

ExtremeCloud Appliance Deployment Guide

Version 4.76.01

9036571-00 Rev AB
February 2020



Copyright © 2020 Extreme Networks, Inc. All rights reserved.

Legal Notice

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, please see:

www.extremenetworks.com/company/legal/trademarks

Open Source Declarations

Some software files have been licensed under certain open source or third-party licenses. End-user license agreements and open source declarations can be found at:

www.extremenetworks.com/support/policies/software-licensing


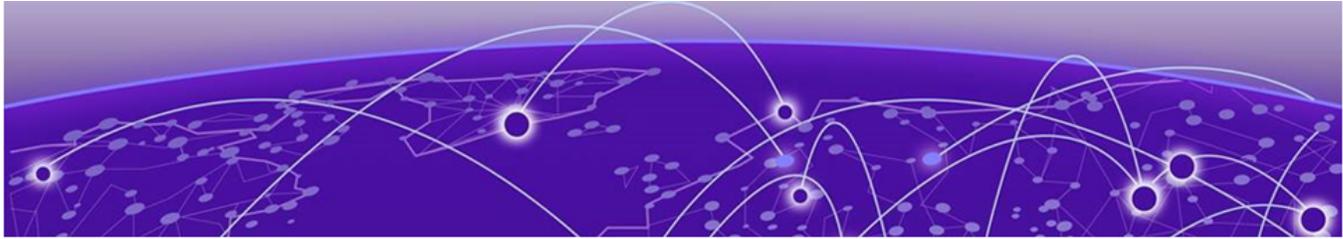


Table of Contents

Preface.....	vi
Conventions.....	vi
Text Conventions.....	vi
Documentation and Training.....	viii
Providing Feedback.....	viii
Getting Help.....	viii
Subscribe to Service Notifications.....	ix
AP Regulatory Information.....	ix
About ExtremeCloud Appliance Deployment.....	10
Deploying ExtremeCloud Appliance.....	10
VE6120H Virtual Appliance.....	10
VE6125 Virtual Appliance.....	11
Supported Appliance Specifications.....	12
Discovery and Registration.....	14
Discovery Process for APs and Adapters in a Centralized Site.....	14
Switch Discovery Process.....	16
Sites.....	18
Device Groups.....	19
Configuring DHCP, NPS, and DNS Services.....	20
DHCP Service Configuration.....	20
Configuring DHCP on Windows Server 2012 R2.....	20
Configuring DHCP on a Red Hat Linux Server.....	36
Configuring the ExtremeCloud Appliance as an NPS Client.....	39
NPS Service Configuration.....	40
Add a New Network Policy.....	40
DNS Service Configuration.....	45
Configuring DNS for Wireless AP Discovery.....	46
Configuring DNS on a Linux Server.....	47
Centralized Site with a Captive Portal.....	49
Deployment Strategy.....	49
Adding a Centralized Site with Device Group.....	49
Configuring an Internal Captive Portal.....	51
Specifying B@AC Network Topology.....	52
Configuring a Captive Portal Network.....	53
Working with Internal Captive Portal Engine Rules.....	54
Editing Device Group Profile for Network and Role.....	54
Creating Adoption Rules.....	57
Centralized Site with AAA Network.....	60
Deployment Strategy.....	60
Configuring a AAA Network.....	60

Creating an Engine Rule.....	61
Creating a Policy Role.....	62
Applying a AAA Network and Role to the Device Group.....	63
Configuring an External NAC Server for MBA and AAA Authentication	65
Deployment Strategy.....	65
Configuring the External NAC Server.....	66
Network with Default Auth Role.....	68
Configuring an MBA Network.....	68
Configuring a AAA Network.....	69
Network with Pass-Through External RADIUS.....	70
Configuring an MBA Network.....	71
Configuring a AAA Network.....	72
Deploying XMC as External Captive Portal.....	74
Deployment Strategy.....	74
Configuring an External Captive Portal Network.....	75
Editing the Configuration Profile for Network and Roles.....	77
ExtremeCloud Appliance Default Pass-Through Rule.....	77
Adding ExtremeCloud Appliance as a Switch to Extreme Management Center.....	78
Creating an Unregistered Policy on Extreme Management Center.....	83
Editing the Extreme Management Center Profile for Policy and Location-Based Services.....	84
Deploying an ExtremeGuest Captive Portal.....	87
Deployment Strategy.....	87
Configure an ExtremeGuest Server.....	88
Configure an ExtremeGuest Captive Portal Network.....	88
Configuration Settings on ExtremeGuest.....	89
Hierarchical Visibility for WiNG Appliances.....	91
Deployment Strategy.....	91
Configuring ExtremeCloud Appliance as an External Server.....	92
Configuring ExtremeCloud Appliance as Proxy Server.....	92
Configuring an Availability Pair with WiNG.....	93
Understanding Proxy APs.....	93
Legacy AP Support.....	94
Understanding Proxy Clients.....	94
Deploying an Availability Pair.....	95
Deploying an Availability Pair.....	95
ExtremeCloud Appliance Pair with ExtremeLocation and AirDefense.....	98
Scenario Outline.....	98
Deployment Strategy.....	98
Configuring the Centralized Site with an AP3915 Profile.....	99
Configuring ExtremeLocation.....	99
Configuring AirDefense.....	100
ECP Local Authentication.....	101
Scenario Outline.....	101
Deployment Strategy.....	101
Configuring External Captive Portal Network.....	102

Editing the Device Group Profile for ECP Network.....	104
PHP External Captive Portal, Controller's Firewall Friendly API.....	106
net-auth.php.....	106
login.php.....	110
common_utilities.php.....	112
crypt_aws_s4.php.....	116
ffecp-config.php.....	121
Index.....	123

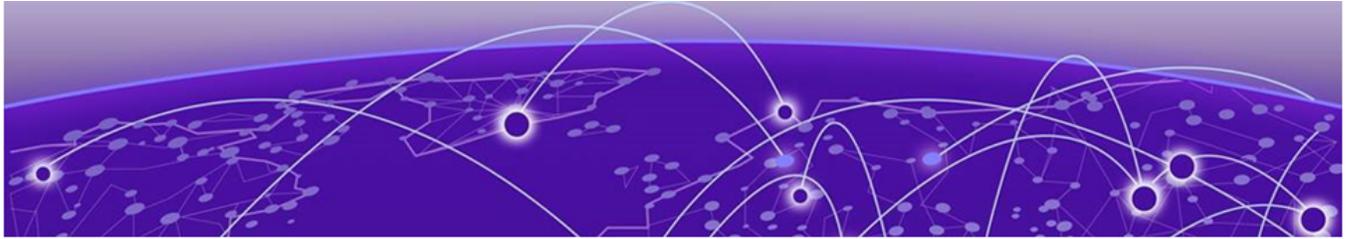

Preface

This section describes the text conventions used in this document, where you can find additional information, and how you can provide feedback to us.

Conventions

This section discusses the conventions used in this guide.

Text Conventions

Unless otherwise noted, information in this document applies to all supported environments for the products in question. Exceptions, like command keywords associated with a specific software version, are identified in the text.

When a feature, function, or operation pertains to a specific hardware product, the product name is used. When features, functions, and operations are the same across an entire product family, such as ExtremeSwitching switches or SLX routers, the product is referred to as *the switch* or *the router*.

Table 1: Notes and warnings

Icon	Notice type	Alerts you to...
	Tip	Helpful tips and notices for using the product.
	Note	Useful information or instructions.
	Important	Important features or instructions.

Table 1: Notes and warnings (continued)

Icon	Notice type	Alerts you to...
	Caution	Risk of personal injury, system damage, or loss of data.
	Warning	Risk of severe personal injury.

Table 2: Text

Convention	Description
<code>screen displays</code>	This typeface indicates command syntax, or represents information as it appears on the screen.
The words <i>enter</i> and <i>type</i>	When you see the word <i>enter</i> in this guide, you must type something, and then press the Return or Enter key. Do not press the Return or Enter key when an instruction simply says <i>type</i> .
Key names	Key names are written in boldface, for example Ctrl or Esc . If you must press two or more keys simultaneously, the key names are linked with a plus sign (+). Example: Press Ctrl+Alt+Del
<i>Words in italicized type</i>	Italics emphasize a point or denote new terms at the place where they are defined in the text. Italics are also used when referring to publication titles.
NEW!	New information. In a PDF, this is searchable text.

Table 3: Command syntax

Convention	Description
bold text	Bold text indicates command names, keywords, and command options.
<i>italic</i> text	Italic text indicates variable content.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, such as passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member</i> [<i>member</i> ...].
\	In command examples, the backslash indicates a “soft” line break. When a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Documentation and Training

Find Extreme Networks product information at the following locations:

[Current Product Documentation](#)

[Release Notes](#)

[Hardware/software compatibility matrices](#) for Campus and Edge products

[Supported transceivers and cables](#) for Data Center products

[Other resources](#), like white papers, data sheets, and case studies

Extreme Networks offers product training courses, both online and in person, as well as specialized certifications. For details, visit www.extremenetworks.com/education/.

Providing Feedback

The Information Development team at Extreme Networks has made every effort to ensure the accuracy and completeness of this document. We are always striving to improve our documentation and help you work better, so we want to hear from you. We welcome all feedback, but we especially want to know about:

- Content errors, or confusing or conflicting information.
- Improvements that would help you find relevant information in the document.
- Broken links or usability issues.

If you would like to provide feedback, you can do so in three ways:

- In a web browser, select the feedback icon and complete the online feedback form.
- Access the feedback form at <https://www.extremenetworks.com/documentation-feedback/>.
- Email us at documentation@extremenetworks.com.

Provide the publication title, part number, and as much detail as possible, including the topic heading and page number if applicable, as well as your suggestions for improvement.

Getting Help

If you require assistance, contact Extreme Networks using one of the following methods:

[Extreme Portal](#)

Search the GTAC (Global Technical Assistance Center) knowledge base; manage support cases and service contracts; download software; and obtain product licensing, training, and certifications.

[The Hub](#)

A forum for Extreme Networks customers to connect with one another, answer questions, and share ideas and feedback. This community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC.

[Call GTAC](#)

For immediate support: (800) 998 2408 (toll-free in U.S. and Canada) or 1 (408) 579 2826. For the support phone number in your country, visit: www.extremenetworks.com/support/contact

Before contacting Extreme Networks for technical support, have the following information ready:

- Your Extreme Networks service contract number, or serial numbers for all involved Extreme Networks products
- A description of the failure
- A description of any actions already taken to resolve the problem
- A description of your network environment (such as layout, cable type, other relevant environmental information)
- Network load at the time of trouble (if known)
- The device history (for example, if you have returned the device before, or if this is a recurring problem)
- Any related RMA (Return Material Authorization) numbers

Subscribe to Service Notifications

You can subscribe to email notifications for product and software release announcements, Vulnerability Notices, and Service Notifications.

1. Go to www.extremenetworks.com/support/service-notification-form.
2. Complete the form (all fields are required).
3. Select the products for which you would like to receive notifications.




Note

You can modify your product selections or unsubscribe at any time.

4. Select **Submit**.

AP Regulatory Information

For regulatory information for the ExtremeCloud Appliance supported access point models and appliances, refer to the appropriate *Installation Guide*.

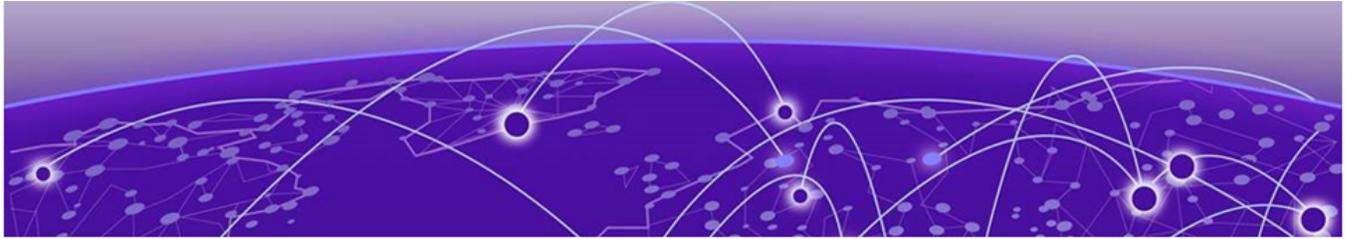

About ExtremeCloud Appliance Deployment

[Deploying ExtremeCloud Appliance](#) on page 10

[VE6120H Virtual Appliance](#) on page 10

[VE6125 Virtual Appliance](#) on page 11

[Supported Appliance Specifications](#) on page 12

[Discovery and Registration](#) on page 14

[Sites](#) on page 18

[Device Groups](#) on page 19

Deploying ExtremeCloud Appliance

The Deployment Guide will guide you through the process of deploying your access points using ExtremeCloud Appliance. The instructions will provide a flow of tasks from creating a site, through captive portal and network configuration, to developing adoption rules that will automatically organize your APs into proper device groups upon registration with ExtremeCloud Appliance.

The purpose of the Deployment Guide is to get you up and running quickly, taking you through the full deployment process. If there are concepts or parameter options you do not understand, consult the User Guide or ExtremeCloud Appliance Online Help system for detailed information.

VE6120H Virtual Appliance

ExtremeCloud Appliance offers a new platform model. The VE6120H for Microsoft Hyper-V offers elasticity with support for small, medium, and large deployments:

- Uses the same licensing procedure as the VE6120.
- Is entitled per the 30324/30326 activation keys.

- Accepts the same capacity keys as the hardware model E2120.
- Supported on Windows Server 16 (minimal support). The lowest supported VMBUS is version 3.0.

**Note**

VE6120H, VE6120, and VE6125 use separate .ova files. You cannot upgrade from one VM model to another.

Virtual Machine Upgrade File Formats:

- VE6120 — .dle
- VE6120H — .spe
- VE6125 — .rse

Requirements for the ExtremeCloud Appliance VE6120H model are listed in [Supported Appliance Specifications](#) on page 12.

For installation information, see *VE6120H Virtual Appliance Installation Guide Microsoft Hyper-V Platform* at <https://extremenetworks.com/documentation/extremecloud-appliance>.

Related Topics

[Supported Appliance Specifications](#) on page 12

VE6125 Virtual Appliance

ExtremeCloud Appliance offers a new platform model. The VE6125 targets extra large deployments of up to 4000 access points. The larger capacity offers support for customers wanting to manage a large deployment from a virtual installation. The new VE6125 X-Large configuration provides capacity parity with the E2120. Customers with large installations of up to 4000 APs have the option to manage their infrastructure via a pair of hardware appliances, the E2120 or in virtual configuration options, the VE6125:

- Requires a VMWare Enterprise license.
- Uses the same licensing procedure as the VE6120.
- Is entitled per the 30324/30326 activation keys.
- Accepts the same capacity keys as the hardware model E2120.

**Note**

VE6120H, VE6120, and VE6125 use separate .ova files. You cannot upgrade from one VM model to another.

Virtual Machine Upgrade File Formats:

- VE6120 — .dle
- VE6120H — .spe
- VE6125 — .rse

Requirements for the ExtremeCloud Appliance VE6125 model are listed in [Supported Appliance Specifications](#) on page 12.

For installation information, see *VE6120/VE6125 Virtual Appliances Installation Guide VMware® Platform* at <https://extremenetworks.com/documentation/extremecloud-appliance>.

Related Topics

[Supported Appliance Specifications](#) on page 12

Supported Appliance Specifications

ExtremeCloud Appliance supports the following virtual appliances:

- VE6120
- VE6120H for Microsoft Hyper-V
- VE6125

And the following hardware appliances:

- E1120
- E2120
- E3120

Requirements for each ExtremeCloud Appliance model are listed below.

Table 4: Virtual ExtremeCloud Appliances (VE6120 and VE6125)

Extreme Application	VE6120			VE6125
	Small	Medium	Large	X-Large
Total APs managed in Standalone mode	50	250	500	2000
Additional APs supported in high-availability mode	50	250	500	2000
Total managed APs per Appliance Pair	100	500	1000	4000
Total Switches managed per Appliance	50/100	100/200	200/400	200/400
Total simultaneous users in Standalone mode	1,000	4,000	8,000	16000
Additional simultaneous users in high-availability mode	1,000	4,000	8,000	16000
Total Simultaneous Users per Appliance Pair	2,000	8,000	16,000	32000
Hardware Requirements				
CPU	4 (4 distinct physical cores or 2 cores with hyper-threading)	6	8	32 (physical or hyper-threading cores)
RAM (GB)	8	16	24	32
Hard Disk (GB)	80	80	80	512

Table 4: Virtual ExtremeCloud Appliances (VE6120 and VE6125) (continued)

Extreme Application	VE6120			VE6125
	2x1Gbps Host (Open/Secure Mbps)	1,870/1,870	1,870/1,870	1,870/1,870
2x10 Gbps Host (Open/Secure Mbps)	10,800/5,100	10,800/5,100	10,800/5,100	

- Consult VMWare ESXi for minimum host performance requirements for virtual environment. Performance depends on network interface characteristics of underlying host and on utilization on shared interfaces by other virtual appliances.
- Follow VMWare minimum installation requirements. 10 Gbps host recommended for best results. VE6120 supports VMware ESXi 5.1 or higher. VE6125 supports VMware ESXi 5.5 or higher.
- A VMware Enterprise license is required for the VE6125.

Table 5: Virtual ExtremeCloud Appliances VE6120H

Extreme Application	VE6120H		
	Small	Medium	Large
Total APs managed in Standalone mode	50	250	500
Additional APs supported in high-availability mode	50	250	500
Total managed APs per Appliance Pair	100	500	1000
Total Switches managed per Appliance	50/100	100/200	200/400
Total simultaneous users in Standalone mode	1,000	4,000	8,000
Additional simultaneous users in high-availability mode	1,000	4,000	8,000
Total Simultaneous Users per Appliance Pair	2,000	8,000	16,000
Hardware Requirements			
CPU	4 (4 distinct physical cores or 2 cores with hyper-threading)	6	8
RAM (GB)	8	16	24
Hard Disk (GB)	80	80	80

Supported Features	E1120	E2120	E3120
Total APs managed per appliance	250	4,000	10,000
Total APs managed in standalone mode per appliance pair	125	2,000	5,000
Additional APs supported in high-availability mode	125	2,000	5,000
Total Switches managed per appliance	50/100	400/800	1,000/2,000
Total simultaneous users per appliance pair	4,000	32,000	Scales up to 100,000
Total simultaneous users in standalone mode per appliance pair	2,000	16,000	Scales up to 50,000
Additional simultaneous users in high-availability mode	2,000	16,000	Scales up to 50,000
Dual, hot swappable power supplies	N/A	Sold Separately	Sold Separately
Maximum Throughput (Mbps): Mixed (RFC2544)/Encrypted	3730/2140	18500/18000	TBD

Figure 1: ExtremeCloud Appliance Hardware

Related Topics

[VE6120H Virtual Appliance](#) on page 10

[VE6125 Virtual Appliance](#) on page 11

Discovery and Registration

Wireless devices (APs and SA201 adapters) discover the IP address of ExtremeCloud Appliance using a sequence of mechanisms that allow for the possible services available on the enterprise network. The discovery process is successful when the AP/adaptor successfully locates a controller to which it can register. Ensure that the appropriate services on your enterprise network are prepared to support the discovery process.

Discovery Process for APs and Adapters in a Centralized Site



Note

The following process outlines device discovery and registration for AP39xx, AP4xx, and AP5xx access points, and SA201 adapters, in a Centralized site.

ExtremeCloud Appliance supports Extreme Defender Adapter SA201 for the Defender for IoT solution. For more information on Extreme Defender for IoT, refer to documentation located in the Extreme Networks documentation portal: <https://extremenetworks.com/documentation/defender-application>.

When a wireless device is powered on, it automatically begins a discovery process to determine its own IP address and the IP address of the ExtremeCloud Appliance. When the discovery process is successful, the AP/adaptor registers with the ExtremeCloud Appliance.

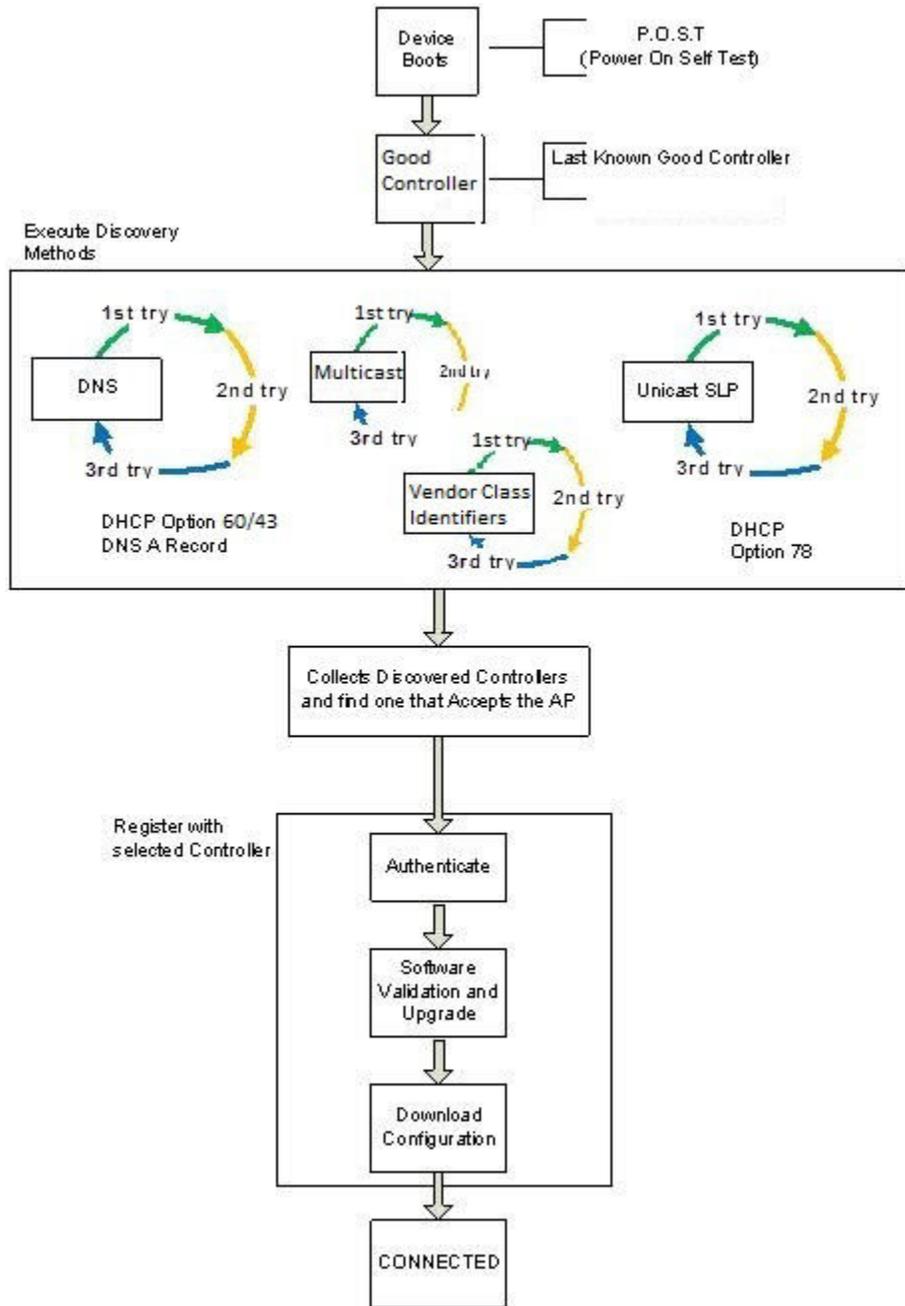


Figure 2: Discovery Process for devices in a Centralized site

Discovering Centralized Site APs and Adapters

Once an AP has successfully registered with a controller, it recalls that controller's IP address, and uses that address on subsequent reboots. The AP bypasses discovery and goes straight to registration. Use the IP address of the controller to which the AP last connected successfully.

If a known controller cannot be located, take the following steps:

1. Use DHCP Option 60 to query the DHCP server for available controllers. The DHCP server responds to the AP with Option 43, which lists the available controllers.

For the DHCP server to respond to an Option 60 request from an AP, configure the DHCP server with the vendor class identifier (VCI) for each AP model. Also, configure the DHCP server with the IP addresses of the controllers.

2. Use a Domain Name Server (DNS) lookup for the host name Controller.domain-name.

The AP tries the DNS server if it is configured in parallel with SLP unicast and SLP multicast.

If you use this method for discovery, place an A record in the DNS server for Controller.<domain-name>. The <domain-name> is optional, but if used, ensure it is listed with the DHCP server.

3. Use a multicast SLP request to find SLP SAs.

The AP sends a multicast SLP request, looking for any SLP Service Agents providing the Extreme Networks service.

The AP tries SLP multicast in parallel with other discovery methods.

4. Use DHCP Option 78 to locate a Service Location Protocol (SLP) Directory Agent (DA), followed by a unicast SLP request to the Directory Agent.

To use the DHCP and unicast SLP discovery method, ensure that the DHCP server on your network supports Option 78 (DHCP for SLP RFC2610). The APs use this method to discover the controller.

This solution takes advantage of two services that are present on most networks:

- **DHCP** — The standard is a means of providing IP addresses dynamically to devices on a network.
- **SLP** — A means of allowing client applications to discover network services without knowing their location beforehand. Devices advertise their services using a Service Agent (SA). In larger installations, a Directory Agent (DA) collects information from SAs and creates a central repository (SLP RFC2608).

The controller contains an SLP SA that, when started, queries the DHCP server for Option 78 and if found, registers itself with the DA as service type Extreme Networks. The controller contains a DA (SLPD).

The AP queries DHCP servers for Option 78 to locate any DAs. The SLP User Agent for the AP then queries the DAs for a list of Extreme Networks SAs.

Option 78 must be set for the subnets connected to the ports of the controller and the subnets connected to the APs. These subnets must contain an identical list of DA IP addresses.

Switch Discovery Process

ExtremeCloud Appliance provides support for Management and Statistical services for ExtremeXOS and 200 Series switches. These switches are provisioned with built-in Zero Touch Provisioning (ZTP). ZTP provisioned switches can discover and connect to any of the following Extreme Networks Management Appliances:

- On-premises ExtremeCloud Appliance

- On-premises Extreme Management Center
- ExtremeCloud

**Note**

Only one appliance at a time can be configured as the Management Appliance.

When the switch is turned on, it automatically starts the Linux process `cloud-connector client`. The cloud-connector client relies on the Default VLAN 1 enabled DHCP client to discover a DHCP server. The default configuration for these switches includes all data ports configured with VLAN 1. Any pre-configured data port can be used to connect to a DHCP Server. Simply provide an IP address and the Domain Name.

After the switch receives an IP address and a Domain Name, it begins the DNS query to find the built-in Extreme Networks Management Appliance Fully-Qualified Domain Name (FQDN):

- `extremecontrol@<domain-name>` for on-premises appliances (ExtremeCloud Appliance or Extreme Management Center).
- `devices.extremenetworks.com` resolved by the Internet Domain Name Servers to the ExtremeCloud IP address.

The cloud-connector tries to resolve these names in an endless round-robin loop. When any of the names are resolved to an IP address, the switch attempts connection to that IP address.

**Note**

Before connecting a switch to an on-premises Management Appliance:

- Within ExtremeCloud Appliance, configure each physical port to enable device registration:
 1. Go to **Administration > System**.
 2. Under **Interfaces** click **Add**.
 3. On the **Create New Interface** dialog, check **Enable Device Registration**.
- Configure a local DNS server that resolves `extremecontrol@<domain-name>` to the IP address of a ExtremeCloud Appliance physical port that is configured with the **Enable Device Registration** enabled.

**Note**

Switches that are connected to the internet and can reach the Internet Domain Name servers will attempt to connect to ExtremeCloud.

Related Topics

[Discovering Switches](#) on page 17

[Switch Discovery in an Availability Pair](#) on page 18

Discovering Switches

A switch discovers ExtremeCloud Appliance by resolving the built-in Fully-Qualified Domain Name (FQDN) `extremecontrol@<domain-name>` to an IP address. `<domain-name>` is the domain assigned to the switch by the DHCP server.

To configure switch discovery, add a single "A" record for `extremecontrol@<domain-name>` to the local DNS server. If using a public DNS service, add the record to the DNS service. When using the public option, the DNS servers used by the switch must be integrated with the public service.

When the switch discovers ExtremeCloud Appliance, the device status is initially *In-Service-Trouble*. This corresponds to the cloud-connector machine state *Connecting* and is represented in ExtremeCloud Appliance as a yellow triangle.

Once ExtremeCloud Appliance acknowledges the switch configuration, the switch enters the machine state *Running*. This state is represented in ExtremeCloud Appliance with a green circle.

<input type="checkbox"/>		1733N-42040	1733N-42040	200SeriesOS 22...	10.100.10.4	Site1	1.2.5.3	220-48p-10GE4
<input type="checkbox"/>		1733N-42040	1733N-42040	200SeriesOS 22...	10.100.10.4	Site1	1.2.5.3	220-48p-10GE4

Figure 3: ExtremeCloud Appliance: Switch States During Discovery

Related Topics

[Switch Discovery in an Availability Pair](#) on page 18

[Switch Discovery Process](#) on page 16

Switch Discovery in an Availability Pair

When configuring ExtremeXOS switches in an ExtremeCloud Appliance (ExtremeCloud Appliance) Availability Pair, use an "A" record for `extremecontrol@<domain-name>`, providing an IP address for the primary ExtremeCloud Appliance and an IP address for the backup ExtremeCloud Appliance. When the first address fails, the switch attempts the second IP address. If both IP addresses fail, the switch performs a second DNS request. The switch performs the DNS request before sending an HTTPS message and does not use DNS caching.

- If both the primary and backup ExtremeCloud Appliance are up, all configured switches are adopted on the primary ExtremeCloud Appliance, and the switch sends the HTTPS message to the primary ExtremeCloud Appliance only.
- If the primary ExtremeCloud Appliance is down and the backup ExtremeCloud Appliance is up, the switch fails over to the backup. The switch will timeout on the primary IP address and proceed to the secondary IP address. The switch attempts to send the HTTPS message to the primary ExtremeCloud Appliance first because its IP address is first in the DNS reply. That attempt will timeout and the switch will send the second HTTPS to the secondary IP address. The switch continues to send HTTPS messages to both IP addresses. If the primary ExtremeCloud Appliance comes up, the switch sends the HTTP message to the first IP address and does not attempt the second IP address.

Related Topics

[Switch Discovery Process](#) on page 16

[Discovering Switches](#) on page 17

Sites

Use sites to define boundaries for fast roaming and session mobility without interruption. A site represents a physical, geographic area in your network. As the top-level element in the ExtremeCloud Appliance data model, the site runs Sessions Manager and RF Manager functions for all RF Domains in the site.

The following ExtremeWireless™ access points are supported:

- AP410i/e
- AP460i/e
- AP505i
- AP510i/e
- AP560i/h

- AP3917i/e/k
- AP3916ic
- AP3915i/e
- AP3912i
- AP3935i/e
- AP3965i/e

A Defender site is a Centralized site that supports SA201. It begins with the DFNDR_ prefix.

The licensing domain is defined at the site level. When configuring a site, select the Country value that matches the licensing domain of the APs that comprise the site.



Note

If the licensing domain of your AP does not match the Country assigned to the site, the AP will not display within a device group for possible selection.

Device Groups


The most simple site configuration allows for one device group for each AP/adaptor model, selecting the default configuration profile and the default RF Management profile for that model.

A more complex deployment allows for more than one device group per AP model. This makes use of different profile features and/or a unique RF Management profile for each device group. With this more complex deployment, create a device group for any combination of configuration features and RF configurations.

All devices in a device group must share the following:

- AP/adaptor model number
- Configuration Profile
- RF Management Profile

You have the option to discover AP/adapters before creating a device group. However, if you create the device group first, discovered devices that match the configuration profile are listed within the **Create Device Group** dialog, allowing you to simply add each AP/adaptor to the device group. Furthermore, if you create a device group and an adoption rule, your newly discovered AP/adapters will be automatically added to the correct device group without your intervention.

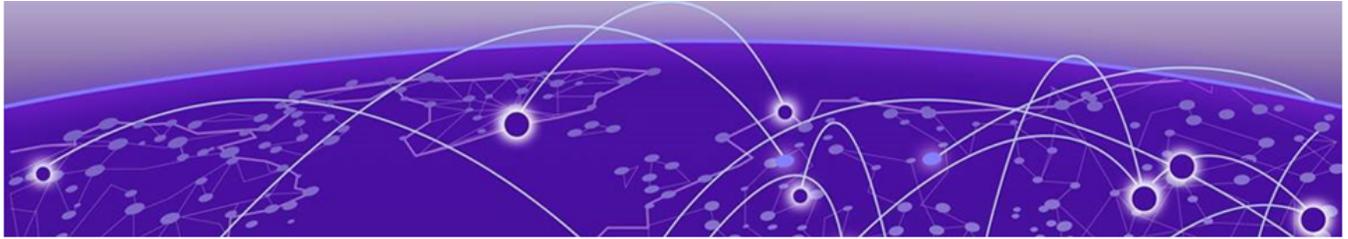

Configuring DHCP, NPS, and DNS Services

[DHCP Service Configuration](#) on page 20

[Configuring the ExtremeCloud Appliance as an NPS Client](#) on page 39

[NPS Service Configuration](#) on page 40

[DNS Service Configuration](#) on page 45

This chapter describes how to configure DHCP and DNS (Domain Name System) services on a Windows Server 2012 R2 or Linux server for use by ExtremeWireless Appliance and APs. In addition, the chapter explains how to configure Network Policy Server (NPS) service on Windows Server 2012 R2. Use the configuration processes in this chapter as a reference when configuring services.



Note

Windows Server 2012 R2 or Linux server may have a different configuration process than what is described here. Refer to your manufacturer's documentation for the configuration process that is specific to your server.

This section includes the following procedures:

- [DHCP Service Configuration](#) on page 20
- [NPS Service Configuration](#) on page 40
- [DNS Service Configuration](#) on page 45

DHCP Service Configuration

Before you can configure the DHCP service, you must install it on the server. You can configure DHCP on Windows Server 2012 R2 or on a Red Hat Linux server.

This section includes the following procedures:

- [Configuring DHCP on Windows Server 2012 R2](#) on page 20
- [Configuring DHCP on a Red Hat Linux Server](#) on page 36

Configuring DHCP on Windows Server 2012 R2

Install DHCP either during the initial installation of Windows Server 2012 R2 or after the initial installation is completed.

DHCP options provide specific configuration and service information to DHCP clients. The options described here are specific to pointing an AP to its adopter and setting the correct MINT link level. The option value you configure is specific to your network site type.

When you configure DHCP for ExtremeCloud Appliance, include 078 SLP DA Option for access points on a Centralized site.

A scope is a collection of IP addresses meant to be distributed by the DHCP server to the client devices on a subnet.

Enable the DHCP Option for every scope you define. The the DHCP Option is used by:

- The Wireless APs to discover the ExtremeCloud Appliance
- The mobility agents to discover the mobility manager.

**Note**

Go to <http://support.microsoft.com> for instructions on how to install DHCP.

Related Topics

[Add a New DHCP Scope](#) on page 21

[Configure DHCP Server Options](#) on page 27

Add a New DHCP Scope

Add a scope for the DHCP service.

To configure DHCP on Windows Server 2012 R2:

1. Select **Start > Administrative Tool > DHCP**.
2. In the console tree, right-click the DHCP server, IPv4 on which you want to create the new DHCP scope, and then select **New Scope**.
3. Select **Next**.
4. In the Name and Description text boxes, type the scope name and description.

This can be any name that you want, but it should be descriptive enough so that you can identify the purpose of the scope on your network.

5. Select **Next**.

The **IP Address Range** window is displayed.

New Scope Wizard

IP Address Range
You define the scope address range by identifying a set of consecutive IP addresses.

Configuration settings for DHCP Server

Enter the range of addresses that the scope distributes.

Start IP address: 10 . 209 . 0 . 3

End IP address: 10 . 209 . 0 . 40

Configuration settings that propagate to DHCP Client

Length: 24

Subnet mask: 255 . 255 . 255 . 0

< Back Next > Cancel

Figure 4: IP Address Range

6. In the Start IP address and the End IP address text boxes, type the start and end of the IP address range that you want to be distributed to the network.
You must use the range provided by your network administrator.
7. In the Length text box, type the numeric value of the subnet mask bits, or in the Subnet mask text box, type the subnet mask IP address.
A subnet mask defines how many bits of an IP address to use for the network/subnet IDs and how many bits to use for the host ID. You can specify the subnet mask by length or as an IP address. You must use the Length (or the Subnet mask) provided by your network administrator.
8. Select **Next**.
The **Add Exclusions** window displays.
9. In the Start IP address and the End IP address text boxes, type the start and end of the IP address range that you want to exclude from the distribution.
You must use the exclusion range provided by your network administrator.
10. Select **Next**.
The **Lease Duration** window displays.
The DHCP server assigns a client an IP address for a given amount of time. The amount of time for which the IP address can be leased is defined in the Lease Duration window.

11. In the Days, Hours and Minutes text box, type the lease duration.
You must use the Lease Duration as specified by your network administrator.
12. Select **Next**.
The **Configure DHCP Options** window displays.
13. Select **Yes, I want to configure these options now**, and then select **Next**.
The **Router (Default Gateway)** window displays.
14. In the IP address text box, type the network's default gateway and select **Add**.
You must use the default gateway provided by your network administrator.

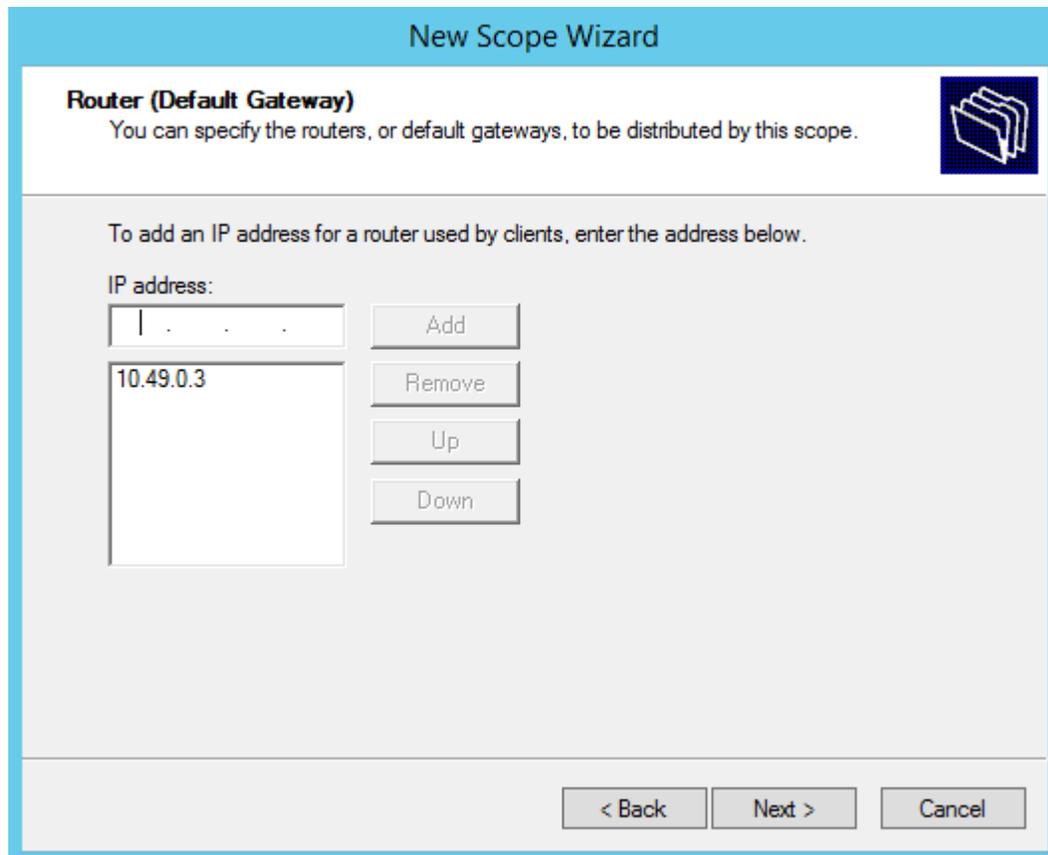


Figure 5: Router Default Gateway

15. Select **Next**.

The **Domain Name and DNS Servers** window displays.

Figure 6: Domain Name and DNS Servers

16. In the Parent domain text box, type your company's domain name.
You must use the Parent Domain provided by your network administrator.
17. In the Server name text box, type your server name.
You must use the server name provided by your network administrator.
18. In the IP address text box, type your server's IP address, and then select **Add**.
19. Select **Next**.
The **WINS Servers** window displays.
20. Select **Next**.
The **Activate Scope** window displays.
21. Select **Yes, I want to activate this scope now**, and select **Next**.
The wizard displays the following message:
You have successfully completed the New Scope wizard.
22. Select **Finish**.

Related Topics

[Create New DHCP Options](#) on page 25

Create New DHCP Options

When you configure DHCP for ExtremeCloud Appliance, create 078 SLP DA Option for access points on a Centralized site.



Note

You can create the DHCP options at the scope level or at the server IPv4 node. When you configure DHCP options at the server node, the options apply to all scopes under that node.

1. From the IPv4 node, right-click and select **Set Predefined Options**.
The **Predefined Options and Values** dialog displays.
2. Option Class is **DHCP Standard Options**.
3. Select **Add**.
The **Option Type** dialog displays.
4. Refer to the related information for each option.

Related Topics

[Creating Option 78](#) on page 25

Creating Option 78

To create Option 78 for a Centralized site:

1. Go to **Start > Administrative Tool > DHCP**.
2. Right-click the server node, and select **Set predefined options**.
3. Select **Add**, and configure the following parameters:

Name

Provide a name for the option, for example **SLP DA**.

Data Type

Set the data type to **Byte** and select the **Array** check box.

Code

78

Description

Optional description. For example, `Extreme Networks SLP Discovery`.

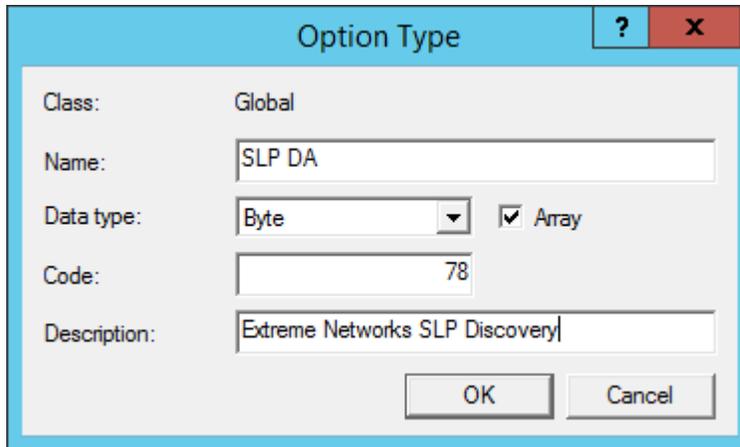


Figure 7: Option Type

4. Select **OK**.
5. Select **Edit Array** and enter the IP address per octet.

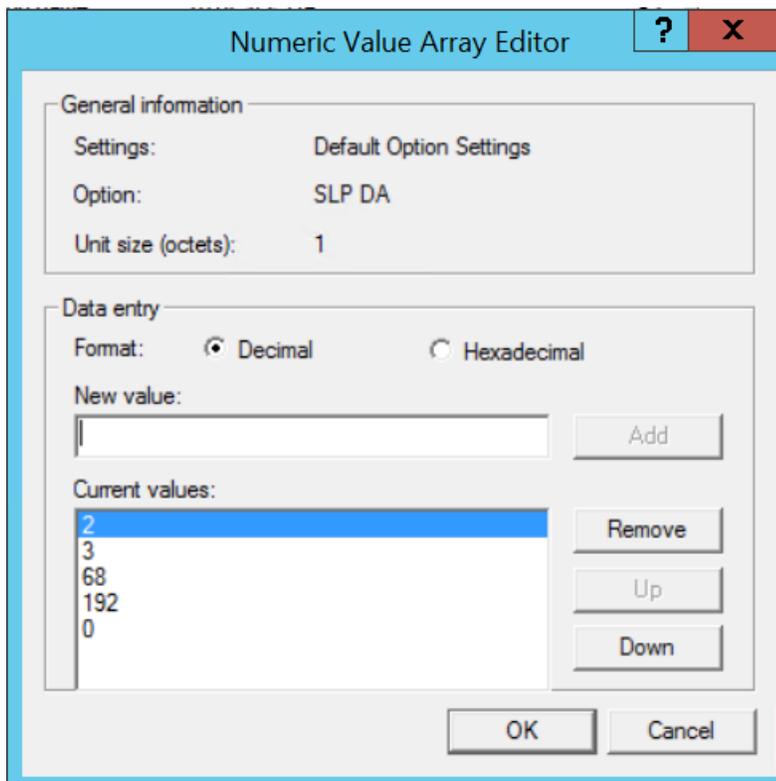


Figure 8: DHCP Option 78 Array Decimal Values

6. Select **OK**.

Related Topics

[Configure DHCP Server Options on page 27](#)

Configure DHCP Server Options

Configure the DHCP Option that you created under [Create New DHCP Options](#) on page 25. Configuring this option for the server, automatically includes the scope.

1. From the **IPv4** node, expand the tree.
2. Right-click **Server Options** and select **Configure Options**.

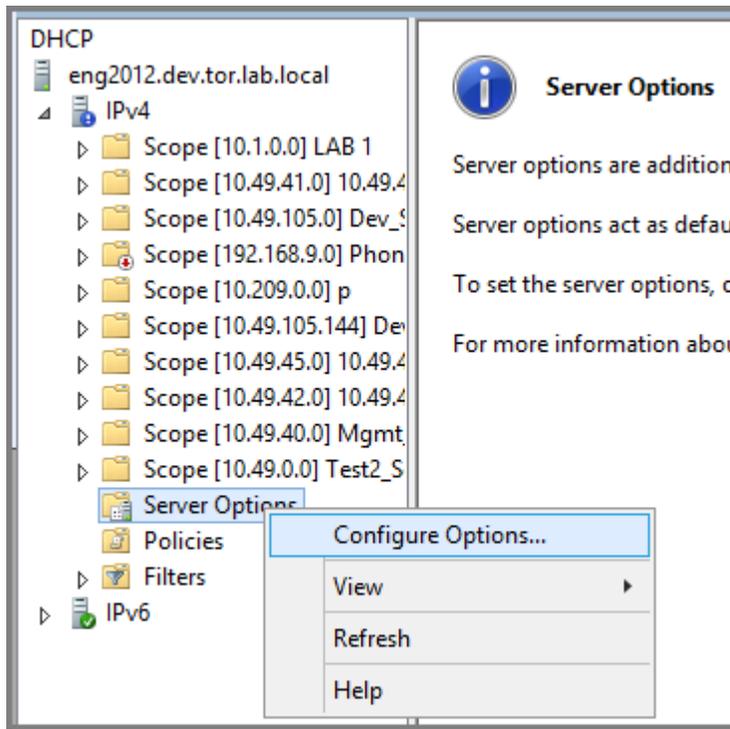


Figure 9: Configure Options

The **Server Options** dialog displays.

- From the **General** tab, select the DHCP option you just created: 078 SLP DA

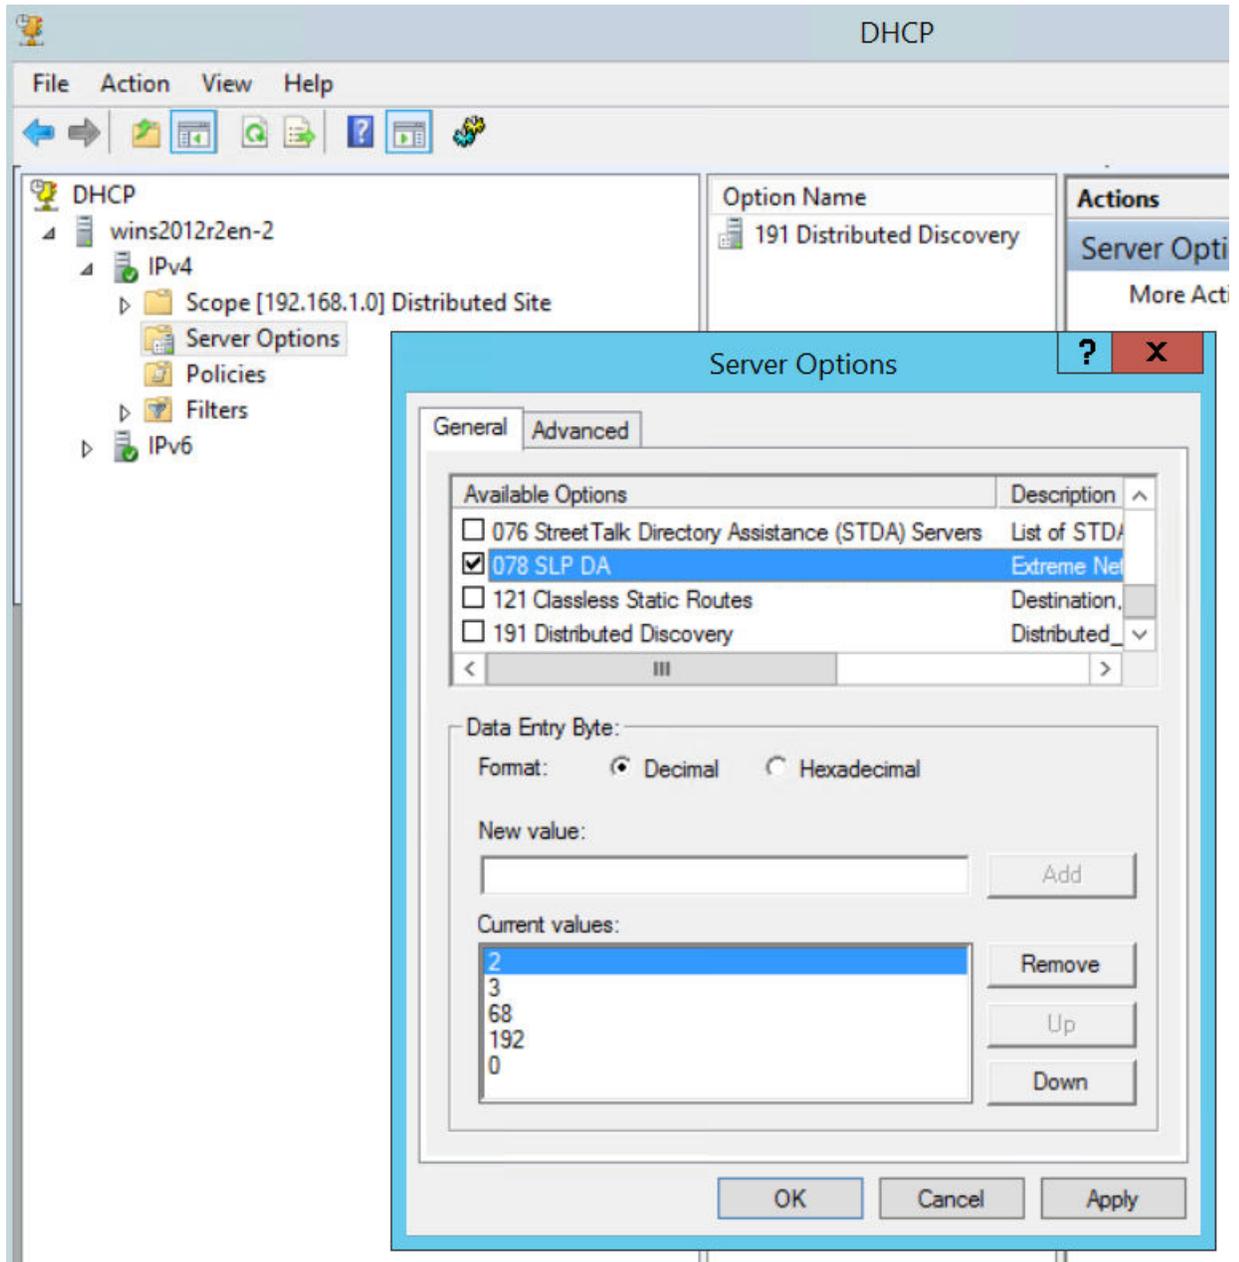


Figure 10: Configure Server Option 078

- Verify the configured Data entry values for the selected option and select **OK**.

In a Centralized site, the wireless APs use the SLP DA to discover the ExtremeCloud Appliance. The mobility agents use the SLP DA to discover the mobility manager. If there is no SLP deployment on the enterprise network, the ExtremeCloud Appliance is configured to act as a DA by default. If you put the appliance IP address in a DHCP server for Option 78, Wireless APs will interact with the appliance for discovery. Similarly, the mobility agents also interact with the ExtremeCloud Appliance to discover the mobility manager.

Related Topics

[Creating Option 78](#) on page 25

Configuring Vendor Class on Windows Server 2012 R2

This section describes the Vendor Class Identifier on a Microsoft DHCP server for ExtremeCloud Appliance discovery. In the discovery process, the DHCP server returns vendor-specific information to the client. When an AP requests vendor specific information, the DHCP server sends the appliance IP addresses in Option 43 to the AP.

- **Vendor Class Identifier (VCI)**
 - The VCI for an ExtremeWireless AP39xx is `HiPath <AP model name>`. For example, the VCI for the ExtremeWireless AP3965e is `HiPath AP3965`.
 - The VCI for an ExtremeWireless 11ax AP is `WingAP.<AP model name>`. For example, the VCI for the ExtremeWireless AP505i is `WingAP.<AP505>` and AP410i is `WingAP.<AP410>`.
 - The VCI for the SA201 adapter is `HiPath SA201`.
- **Option 43 sub-option code:**
 - The option 43 sub-option code:
 - ExtremeWireless APs supported in a Centralized site is type 1 (0x1).
- IP addresses of ExtremeCloud Appliance.

Configuring Option 43

How to configure Option 43 on Windows Server 2012 R2.

Create Vendor Class

To create a vendor class using the Windows Server 2012 R2 DHCP, IPv4 server utility:

1. Go to **Start > Administrative Tool > DHCP**.
2. In the DHCP Server Utility, right-click the DHCP server icon and select **Define Vendor Classes**.

You will create a new vendor class to program the DHCP server to recognize the VCI **ExtremeWireless <AP model name>**.

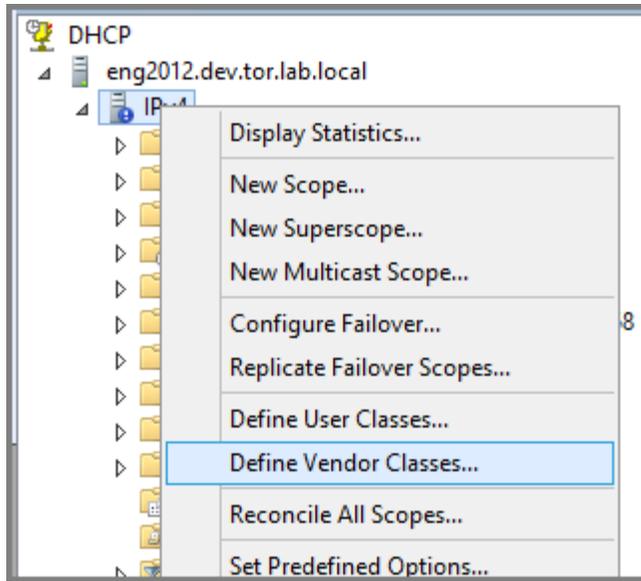


Figure 11: Define Vendor Classes

The **DHCP Vendor Classes** window displays.

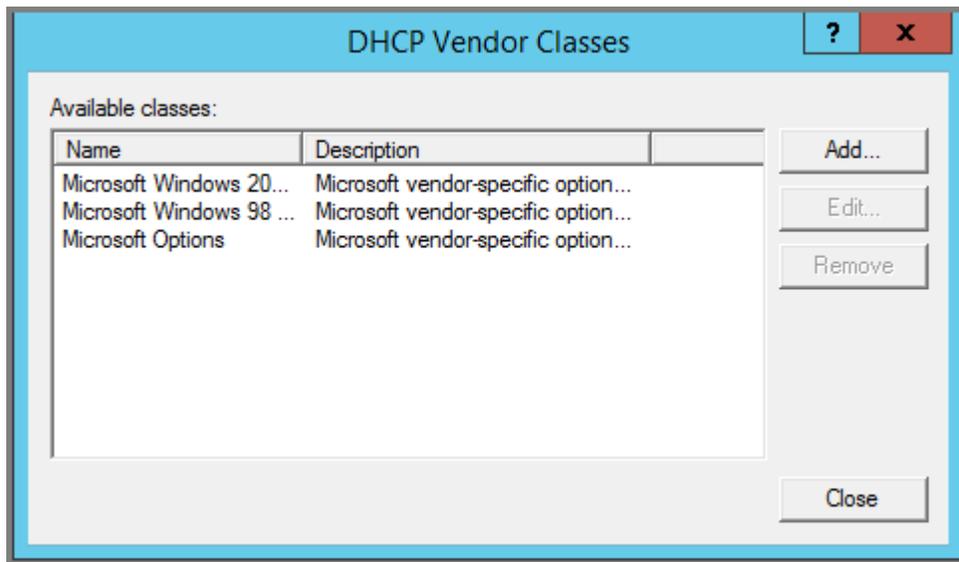


Figure 12: DHCP Vendor Classes

3. To create the new class, select **Add**.
The **New Class** dialog displays.
4. Provide a Display Name and Description for the vendor class.

5. Select the ASCII field and type the VCI for the specific AP. For example, type **AP410** for an AP410i. The ID and Binary values are populated.

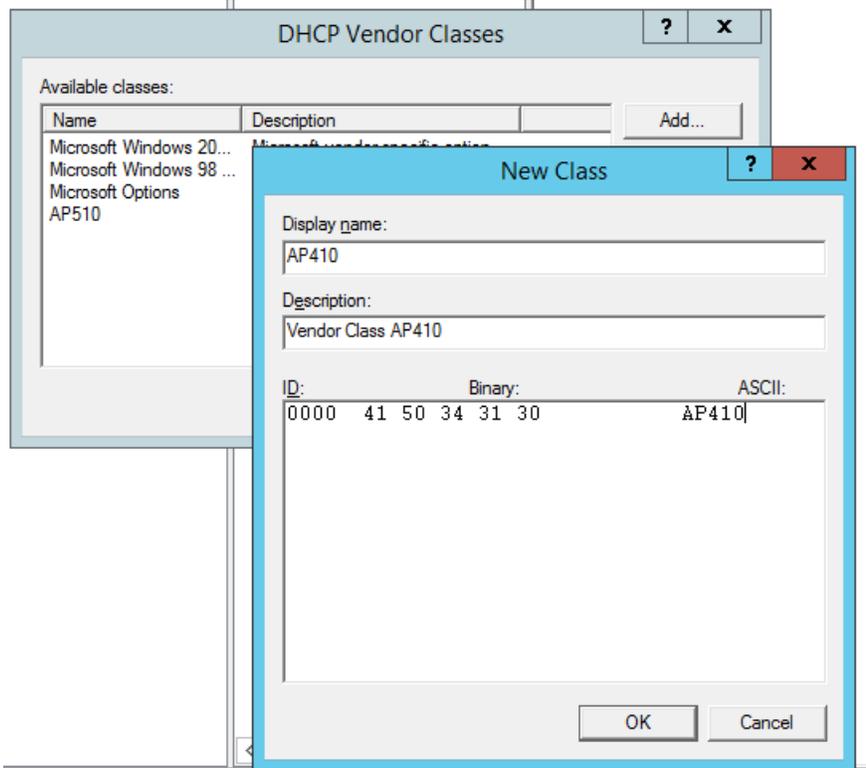


Figure 13: VCI AP410

6. Select **OK**. The new class is created.

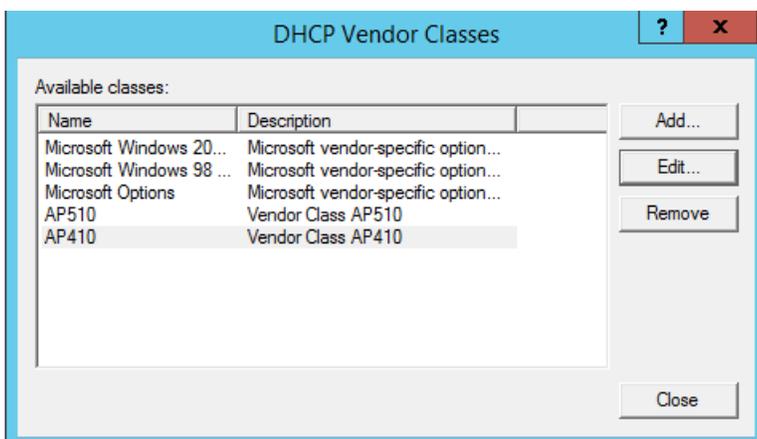


Figure 14: Vendor Classes

7. Select **Close**.

Configure Vendor Class

Configure the vendor class that you just created under [Create Vendor Class](#) on page 29.

1. Go to **Start > Administrative Tool > DHCP**.
2. In the DHCP server utility, right-click the server icon and select **Set predefined options**.

Here we will add an entry for the WLAN controller sub-option for the newly created vendor class. The sub-option code type and the data format is used to deliver the vendor specific information to the APs.

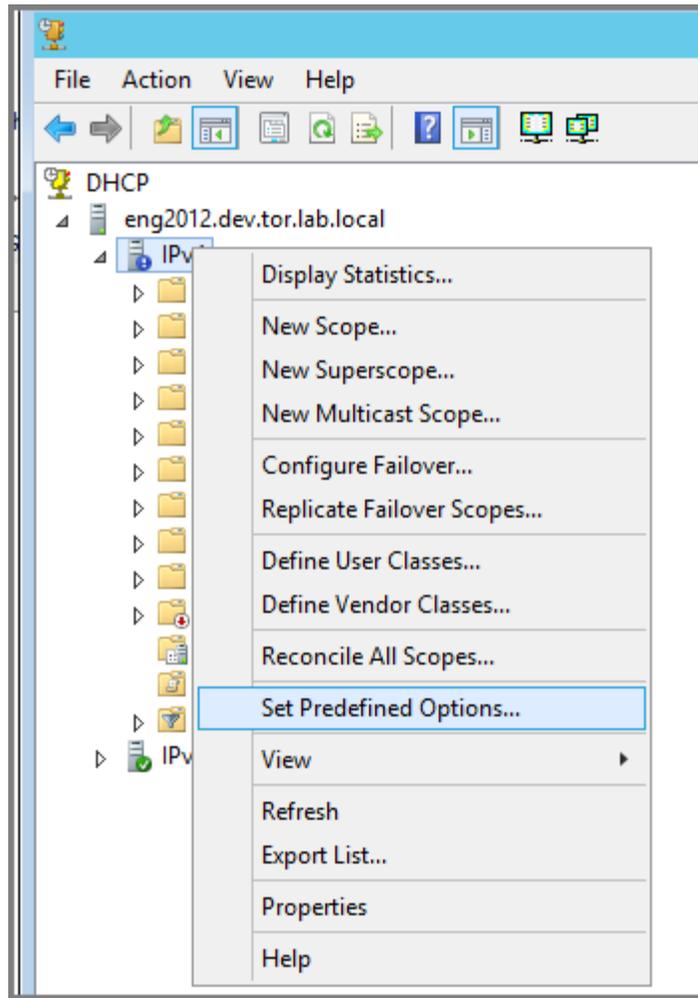


Figure 15: Set Predefined Options

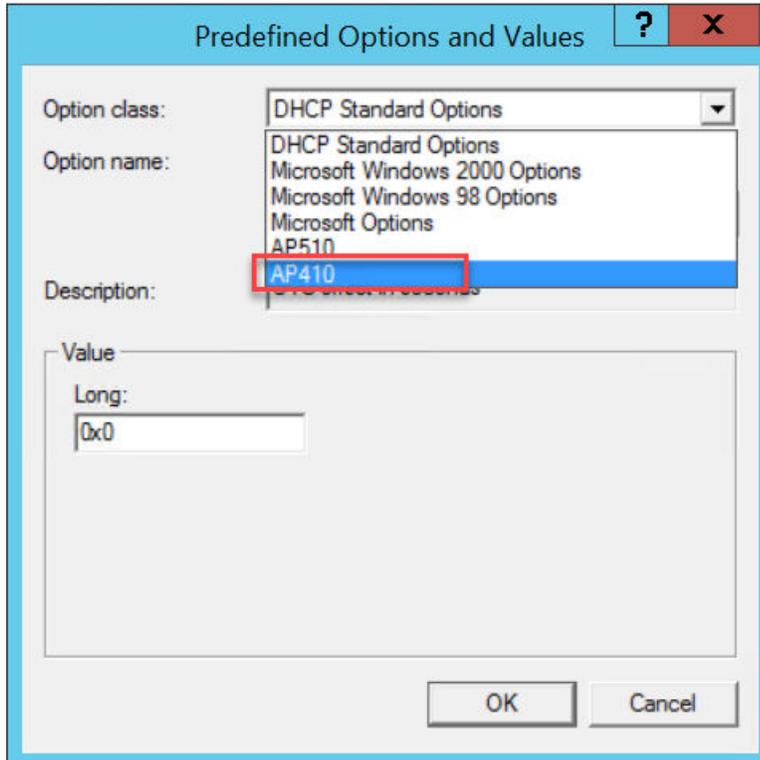


Figure 16: Predefined Options and Values

- In the Option class field, select the value you configured for the vendor class and select **Add**. The **Option Type** window displays.

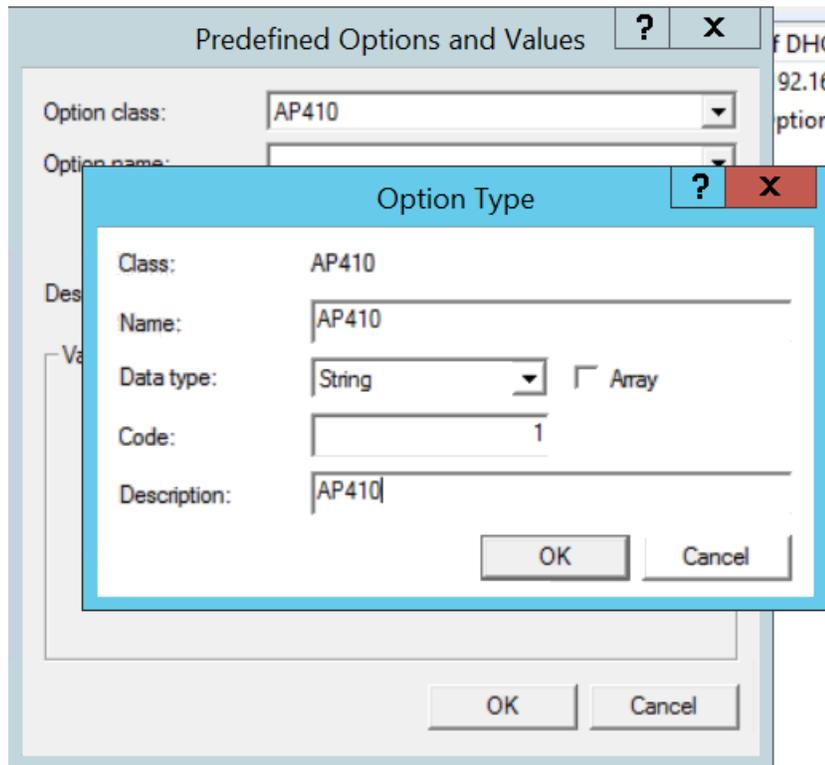


Figure 17: Option Type

- Configure the following parameters:

Name

Name of the VCI option.

Data Type

Select **String**.

Code

Sub-option value **1**

Description

(Optional) Enter a description.

- Select **OK**.

The new predefined option is displayed in the **Predefined Options and Values** window.

- Select **OK**.

You have created the vendor class and sub-option type needed in order to support controller discovery.

Configuring Server Options

Associate the Vendor Class Identifier option with each DHCP scope.

1. In the DHCP server utility, right-click the **Server Options** folder under the DHCP scope, then select **Configure Options**.

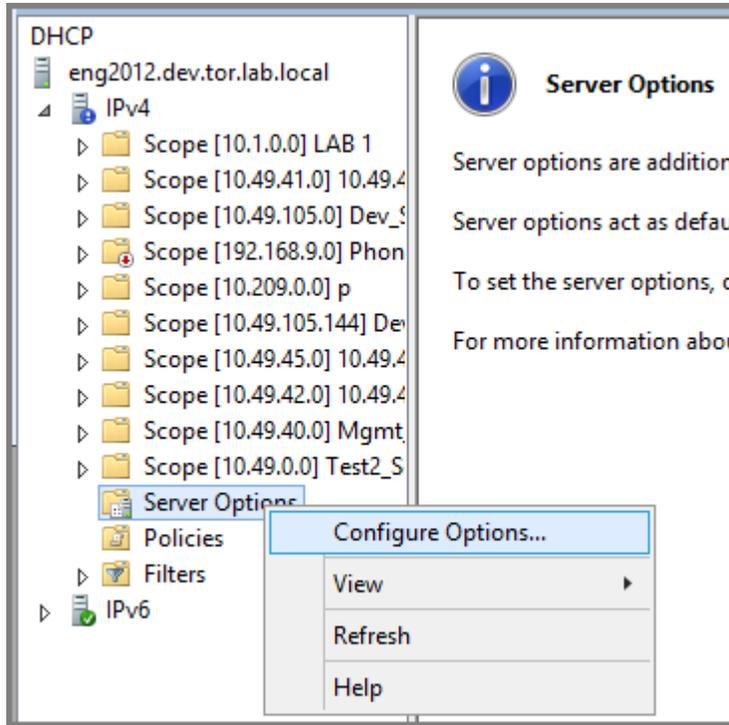


Figure 18: Configure Options

The **Scope Options** window displays.

2. Click the **Advanced** tab.

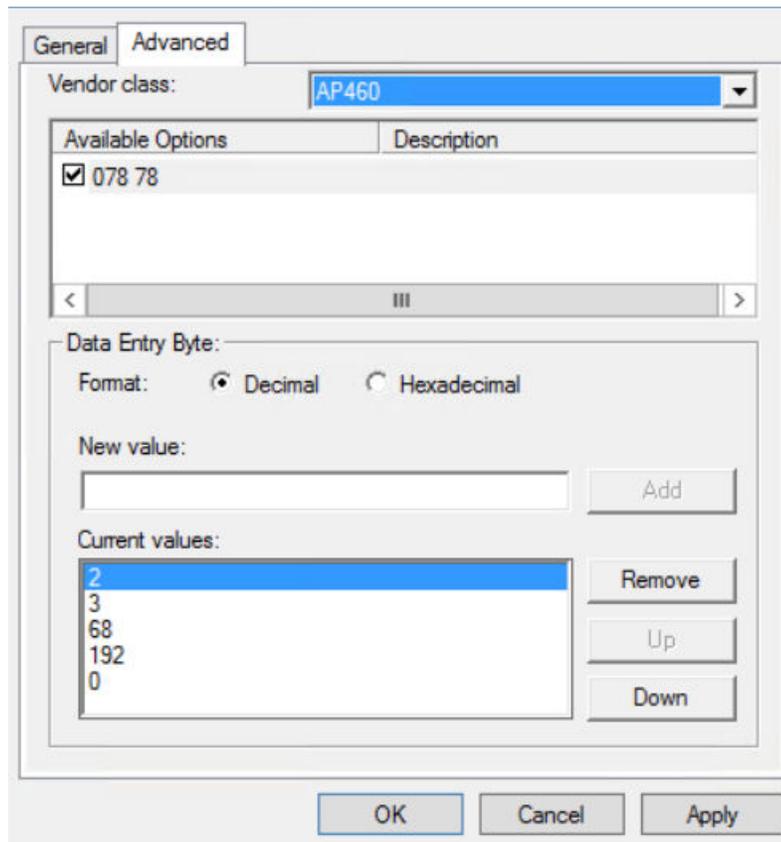


Figure 19: Vendor Class Option 078

Vendor Class

Select the vendor class that you plan to use. For example, AP410 or AP460.

Available Options

Select a predefined sub-option to assign to this scope. The option must be checked and highlighted to display Data Entry options.

Data Entry

(Option 078 Only) Enter the controller IP addresses to return to the APs. This is a comma-delimited list.

3. Click **OK**.

DHCP Option 43 is now configured. This DHCP option is available for all the DHCP scopes that are configured in the DHCP server. When an AP requests vendor specific information, the DHCP server sends the ExtremeCloud Appliance IP addresses in Option 43 to the AP.

Configuring DHCP on a Red Hat Linux Server

You can configure a DHCP server using the configuration file `/etc/dhcpd.conf`.

DHCP also uses the file `/var/lib/dhcp/dhcpd.leases` to store the client lease database.

The first step in configuring a DHCP server is to create the configuration file that stores the network information for the clients. Global options can be declared for all clients, or options can be declared for each client system.

The configuration file can contain any extra tabs or blank lines for easier formatting. The keywords are not case-sensitive and lines beginning with a hash mark (#) are considered comments.

To use the recommended mode, add the following line to the top of the configuration file:

```
ddns-update-style interim;
```

Read the `dhcpd.conf` man page for details about the different modes.

There are two types of statements in the configuration file:

- Parameters – State how to perform a task, whether to perform a task or what networking configuration options to use to send to the client.
- Declarations – Describe the Topology of the network, describe the clients, provide addresses for the clients, or apply a group of parameters to a group of declarations.

Some parameters must start with the option keyword and are referred to as options. Options configure DHCP options; whereas, parameters configure values that are not optional or control how the DHCP server behaves.

Parameters (including options) declared before a section enclosed in curly brackets {} are considered global parameters. Global parameters apply to all the sections below it.



Note

If you change the configuration file, the changes will not take effect until you restart the DHCP daemon with the command `service dhcpd restart`.

The following is an example of a DHCP configuration on a Red Hat Linux server.

For Wireless AP Subnet

```
subnet 10.209.0.0 netmask 255.255.255.0 {
option routers 10.209.0.2; ### This is the network's default gateway address.
option subnet-mask 255.255.255.0
option domain-name xyznetworks.ca
option domain-name servers 192.168.1.3, 207.236, 176.11
range 10.209.0.3 10.209.0.40;
default-lease-time 7200000 ###The figures are in seconds.
## SLP option 78 for Extreme Wireless APs in a Centralized site.

option slp-directory-agent true 10.209.0.1, 10.209.0.3;

authoritative;
```

Configuring DHCP Option 43 on a Linux Server

This section describes the configurations necessary on the Linux DHCP server to use DHCP option 43 for ExtremeCloud Appliance discovery. Option 43 requires the following information:

- Vendor Class Identifier (VCI) — The VCI for an ExtremeWireless AP or adapter is `HiPath <AP model name>`. For example, the ExtremeWireless AP3912 is **HiPath AP3912** and the SA201 adapter is **HiPath SA201**.

- Option 43 sub-option code — The option 43 sub-option code for the ExtremeWireless APs is type 1 (0x1).
- IP addresses of ExtremeCloud Appliance

To configure the vendor encapsulated option on a Linux server, you must do the following:

- Define an option space.
- Define some options in that option space.
- Provide values for the options.
- Specify that this option space should be used to generate the vendor-encapsulated-options option.

To configure DHCP option 43:

1. Modify the `dhcp.conf` file (modifications are in bold).

```
[root@localhost ~]# vim /etc/dhcpd.conf
authoritative;
ddns-update-style interim;
ignore client-updates;
option space HAP;
option HAP.HWC code 1 = text;

subnet 10.100.1.0 netmask 255.255.255.0 {
range 10.100.1.10 10.100.1.254;
option subnet-mask 255.255.255.0;
option slp-directory-agent false 10.1.100.11;
option domain-name-servers 10.100.1.2;
option domain-name "bpmgmt.com";
option routers 10.100.1.1;
default-lease-time 40000;
}
...
subnet 10.100.4.0 netmask 255.255.255.0 {
range 10.100.4.100 10.100.4.254;
option subnet-mask 255.255.255.0;
option slp-directory-agent false 10.100.4.46, 10.100.4.47;
option domain-name-servers 10.100.1.2;
option domain-name "bpmgmt.com";
option routers 10.100.4.1;
default-lease-time 40000;

Vendor Class for ExtremeWireless APs:

class "HAP" {
match option vendor-class-identifier;
}
subclass "HAP" "AP3935" {
vendor-option-space HAP;
option HAP.HWC "10.100.2.36, 10.100.2.22";
}
}
```

2. Restart the DHCP server.

```
[root@localhost ~]# /etc/init.d/dhcpd restart
```

Configuring the ExtremeCloud Appliance as an NPS Client

1. Click **Start > Administrative Tools > Network Protocol Server**.
2. Expand **RADIUS Clients and Servers**, right-click **RADIUS Clients**, and then click **New**.
The dialog appears.
3. Configure the following parameters:
 - Friendly name. Type the name that you want to assign to the ExtremeCloud Appliance
 - Client address (IP or DNS). Type the IP address of the ExtremeCloud Appliance , and then click **Verify**.

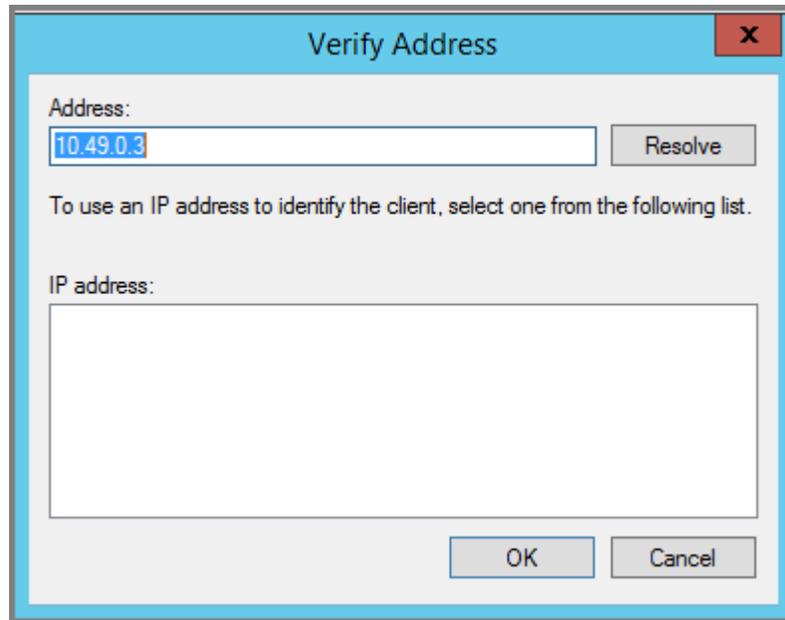


Figure 20: Verify Address

- a. Click **Resolve**.
If the IP address is correct, it appears in the Search results text box.
 - b. Click **OK**.
- Shared Secret. Select a Shared Secret Template (Optional).
You can opt to enter a Shared Secret manually or have NPS generate the Shared Secret.
 - Manual. Type a password that both the NPS server and the ExtremeCloud Appliance will use to mutually authenticate. This password is case-sensitive. You can use alpha-numeric characters. You must configure the same shared secret password for the VNS .
 - Generate. Click **Generate** to have NPS generate the password. Not all servers support long generated secrets.
4. Click **OK**.

NPS Service Configuration

Microsoft Network Policy Server (NPS) can run as a RADIUS server. You can use NPS for centralized authentication and accounting of multiple client devices. To install NPS on Windows Server 2012 R2, see <http://support.microsoft.com>. This section outlines the following configuration procedures:

- [Add a New Network Policy](#) on page 40
- [Configuring the ExtremeCloud Appliance as an NPS Client](#) on page 39

Add a New Network Policy

Create one or more network policies. In this section, we outline how to create two specific policy conditions. Adding policy conditions is optional.

- Create a condition to limit the policy to specific IP addresses.
- Create a condition to limit the policy to a specific group that corresponds to an ExtremeCloud Appliance Role.

To create a new network policy:

1. Select **Start > Administrative Tool > Network Policy Server**.
2. In the tree view, expand **NPS (Local)**, expand **Policies**, and right-click **Network Policies**.
3. Select **New**
4. Provide a **Policy name**.
 - Type of network access server is **Unspecified**.
 - Do not select **Vendor Specific**
5. Select **Next** to configure a condition if applicable.

Related Topics

[Create Condition: Client IPv4 Addresses](#) on page 40

[Create Condition: Windows Groups](#) on page 42

Create Condition: Client IPv4 Addresses

1. Click **Add** to add a condition.
2. Scroll down to Radius Client Properties and select **Client IPv4 Addresses**.

3. Enter the IP Address of the ExtremeCloud Appliance and click **OK**.

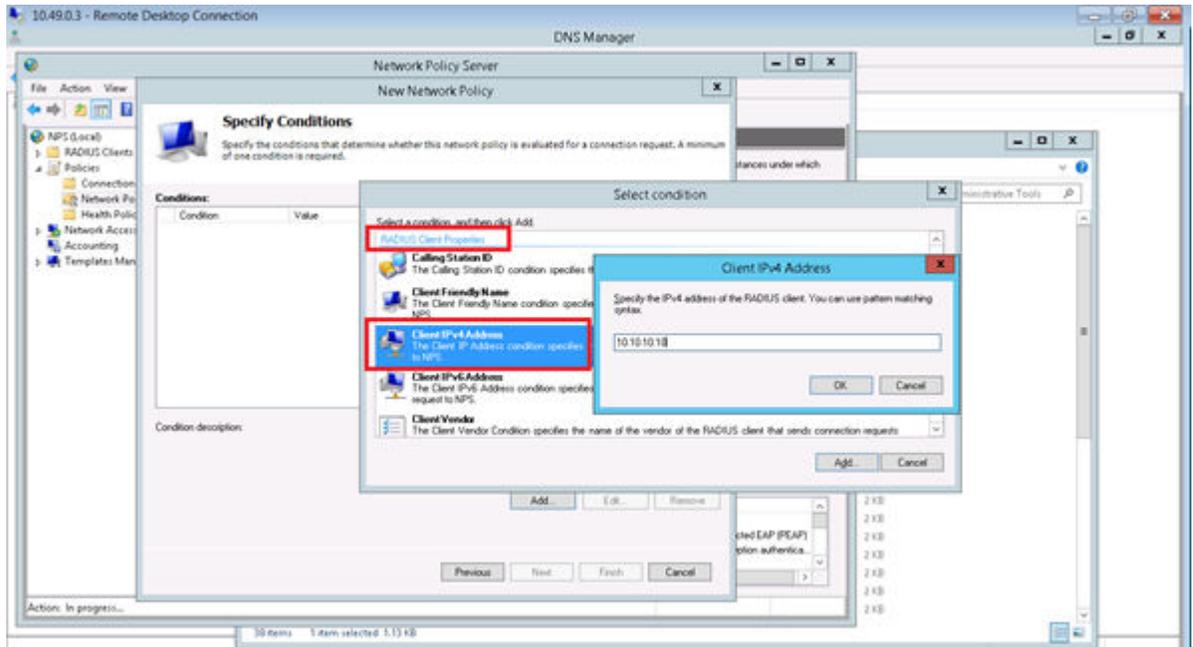


Figure 21: Condition: Client IPv4 Address

4. Click **Next**.
5. On the **Specify Access Permission** screen, select **Access granted** and click **Next**.
6. On the **Configure Authentication Methods** screen, click **Add** and select **Microsoft: Smart Card or other certificate**. Then, click **OK**.

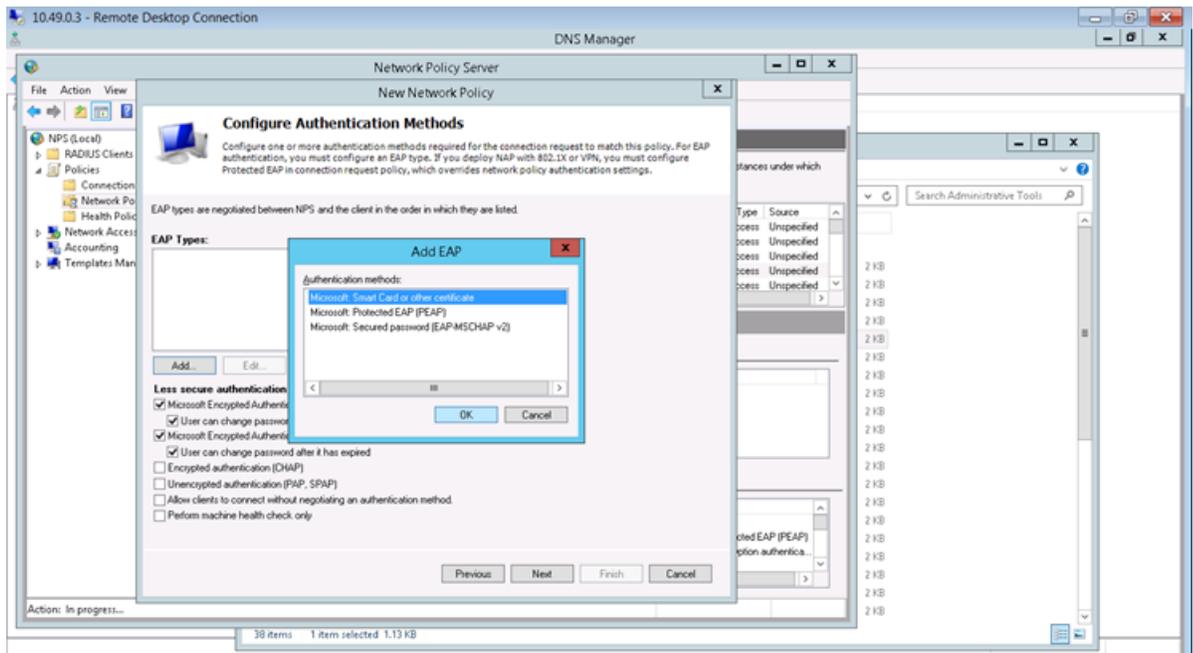


Figure 22: Add EAP

7. Click **Next**.
8. Configure the Idle Timeout and click **Next**.
9. Configure the Radius Attributes and click **Next**.
10. Click **Finish**.

Create Condition: Windows Groups

Create a condition specifying a Windows group to add flexibility to policy management.

1. Click **Add** to add a condition.
2. Select **Windows Groups** and click **Add**.
3. Click **Add Groups**.

The **Select Groups** dialog appears.

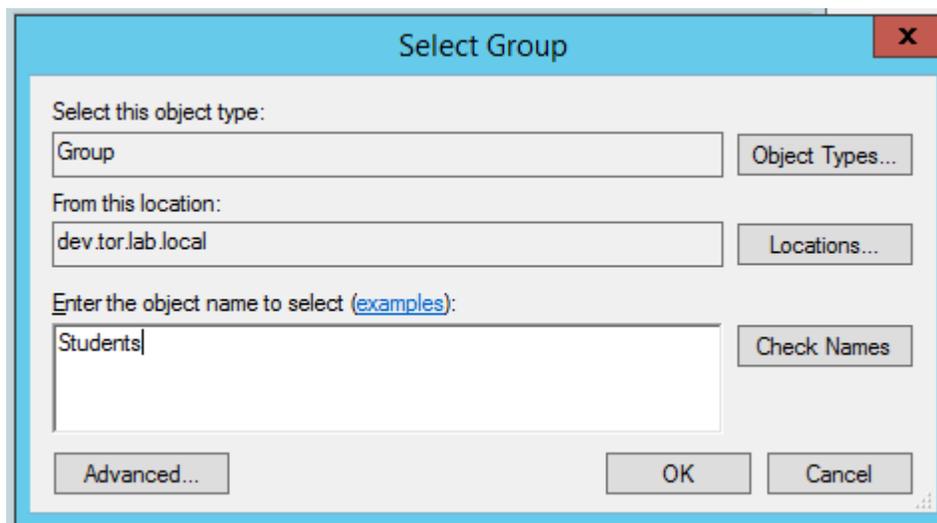


Figure 23: Select Group

4. Type `Group` as the object type.
5. Specify the location.
6. Enter the name of the group. This name must match a configured Active Directory group. You may be prompted to specify the Active Directory Windows group that the group corresponds to.
7. Click **OK**.
8. On the **Specify Access Permission** screen, specify the level of access permission and click **Next**.

9. On the **Configure Authentication Methods** screen, click **Add** and select one or more EAP methods. Then, click **OK**.


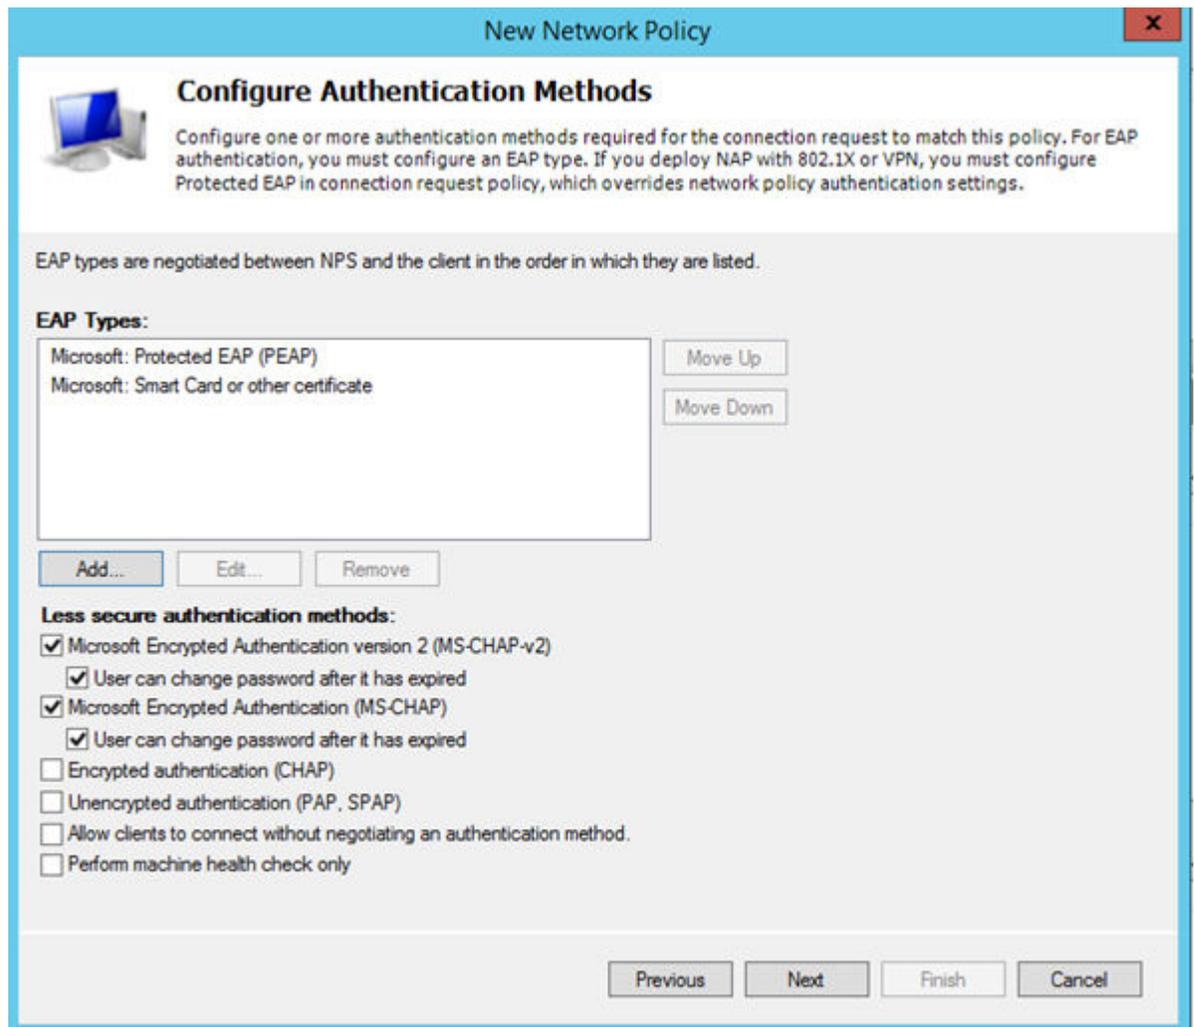


Figure 24: Configure Authentication Methods

10. Click **Next**.
11. Configure the Idle Timeout and click **Next**.
12. Configure the Radius Attributes. As an example, you can set the Filter-Id attribute to a wireless controller role. This will override the default role. The following procedure illustrates how to set the Filter-Id:
 13. Click **Add**, select the **Filter-Id** attribute.
 14. Click **Add**.

15. Click **Add** again and type the attribute name. The Attribute name is case sensitive and must match the Role on the wireless controller.

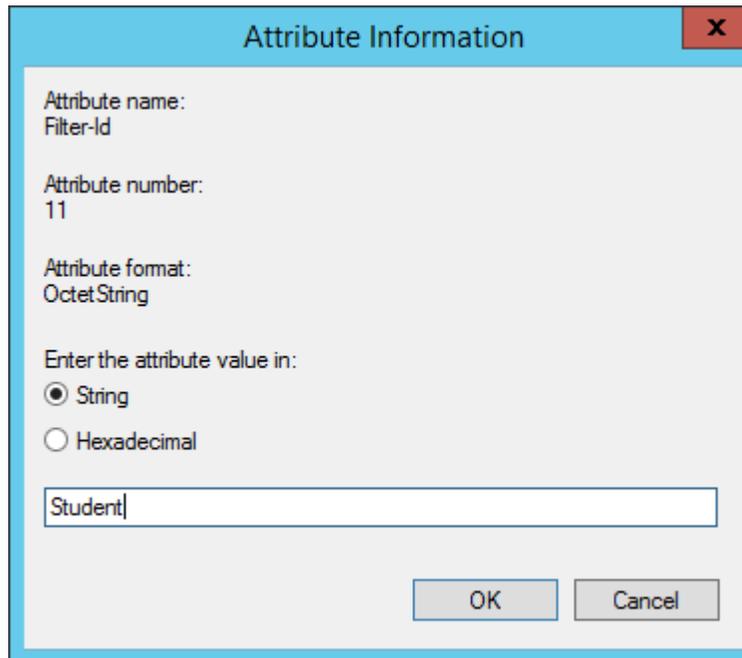

Attribute Information

Attribute name:
Filter-Id

Attribute number:
11

Attribute format:
OctetString

Enter the attribute value in:

String
 Hexadecimal

Student

OK Cancel

Figure 25: Attribute Information

16. Click **OK**.
17. Click **Close** to close the **RADIUS Attribute** dialog.

18. Click **Next**.

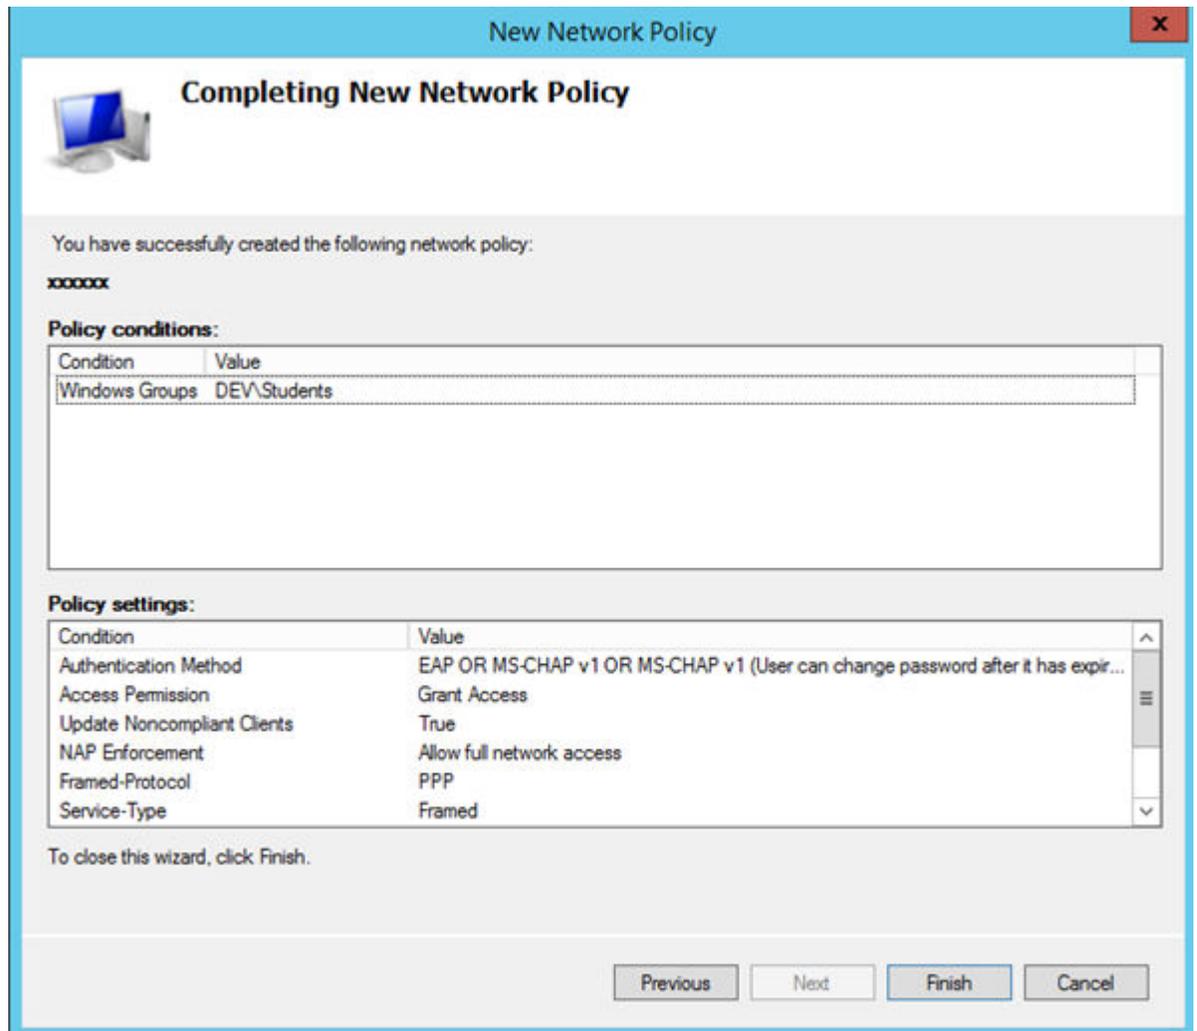


Figure 26: Completing New Network Policy

19. Click **Finish**.

DNS Service Configuration

The domain name system (DNS) stores and associates many types of information with domain names, but most importantly, it translates domain names (computer hostnames) to IP addresses.

You must install DNS on Windows Server 2012 R2 according to the server documentation. Visit <http://support.microsoft.com> to learn how to install and configure DNS on Windows Server 2012 R2.

The instructions here are limited to [Configuring DNS for Wireless APs Discovery](#).

For configuration on Linux, see [Configuring DNS on a Linux Server](#) on page 47.

Configuring DNS for Wireless AP Discovery

1. Click **Start > Administrative Tools > DNS**.
2. Expand the tree and right-click on a domain.
3. Select **New Host (A or AAA)**.

The **New Host** window displays.

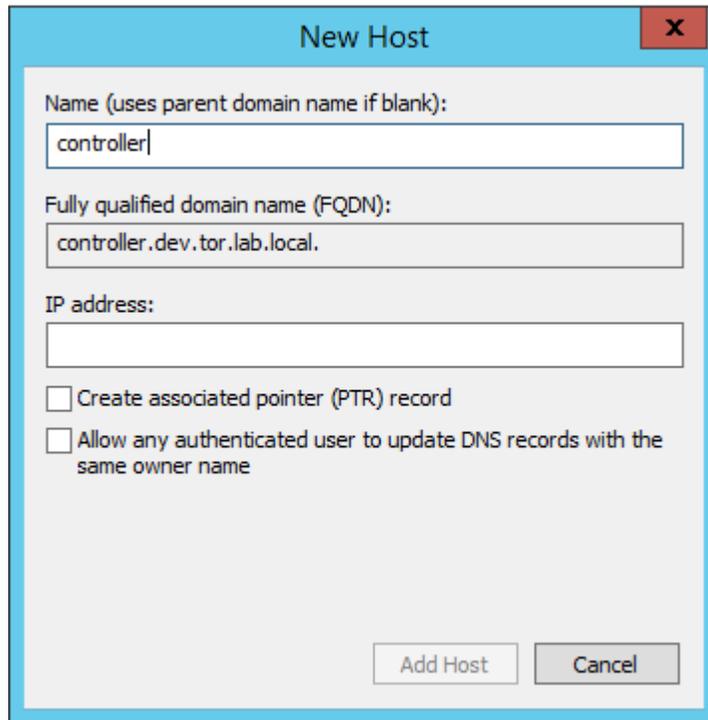


Figure 27: New Host

4. In the Name text box, type *controller*
5. In the IP address text box, type the ExtremeCloud Appliance IP address.
If configuring multiple controllers, create all records with the same name controller, and provide unique IP addresses.
6. Select **Create associated pointer (PTR) record** check box.

This option creates a record for reverse lookup.



Note

ExtremeWireless WiNG APs — Use a Domain Name Server (DNS) lookup for the host name `Controller.<domain-name>`. If you use this method for discovery, place an "A" record in the DNS server for `Controller.<domain-name>`. The `<domain-name>` is optional, but if used, ensure it is listed with the DHCP server.

7. Click **Add Host**.
The new host is displayed in the right pane of the screen.
8. Click **Done**.

You must now configure the Wireless APs via the ExtremeCloud Appliance.

Configuring DNS on a Linux Server

This section describes the procedure to configure Linux DNS server for ExtremeCloud Appliance IP addresses discovery.

1. Configure the Linux DHCP server to include DNS information. In the `/etc/dhcp.conf` file, add domain-name-servers and domain-name DHCP options.

```
subnet 10.2.221.0 netmask 255.255.255.0 {
    range 10.2.221.30 10.2.221.130;

    option slp-directory-agent true 10.2.221.2;
    option subnet-mask 255.255.255.0;
    option domain-name-servers 192.168.6.2;
    option domain-name "Availability-221.com";
    option routers 10.2.221.1;
    default-lease-time 40000;
}
```

2. Configure the Linux DNS server to include ExtremeCloud Appliance IP addresses.

Create a file for the domain name configured in `dhcp.conf` (in this example, "Availability-221.com") as follows at `/var/named/chroot/var/named`.

The name of the file should be the following: `/var/named/chroot/var/named/named.Availability-221.com`

```
/var/named/chroot/var/named/named.Availability-221.com
$TTL 86400
@      IN      SOA     ns1.availability-221.com.    hostmaster.availability-221.com.    (
                                2          ; serial #
                                28800     ; refresh
                                14400     ; retry
                                3600000   ; expire
                                86400     ; ttl
                                )
      IN      NS      ns1.availability-221.com.
Controller  IN      A      10.2.221.2
```

3. Add the domain name to the DNS configuration file (`/var/named/chroot/etc/named.conf`).

```
$/
// a caching only nameserver config
//
options {
/*
 * If there is a firewall between you and nameservers you want
 * to talk to, you might need to uncomment the query-source
 * directive below. Previous versions of BIND always asked
 * questions using port 53, but BIND 8.1 uses an unprivileged
 * port by default.
 */
// query-source address * port 53;
version "Bind";
recursion no;
directory "/var/named";
};
zone "Availability-221.com" {
    type master;
    file "named.Availability-221.com";
};
zone "0.0.127.in-addr.arpa" {
type master;
file "named.local";
allow-update { none; };
}
```


4. Confirm that DNS service is running.

```
ps -ef | grep named
named 10023 1 0 Feb18 ? 00:00:00 /usr/sbin/named -u named -t /var/named/chroot
root 7687 7531 0 22:14 pts/982 00:00:00 grep named
```

5. Verify that the domain name is configured properly.

```
nslookup Controller.Availability-221.com
Server:          127.0.0.1
Address:         127.0.0.1#53

Name:   Controller.Availability-221.com
Address: 10.2.221.2
```

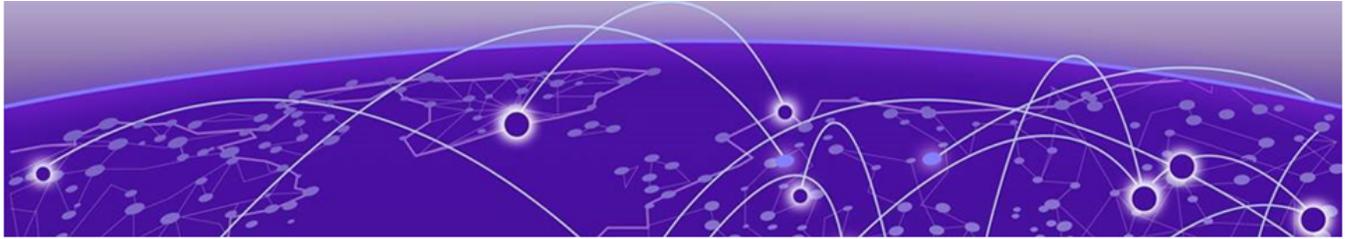

Centralized Site with a Captive Portal

[Deployment Strategy](#) on page 49

[Adding a Centralized Site with Device Group](#) on page 49

[Configuring an Internal Captive Portal](#) on page 51

[Specifying B@AC Network Topology](#) on page 52

[Configuring a Captive Portal Network](#) on page 53

[Working with Internal Captive Portal Engine Rules](#) on page 54

[Editing Device Group Profile for Network and Role](#) on page 54

[Creating Adoption Rules](#) on page 57

Deployment Strategy

The following strategy outlines how to create a Centralized site with an internal captive portal:

1. [Add a Centralized site with a device group.](#)
2. [Configure an internal captive portal.](#)
3. [Specify a network topology.](#)
4. [Configure a captive portal network.](#)
5. [Work with engine rules.](#)
6. [Specify the network and role in the device group profile.](#)
7. [Create adoption rules.](#)

Adding a Centralized Site with Device Group

Before you create a site, know the following information about your network:

- AP licensing domain
- AP models.

For this deployment scenario, the licensing domain is ROW (Rest of World).

For this deployment scenario, the AP model is AP3915.

1. Go to **Configure > Sites > Add** and configure the following parameters:

Name

Site_Row

Country

Select **Toronto Canada**.

This value corresponds to the licensing domain ROW.

Timezone

Canada: America/Toronto

2. Create one or more device groups for the site.

All APs in a device group must share the following:

- AP model number
- Configuration Profile
- RF Management Profile

Go to **Configure > Sites** and select a site. Then, select **Device Groups > Add** and configure the following parameters:

Name

DeviceGroup_AP3915

Profile

AP3915-default

Select a configuration profile for the AP model. The configuration profile is specific to the AP model.

RF Management

Select **Default ACS**.

This option displays after you have selected the configuration profile, because the RF Management options depend on the selected configuration profile. A Centralized site supports the following AP models:

- AP39xx supporting ACS Policy for RF Management
- AP4xx, AP5xx.



Note

AP4xx and AP5xx currently require manual channel plan configuration when used in a Centralized site. Go to **Configure > Devices > Access Points** and select an AP5xx model. For more information, see *Configure AP Radio Settings* in the *User Guide*

3. Select from the list of discovered APs.

Auto-discovered APs that match the selected configuration profile display in a list on the **Create Device Group** dialog.

- Click **OK**.

Create Device Group

Figure 28: Create Device Group AP3915

- Click **Save** on the **Site** page to save the site and device group.
- Optional:** Repeat steps 1-5 to create a second device group for AP3935 access points.

<input type="checkbox"/>	Name	AP Platform	Profile	RF Management Policy
<input type="checkbox"/>	DeviceGroup_AP3915	AP3915	AP3915-default	Default ACS
<input type="checkbox"/>	DeviceGroup_AP3935	AP3935	AP3935-default	Default ACS

Figure 29: Centralized Site with Two Device Groups

Next, configure an internal captive portal.

Related Topics

[Configuring an Internal Captive Portal](#) on page 51

Configuring an Internal Captive Portal

Creating a captive portal on ExtremeCloud Appliance that is authenticated with an external RADIUS server.

- Go to **Onboard > Portal > Default** and select the portal type.

2. From the Authenticated Portal field, select **Authenticated Web Access** and click **Save**.
3. Go to **Onboard > AAA > RADIUS Servers > Add** and configure the following parameters for your RADIUS server.

RADIUS Server IP address

Valid IP address of the RADIUS server.

Shared Secret

Password for the RADIUS server. The value must be at least six characters.

4. Click **Save**.

Next, specify a network topology.

Related Topics

[Specifying B@AC Network Topology](#) on page 52

Specifying B@AC Network Topology

ExtremeCloud Appliance offers a default VLAN that is Bridged@AP, untagged. Each site can only have one untagged VLAN. For this deployment, we will specify Bridged@AC topology.

1. Go to **Configure > Policy > VLANS > Add** and configure the following parameters:

Name

test1

Mode

Bridged@AC

VLAN ID

Specify a valid VLAN ID.

Port

If the Mode is Bridged@AC, specify a data port.

Layer 3

If the Mode is Bridged@AC, provide the following Layer 3 parameters:

- IP Address
- CIDR
- FQDN
- DHCP.

Select **Relay**, then click **Configure** to enter the DHCP Relay Server IP address.

- Enable Device Registration. Indicates that the wireless AP or switch can use this port for discovery and registration.
- Mgmt traffic. Indicates that this port will be used to manage traffic. Enable **Mgmt Traffic** to access the ExtremeCloud Appliance user interface through this port.

2. Click **Save**.

Next, add a network.

Related Topics

[Configuring a Captive Portal Network](#) on page 53

Configuring a Captive Portal Network

Configuring an Internal Captive Portal network with WPAv2 PSK privacy.

**Note**

Centralized sites support B@AC and B@AP VLAN topology.

1. Go to **Configure > Networks > WLANs > Add** and configure the following parameters:

Network Name

test1-ICP

SSID

test1-ICP

Status

Enable or disable the network service. Disabling the network service shuts off the service but does not delete it.

Auth Type

Select **WPAv2 - Personal (PSK)** then select **Edit Privacy** and enter a password key.

Enable Captive Portal

Check this option and specify the following parameters:

- Captive Portal Type = **Internal**
- **Default** captive portal is specified. This is the captive portal we configured.
- Authentication Method. Select **Proxy RADIUS (Failover)**.
- Primary RADIUS. This is the RADIUS server we configured. Enter the IP address. You have the option to add 1-3 failover RADIUS servers.
- Default VLAN = **test1**. This is the B@AC VLAN we created.

Default Auth Role

The default network policy roles for an authenticated client. Select the plus sign to create a new role.

Configure this setting if you want to override the default accept policy role with your own default authentication policy role. By default, **Enterprise User** is the Default Auth Role.

To configure a different role as the Default Auth Role:

- a. Configure the role under **Configure > Policy > Roles** and indicate that it is the Default Auth Role here.
- b. Go to **Onboard > Rules** and edit a policy rule, specifying **Default Auth Role** in the Accept Policy field.

Default VLAN

The default network topology. A topology can be thought of as a VLAN (Virtual LAN) with at least one egress port, and optionally include: sets of services, exception filters, and multicast

filters. Examples of supported topology modes are Bridged at AP and Bridged at AC. Select a VLAN from the list.

2. Select **Save**.

When a client connects to the network, a captive portal page is presented. The user enters a user name and password. The RADIUS authenticates the user name and password. Captive portal automatically generates two engine rules that define the Accept Policy for a client before authentication and after authentication.

Next, work with the ExtremeCloud Appliance engine rules.

Related Topics

[Working with Internal Captive Portal Engine Rules](#) on page 54

Working with Internal Captive Portal Engine Rules

When configuring captive portal, the ExtremeCloud Appliance Rules Engine creates default rules for network policy. Use the default rules and modify the Accept Policy when necessary.

1. Go to **Onboard > Rules**.

Two new engine rules are displayed:

- Unregistered LOC: Network: Test1- ICP (SSID of network)

Prior to CP authentication, the client matches this rule and applies the **Accept Policy** of a non-authenticated role.

- Web Authenticated LOC: Network: Test1- ICP (SSID of network)

Once the client password is authenticated on the RADIUS server, the client matches this rule and applies the **Accept Policy** of the **Enterprise User** role.

The **Enterprise User** is the default **Accept Policy**.

Alternatively, you can create unique **Accept Policy** roles to be assigned upon authentication.

- a. Select the rule **Web Authenticated LOC: Network: Test1- ICP** and click  to edit.
- b. From the **Accept Policy** field select a different value.

2. Click **Save**.

Next, modify the device group profile to enable the network and role options we are using.

Related Topics

[Editing Device Group Profile for Network and Role](#) on page 54

Editing Device Group Profile for Network and Role

Configure a network and be aware of policy roles that you are using before modifying the device group profile.

1. Go to **Configure > Sites** and select a site.
2. Click **Device Groups**.
3. Select **DeviceGroup_AP3915**.

4. Beside the Profile field, select  to edit the default profile AP3915-default.
5. From the **Networks** tab, assign a radio to the network you created.
6. From the **Roles** tab, select the Accept Policy roles that the Rules Engine is using.

**Note**

Upon creating an internal captive portal network, the rules engine created two engine rules that make use of the following policies:

- Enterprise User
- Unregistered

External Captive Portal networks use the Unregistered policy by default, there is no user interaction.

Edit Profile

Name AP3915-default

AP Platform AP3915

ADVANCED

[NETWORKS](#)
[ROLES](#)
[RADIOS](#)
[AIR DEFENSE](#)
[EXTREME LOCATION](#)

Name	Selected	
Enterprise User	<input checked="" type="checkbox"/>	
Quarantine	<input type="checkbox"/>	
Unregistered	<input checked="" type="checkbox"/>	
Guest Access	<input type="checkbox"/>	
Deny Access	<input type="checkbox"/>	
Assessing	<input type="checkbox"/>	
Failsafe	<input type="checkbox"/>	

Figure 30: Edit Device Group Profile (Internal Captive Portal)

7. Optionally, you can configure settings from any of the available profile options. All APs in the device group are affected by options configured in the profile.



Note

The supported profile options depend on the AP Platform definition.

8. Click **Save** to save the profile settings.
9. Click **Close** to close **DeviceGroup_AP3915**

Currently, **Site_ROW** has **DeviceGroup_AP3915** with the following:

- 2 Roles

- 1 Network
- 1 Device

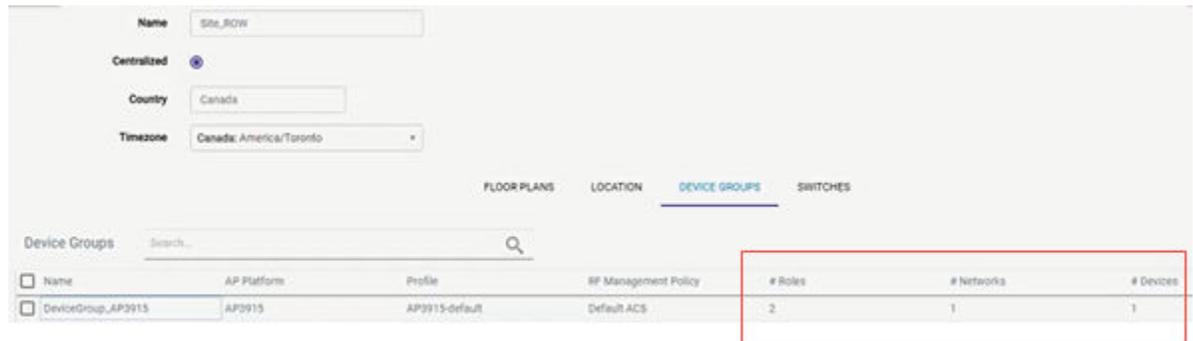


Figure 31: Centralized Site with Device Group

Next, configure adoption rules.

Related Topics

[Creating Adoption Rules](#) on page 57

Creating Adoption Rules

Configure a site and a device group before creating adoption rules. Adoption rules automatically assign devices to specific device groups upon registration with ExtremeCloud Appliance.

1. Go to **Configure > Adoption > Add**.
2. To create a rule for access points, select **AP**.
3. Select an Action.
4. Select a site and device group.
5. Specify a filter and select . The following are available parameters:

IP Address/CIDR

Filter the APs or switches by IP address, adopting APs into the specified device group based on their IP address. CIDR field is used along with IP address field to find the IP address range.

For switch adoption rules, specify the management IP address.

Host Name

Filter the APs by host name, adopting APs into the specified device group based on their host name. This field matches on sub strings.

For switch adoption rules, use the system name. The full host or system name is not required for a match.

Model

Model number on the device. This field matches on sub strings. The full model number is not required for a match.

Serial Number

Serial number on the device. Serial number requires an *exact* string match.



Note

Each filter value can only be applied once to a single rule.

New Rule

? ×

Action

Applies To AP Switch

Action Allow ▼

Site Site_ROW ▼

Device Group DeviceGroup_AP3915 ▼

Filter

Add Filter Model ▼ + -

Note: same rule can only applied once to the filter

CANCEL
OK

Figure 32: Create Adoption Rule

6. Select **OK**.
7. From the **Adoption Rules** page, select **Save**.

All AP3915 access points will be automatically added to **DeviceGroup_AP3915** within **Site_ROW** upon registration with ExtremeCloud Appliance.




Note

Be aware that all devices in a device group must share the following:

- AP model number
- Configuration Profile
- RF Management Profile

For more information on adoption rules, including Pattern-Based adoption and device redirection, see the *ExtremeCloud Appliance User Guide*.

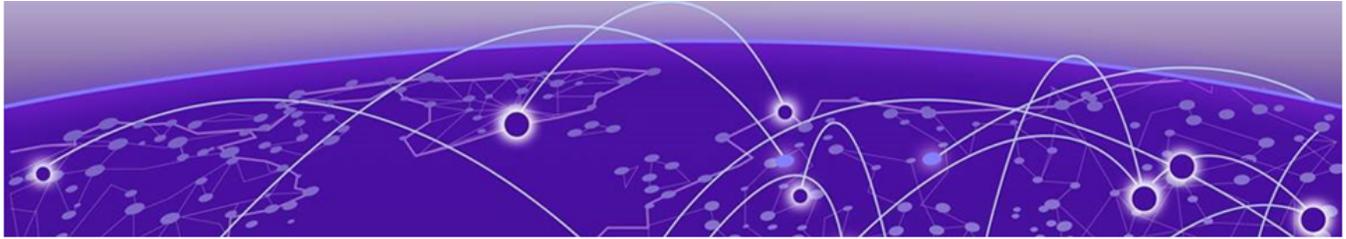

Centralized Site with AAA Network

[Deployment Strategy](#) on page 60

[Configuring a AAA Network](#) on page 60

[Creating an Engine Rule](#) on page 61

[Creating a Policy Role](#) on page 62

[Applying a AAA Network and Role to the Device Group](#) on page 63

Deployment Strategy

The following strategy outlines how to create a Centralized site with a AAA network.

1. [Add a Centralized site with a device group.](#)
2. [Configure a AAA network.](#)
3. [Work with engine rules.](#)
4. [Create a policy role.](#)
5. [Specify the network and role in the device group profile.](#)
6. [Create adoption rules.](#)

Configuring a AAA Network

Using the same Centralized site: **Site_ROW** specify a separate tagged VLAN for the AAA Network, defining a different IP address range for the AAA Network.



Note

You can configure more than one network on a single VLAN, but to configure a separate IP address range for the AAA Network, we will create a separate VLAN.

1. Go to **Configure > Policy > VLAN > Add** to create a new VLAN for the AAA Network.
For more information, see [Specifying B@AC Network Topology](#) on page 52.
2. Go to **Configure > Networks > Add** and configure the following parameters:

Network Name

Test2-AAA

SSID

Test2-AAA

Status

Enable or disable the network service. Disabling the network service shuts off the service but does not delete it.

Auth Type

WPA2 Enterprise 802.1x/EAP

AAA Policy

Local On-boarding

This option is not displayed for WLAN Networks that do not require authentication or authorization. The value **Local Onboarding** refers to RADIUS requests that are directed through the ExtremeCloud Appliance. Local Onboarding is the default value for WLAN Networks configured for Internal Captive Portal. AAA Policy can only be configured for WLAN Networks requiring MACAUTH, External Captive Portal, or EAP.

To use AAA Policy to bypass ExtremeCloud Appliance, create a policy with RADIUS servers and a NAS IP address, then specify the policy here. To get started, go to **Configure > AAA Policy > Add**. For more information, see the *ExtremeCloud Appliance User Guide* or *Online Help*.

Authentication Method

Default

Default AAA Authentication Method

Local

LDAP Configuration

None

Default Auth Role

Quarantine

Defines the default Accept Policy for a client attempting to join the network. When an authenticated client does not meet rule conditions on an 802.1x AAA Network, the default policy role is Quarantine.

Default VLAN

test2 (This is the VLAN we created for the AAA Network.)

3. Click **Save**.

**Note**

To activate the **Scheduling** button and schedule when network services are enabled, install the Extreme Scheduler Application on ExtremeCloud Appliance. For more information, see the *ExtremeCloud Appliance User Guide*.

Next, work with engine rules.

Related Topics

[Creating an Engine Rule](#) on page 61

Creating an Engine Rule

Create a unique engine rule that applies the Enterprise User role upon authentication.

1. Go to **Onboard > Rules > Add** and configure the following parameters:

Name

test2-rule

Rule Enabled

Select this box to enable the rule.

Location Group

Specify the Test2-AAA Network we created.

2. Select **Enterprise User** as the Accept Policy.
3. Click **Save**.

Next, create a unique policy role that this engine rule will apply upon authentication instead of **Enterprise User**.

Related Topics

[Creating a Policy Role](#) on page 62

Creating a Policy Role

You can create a policy role that will customize network access.

To create a new policy role:

1. Go to **Configure > Policy > Roles > Add** and configure the following parameters.

Name

myTest2-policy

Default Action

Set to **Deny**.

The policy rule will deny everything except for the rules we define as allowed.

2. Select the **L3 L4 Rules** section and click **New**.
3. Configure the following rules:
 - Allow traffic to subnet 0.0.0.0/0, any protocol, Port DHCP Server (68).
 - Allow traffic to subnet 0.0.0.0/0, any protocol, port Port DHCP Client (67).
 - Allow traffic to subnet 10.48.51.50/28, any protocol, any port.
 - Allow traffic to subnet 10.48.49.9/32, any protocol, any port.
4. Click **Save** to save the policy.
5. Go to **Onboard > Rules**.
6. Edit the **test2-rule** Accept Policy. Apply **myTest2-policy** instead of **Enterprise User** policy.
 - a. Highlight **test2-rule** and click .
 - b. From the Accept Policy field, select **myTest2-policy**.

The screenshot shows the configuration for an engine rule named "test2-rule". The rule is enabled. The condition section has four dropdown menus: "User Group" (Any), "End-System Group" (Any), "Device Type Group" (Any), and "Location Group" (Network: test2-AAA). There is an "Invert" checkbox next to the Location Group dropdown. The action section has two dropdown menus: "Accept Policy" (myTest2-policy) and "Portal" (None).

Figure 33: Engine Rule with Unique Policy

7. Click **Save**.

Upon authentication to the network, the client reaches the engine rule **test2-rule**. Client is accepted to the network based on the unique Accept Policy **myTest2-policy**.

Next, enable **myTest2-policy** within the device group profile.

Related Topics

[Applying a AAA Network and Role to the Device Group](#) on page 63

Applying a AAA Network and Role to the Device Group

Each time you configure a network or specify policy roles, you must enable the network and roles within the device group.

1. Go to **Configure > Sites** and select the site.
2. Select **Device Groups** tab.
3. Select **DeviceGroup_AP3915**.
4. Beside the Profiles field, select  to edit the profile AP3915-default.
5. From the **Networks** tab, assign a radio to network **test2-AAA**.


This is the AAA network we created.

6. From the **Roles** tab, select the Accept Policy roles we have configured under the Rules Engine. Quarantine is added to the list of roles.
 - Enterprise User
 - Quarantine
 - Unregistered
 - myTest2-policy
7. Click **Save** to save the profile settings.
8. Click **Close** to close **DeviceGroup_AP3915**.

Next, you have the option to create adoption rules for device group **DeviceGroup_AP3915**.

Related Topics

[Creating Adoption Rules](#) on page 57

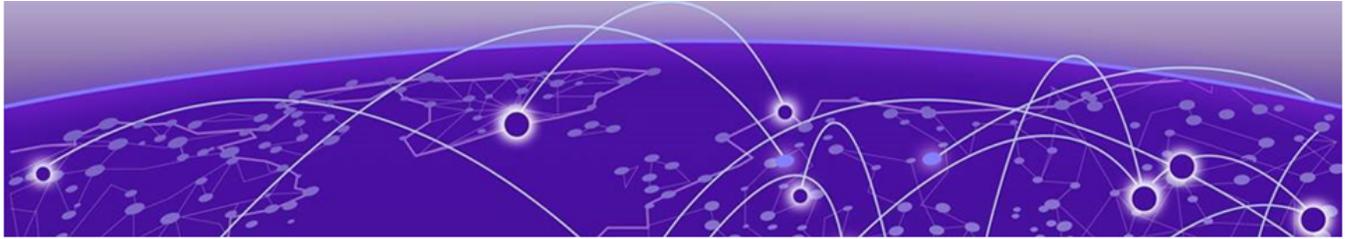

Configuring an External NAC Server for MBA and AAA Authentication

[Deployment Strategy](#) on page 65

[Configuring the External NAC Server](#) on page 66

[Network with Default Auth Role](#) on page 68

[Network with Pass-Through External RADIUS](#) on page 70

Deployment Strategy

The following deployment strategy uses an external NAC (Network Access Control) server to authenticate client sessions using MBA and AAA authentication methods. We will configure the “Use Default Auth” and the “Pass Through External RADIUS” Accept Policy actions upon successful user authentications.

For this strategy we are using the following:

- One of the following ExtremeWireless™ access points:
 - AP3917i/e/k
 - AP3916ic
 - AP3915i/e
 - AP3912i
 - AP3935i/e
 - AP3965i/e
- An external NAC server running version 8.1.3 or later, and an Extreme Management Center Server (XMC) server to manage and configure the NAC server.

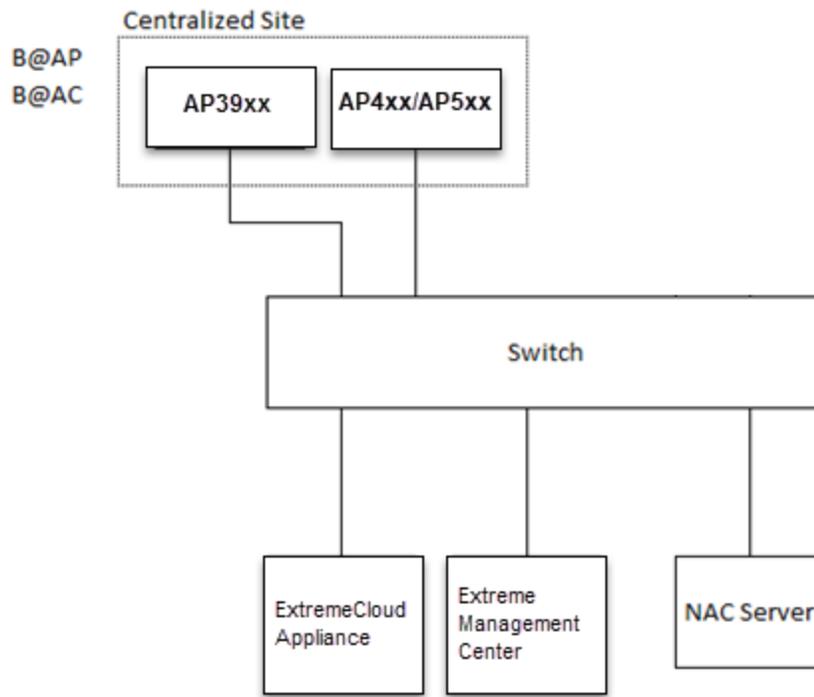


Figure 34: External NAC Server / ExtremeCloud Appliance Setup

Configuring the External NAC Server

Take the following steps to configure the External NAC server:

Extreme Management Center Console

1. Navigate to the Extreme Management Center (XMC) OneView page or launch the XMC console.
2. Add the external NAC server and the ExtremeCloud Appliance esa0 interface as devices to be managed by XMC.

- Open NAC Manager using either OneView or the XMC console.
- Add the external NAC server as an appliance to be managed.

- a. Go to **Switches > Add Switch**.
- b. Select the ExtremeCloud Appliance esa0 interface
- c. Configure the following parameters:

Primary Engine

NAC server

RADIUS Attributes to Send

Edit RADIUS Attribute Settings

3. To edit the RADIUS Attribute settings:
 - Select **Add** and provide the Attribute Group name.

- In the Attribute field, enter the following:
 - Filter-Id=%FILTER_NAME%
 - Filter-Id=Enterasys:version=1:%MANAGEMENT%policy=%POLICY_NAME%
 - Login-LAT-Port=%LOGIN_LAT_PORT%
 - Service-Type=%MGMT_SERV_TYPE%



Note

The Attribute Group is configured to ensure that both ExtremeWireless and ExtremeWireless WING APs function with the appliance.

4. Save the Attribute Group, then select this group as the option in the **RADIUS Attributes to Send** field.
5. Press **OK**.

NAC Manager

6. Go to **Tools > Management**
7. Click **Configuration > Advanced NAC Configurations > AAA Configurations > Local Password Repository > Default**.
8. Add a new user.

Click **Add** and configure the following parameters:

- Display Name
- Username
- Password

9. Click **Save**.
10. In the **Advanced Configuration** window, navigate to **NAC Configurations > Rule Components > End-System Group**.
11. Add a new **End-System Group**.

Add a new MAC entry for each MAC address of each client that should be successfully authenticated.

12. Click **Save**.
13. In the **Advanced Configuration** window, navigate to **NAC Configurations > Default**.
14. Add a new rule.



Note

Assuming no prior configuration changes have been made to the Default NAC Profile, it will send an *Enterprise User* Filter-ID.

15. In the **Profile** drop-down list, select **Default NAC Profile**.
16. Save the rule and move it up the list, just after the **Assessment Warning** rule.
17. Close the **Advanced Configuration** window and Enforce the NAC engine.
18. Once the Enforce is successful, close the window.

Network with Default Auth Role

The following procedure outlines how to configure a network and associate it with a Default Auth Role accept policy. The following network types are described:

- MBA Network
- AAA Network

Related Topics

[Configuring an MBA Network](#) on page 68

[Configuring a AAA Network](#) on page 69

Configuring an MBA Network

To create the MBA network associated to a Default Auth Role accept policy. Take the following steps:

1. Configure a RADIUS server for AAA authentication.

- Log in to ExtremeCloud Appliance and go to **Onboard > AAA > Radius Server** and add a new RADIUS server.
- Configure the following parameters:

Radius Server IP Address

Add the NAC IP address

Shared Secret

Provide the NAC Shared Secret.



Note

To find the Shared Secret of the NAC Manager, go to:

Advanced NAC Configuration Settings > Global and Appliance Settings > Appliance Settings.

2. Create a new network.

- Enable **MAC-based authentication (MBA)** and choose an appropriate MBA Timeout Role.
- Clear the **Authenticate Locally for MAC** check box.
- Choose **RADIUS** as the Authentication Method and select the NAC added in Step 1 as the Primary RADIUS.
- Select a Default VLAN.
- Click **Save**.

3. Add a new rule.

- From ExtremeCloud Appliance, navigate to **Onboard > Rules**.
- Click **Add**.
- In the Location Group drop-down menu, select **Network: <name of your network>**.
- From the Accept Policy field:
 - To configure a Default Auth Role Policy: select **Use Default Auth Role**.

- To configure a Pass-thru External RADIUS Accept Policy: select **Pass Through External RADIUS**.
 - Save the rule.
4. Assign the network created previously and its Default Auth Role to a site and save. Take the following steps:
- Go to **Configure > Sites** and select a site.
 - Click the **Device Groups** tab and select a device group.
 - Beside the Profile field, click  to edit the device group profile.
 - Go to the **Networks** tab and select the configured network.
 - Go to the **Roles** tab and select the configured Default Auth Role.

Finally, associate clients to the SSID of the network. The Access-Request is sent to the external NAC server. The NAC server matches the MAC address of the user with one of the MAC addresses in the [End-System Group](#) (that was created earlier) and sends an Access-Accept with a Filter-ID *Enterprise User*. The ExtremeCloud Appliance Access Control engine ignores the Filter-ID and applies the Default Auth Role that was configured under Network Settings.

Configuring a AAA Network

To configure a AAA Network associated to a Default Auth Role accept policy. Take the following steps:

On ExtremeCloud Appliance:

Use the IP address of the external NAC server as the primary RADIUS server.

1. Configure a RADIUS server for AAA authentication.
 - Log in to ExtremeCloud Appliance and go to **Onboard > AAA > Radius Server** and add a new RADIUS server.
 - Configure the following parameters:

Radius Server IP Address

Add the NAC IP address

Shared Secret

Provide the NAC Shared Secret.



Note

To find the Shared Secret of the NAC Manager, go to:

Advanced NAC Configuration Settings > Global and Appliance Settings > Appliance Settings.

2. Create a new network.
Configure the following parameters:

Auth Type

WPA2 Enterprise w/ RADIUS

Authentication Method

RADIUS

Primary RADIUS

IP Address of the External NAC added in [Step 1](#).

Default Auth Role

Select a role other than *Enterprise User*.

Default VLAN

Select a Default VLAN. B@AP *VLAN ID*

3. Click **Save**.

4. Create a policy rule.

Go to **Onboard > Rules** and configure the following parameters:

Location Group

Network: *<name of your network>*

Accept Policy

- To configure a Default Auth Role Policy, select **Use Default Auth Role**.
- To configure a Pass-Through External RADIUS Accept Policy, select **Pass Through External RADIUS**.

5. Click **Save**.

On the NAC Manager:

6. Edit the rule you created on ExtremeCloud Appliance [here](#).

Configure the following parameters:

Authentication Method

802.1x

End-System Group

Any

7. Click **Save** and enforce the NAC.

On ExtremeCloud Appliance:

8. Assign the network created previously and its Default Auth Role to a site and save.

- Go to **Configure > Sites** and select a site.
- Click the **Device Groups** tab and select a device group.
- Beside the Profile field, click  to edit the device group profile.
- Go to the **Networks** tab and select the configured network.
- Go to the **Roles** tab and select the configured Default Auth Role.

Associate clients to the SSID of the Network, when prompted for the username and password, use the username and password created with the [New User](#). The external NAC server matches the rule you created under [New Rule](#) and upon successful authentication sends an Access-Accept and a Filter-ID *Enterprise User*. The ExtremeCloud Appliance Access Control engine ignores the Filter-ID and applies the Default Auth Role that was configured under Network Settings.

Network with Pass-Through External RADIUS

The following procedure outlines how to configure a network and associate it with a Pass-Through External RADIUS accept policy. The following network types are described:

- MBA Network

- AAA Network

Related Topics

[Configuring an MBA Network](#) on page 71

[Configuring a AAA Network](#) on page 72

Configuring an MBA Network

To create the MBA network associated to a Pass-thru External RADIUS accept policy. Take the following steps:

1. Configure a RADIUS server for AAA authentication.

- Log in to ExtremeCloud Appliance and go to **Onboard > AAA > Radius Server** and add a new RADIUS server.
- Configure the following parameters:

Radius Server IP Address

Add the NAC IP address

Shared Secret

Provide the NAC Shared Secret.



Note

To find the Shared Secret of the NAC Manager, go to:

Advanced NAC Configuration Settings > Global and Appliance Settings > Appliance Settings.

2. Create a new network.

- Enable **MAC-based authentication (MBA)** and choose an appropriate MBA Timeout Role.
- Clear the **Authenticate Locally for MAC** check box.
- Choose **RADIUS** as the Authentication Method and select the NAC added in Step 1 as the Primary RADIUS.
- Select a Default VLAN.
- Click **Save**.

3. Add a new rule.

- From ExtremeCloud Appliance, navigate to **Onboard > Rules**.
- Click **Add**.
- In the Location Group drop-down menu, select **Network: <name of your network>**.
- From the Accept Policy field:
 - To configure a Default Auth Role Policy: select **Use Default Auth Role**.
 - To configure a Pass-thru External RADIUS Accept Policy: select **Pass Through External RADIUS**.
- Save the rule.

4. Assign the network created previously and its Default Auth Role to a site and save. Take the following steps:
 - Go to **Configure > Sites** and select a site.
 - Click the **Device Groups** tab and select a device group.
 - Beside the Profile field, click  to edit the device group profile.
 - Go to the **Networks** tab and select the configured network.
 - Go to the **Roles** tab and select the configured Default Auth Role.

Finally, associate clients to the SSID of the network. The Access-Request is sent to the external NAC server. The NAC server matches the MAC address of the user with one of the MAC addresses in the [End-System Group](#) (that was created earlier) and sends an Access-Accept with a Filter-ID *Enterprise User*. The ExtremeCloud Appliance applies the *Enterprise User* Role instead of the Default Auth Role that was configured under Network Settings.



Note

The *Enterprise User* role must exist on ExtremeCloud Appliance and must be assigned to the same device group as the client in order to be applied.

Configuring a AAA Network

To create a AAA network associated to a Pass-thru External RADIUS Accept Policy. Take the following steps:

On ExtremeCloud Appliance:

Use the IP address of the external NAC server as the primary RADIUS server.

1. Configure a RADIUS server for AAA authentication.
 - Log in to ExtremeCloud Appliance and go to **Onboard > AAA > Radius Server** and add a new RADIUS server.
 - Configure the following parameters:

Radius Server IP Address

Add the NAC IP address

Shared Secret

Provide the NAC Shared Secret.



Note

To find the Shared Secret of the NAC Manager, go to:

Advanced NAC Configuration Settings > Global and Appliance Settings > Appliance Settings.

2. Create a new network.
Configure the following parameters:

Auth Type

WPA2 Enterprise w/ RADIUS

Authentication Method

RADIUS

Primary RADIUS

IP Address of the External NAC added in [Step 1](#).

Default Auth Role

Select a role other than *Enterprise User*.

Default VLAN

Select a Default VLAN. B@AP VLAN ID

3. Click **Save**.

4. Create a policy rule.

Go to **Onboard > Rules** and configure the following parameters:

Location Group

Network: <name of your network>

Accept Policy

- To configure a Default Auth Role Policy, select **Use Default Auth Role**.
- To configure a Pass-Through External RADIUS Accept Policy, select **Pass Through External RADIUS**.

5. Click **Save**.

On the NAC Manager:

6. Edit the rule you created on ExtremeCloud Appliance [here](#).

Configure the following parameters:

Authentication Method

802.1x

End-System Group

Any

7. Click **Save** and enforce the NAC.

On ExtremeCloud Appliance:

8. Assign the network created previously and its Default Auth Role to a site and save.


- Go to **Configure > Sites** and select a site.
- Click the **Device Groups** tab and select a device group.
- Beside the Profile field, click  to edit the device group profile.
- Go to the **Networks** tab and select the configured network.
- Go to the **Roles** tab and select the configured Default Auth Role.

Associate clients to the SSID of the Network, when prompted for the username and password, use the username and password created with the [New User](#). The external NAC server matches the rule you created under [New Rule](#) and upon successful authentication sends an Access-Accept and a Filter-ID *Enterprise User*. The ExtremeCloud Appliance Access Control engine applies the *Enterprise User* Role instead of the Default Auth Role that was configured under Network Settings.



Note

The *Enterprise User* role must exist on ExtremeCloud Appliance and must be assigned to the same device group as the client in order to be applied.

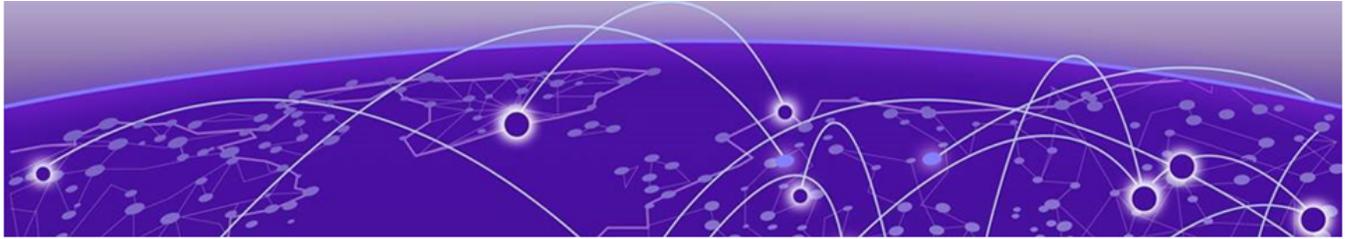

Deploying XMC as External Captive Portal

[Deployment Strategy on page 74](#)

[Configuring an External Captive Portal Network on page 75](#)

[Editing the Configuration Profile for Network and Roles on page 77](#)

[ExtremeCloud Appliance Default Pass-Through Rule on page 77](#)

[Adding ExtremeCloud Appliance as a Switch to Extreme Management Center on page 78](#)

[Creating an Unregistered Policy on Extreme Management Center on page 83](#)

[Editing the Extreme Management Center Profile for Policy and Location-Based Services on page 84](#)

Deployment Strategy

The following strategy outlines how to configure ExtremeCloud Appliance to integrate with Extreme Management Center (XMC), which houses the external captive portal, handling client authentication. The portal resides on the NAC server and ExtremeCloud Appliance handles the client network connections. Traffic connecting to the Guest network will send and receive all RADIUS requests from the externally defined RADIUS server, not from the ExtremeCloud Appliance that processes the request. The NAC server provides RADIUS authentication and authorization and policies that are defined in Extreme Management Center.

The following outlines how to integrate ExtremeCloud Appliance with Extreme Management Center, configuring an External Captive Portal on the NAC server.

1. Add a site with a device group.
2. Configure the network as External Captive Portal.
3. Assign the network to the device group by modifying the configuration profile.
4. Create a RADIUS pass-through rule on ExtremeCloud Appliance.
5. Add ExtremeCloud Appliance to Extreme Management Center as a switch.
6. On NAC, create an Unregistered Policy for the ExtremeCloud Appliance Pass-Through Network.
7. Edit the NAC configuration profile, associating network policy and Location-Based Services.

Configuring an External Captive Portal Network

Configuring an External Captive Portal network with WPAv2 PSK privacy.

1. Go to **Networks > Add** and configure the following parameters:

Network Name

ECA_Guest

SSID

ECA_Guest

Auth Type

Select **WPAv2 with PSK** then click **Edit Privacy** and enter a password key.

Enable Captive Portal

Check this option and specify the following parameters:

Captive Portal Type

External

ECP URL

(http/https)://<access engine fqdn>/static/index.jsp

FQDN should be resolvable by connecting end systems via DNS.

Full URL of “/static/index.jsp” is required for both standard and mobile captive portal detection and device detection by the access control engine.



Note

Walled Garden rules are not required for this network. The process of enabling a captive portal on the network automatically creates rules allowing DNS, DHCP, and redirection rules. However, if users are unable to connect to the network, consider creating specific DNS and DHCP Allow rules as a Walled Garden configuration.

The following are rule examples:

```
Unregistered role for ECA_Guest:acfilters# show
Custom AP Filters: disable
filter 1 3 proto udp eth 800 mac any 0.0.0.0/0 port 53 in dst out src allow
filter 2 3 proto udp eth 800 mac any 0.0.0.0/0 port 67 in dst out src allow
filter 3 3 proto any eth any mac any 0.0.0.0/0 all_ports in none out src allow
filter 4 3 proto icmp eth 800 mac any 0.0.0.0/0 type-code 0x0000 0x0000 in dst out
src allow
filter 5 3 proto tcp eth 800 mac any 1.1.1.1/32 all_ports in dst out src allow
filter 6 3 app-signature group "Web Applications" hostname
"fqdn:nac_engine.mynetwork.com" proto any eth 800 mac any 0.0.0.0/0 all_ports in
dst out src allow
filter 7 3 proto tcp eth 800 mac any 0.0.0.0/0 port 80 in dst out none redirect
filter 8 3 proto tcp eth 800 mac any 0.0.0.0/0 port 443 in dst out none redirect
```

Identity/ Shared Secret

Use the Shared Secret setting for switches as defined by your Access Control Engine Credentials setting. Right-click on the engine, and select **Engine Settings**.

Use HTTPS

Check this option if using https on the Access Control Engine portal configuration.

Send Successful Login To

Original Destination. Or ,enter the redirection URL here.

MAC-based authentication (MBA)

Enable and configure the following parameters:

MBA Timeout Role

Enterprise User

Authentication Method

RADIUS

Primary RADIUS

IP address of the Access Control Engine.

Configure a primary and backup if you have more than one Access Control Engine.

Authenticate Locally for MAC

Must be *Disabled* for external captive portal on the NAC server.

Default Auth Role

Enterprise User

Default VLAN

Bridged at AP Untagged

2. Click **Advanced** and configure the following parameters:

RADIUS Accounting

Enabled

Pre-authenticated idle timeout

30 seconds

Post-authenticated idle timeout

30 seconds

Maximum session timeout

30 seconds

End-systems are re-authenticated on ExtremeCloud Appliance, not from the Extreme Management Center Access Control Engine. Therefore, ExtremeCloud Appliance ignores Extreme Management Center re-authentication requests to modify filter-ids (policies). Modification of these timeout values initiates re-authentication from the ExtremeCloud Appliance to the Extreme Management Center Access Control Engine, resulting in modification of the policy/filter-id as expected.

**Note**

There may be a delay or network interruption on policy changes. Adjust the timeout values if you do not see a timely policy change or if you experience network interruptions during the connection attempts from clients.

Editing the Configuration Profile for Network and Roles

Configure a network and be aware of policy roles that you are using before modifying the device group profile.

1. Go to **Configure > Sites** and select a site.
2. Click **Device Groups** tab.
3. Select your configured device group.
4. Beside the Profile field, select  to edit the configuration profile.
5. From the **Networks** tab, assign a radio to the network you created.
6. From the **Roles** tab, select the appropriate roles that will be applied to the end system during connection/registration/authorization. Typically all roles are selected.



Note

Upon creating an External Captive Portal network, the rules engine creates the following:

- Unregistered role for <network name>

External Captive Portal networks use the Unregistered role for <network name> by default. We are going to modify this to explicitly configure end system traffic coming from the ExtremeCloud Appliance network. We will create a policy mapping to the Unregistered role for <ECA Network> without actually creating the policy in the NAC policy domain.

7. Click **Save** to save the profile settings.
8. Click **Close** to close the device group.

ExtremeCloud Appliance Default Pass-Through Rule

Create a RADIUS Pass-Through rule on ExtremeCloud Appliance. This rule designates that traffic connecting to the ECA_Guest_NAC network will send and receive all RADIUS requests from the externally defined RADIUS server, not from the ExtremeCloud Appliance that processes the request. This includes filter-ids that are received as attributes. The NAC RADIUS server provides RADIUS authentication and authorization and policies that are defined in Extreme Management Center.

1. On ExtremeCloud Appliance, go to **Onboard > Rules > Add**.
2. Configure the following parameters:

Name

ECA Guest Rule

Rule Enabled

Check this option to enable the new rule.

Location

ECA_Guest_NAC

Accept Policy

Pass-Thru External RADIUS

3. Click **Save**.
4. Move the rule to the top of the rule set, if it is not already there.

Adding ExtremeCloud Appliance as a Switch to Extreme Management Center

Configure Extreme Management Center in the NAC Manager thick client.

1. Configure SNMPv2 and CLI credentials.
Go to NAC Manager **Authorization/Device Access**.

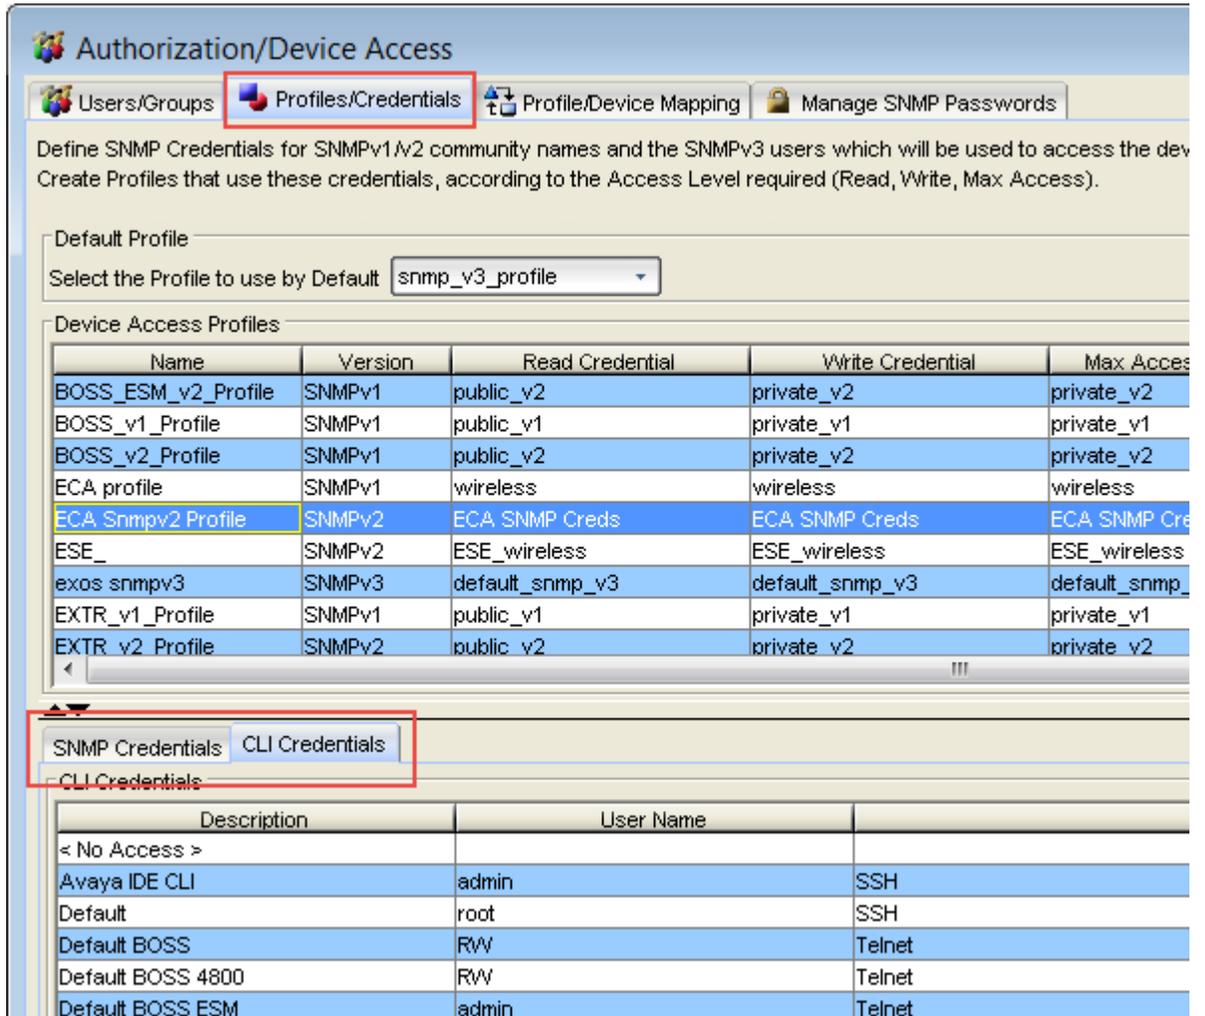


Figure 35: NAC Manager Authorization/Device Access

2. Click the **Profiles/Credentials > SNMP Credentials** and configure SNMPv2 credentials.



Figure 36: SNMPv2 Community

3. Click the **CLI Credentials** tab and configure the CLI credentials.

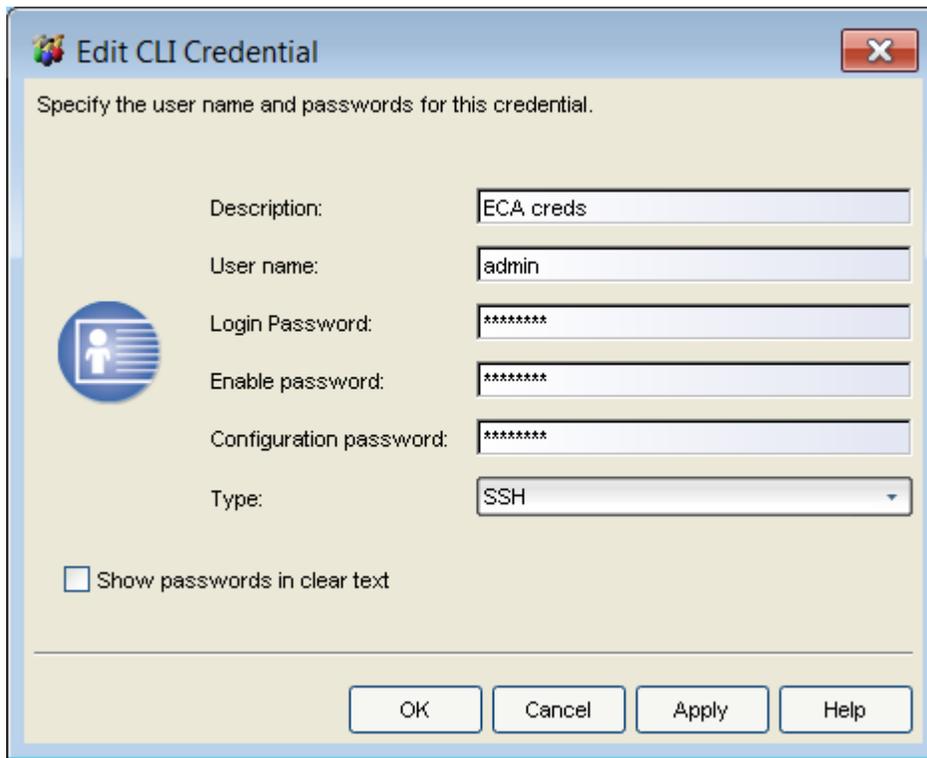


Figure 37: CLI Credentials

4. Create an ExtremeCloud Appliance SNMP profile, selecting the two credentials.

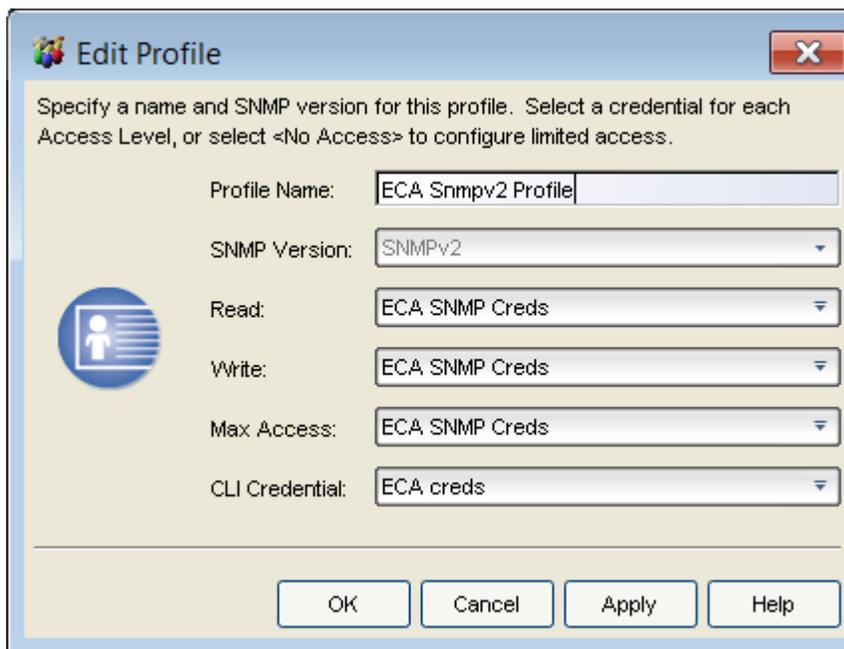


Figure 38: ExtremeCloud Appliance SMP Profile

5. Click **Save**.

6. Add the switch to your Access Control Engine.
 - a. In NAC Manager, select the Access Control Engine in your configuration.
 - b. Click **Switches > Add Switch**.
 - c. Enter the IP of the ExtremeCloud Appliance, and select the SNMP profile you previously created.

Figure 39: Add Device

7. Click **Apply**.
8. With the switch selected, set the following criteria:
 - Switch Type: **Layer 2 Out-Of-Band**
 - Primary Engine: Select the Access Control Engine that you set as the RADIUS server for the network on the ExtremeCloud Appliance.
 - Secondary Engine (if appropriate for your configuration)
 - Edit Auth Access Type: **Manual RADIUS Configuration**



Note

Select the drop-down for **RADIUS Attributes to Send** and select the gear icon beside **Edit RADIUS Attribute Settings**.

- Select **Extreme Identifi Wireless** and copy the attributes listed in the **Preview** pane.
9. Select **Add** to create a new Attribute Grouping.
 - Name: **ExtremeCloud Identifi and WiNG**
 - Attributes
 - Press **Ctrl-V** to paste in the attributes from Extreme Identifi Wireless.
 - Add the following attribute: `Filter-Id=%POLICY_NAME%`



Note

WiNG devices do not accept the Identifi Attribute set and therefore will not set the policy appropriately on ExtremeCloud Appliance when connecting end systems to a WiNG network. Therefore, create an attribute set with all valid values to ensure that the correct policy is applied to both Identifi-connected and WiNG-connected end systems.

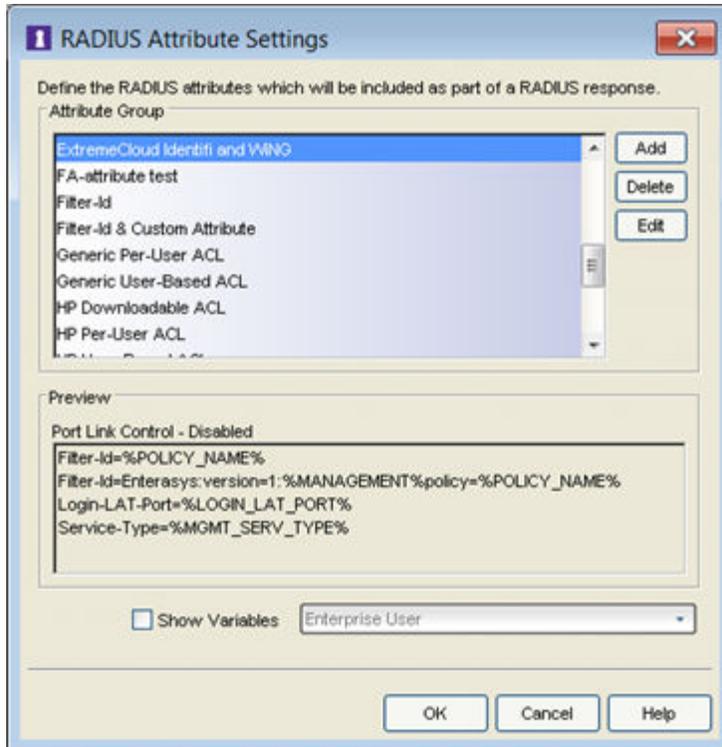


Figure 40: RADIUS Attribute Settings

10. Click **OK**.

- From the **RADIUS Attributes to Send** drop-down menu, select the new attribute set for the ExtremeCloud Appliance switch and click **OK**.

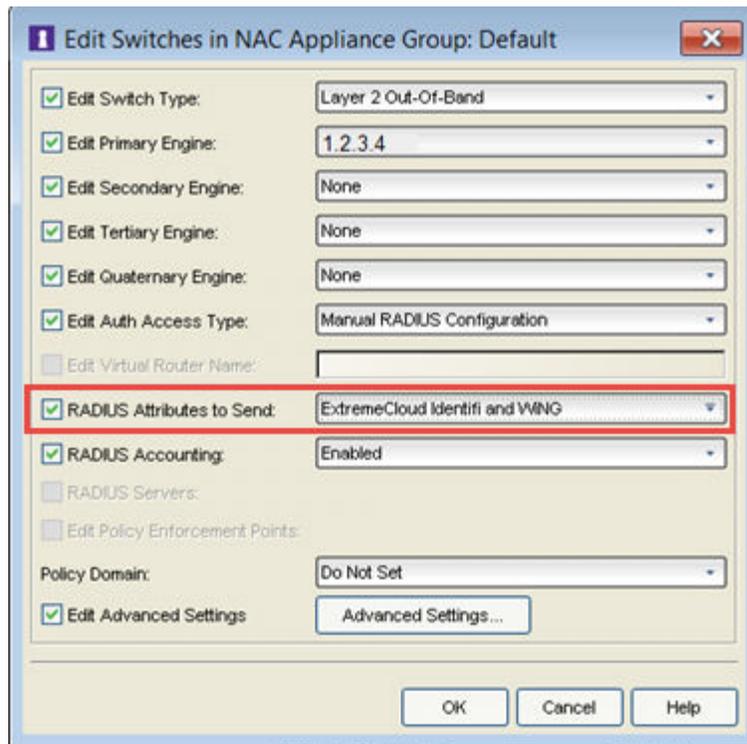


Figure 41: Edit Switch in NAC – ExtremeCloud Appliance

Creating an Unregistered Policy on Extreme Management Center

Create an unregistered policy on the Extreme Management Center web console. Policy creation is not available in NAC Manager.

- Go to the Extreme Management Center web client and select **Access Control > Policy**.

If you have imported policy domains in your NAC configuration, select the domain your configuration uses.

- Go to **Open Domain > Open > Manage Domains**.
- Expand the **Roles** tree.
- Right-click the **Unregistered** policy and select **Copy**.
- Go to **Roles** and select **Paste** from the right-click menu.

A new Unregistered policy is pasted into the tree.

- Rename the new policy to **Unregistered role for ECA_Guest**.

Use *Unregistered role for <network name>* as the name of the policy if not using *ECA_Guest* as your network name.



Note

The role *must* be named *Unregistered role for <NETWORK NAME>*. Use the *Name* of the network and not the SSID of the network. The name must match all characters and spaces exactly.

7. Go to **Open > Manage Domain** and select **Save Domain**.
8. Return to NAC Manager.

Editing the Extreme Management Center Profile for Policy and Location-Based Services

All policies/filter-ids sent from the NAC server to ExtremeCloud Appliance must also be configured in ExtremeCloud Appliance. If ExtremeCloud Appliance cannot correlate a filter-id to an existing policy in the ExtremeCloud Appliance roles database, the ExtremeCloud Appliance default authenticated roles are applied.

To enable Location Based Services on a NAC server, take the following steps:

1. Go to NAC Manager and select the NAC Appliance Group.
2. Select the **Configuration** tab
3. From the **Configuration** drop-down, click the gear icon next to the NAC Configuration that you are using for your appliance group.

The NAC Configuration Default dialog displays.

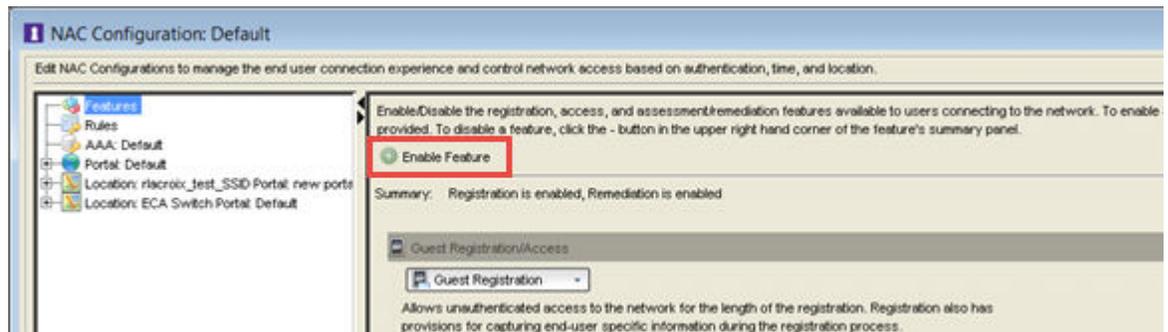


Figure 42: NAC Configuration Default

4. Select **Enable Feature**.
5. Select **Allow Location-Based Access**.
The Location-Based configuration window appears.
6. Select the **Location** drop-down and select **New**.
7. Configure the following parameters:

Switch

ExtremeCloud Appliance Switch IP

Interface (optional)

Select **Wireless** to restrict to a Wireless interface.

SSIDs

ExtremeCloud Appliance_Guest (if you want to restrict this to only systems via this SSID)

8. Click **OK**.

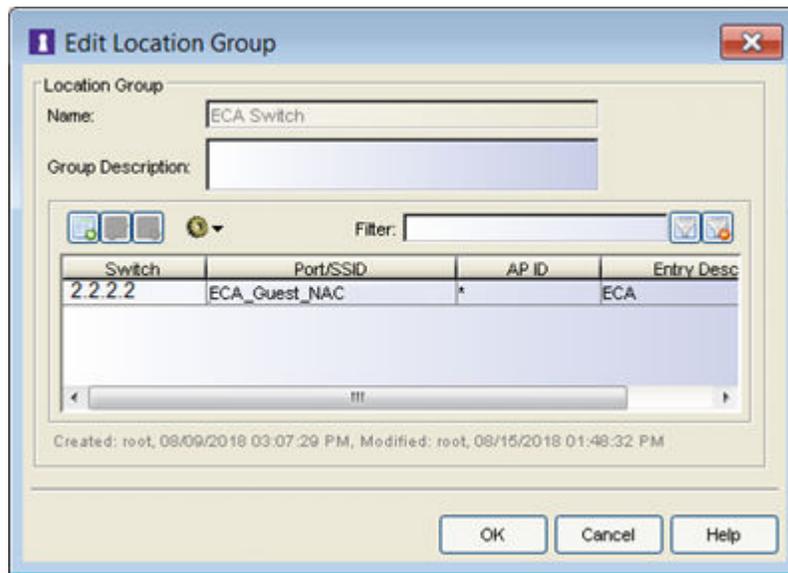


Figure 43: Edit Location Group Dialog

9. Select the network as the location you just created.
10. Select a portal and features you wish to enable for this location.
11. To create a new NAC profile, go to **Access Rules**.
12. From the **Registration Pending Access** column, select **Unregistered**, then select **New**.
13. Configure the following parameters:

Name

ExtremeCloud Appliance Unregistered

Accept Policy

Unregistered role for ExtremeCloud Appliance_Guest

Replace RADIUS attributes with Accept Policy

Enabled



Note

By default, all unregistered systems get the Unregistered profile/policy. Modify the default profile so all ExtremeCloud Appliance end system traffic explicitly uses the new NAC Profile and the new ExtremeCloud Appliance Unregistered policy that we created for the network, previously.

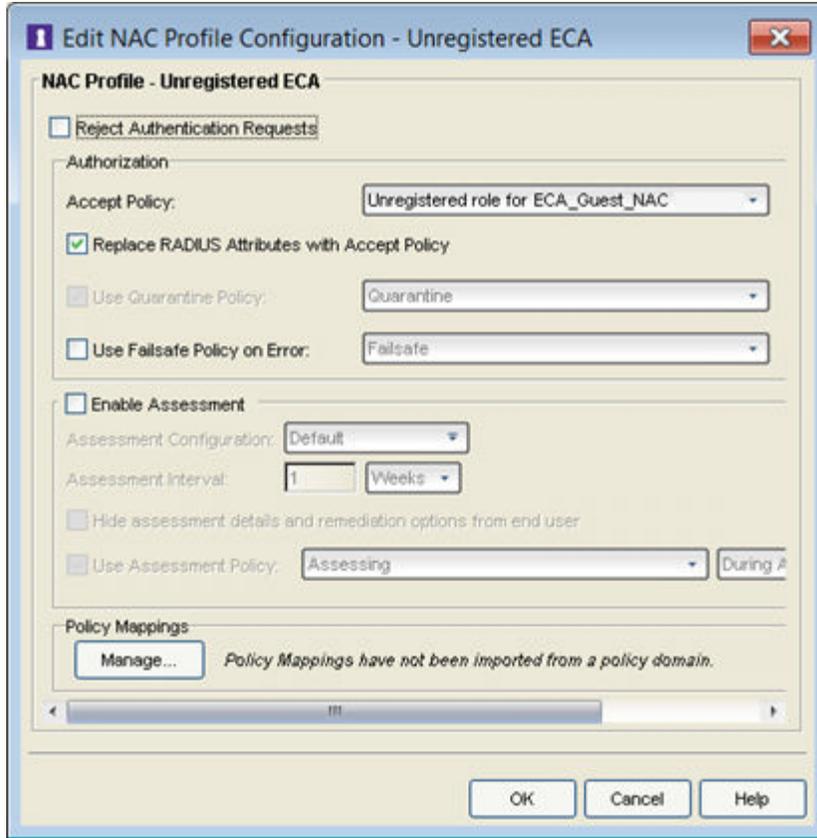


Figure 44: NAC Profile Unregistered for ExtremeCloud Appliance

14. Click **OK**.
15. Set the Profile for both **Registration Pending Access** and **Unregistered** to the new NAC Profile: **Unregistered ECA** and click **OK**.
16. Click **OK** again to save the Location-Based Services profile.
17. Go to **NAC Configuration Default > Rules** to see the new rules that are specific to the ExtremeCloud Appliance network.



Note


There are multiple registration rules for each registration type, because we have configured both Guest and Authenticated registrations enabled on the portal configuration.



Note

If there is a mismatch in roles between NAC and ExtremeCloud Appliance, force a re-authentication from ExtremeCloud Appliance. The mismatch may be a result of a timing issue. View **Session timeouts** on the network configuration for more information.

If the mismatch persists, confirm that you have used exact syntax on the role configuration. See [Creating an Unregistered Policy on Extreme Management Center](#) on page 83 for more information.

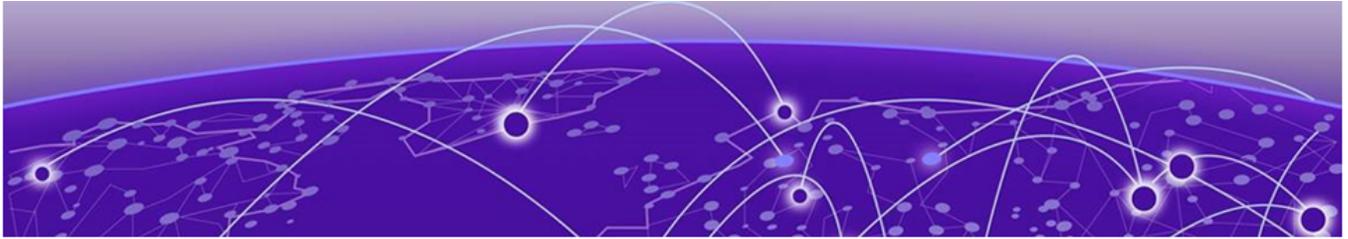

Deploying an ExtremeGuest Captive Portal

[Deployment Strategy](#) on page 87

[Configure an ExtremeGuest Server](#) on page 88

[Configure an ExtremeGuest Captive Portal Network](#) on page 88

[Configuration Settings on ExtremeGuest](#) on page 89

Deployment Strategy

The following strategy outlines how to configure ExtremeCloud Appliance to integrate with ExtremeGuest™, which houses the external captive portal. The ExtremeGuest server can be assigned from the ExtremeCloud Appliance **Networks Add** page to handle client authentication and accounting. The portal resides on the ExtremeGuest server and ExtremeCloud Appliance initiates the client network connections.

The following outlines how to integrate ExtremeCloud Appliance with ExtremeGuest.

1. Add a site with a device group.
2. Configure one or more ExtremeGuest servers.
3. Configure a captive portal network:
 - Select **Enable Captive Portal** on the network.
 - Select portal type **EGuest**.
 - Specify the ExtremeGuest servers.
4. Modify the configuration profile associated with the device group:
 - Assign the ExtremeGuest network to the device group.
 - Assign the policy roles to the device group.



Note

The policy role names must match on both ExtremeGuest and ExtremeCloud Appliance. A simple approach is to create policies on ExtremeGuest with names that match the ExtremeCloud Appliance default policies.

Related Topics

[Configure an ExtremeGuest Server](#) on page 88

[Configure an ExtremeGuest Captive Portal Network](#) on page 88

[Configuration Settings on ExtremeGuest](#) on page 89

Configure an ExtremeGuest Server

Configure up to three ExtremeGuest servers. To configure an ExtremeGuest server, take the following steps:

1. Go to **Configure > ExtremeGuest** and select **Add**.
2. Configure the following parameters:

IP Address

Valid IP address of the ExtremeGuest server.

Name

Name of the ExtremeGuest server.

FQDN

Fully-qualified domain name of the ExtremeGuest server.

Authentication Timeout Duration (Seconds)

Determines a timeout value, in seconds, for the RADIUS server connection.

Authentication Retry Count

Determines the number of times ExtremeCloud Appliance will attempt to authenticate an end user.

Authentication Client UDP Port

User Datagram Protocol (UDP) port number used for client authentication. UDP needs only one port for full-duplex, bidirectional traffic.

Shared Secret

The password that is used to validate the connection between ExtremeCloud Appliance and the ExtremeGuest server.

Mask

Determines if the Shared Secret or password value is displayed on the user interface. Enable Mask to display dots in place of the Shared Secret or password value. Clear the **Mask** check box to display the password characters.

Callback User Name

User ID that Callback Manager uses to access the ExtremeGuest server.

Callback Password

The password that Callback Manager uses to access the ExtremeGuest server. The minimum password length is 6 characters.

Mask

Determines if the Shared Secret or password value is displayed on the user interface. Enable Mask to display dots in place of the Shared Secret or password value. Clear the **Mask** check box to display the password characters.

Configure an ExtremeGuest Captive Portal Network

To configure an ExtremeGuest captive portal network.

Go to **Networks > Add** and configure the following parameters:

Network Name

ECA_EGuest

SSID

ECA_EGuest

Auth Type

Select **WPAv2 with PSK** then click **Edit Privacy** and enter a password key.

Enable Captive Portal

Check this option and specify the following parameters:

- Captive Portal Type = **EGuest**
- Select the ExtremeGuest server from the drop-down list of configured servers. The number of server fields depends on the number of configured servers. Configure one portal server and up to two backup servers.
 - Select an icon (, , or ) to manage your servers from here. Select the appropriate check box to indicate that the server handles authentication, accounting, or both. At least one selection is required for each server.
 - Select **Portal** to configure one server as the portal server. If your portal server goes down, you must manually select a backup server as the portal server.



Note

Walled Garden rules are not required for this network. The process of enabling a captive portal on the network automatically creates rules allowing DNS, DHCP, and redirection rules. However, if users are unable to connect to the network, consider creating specific DNS and DHCP Allow rules as a Walled Garden configuration.

MAC-based authentication (MBA)

This option is enabled by default. Configure the following parameters:

MBA Timeout Role

Unregistered

Use HTTPS connection

Enable this option if connecting to the server through https.

Default Auth Role

Enterprise User

Default VLAN

Bridged at AP Untagged


Configuration Settings on ExtremeGuest

Configure the following settings on ExtremeGuest to support integration with ExtremeCloud Appliance:

- Policy Role Names — The policy role names must match on both ExtremeGuest and ExtremeCloud Appliance. A simple approach is to create policies on ExtremeGuest with names that match the ExtremeCloud Appliance default policies.

- Configure ExtremeCloud Appliance as the **AAA NAS** (Network Access Server). Use the IP address (or Subnet address) of ExtremeCloud Appliance or the address of the RF Domain Manager.

For more information, see the *ExtremeGuest User Guide* on <https://extremenetworks.com/support/documentation>.

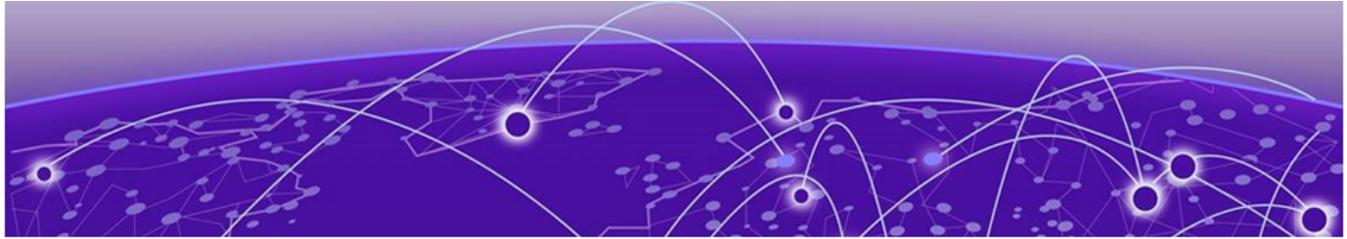

Hierarchical Visibility for WiNG Appliances

[Deployment Strategy](#) on page 91

[Configuring ExtremeCloud Appliance as an External Server](#) on page 92

[Configuring ExtremeCloud Appliance as Proxy Server](#) on page 92

[Understanding Proxy APs](#) on page 93

[Understanding Proxy Clients](#) on page 94

Deployment Strategy

ExtremeCloud Appliance offers unified visibility into Extreme Management Center for existing ExtremeWireless WiNG installations. This option extends the reporting and visibility capabilities of Extreme Management Center to ExtremeWireless WiNG accounts. This offers not only as an alternative to NSight, but supports unified wireless, wired infrastructure and expands other Extreme Networks software offerings, such as ExtremeAnalytics. If you are already leveraging NSight, this solution continues to support that investment. ExtremeCloud Appliance will relay statistics that feed into NSight to keep its visibility value intact.

APs and appliances running ExtremeWireless WiNG version 5.9.1 or later are supported in this deployment strategy. ExtremeWireless WiNG APs are adopted by the WiNG appliance, and their configuration and statistics are fed through ExtremeCloud Appliance for presentation in Extreme Management Center or NSight.

The ExtremeCloud Appliance Statistics Proxy function leverages the ExtremeWireless WiNG stats connection that typically feeds NSight. The connection may already be in use if you are using the NSight product on the ExtremeWireless WiNG deployment. To support compatibility with the installed base, ExtremeCloud Appliance can relay the stats to feed the NSight (cluster).

You can opt to configure ExtremeCloud Appliance as an external NSight server for an ExtremeWireless WiNG controller or as an additional proxy server between ExtremeWireless WiNG and Extreme Management Center, with or without NSight. When using NSight, the NSight server displays stats from proxy APs along side other AP stats. The ExtremeCloud Appliance is completely transparent to NSight.

Related Topics

[Configuring ExtremeCloud Appliance as an External Server](#) on page 92

[Configuring ExtremeCloud Appliance as Proxy Server](#) on page 92

Configuring ExtremeCloud Appliance as an External Server

The following outlines how to configure ExtremeCloud Appliance as an external server to NSight.

1. Configure the following parameters on the ExtremeWireless WiNG appliance.

nsight-policy

<policy-name>

server host

<ECA IP address> using https

rf-domain

<rf-domain-name>

2. On ExtremeCloud Appliance, enable **Device Registration** on the Interface that uses the ExtremeCloud Appliance IP address.

Go to **Administration > System > Interfaces**. Under **Interfaces**, select the topology and enable **Device Registration**.

Related Topics

[Configuring ExtremeCloud Appliance as Proxy Server](#) on page 92

[Deployment Strategy](#) on page 91

Configuring ExtremeCloud Appliance as Proxy Server

The following outlines how to configure ExtremeCloud Appliance as a proxy server to utilize Extreme Management Center in an ExtremeWireless WiNG environment. The proxy function provides visibility into metrics of an ExtremeWireless WiNG deployment, by leveraging existing reporting interfaces that feed into Extreme Management Center.

This deployment strategy can be used with or without NSight. If NSight is present, ExtremeCloud Appliance serves as a proxy for the data stream. While NSight controls the data stream, ExtremeCloud Appliance becomes, essentially, a relay.

1. Configure the following parameters on the ExtremeWireless WiNG appliance.

(Optional) nsight-policy

<policy-name>

server host

<ECA IP address> using https

rf-domain

<rf-domain-name>

2. On ExtremeCloud Appliance, enable **Device Registration** on the Interface that uses the ExtremeCloud Appliance IP address.

Go to **Administration > System > Interfaces**. Under **Interfaces**, select the topology and enable **Device Registration**.

3. If NSight is part of your deployment strategy, on ExtremeCloud Appliance, configure the IP address of the NSight server.

Go to **Administration > System > Setting**. Under **NSight Configure** provide the following:

Connection

HTTPS

IP Address

IP address of NSight server

Related Topics

[Configuring an Availability Pair with WiNG](#) on page 93

Configuring an Availability Pair with WiNG

When deploying an availability pair of appliances, within ExtremeWireless WiNG configuration, configure the server host address for each ExtremeCloud Appliance. From the ExtremeWireless WiNG controller, configure the following parameters:

nsight-policy

<policy-name>

Server host 1

ECA1 (https)

Server host 2

ECA 2 (https)



Note

Each ExtremeCloud Appliance serves as a proxy server to one NSight instance. If one ExtremeCloud Appliance/NSight connection fails, the ExtremeWireless WiNG controller moves to another ExtremeCloud Appliance/NSight connection. ExtremeCloud Appliance does not initiate the change to another NSight. As a result, ExtremeCloud Appliance is not aware of the new NSight IP address. Therefore, the NSight IP address is not synchronized between paired appliances. Configure the NSight IP address separately on each ExtremeCloud Appliance.

Understanding Proxy APs

A proxy AP is an AP that has been adopted by an ExtremeWireless WiNG controller. The AP statistics and configuration are fed from the controller through ExtremeCloud Appliance for display in NSight. Proxy APs and their associated components are all marked as **Proxied** in the ExtremeCloud Appliance:

- **AP List** — APs that are adopted by an ExtremeWireless WiNG controller are listed as Proxied on the ExtremeCloud Appliance **AP** page.
- **Site List** — RF domains associated with the proxy AP are listed as Proxied on the ExtremeCloud Appliance **Sites** page. The Country designation for a site is derived from the AP RF domain. When there are no APs assigned to an RF domain, the Country designation for the site is “Demo Country”.
- **Networks List** — Networks associated with the proxy AP are listed as Proxied on the ExtremeCloud Appliance **Networks** page, and a proxy network displays the network name, SSID, privacy/encryption and VLAN of the ExtremeWireless WiNG network. The default role is “Enterprise User” for a proxy network.
- **VLAN List** — VLANs associated with the proxy AP are listed as Proxied on the ExtremeCloud Appliance **VLAN** page. A proxy VLAN topology is always “Bridged at AP, tagged”. If a network

references a VLAN that is configured in ExtremeCloud Appliance, that existing VLAN is used by the proxy network.

- **Controller List** — ExtremeWireless WiNG proxy controllers configured for NSight are listed in ExtremeCloud Appliance under **Monitor > Devices > Controllers**. Proxied controllers can be removed from the **Controllers** page. However, if the ExtremeWireless WiNG controller has ExtremeCloud Appliance in its configuration, the ExtremeWireless WiNG controller displays in the list of controllers after each update. Proxy controllers cannot be edited.

All relevant information and statistics for a proxy AP displays in ExtremeCloud Appliance. However, editing and troubleshooting are not available in ExtremeCloud Appliance for a proxy AP or its associated: site, network, or VLAN.



Note

A proxy AP and its associated components can be removed from the ExtremeCloud Appliance. However, as long as the AP is adopted by the ExtremeWireless WiNG controller, the AP, site, network, and VLAN are re-created each time the controller sends an update to ExtremeCloud Appliance.

APs that are adopted by an ExtremeWireless WiNG controller continue to provide data to ExtremeWireless WiNG wizards and dashboards, as well as feed data to ExtremeCloud Appliance.

Related Topics


[Legacy AP Support](#) on page 94

Legacy AP Support

ExtremeCloud Appliance supports AP proxy for all ExtremeWireless WiNG AP models. AP models that are not supported for local adoption by ExtremeCloud Appliance are displayed as “Legacy AP model” in ExtremeCloud Appliance. However, the proxy AP model is correctly displayed in NSight. All ExtremeWireless WiNG AP widgets are supported on ExtremeCloud Appliance dashboards for legacy AP models.

Understanding Proxy Clients

There is little difference between a wireless client associated with a proxy AP and a locally adopted AP. In ExtremeCloud Appliance, wireless clients, attached to proxy APs, are displayed on the **Clients** page, along side clients of locally adopted APs. ExtremeCloud Appliance widgets and dashboards are available for proxy clients. You cannot delete or disassociate a proxy client from ExtremeCloud Appliance because they are managed by the ExtremeWireless WiNG controller.

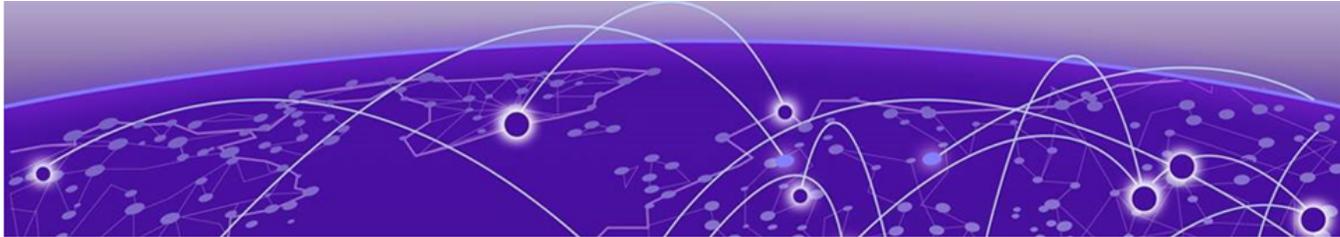

Deploying an Availability Pair

[Deploying an Availability Pair](#) on page 95

Deploying an Availability Pair

ExtremeCloud Appliance provides the availability feature to maintain service availability in the event of an outage. The Availability Pair feature allows both AP and Client statistics to be available on both sides of the High Availability configuration.

Before you begin:

1. Enable NTP on both ExtremeCloud Appliance appliances. Go to **Administration > System > Network Time** and select **NTP**.
2. On the primary ExtremeCloud Appliance, go to **Administration > System > Availability** and select **Paired**.
3. Configure the following parameters:

Role

Primary

Peer IP Address

The data port IP address of the second ExtremeCloud Appliance.



Note

The Peer IP address must refer to a physical topology of the peer appliance. It can be the IP address of a physical port or the IP address of a Lagged interface. Configuring availability against a service topology such as the IP address (L3) of a Bridged@Controller appliance is not supported.

Auto AP Balancing

Select **Active - Passive**

In a Availability Pair, an AP establishes an active tunnel to one appliance and a backup tunnel to the other appliance. The active tunnel is used to pass the client data over tunneled topologies.

- In an **Active-Active** configuration, approximately half of the APs establish an active tunnel to the primary appliance. The remaining APs establish an active tunnel to the backup appliance, spreading the load across the Availability Pair.
- In an **Active-Passive** configuration, all APs establish an active tunnel to the primary appliance. The secondary appliance is used for failover only.

In either configuration, however, most parameters can be configured on either appliance in the availability pair.

4. Click **Save**.
5. On the secondary ExtremeCloud Appliance, select **Paired** and configure the following parameters:

Role

Backup

Pair IP Address

The IP address of the primary ExtremeCloud Appliance.

Auto AP Balancing

Select **Active-Passive**

6. Click **Save**.
7. Go to **Admin > Logs** and look for the message `Availability Link established with Peer <ip address>`.

**Note**

It will take a few minutes for the two ExtremeCloud Appliance configurations to synchronize.

8. To verify synchronization, add a network health widget to the Overview dashboard.
 - a. Go to **Dashboard**.
 - b. Click  to edit the dashboard.

- c. Select **Widgets**.
- d. Select **System** and drag **Network Health** onto the dashboard.

The **Synchronization Status** is displayed as part of the Network Health widget.


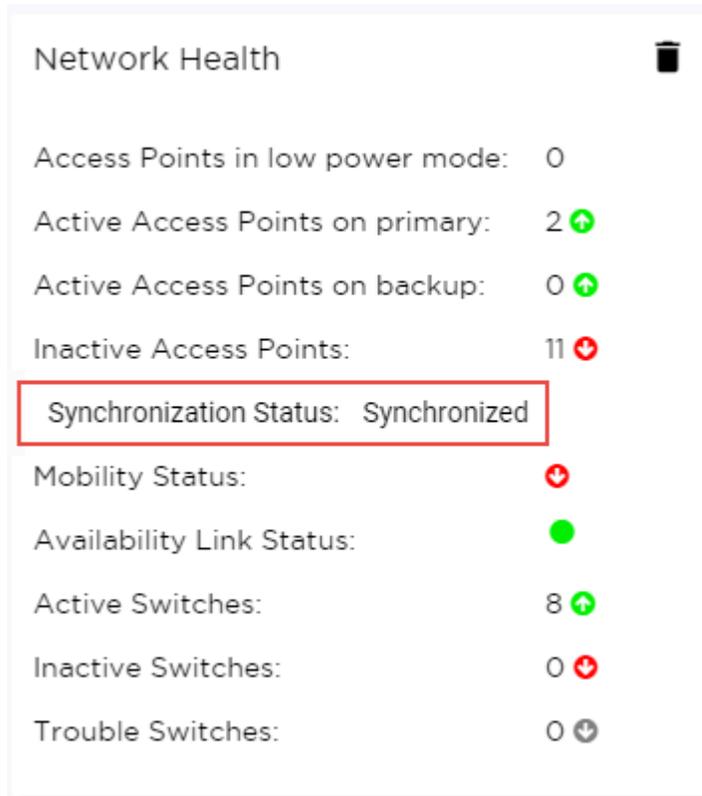


Figure 45: Availability Pair Synchronization Status

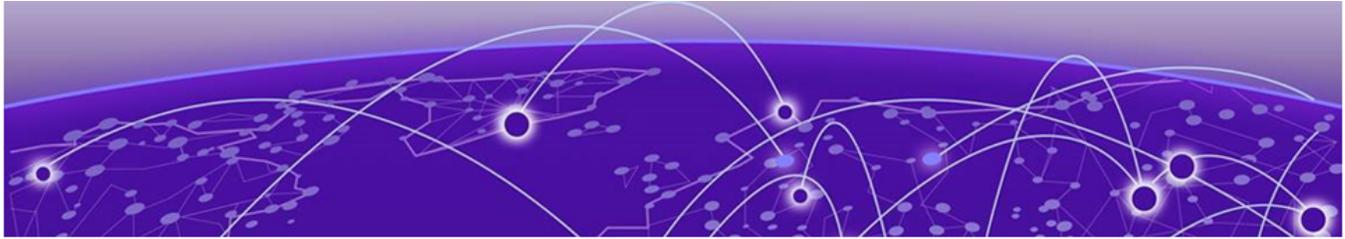

ExtremeCloud Appliance Pair with ExtremeLocation and AirDefense

[Scenario Outline](#) on page 98

[Deployment Strategy](#) on page 98

[Configuring the Centralized Site with an AP3915 Profile](#) on page 99

[Configuring ExtremeLocation](#) on page 99

[Configuring AirDefense](#) on page 100

Scenario Outline

The following scenario outlines an availability pair of ExtremeCloud Appliance appliances that utilize ExtremeWireless access point models. This scenario supports integration with ExtremeLocation and AirDefense products.

This deployment scenario offers the following configuration factors:

- Availability pair of ExtremeCloud Appliance appliances.
- Appliance capacity 32K-100K users
- Local authentication with 802.1x and internal captive portal.
- ExtremeLocation is provisioned from within ExtremeCloud Appliance and the data is fed from the APs.
- AirDefense is provisioned from within ExtremeCloud Appliance and the data is fed from the APs.

Deployment Strategy

1. Create a site with a device group for the AP3915 devices.
2. Configure an internal captive portal.
3. Specify the network topology.
4. Configure a captive portal network.
5. Work with the captive portal engine rules.
6. Go back to each device group in the site and configure the configuration profile.
7. Create adoption rules for each device group.
8. Deploy the availability pair.

Related Topics

[Adding a Centralized Site with Device Group](#) on page 49

[Configuring an Internal Captive Portal](#) on page 51

- [Specifying B@AC Network Topology](#) on page 52
- [Configuring a Captive Portal Network](#) on page 53
- [Working with Internal Captive Portal Engine Rules](#) on page 54
- [Configuring the Centralized Site with an AP3915 Profile](#) on page 99
- [Creating Adoption Rules](#) on page 57
- [Deploying an Availability Pair](#) on page 95

Configuring the Centralized Site with an AP3915 Profile

1. Go to **Configure > Sites > Add** to create a Centralized site.
2. Click **Device Groups**.
3. Select the AP3915 device group.
4. From the Profile field, select the **default AP3915** profile and click  to edit the profile.
5. From the **Networks** tab, select the configured Internal Captive Portal network.
6. From the **Roles** tab, select the configured policy roles.
7. From the **ExtremeLocation** tab, configure ExtremeLocation integration.
8. From the **AirDefense** tab, configure AirDefense integration.

Related Topics

- [Adding a Centralized Site with Device Group](#) on page 49
- [Editing Device Group Profile for Network and Role](#) on page 54
- [Configuring ExtremeLocation](#) on page 99
- [Configuring AirDefense](#) on page 100

Configuring ExtremeLocation

Configure the following parameters to integrate the AP with ExtremeLocation.

Table 6: ExtremeLocation Profile Settings

Field	Description
Name	Name of the ExtremeLocation Profile.
Tenant ID	The Tenant ID links the ExtremeCloud Appliance to the tenant, ensuring that your assets cannot inadvertently be deployed on sites that belong to other ExtremeLocation accounts. Any modification made to sites managed by this ExtremeCloud Appliance, such as adding new access points or sites, is tagged by the ExtremeLocation Tenant Account Number automatically. The location Tenant ID is saved to, and retrieved from, the data plane by websocket client, then sent as session data to the ExtremeLocation server once a session is established. The Tenant ID can be up to 32 characters.
Server Address	The FQDN (fully-qualified domain name) of the LocationEngine Server.
Minimum RSS	RSS threshold for reporting location data. Valid values are -90 to -70 dBm.
Report Frequency	Reporting interval in seconds.


Configuring AirDefense

The AP integrates with the AirDefense Service Platform (ADSP), offering an additional profile option that allows the AP to function as an AirDefense sensor or to act as a sensor and retain the ability to forward traffic.

In dedicated sensor mode, the AP operates independently from the ExtremeCloud Appliance while the ExtremeCloud Appliance continues to see the AP and display the AP Role as a dedicated AirDefense sensor. In its role as a dedicated sensor, the AP does not report statistics to the ExtremeCloud Appliance.

Table 7: AirDefense Profile Settings

Field	Description
Name	Name of AirDefense profile.
Add Server IP Address	The IP address of the AirDefense servers. Provide the FQDN or IPv4 string, maximum 255 characters. Enter the IP address, then click  . The IP address is added to the Server IP Addresses list.
Server IP Addresses	List of IP addresses for servers. Click  to remove an IP address from the list.

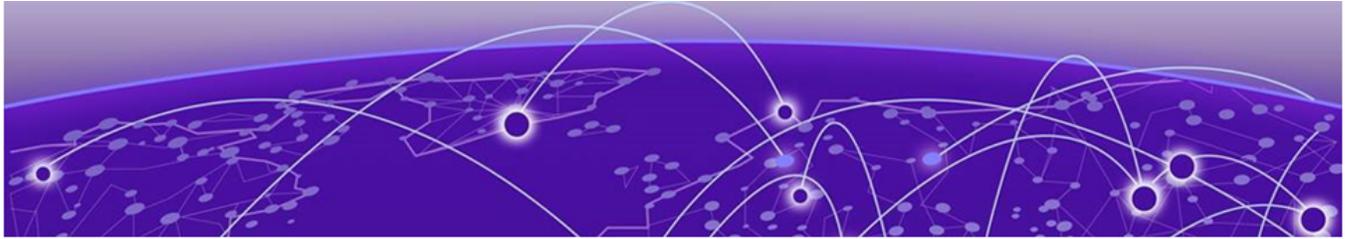

ECP Local Authentication

[Scenario Outline](#) on page 101

[Deployment Strategy](#) on page 101

[Configuring External Captive Portal Network](#) on page 102

[Editing the Device Group Profile for ECP Network](#) on page 104

Scenario Outline

The following scenario outlines an availability pair of ExtremeCloud Appliance appliances with ExtremeWireless access point models. This scenario employs an External Captive Portal.

This deployment scenario offers the following configuration factors:

- Availability pair of ExtremeCloud Appliance appliances.
- Appliance capacity 32K-100K users
- MBA with local authentication and External Captive Portal.

Related Topics

[Deployment Strategy](#) on page 101

[Configuring External Captive Portal Network](#) on page 102

Deployment Strategy

1. Create a site with a device group for the AP3915 devices.
2. Configure an External Captive Portal.
3. Specify the network topology.
Specify **Bridged@AP**. ExtremeWireless APs support both Bridged@AC and Bridged@AP topologies.
4. Configure an External Captive Portal network.
5. Engine Rules: The ExtremeCloud Appliance rules engine generates a default Unauthenticated rule. There is no user interaction required on the ExtremeCloud Appliance. An authenticated rule is generated from the External Captive Portal server. You must define a policy role on ExtremeCloud Appliance that matches the authenticated role on the server. This can be a unique role or default authenticated role like Enterprise User.
6. Go back to each device group and configure the configuration profile. Specify the External Captive Portal network and the ExtremeCloud Appliance authenticated role that matches the ECP server authenticated policy.
7. Create adoption rules for each device group.

8. Deploy the availability pair.

Related Topics

[Adding a Centralized Site with Device Group](#) on page 49

[Configuring External Captive Portal Network](#) on page 102

[Creating Adoption Rules](#) on page 57

[Deploying an Availability Pair](#) on page 95

Configuring External Captive Portal Network

To configure an External Captive Portal network:

1. Go to **Configure > Networks > WLANS > Add**
2. Configure the following parameters:

Table 8: External Captive Portal Settings

Field	Description
Network Name	Enter a unique, user-friendly value that makes sense for your business. Example: Staff
SSID	Enter a character string to identify the wireless network. Maximum 32 characters. Upper and lowercase allowed. Example: PermanentStaff
Status	Enable or disable the network service. Disabling the network service shuts off the service but does not delete it.

Table 8: External Captive Portal Settings (continued)

Field	Description
Auth Type	<p>Define the authorization type. Valid values are:</p> <ul style="list-style-type: none"> • Open — Anyone is authorized to use the network. This authorization type has no encryption. The Default Auth role is the only supported policy role. • WEP (Static Wired Equivalent Privacy) — Keys for a selected network, that match the WEP mechanism used on the rest of the network. Each AP can participate in up to 50 networks. Specify one WEP key per network. This option is offered to support legacy APs. • WPAv2 with PSK — Network access is allowed to any client that knows the pre-shared key (PSK). All data between the client and the AP is AES encrypted using the shared secret. Privacy is based on the IEEE standard, and privacy settings are editable. If MAC-based authentication (MBA) is enabled, you can assign different roles to different devices with a PSK because MBA distinguishes between different devices. If MBA is not enabled, then devices with a PSK use the Default Auth role only. • WPA2 Enterprise w/ RADIUS — Supports 802.1X authentication with a RADIUS server, using AES encryption. This method can be used with client certificate-based authentication (EAP-TLS). All 802.1X protocols are supported. <p>Note: MBA and Captive Portal are not supported when using WPA2 Enterprise w/ RADIUS. The devices with 802.1X use Default Auth role only.</p> <p>Privacy Settings</p> <p>Protected Management Frames — Management Frames are the signaling packets used in the 802.11 wireless standard to allow a device to negotiate with an AP. PMF adds an integrity check to control packets being sent between the client and the access point. This setting is enabled by default. Valid values are:</p> <ul style="list-style-type: none"> ◦ Enabled. Supports PMF format but does not require it. ◦ Disabled. Does not address PMF format. Clients connect regardless of format. ◦ Required. Requires all devices use PMF format. This could result in older devices not connecting. <ul style="list-style-type: none"> • WPAv3 - Personal with SAE — 128-bit encryption, supported on: <ul style="list-style-type: none"> ◦ AP4xx running ExtremeWireless WiNG 7.3x. ◦ AP5xx running ExtremeWireless WiNG 7.2x and later. <p>WPAv3 uses a pre-shared key (PSK) and Simultaneous Authentication of Equals (SAE). WPAv3 offers an</p>

Table 8: External Captive Portal Settings (continued)

Field	Description
	<p>augmented handshake and protection against future password compromises.</p> <ul style="list-style-type: none"> WPAv3 - Compatibility – Option for mixed deployments of 802.11ax APs and older AP models. If the network is configured with WPAv3-Compatibility (SAE or WPAv2 PSK authentication), 802.11ax APs running ExtremeWireless WiNG 7.2.x or later utilize the WPAv3 - Personal protocol. Older AP models that are not WPAv3 compatible use WPAv2 AES. <p>For more information, see the <i>ExtremeCloud Appliance User Guide</i> or <i>Online Help</i>.</p>
Enable Captive Portal	Check this option to enable captive portal support on the network service.
Captive Portal Type	Select External as the Captive Portal Type.
ECP URL	URL address for the external captive portal.
Walled Garden Rules	Select Walled Garden Rules to configure policy rules for the external captive portal.
Identity	Determines the name common to both the ExtremeCloud Appliance and the external Web server if you want to encrypt the information passed between the ExtremeCloud Appliance and the external Web server. Required for signing the redirected URL. If you do not configure the Identity, the redirector on the AP drops the traffic.
Shared Secret	The password that is used to validate the connection between the client and the RADIUS server.
Use HTTPS for connection	Indicates that the connection will be secure with HTTPS.
Send Successful Login To	Indicates destination of authenticated user. Valid values are: <ul style="list-style-type: none"> Original Destination. The destination of the original request. Custom URL. Provide the URL address.
MAC-based authentication (MBA)	Check this option to enable MBA.

3. Select **Save**.

Next, edit the configuration profiles in each device group, specifying the External Captive Portal network.

Related Topics

[Editing the Device Group Profile for ECP Network](#) on page 104

Editing the Device Group Profile for ECP Network

Configure an ECP network and be aware of the authenticated policy role that you are using before modifying the device group profile.

- Go to **Configure > Sites** and select a site.
- Click **Device Groups**.

3. Select a device group.
4. Beside the Profile field, select  to edit the default profile AP3915-default.
5. From the **Networks** tab, assign a radio to the ECP network you created.
6. External Captive Portal networks use the Unregistered policy by default, there is no user interaction. The authenticated policy is configured on the captive portal server. You must specify an authenticated policy on the ExtremeCloud Appliance that will coincide with the authenticated captive portal server policy. For example, from the **Roles** tab, specify **Enterprise User** as the ExtremeCloud Appliance authenticated policy.
7. Optionally, you can configure settings from any of the available profile options. All APs in the device group are affected by options configured in the profile.

**Note**

The supported profile options depend on the AP Platform definition.


8. Click **Save** to save the profile settings.
9. Click **Close** to close the device group.

Next, configure adoption rules and deploy an availability pair of appliances.

Related Topics

[Creating Adoption Rules](#) on page 57

[Deploying an Availability Pair](#) on page 95

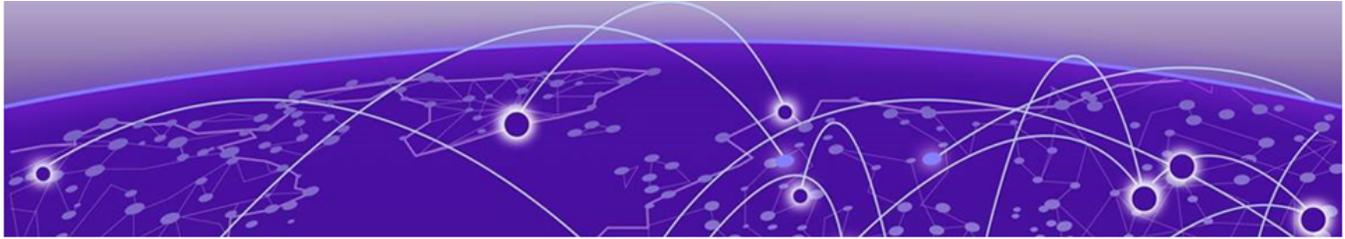

PHP External Captive Portal, Controller's Firewall Friendly API

[net-auth.php](#) on page 106

[login.php](#) on page 110

[common_utilities.php](#) on page 112

[crypt_aws_s4.php](#) on page 116

[ffecp-config.php](#) on page 121

This chapter contains five files that serve as an example of how to build an External Captive Portal that makes use of the controller's Firewall-Friendly External Captive Portal Interface. The files presented are:

- [net-auth.php](#)

Receives redirected requests from browsers trying to access web sites, verifies that the redirect was sent from the controller and if so, displays a suitable login page.

- [login.php](#)

This script gets invoked as a consequence of a browser submitting the login form created by [net-auth.php](#). The script authenticates the station in whatever way it likes. If the station is authorized the script selects a maximum session duration and an access control role for the station. It then redirects the station's browser back to a web server on the controller, using a URI that contains the access control role, the maximum session duration, other data required by the controller, and a signature.

- [crypt_aws_s4.php](#)

This file contains the code that verifies the signatures on received URLs and that signs the URLs that redirect the station back to the controller.

- [common_utilities.php](#)

Utilities used by various ECP scripts

- [ffecp-config.php](#)

Contains the main statically configured parameters that the application uses to verify signed URLs and to create signed URLs.

[net-auth.php](#)

```
<?php
// net-auth.php
// This is a simple implementation of a script that
// receives HTTP requests that have been redirected
// by a controller configured with "Firewall-Friendly
```

```
// External Captive Portal" support enabled.
// This script is responsible for collecting critical
// information from the redirection, such as the
// session token and for constructing the login page
// for the user. The script reads the VNS attribute
// from the redirected request so that the script can
// display it on the login page.
//
// The script expects the controller to sign the
// its redirection response. The script validates the
// signature. If the signature is valid it displays
// the login page. Otherwise it displays an error page.
//
// Assumptions
// =====
// 1. The controller is configured to include its IP address
//    and port in the redirection URL.
// 2. The controller is configured to sign its redirection
//    responses using the Amazon S3 version 4 signature
//    algorithm (as of May 2014).
// 3. The controller is configured to include the VNS in its
//    redirection response.
// 4. This application assumes that the identity & shared key
//    key pairs it is allowed to use are stored in an associative
//    array. It also assumes that some configuration options such
//    as the 'service' and 'region' are stored in another associative
//    array. Real applications might retrieve this information from
//    databases or configuration files.

require_once("ffecp_config.php");
require_once("crypt_aws_s4.php");
require_once("common_utilities.php");

// Mainline processing starts here. Utilities are defined after
// the mainline.
// 1. Verify that the request has all necessary fields
// and a valid signature.
$src = SimpleAws::verifyAwsUrlSignature(getURL($_SERVER),
    $awsKeyPairs);
if (SimpleAws::AWS4_ERROR_NONE != $src) {
    printError(SimpleAws::getAwsError($src));
    exit;
}
// Determine which controller interface to interact with
if(isset($_REQUEST['hwc_ip']) && isset($_REQUEST['hwc_port'])) {
    //BM IP address and port is enabled
    $swc_ip = trim($_REQUEST['hwc_ip']);
    $swc_port = trim($_REQUEST['hwc_port']);
} else {
    // The controller has not been configured as expected. It did not
    // include its address and port on the redirection URL. This is
    // easy to fix but all this program can do is report the error.
    printError("Controller must be configured to include its IP " .
        "address & port in the request.");
    exit;
}
// Collect the data required by the login page and
// subsequent authentication.
$dest = isset($_REQUEST['dest']) ? $_REQUEST['dest'] : "";
$bssid = isset($_REQUEST['bssid']) ? $_REQUEST['bssid'] : "";
$wlan = isset($_REQUEST['wlan']) ? $_REQUEST['wlan'] : "";
$vns = isset($_REQUEST['vns']) ? $_REQUEST['vns'] : "";
$mu_mac = isset($_REQUEST['mac']) ? $_REQUEST['mac'] : "";
$ap_name = isset($_REQUEST['ap']) ? $_REQUEST['ap'] : "";
```

```

$token = isset($_REQUEST['token']) ? $_REQUEST['token'] : "";
if(!tokenCheck($token)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
token.</span>");
    exit;
} else if(isset($ewc_port) && !is_numeric($ewc_port)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
EWC port.</span>");
    exit;
} else if($mu_mac && !macCheck($mu_mac)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
client MAC address.</span>");
    exit;
} else if(!empty($wlan) && !is_numeric($wlan)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
WLAN.</span>");
    exit;
}
//escape the parameters
$dest =convertUrlParam($dest);
$bssid = convertUrlParam($bssid);
$vns = convertUrlParam($vns);
$ap_name = convertUrlParam($ap_name);
// 3. Compose the login page and send it to the user. The page
// is used to store session data, but this could have been
// stored in the user session variable or in cookies.
print compose_login_page($ewc_ip, $ewc_port, $token, $dest,
    $wlan, $vns, $bssid, $mu_mac, $ap_name);
// 4. And exit. This script is finished executing.
exit;
// End of mainline
// A function that reconstructs the URL that the
// station was trying to Get, from the variables
// generated by the PHP runtime.
function getURL($data) {
    $ssl = (!empty($data['HTTPS']) && $data['HTTPS'] == 'on') ? true:false;
    $protocol = $ssl ? "https" : "http";
    $port = $data['SERVER_PORT'];
    $port = ((!$ssl && $port=='80') || ($ssl && $port=='443')) ? '' :
    ':'.$port;
    $host = isset($data['HTTP_HOST']) ? $data['HTTP_HOST'] :
    $data['SERVER_NAME'] . $port;
    return $protocol . '://' . $host . $data['REQUEST_URI'];
}
// This function generates a basic login page containing a form
// that allows the user to submit his credentials back to this
// server. The page displays the name of the VNS (service) the user
// associated to. Otherwise the page is pretty plain. Obviously
// a real login page would have more content on it. This routine
// highlights the critical aspects of composing the login page so
// that when the user submits his credentials all the information
// necessary to manage the user's session will be on the page.
function compose_login_page($ewc_ip, $ewc_port, $token, $dest,
    $wlan, $vns, $bssid, $mu_mac, $ap_name)
{
    $template = "<!DOCTYPE html>
<html>
<head>
    <meta charset=\"ISO-8859-1\">
    <title>Please Login</title>
</head>
<body>
    <form id=\"Login\" name=\"Login\" method=\"post\" action=\"login.php\">
        <table border='0' width='800' height='310' cellpadding='0'

```

```

        cellpadding='0'>
        <tr>
            <td colspan='3' height='100'>&nbsp;&nbsp;&nbsp;</td>
        </tr>
        <tr>
            <td width='260' height='1' border='0' />
            <td width='300' height='65'>
                Please login to use '$vns' network.</td>
            <td width='240' rowspan='5'>&nbsp;&nbsp;&nbsp;</td>
        </tr>
        <tr>
            <td align='right'><b>User Name&nbsp;&nbsp;&nbsp;</b>
            </td>
            <td height='28'>
                <input type='text' autocomplete='off'
                    id='userid' name='userid'
tabindex='1'>
            </td>
        </tr>
        <tr>
            <td align='right'><b>Password&nbsp;&nbsp;&nbsp;</b>
            </td>
            <td height='28'><input type='password'
autocomplete='off'
                    id='passwd' name='passwd' tabindex='2'>
            </td>
        </tr>
        <tr>
            <td><br>
            </td>
            <td height='33' valign='bottom'><input
type='submit'
                    style='width: 100px' value='Login'
tabindex='3'>
            </td>
        </tr>
        </table>
        <input type='hidden' name='ewc_ip' id='ewc_ip'
value='$ewc_ip' />
        <input type='hidden' name='ewc_port' id='ewc_port'
value='$ewc_port' />
        <input type='hidden' name='token' id='token'
value='$token' />
        <input type='hidden' name='dest' id='dest'
value='http://$dest' />
        <input type='hidden' name='wlan' id='wlan'
value='$wlan' />
        <input type='hidden' name='mu_mac' id='mu_mac'
value='$mu_mac' />
        <input type='hidden' name='bssid' id='bssid'
value='$bssid' />
        <input type='hidden' name='ap' id='ap'
value='$ap_name' />
    </form>
</body>
</html>";
    return $template;
}
?>

```

login.php

```
<?php
// login.php
// This is a simple implementation of a script that
// receives a user's credentials, authenticates the
// credentials, selects an access control role for
// the user, then redirects the user back to the
// controller using a signed URL containing the selected
// access control role.
// This script assumes that the credentials are
// submitted on the form created by the example script
// net-auth.php.
//
//
// Assumptions
// =====
// 1. The controller is configured to include its IP address
// and port in the redirection URL and the submitted login
// form contains that IP address and port. This allows the
// ECP to interact with more than 1 controller.
// 2. Whether the script uses HTTP or HTTPS in its redirection
// response depends on the value of use_https
// which must be defined in php.ini.
// If the value of use_https is 1 then the script uses
// HTTPS. If the configuration variable has any other value
// or is not defined then the script uses HTTP. In practice
// an actual site is going to settle on using HTTP or HTTPS.
// The scripts can then assume that method is being used
// rather than looking up the method in php.ini.
// The use_https is a user-
// defined variables. They must be created in php.ini by the
// web server administrator.
require_once("ffecp_config.php");
require_once("crypt_aws_s4.php");
require_once("common_utilities.php");
// Some local constants
const EWC_HTTP_REQ = "http://";
const EWC_HTTPS_REQ = "https://";
const EWC_REDIRECT_TARGET = "/ext_approval.php?";
// The mainline begins here. The utilities are defined after the
// mainline.
// 1. Collect the parameters submitted on the login form.
// Some of these attributes come from hidden fields.
$ewc_ip = trim($_REQUEST['ewc_ip']);
$ewc_port = trim($_REQUEST['ewc_port']);
$dest = trim($_REQUEST['dest']);
$token = trim($_REQUEST['token']);
$username = (isset($_REQUEST['userid'])) ?
    trim($_REQUEST['userid']) : "";
$password = (isset($_REQUEST['passwd'])) ?
    trim($_REQUEST['passwd']) : "";
$wlan = isset($_REQUEST['wlan']) ?
    trim($_REQUEST['wlan']) : "";
if(!tokenCheck($token)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
token.</span>");
    exit;
} else if(isset($ewc_port) && !is_numeric($ewc_port)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
EWC port.</span>");
    exit;
} else if(!empty($wlan) && !is_numeric($wlan)) {
    printError("Error: <span style='color:red'>Failed to process the request: incorrect
```

```

WLAN.</span>");
    exit;
}
// For this example the maximum duration of any user's
// session will be 36000 seconds. The session is terminated
// no later than this time. After the session is terminated
// the user can access the network but will be unauthenticated
// again.
$max_duration = 36000;
// 2. Authenticate the user & select an appropriate role.
//   Selecting the role is optional. If one is not specified
//   for the controller the controller will apply the default
//   authenticated role of the WLAN Service the user is
//   accessing.
$assigned_role = authenticate($username, $passwd);
if (false === $assigned_role) {
    // Failed to authenticate the user.
    // Authenticate prints the error message for
    // the browser. We just exit here.
    exit;
}
// 3. Tell the controller that the user is authenticated
//   and tell it which role to apply to the user.
//   3.a Build the URL that needs to be signed.
$pUrl = makeUnsignedUrl($ewc_ip, $ewc_port, isHttps(), $token,
    $username, $wlan, $assigned_role, $dest,
    $max_duration);
// 3.b Sign the URL. Otherwise the role and session
//   duration options will be ignored by the controller.
$redirection = SimpleAws::createPresignedUrl(
    $pUrl, 'BigAuthInc', $awsKeyPairs['BigAuthInc'],
    $awsConfig['region'], $awsConfig['service'],
    $awsConfig['expires']);
if (null == $redirection) {
    // Quietly exit. createPresignedUrl has already
    // reported an error to the browser.
    exit;
}
header( 'Location: '.$redirection);
exit;
// End of mainline.
// A method that validates the user's credentials and
// returns the role to apply to the user. In some cases
// this routine might also return the maximum session
// duration in seconds.
//
// For purposes of this example this procedure is
// not much more than a stub. The stub can be replaced
// by any authentication method, such as sending access
// requests to a backend RADIUS server, or performing
// a lookup in an application credential database.
function authenticate($userid, $passwd) {
    if (" " == $userid) || (" " == $passwd) {
        printError("Invalid Userid or Password. ".
            "Please press the 'Back' button and try again.");
        // If you generate another login page for the user
        // be sure to copy the ewc_ip address, ewc_port,
        // token and dest attributes from the submitted
        // login form to the login page.
        return false;
    } else {
        // Return the name of a role to be applied
        // to the station. The role must be defined on
        // the controller or it will substitute the
    }
}

```

```

        // default authenticated role of the VNS the
        // user is logging into.
        // For purposes of this example assume all
        // authenticated users get the 'Guest_Access' role.
        return "Guest_Access";
    }
}
/**
 * A function that decides whether to send
 * to use HTTP or HTTPS in the redirect to
 * the controller. This example just uses
 * a php.ini user configuration variable
 * to decide.
 */
function isHttps() {
    if (get_cfg_var('use_https')) {
        if (1 == get_cfg_var('use_https')) {
            $useHttps = true;
        } else {
            $useHttps = false;
        }
    } else {
        $useHttps = false;
    }
    return $useHttps;
}
/**
 * A method that assembles an unsigned URL out of the
 * the input from the user's succesful login
 * @param string $ewc_ip IP or FQDN of controller
 * @param int $ewc_port Port on controller to receive redirection
 * @param bool $useHttps Whether the redirect uses HTTP or HTTPS
 * @param string $token Identifier for the station's session
 * @param string $username The name the station's user logged in with
 * @param int $wlanid Identifier for the WLAN the station is using
 * @param string $assigned_role Name of the access control role to assign
 * @param string $dest The URL the station was trying to get to
 * @param int $max_duration The maximum length of the station's session.
 */
function makeUnsignedUrl($ewc_ip, $ewc_port, $useHttps, $token,
    $username, $wlanid, $assigned_role, $dest,
    $max_duration) {
    $redirectUrl = ($useHttps ? EWC_HTTPS_REQ : EWC_HTTP_REQ)
        . $ewc_ip;
    if ((80 != $ewc_port) && (443 != $ewc_port)) {
        $redirectUrl .= ":". $ewc_port;
    }
    $redirectUrl .= EWC_REDIRECT_TARGET
        . 'token='. rawurlencode($token)
        . '&wlan='. rawurlencode($wlanid)
        . '&username='. rawurlencode($username)
        . (is_not_empty($dest) ? '&dest='. rawurlencode($dest): '')
        . (is_not_empty($assigned_role) ? '&role='
            . rawurlencode($assigned_role): '')
        . (is_not_empty($max_duration) ? '&opt27='
            . $max_duration: '');
    return $redirectUrl;
}
?>

```

common_utilities.php

```

<?php
// A library of utilities that can be used by PHP scripts

```

```
// comprising an external captive portal.
// A utility that translates error codes to error messages.
function code_2_message($code, $content_type)
{
    $errMsgList = array (
        0 =>
        array (
            'label' => 'Invalid',
            'content' => '<span style=\'color:red\'>Empty id /
password not allowed. Please try again.</span>'
        ),
        1 =>
        array (
            'label' => 'Success',
            'content' => 'Success',
        ),
        2 =>
        array (
            'label' => 'Access Fail',
            'content' => '<span style=\'color:red\'>Userid or
password incorrect. Please try again.</span>',
        ),
        3 =>
        array (
            'label' => 'Fail',
            'content' => '<span style=\'color:red\'>A problem has
occurred while trying to validate your userid & password.<br>Please contact
your system administrator.</span>',
        ),
        4 =>
        array (
            'label' => 'Timeout',
            'content' => '<span style=\'color:red\'>A problem has
occurred while trying to validate your userid & password.<br>Please contact
your system administrator.</span>',
        ),
        5 =>
        array (
            'label' => 'RADIUS shared security key fail',
            'content' => '<span style=\'color:red\'>A problem has
occurred while trying to validate your userid & password.<br>Please contact
your system administrator.</span>',
        ),
        6 =>
        array (
            'label' => 'RADIUS internal error',
            'content' => '<span style=\'color:red\'>A problem has
occurred while trying to validate your userid & password.<br>Please contact
your system administrator.</span>',
        ),
        7 =>
        array (
            'label' => 'Max RADIUS login fail',
            'content' => '<span style=\'color:red\'>Too many users
trying to login at the same time.Please try again later.</span>',
        ),
        8 =>
        array (
            'label' => 'Invalid Login parameters',
            'content' => '<span style=\'color:red\'>Userid or
password incorrect. Please try again.</span>',
        ),
        9 =>
        array (
```

```

        'label' => 'General failure',
        'content' => '<span style=\'color:red\'>A problem has
occurred while trying to validate your userid & password.<br>Please contact
your system administrator.</span>',
    ),
    14 =>
    array (
        'label' => 'Invalid third party parameters',
        'content' => '<span style=\'color:red\'>Invalid third
party parameters.</span>',
    ),
    15 =>
    array (
        'label' => 'Authentication in progress failure',
        'content' => '<span style=\'color:red\'>Authentication is
in progress.</span>',
    ),
    17 =>
    array (
        'label' => 'Max concurrent session failure',
        'content' => '<span style=\'color:red\'>Login rejected
because the maximum number of concurrent sessions for this set of credentials
has been reached. Please try again later.</span>',
    ),
    18 =>
    array (
        'label' => 'Identified session not found',
        'content' => '<span style=\'color:red\'>Login failed
because could not find a session for the specified identifiers.</span>'
    ),
    99 =>
    array (
        'label' => 'Timeout while trying to authorize a session',
        'content' => '<span style=\'color:red\'>Login failed
because because the controller took too long to authorize the
session.</span>'
    )
);
return (isset($errMsgList[$code])) ?
    $errMsgList[$code][$content_type] :
    "Unrecognized error code: ".$code;
}
// General purpose error reporting procedure.
function printError($errorMsg) {
    header('Content-type: text/html; charset=iso-8859-1');
    print
"<html>\n<head><title>Error</title></head><body>\n<p>\n$errorMsg\n</p>\n</bod
y>\n</html>\n";
}
// Use base64 url safe encode/decode when dealing
// with AES-encrypted strings.
// encode: '+'=>'-', '/' => '_', '=' => '!'
function base64_url_encode($input) {
    return strtr(base64_encode($input), '+/=', '-_!');
}
// Decode: '-'=>'+', '_' => '/', '!' => '='
function base64_url_decode($input) {
    return base64_decode(strtr($input, '-_!', '+/='));
}
// xml parsing functions
function my_xml2array($contents)
{
    $xml_values = array();
    if (! isset($contents)) {

```

```

        return false;
    }
    $parser = xml_parser_create('');
    if(!$parser) {
        return false;
    }
    xml_parser_set_option($parser, XML_OPTION_TARGET_ENCODING,
        'UTF-8');
    xml_parser_set_option($parser, XML_OPTION_CASE_FOLDING, 0);
    xml_parser_set_option($parser, XML_OPTION_SKIP_WHITE, 1);
    xml_parse_into_struct($parser, trim($contents), $xml_values);
    xml_parser_free($parser);
    if (!$xml_values) {
        return array();
    }
    $xml_array = array();
    $last_tag_ar =& $xml_array;
    $parents = array();
    $last_counter_in_tag = array(1=>0);
    foreach ($xml_values as $data)
    {
        switch($data['type'])
        {
            case 'open':
                $last_counter_in_tag[$data['level']+1] = 0;
                $new_tag = array('name' => $data['tag']);
                if(isset($data['attributes']))
                    $new_tag['attributes'] = $data['attributes'];
                if(isset($data['value']) && trim($data['value']))
                    $new_tag['value'] = trim($data['value']);
                $last_tag_ar[$last_counter_in_tag[
                    $data['level']] = $new_tag;
                $parents[$data['level']] =& $last_tag_ar;
                $last_tag_ar =& $last_tag_ar[
                    $last_counter_in_tag[$data['level']]++];
                break;
            case 'complete':
                $new_tag = array('name' => $data['tag']);
                if(isset($data['attributes']))
                    $new_tag['attributes'] = $data['attributes'];
                if(isset($data['value']) &&
                    trim($data['value']))
                    $new_tag['value'] = trim($data['value']);
                $last_count = count($last_tag_ar)-1;
                $last_tag_ar[ $last_counter_in_tag[$data[
                    'level' ]]+ ] = $new_tag;
                break;
            case 'close':
                $last_tag_ar =& $parents[$data['level']];
                break;
            default:
                break;
        }
    };
    }
    return $xml_array;
}
function get_value_by_path($__xml_tree, $__tag_path)
{
    $tmp_arr =& $__xml_tree;
    $tag_path = explode('/', $__tag_path);
    foreach($tag_path as $tag_name)
    {
        $res = false;
        foreach($tmp_arr as $key => $node)

```

```

    {
        if(is_int($key) && $node['name'] == $tag_name)
        {
            $tmp_arr = $node;
            $res = true;
            break;
        }
    }
    if(!$res) {
        return false;
    }
}
if( isset($tmp_arr['value']) ) {
    return $tmp_arr['value'];
} else {
    return null;
}
}
function is_not_empty($string) {
    return (isset($string) && (0 < strlen($string)));
}
//check token format
function tokenCheck($val){
    return preg_match('/^([a-zA-Z0-9-!]){0,24}$/', $val);
}
//check the mac address
function macCheck($val){
    return preg_match("/^[A-Fa-f0-9]{2}:[A-Fa-f0-9]{2}:[A-Fa-f0-9]{2}:[A-Fa-f0-9]{2}:[A-Fa-f0-9]{2}:[A-Fa-f0-9]{2}$/", $val);
}
//encode the input string to avoid script attack
function convertUrlParam($input) {
    return htmlentities($input, ENT_QUOTES);
}
}
?>

```

crypt_aws_s4.php

```

<?php
class SimpleAws {
    const    AWS4_ERROR_NONE=0;
    const    AWS4_ERROR_NULL_INPUT=1;
    const    AWS4_ERROR_INPUT_BUFFER_TOO_SMALL=2;
    const    AWS4_ERROR_INVALID_PROTOCOL=3;
    const    AWS4_ERROR_INPUT_URL_TOO_BIG=4;
    const    AWS4_ERROR_INPUT_ID_TOO_BIG=5;
    const    AWS4_ERROR_INPUT_KEY_TOO_BIG=6;
    const    AWS4_ERROR_INVALID_REGION=7;
    const    AWS4_ERROR_INVALID_SIGNATURE=8;
    const    AWS4_ERROR_MISSING_QUERY=9;
    const    AWS4_ERROR_MISSING_QUERY_DATE=10;
    const    AWS4_ERROR_MISSING_QUERY_SIGNED_HEADERS=11;
    const    AWS4_ERROR_MISSING_QUERY_EXPIRES=12;
    const    AWS4_ERROR_MISSING_QUERY_SIGNATURE=13;
    const    AWS4_ERROR_MISSING_QUERY_CREDENTIAL=14;
    const    AWS4_ERROR_MISSING_QUERY_ALGORITHM=15;
    const    AWS4_ERROR_MISSING_QUERY_PARAMS=16;
    const    AWS4_ERROR_MISSING_CRED_PARAMS=17;
    const    AWS4_ERROR_STALE_REQUEST=2001;
    const    AWS4_ERROR_UNKNOWN_IDENTITY=2002;
    const    AWS4_EXTREME_REQUEST="aws4_request";
    const    AWS4_MAX_URL_SIZE= 512;
    const    AWS4_HTTP_REQ = "http://";
}

```

```

const     AWS4_HTTPS_REQ= "https://";
const     AWS4_MANDATORY_CRED_PARAMS = 4;
/**
 * Method to verify the AWS signature based on given full URL address.
 *
 * @param string $pUrl
 * @param array $awsKeyPairs identity, shared secret key pairs
 * @return AWS error code
 */
public static function verifyAwsUrlSignature($pUrl,
    $awsKeyPairs) {
    // Perform basic validation
    if($pUrl==NULL) {
        return self::AWS4_ERROR_NULL_INPUT;
    }
    if (2*self::AWS4_MAX_URL_SIZE < strlen($pUrl)) {
        return self::AWS4_ERROR_INPUT_URL_TOO_BIG;
    }
    if(stripos($pUrl, self::AWS4_HTTP_REQ)!=0 || stripos($pUrl, self::AWS4_HTTPS_REQ)!
=0) {
        return self::AWS4_ERROR_INVALID_PROTOCOL;
    }
    $urlParams = parse_url($pUrl);
    if (!isset($urlParams['query'])) {
        return self::AWS4_ERROR_MISSING_QUERY;
    }
    $queryParams = explode("&", $urlParams['query']);
    foreach($queryParams AS $el) {
        $sarr = explode("=", $el);
        $q[$sarr[0]] = $sarr[1];
    }
    $valResult = self::validateQueryParms($q);
    if (self::AWS4_ERROR_NONE != $valResult) {
        return $valResult;
    }
    // Done with the basic validations.
    $date = $q['X-Amz-Date'];
    $sign = $q['X-Amz-Signature'];
    $credentVal = rawurldecode($q['X-Amz-Credential']);
    ksort($q);
    // Remove the signature from the list of parameters over
    // which the signature will be recomputed.
    unset($q['X-Amz-Signature']);
    $credentAttrs = explode("/", $credentVal);
    $pKey = $credentAttrs[0];
    if (self::AWS4_MAX_URL_SIZE < strlen($pKey)) {
        return self::AWS4_ERROR_INPUT_KEY_TOO_BIG;
    }
    if(self::AWS4_MANDATORY_CRED_PARAMS > count($credentAttrs)) {
        return self::AWS4_ERROR_MISSING_CRED_PARAMS;
    }
    if (!isset($awsKeyPairs[$pKey])) {
        return self::AWS4_ERROR_UNKNOWN_IDENTITY;
    }
    $scope = $credentAttrs[1]."/".$credentAttrs[2]."/"
        . $credentAttrs[3]."/".$credentAttrs[4];
    $port = $urlParams['port'];
    $host = strtolower($urlParams['host']);
    if($port && (($urlParams['scheme']=='https' && $port !=
        443)||($urlParams['scheme']=='http' && $port != 80))) {
        $host .= ':'.$port;
    }
    $canonical_request = self::getCanonicalFFECPCContent($q,
        $host, $urlParams['path']);

```

```

$stringToSign = "AWS4-HMAC-SHA256\n{$date}\n{$scope}\n" .
    hash('sha256', $canonical_request);
$signingKey = self::getSigningKey($credentAttrs[1], $credentAttrs[2],
    $credentAttrs[3], $awsKeyPairs[$pKey]);
$mySign = hash_hmac('sha256', $stringToSign, $signingKey);
if (strcmp($mySign, $sign)){
    return self::AWS4_ERROR_INVALID_SIGNATURE;
}
return self::AWS4_ERROR_NONE;
}
/**
 * Method to verify that the query parameters contain the elements
 * required in the response to the controller and the ones required to
 * sign the request.
 * @param array $qParams: an associative array in which the key of an
 * entry is the name of a query parameter and the corresponding value
 * is the value of that parameter.
 * @return an AWS_ERROR code.
 */
private static function validateQueryParams($qParams) {
    if (is_null($qParams)) {
        return self::AWS4_ERROR_MISSING_QUERY;
    }
    if ((!isset($qParams['wlan'])) or (!isset($qParams['token']))
        or (!isset($qParams['dest']))) {
        return self::AWS4_ERROR_MISSING_QUERY_PARAMS;
    }
    if (!isset($qParams['X-Amz-Signature'])) {
        return self::AWS4_ERROR_MISSING_QUERY_SIGNATURE;
    }
    if (!isset($qParams['X-Amz-Algorithm'])) {
        return self::AWS4_ERROR_MISSING_QUERY_ALGORITHM;
    }
    if (!isset($qParams['X-Amz-Credential'])) {
        return self::AWS4_ERROR_MISSING_QUERY_CREDENTIAL;
    }
    if (!isset($qParams['X-Amz-Date'])) {
        return self::AWS4_ERROR_MISSING_QUERY_DATE;
    }
    if (!isset($qParams['X-Amz-Expires'])) {
        return self::AWS4_ERROR_MISSING_QUERY_EXPIRES;
    }
    if (!isset($qParams['X-Amz-SignedHeaders'])) {
        return self::AWS4_ERROR_MISSING_QUERY_SIGNED_HEADERS;
    }
    // The date & expires parameters exist in the request.
    // Verify that the request is not stale or replayed.
    $redirectedAt = DateTime::createFromFormat('Ymd?Gis?',
        $qParams['X-Amz-Date'], new DateTimeZone("UTC"));
    $expires = $qParams['X-Amz-Expires'];
    $now = date_create();
    $delta = $now->getTimestamp() - $redirectedAt->getTimestamp();
    // The following gives some latitude for clocks not being synched
    if (($delta < -10) or ($delta > $expires)) {
        print("<br>");
        print(date("Y-m-d H:i:sZ", $now->getTimestamp()));
        print("<br>");
        print("Redirected at: ");
        print(date("Y-m-d H:i:sZ", $redirectedAt->getTimestamp()));
        print("<br>");
        print($now->getTimeZone()->getName());
        print("<br>");
        print($redirectedAt->getTimeZone()->getName());
        print("<br>");
    }
}

```

```

        print($expires);
        print("<br>");
        print($delta);
        return self::AWS4_ERROR_STALE_REQUEST;
    }
    return self::AWS4_ERROR_NONE;
}
/**
 * Method to generate the AWS signed URL address
 * @param string $pUrl: the URL that need to be appened with AWS parameters
 * @param string $identity: the AWS identity
 * @param string $sharedSecret: the secret shared with the controller
 * @param string $region: the region component of the scope
 * @param string $service: the service component of the scope
 * @param int $expires: number of seconds till presigned URL is untrusted.
 * @return URL string with AWS parameters
 */
public static function createPresignedUrl(
    $pUrl, $identity, $sharedSecret, $region,
    $service, $expires) {
    $urlParams = parse_url($pUrl);
    $httpDate = gmdate('Ymd\This\Z', time());
    $scopeDate = substr($httpDate, 0, 8);
    $scope = "{$scopeDate}/".$region."/".$service."/".self::AWS4_EXTREME_REQUEST;
    $credential = $identity . '/' . $scope;
    $duration = $expires;
    //set the aws parameters
    $awsParams = array(
        'X-Amz-Date'=>$httpDate,
        'X-Amz-Algorithm'=> 'AWS4-HMAC-SHA256',
        'X-Amz-Credential'=> $credential,
        'X-Amz-SignedHeaders' =>'host',
        'X-Amz-Expires'=> $duration
    );
    parse_str($urlParams['query'],$q);
    $q = array_merge($q, $awsParams);
    ksort($q);
    $port = $urlParams['port'];
    $host = strtolower($urlParams['host']);
    if($port && (($urlParams['scheme']=='https' && $port !=
        443)||($urlParams['scheme']=='http' && $port != 80)) {
        $host .= ':'.$port;
    }
    $canonical_request = self::getCanonicalFFECPCContent($q,
        $host, $urlParams['path'], true);
    $stringToSign = "AWS4-HMAC-SHA256\n{$httpDate}\n{$scope}\n" .
        hash('sha256', $canonical_request);
    $signingKey = self::getSigningKey(
        $scopeDate,
        $region,
        $service,
        $sharedSecret
    );
    $q['X-Amz-Signature'] = hash_hmac('sha256', $stringToSign,
        $signingKey);
    $p = substr($pUrl, 0, strpos($pUrl,'?'));
    $queryParams = array();
    foreach($q AS $k=>$v) {
        $queryParams[] = "$k=".rawurlencode($v);
    }
    $p .= '?'.implode('&', $queryParams);
    return $p;
}
/**

```

```

* Method to generate the AWS signing key
* @param string $shortDate: short date format (20140611)
* @param string $region: Region name (us-east-1)
* @param string $service: Service name (s3)
* @param string $secretKey Secret Access Key
* @return string
*/
protected static function getSigningKey($shortDate, $region, $service, $secretKey) {
    $dateKey = hash_hmac('sha256', $shortDate, 'AWS4' . $secretKey, true);
    $regionKey = hash_hmac('sha256', $region, $dateKey, true);
    $serviceKey = hash_hmac('sha256', $service, $regionKey, true);
    return hash_hmac('sha256', self::AWS4_EXTREME_REQUEST, $serviceKey, true);
}
/**
* Create the canonical context for the AWS service
* @param array $queryHash the query parameter hash
* @param string $host host name or ip address for the target service
* @param string $path the service address for the target service
* @param boolean $encode determine if the query parameter need to be encoded or not.
* @return string the canonical content for the request
*/
protected static function getCanonicalFFECPCContent($queryHash, $host, $path,
$encode=false) {
    $queryParams = array();
    foreach($queryHash AS $k=>$v) {
        if($encode) {$v = rawurlencode($v);}
        $queryParams[] = "$k=$v";
    }
    $canonical_request = "GET\n"
        . $path . "\n"
        . implode('&', $queryParams) . "\n"
        . 'host:' . $host
        . "\n\nhost\nUNSIGNED-PAYLOAD";
    return $canonical_request;
}
/**
* Create user readable error message
* @param integer $eid error code after verifying the AWS URL
* @return string the error message
*/
public static function getAwsError($eid) {
    $forAws = " for Amazon Web Service request.";
    SWITCH ($eid) {
        case self::AWS4_ERROR_NULL_INPUT:
            $res = "Empty input".$forAws;
            break;
        case self::AWS4_ERROR_INPUT_BUFFER_TOO_SMALL:
            $res = "Input buffer is too small".$forAws;
            break;
        case self::AWS4_ERROR_INVALID_PROTOCOL:
            $res = "Invalid protocol".$forAws;
            break;
        case self::AWS4_ERROR_INPUT_URL_TOO_BIG:
            $res = "Input url is too big".$forAws;
            break;
        case self::AWS4_ERROR_INPUT_ID_TOO_BIG:
            $res = "Input ID is too big".$forAws;
            break;
        case self::AWS4_ERROR_INVALID_REGION:
            $res = "Invalid region".$forAws;
            break;
        case self::AWS4_ERROR_INVALID_SIGNATURE:
            $res = "Invalid signature".$forAws;
            break;
    }
}

```

```

        case self::AWS4_ERROR_MISSING_QUERY:
            $res = "Missing all query parameters".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_DATE:
            $res = "Missing query date".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_SIGNED_HEADERS:
            $res = "Missing query signed headers".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_EXPIRES:
            $res = "Missing query expires".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_SIGNATURE:
            $res = "Missing query signature".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_CREDENTIAL:
            $res = "Missing query credential".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_ALGORITHM:
            $res = "Missing query algorithm".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_QUERY_PARAMS:
            $res = "Missing query parameter".$forAws;
            break;
        case self::AWS4_ERROR_MISSING_CRED_PARAMS:
            $res = "Missing credential parameters".$forAws;
            break;
        case self::AWS4_ERROR_STALE_REQUEST:
            $res = "Invalid request date".$forAws;
            break;
        case self::AWS4_ERROR_UNKNOWN_IDENTITY:
            $res = "Unrecognized identity or identity without a shared secret.";
            break;
        default:
            $res = "Successfully validated".$forAws;
            break;
    }
    return $res;
}
/**
 * Return the AWS validation error message
 * @param string $pUrl
 * @return string the error message
 */
public function getUrlValidationResult($pUrl) {
    $eid = self::verifyAwsUrlSignature($pUrl);
    return self::getAwsError($eid);
}
}
?>

```

ffecp-config.php


```

<?php
// This file contains PHP associative arrays holding the relatively
// static configuration for this ECP application. A real application
// might read the data in from an XML or '.ini' file.
// An associative array of identity => shared secret pairs.
// This example only uses the first one. Any printable ASCII
// alphanumeric string can be use for the identity and shared
// secret so long as both the ECP and the controller use the
// same pair.
$sawsKeyPairs = array(

```

```
'BigAuthInc'=>'secretferqrer123456667',
'testingidentity1'=>'secretferqrer123456668',
'testingidentity2'=>'secretferqrer123456669'
);
// Aws Signature-related Configuration
// Region and service are used to build the scope.
// Expires is the maximum amount of time the signed URL
// should be trusted.
$awsConfig = array(
    'region' => 'world',
    'signature'=> 'v4',
    'service'=>'ecp',
    'expires'=>60
);
?>
```

N

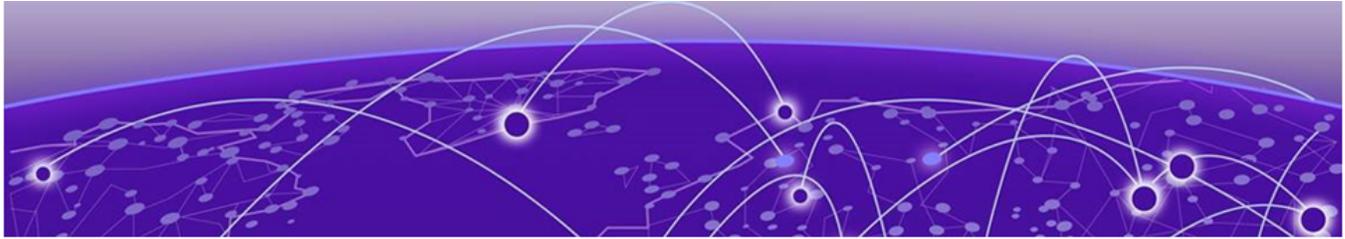

Index

A

- AAA Network, Default Auth Role accept policy 69
- AAA Network, Pass-thru External RADIUS Accept Policy 72
- adoption rules,
 - creating 57
- AirDefense 98, 100
- appliance specifications 12
- availability pair 95, 98
- Availability pair with AirDefense 98
- Availability pair with ExtremeLocation 98
- availability pair, switches 18

B

- B@AC network topology 52

C

- Captive Portal, ExtremeGuest 87
- captive portal, internal
 - configuring 51
- conventions
 - notice icons vi
 - text vi

D

- Default Auth Role 68
- Default Pass-Through Rule 77
- Defender for IoT 14
- device groups
 - modifying 54, 63, 104
 - overview 19
 - profile settings 54, 104
- DHCP
 - add new scope 21
 - configure server options 27
 - create new options 25
 - Option 078 25
 - Option 43 29
 - Vendor Class Identifier 29
 - Windows Server 2012 R2 20
- discovery and registration 14
- discovery, APs and adapters, Centralized site 14
- discovery, Centralized site APs and adapters 15
- discovery, switches 16, 17
- documentation
 - feedback viii
 - location viii

E

- EGuest, configuring network 88
- engine rules,
 - B@AC captive portal 54
 - creating rules 61
- External Captive Portal
 - configuring network 102
- External Captive Portal, configuring network 75
- External Captive Portal, XMC 74
- External NAC server to authenticate client sessions 65
- Extreme Management Center (XMC) 74
- Extreme Management Center profile for external captive portal 84
- ExtremeGuest 87
- ExtremeGuest configuration 89
- ExtremeGuest server settings 88
- ExtremeLocation 98, 99
- ExtremeWiNG Appliance
 - ExtremeManagement Center 91, 92
 - NSight 91, 92

F

- feedback viii

M

- MBA Network, Default Auth Role accept policy 68
- MBA Network, Pass-thru External RADIUS accept policy 71

N

- NAC Server, configuring external server 66
- network topology, B@AC 52
- networks
 - AAA Network 60
 - WPAv2 PSK 53
- notices vi

P

- Pass-Through External RADIUS accept policy 70
- policy role, creating 62
- profile settings 54, 63, 99, 104
- profile, edit 77
- profile, external captive portal 84
- Proxy APs
 - legacy support 94
- Proxy Clients 94

Proxy Controllers 93

R

role, creating 62

S

sites

overview 18

sites,

adding a Centralized Site 49

support, see technical support

switch, ExtremeCloud Appliance as a switch in Extreme Management Center 78

switches discovery 16, 17

switches, availability pair 18

T

technical support

contacting viii, ix

U

unregistered policy 83

W

warnings vi

X

XMC 74

XMC, unregistered policy 83