

Overview of the AP-7562

Designed for extending network coverage to outside areas, the AP-7562 brings the latest 802.11ac 3x3:3 *Multiple Input Multiple Output* (MIMO) dual radio design together with rugged outdoor performance.

AP-7562 Box Contents

Table 1 Contents of the AP-7562 Box

Quantity	Item
1	AP-7562 Quick Reference Guide
1	AP-7562 Access Point
The following hardware is included (except M12 connector models)	
1	Weatherproof RJ45 plug kit

The AP-7562 Access Points do not ship with the mounting kit, antenna, or PoE Injector. These items must be ordered separately.

LED Indicators

AP-7562 Access Points have LED activity indicators on the front of the enclosure. The LEDs provide a status display indicating error conditions, transmission, and network activity for the 2.4 GHz radio (green) and the 5 GHz radio (amber). For more information about AP-7562 LED behavior, refer to the *ExtremeWireless AP-7562 Access Point Installation Guide*.

Hardware Mounting and Installation

The AP-7562 mounting bracket kit (KT-147407-01) is recommended for most deployments. When a standoff distance is required for a pole mounted or wall mounted installation, use the extension arm kit (KT-150173-01). Additionally, the KT-147407-02 stainless steel hardware mounting bracket kit is available for deployments in corrosive environments.



Warning: Only qualified personnel should perform installation procedures.



Caution: All device wiring must comply with the National Electric Code (NEC) or regulations and procedures defined by the regulatory bodies of the country or region where the devices are being deployed. All local building and structure codes must be observed.



Caution: Always mount the AP-7562 with the black gore vent facing down.

Pole Mounted Installations

The mounting hardware kit and extension arm can be used in various combinations to properly install the AP-7562 on a pole. For poles up to 3 inches in diameter, attach the pole mount bracket of the mounting hardware kit at the desired position on the pole using band clamps up to 3/4 inch width, or a 1/2 inch x 4 inch wide U-bolt and nuts. For poles greater than 3 inches in diameter, attach the pole mount bracket using band clamps.



Note: The U-bolt and band clamps are not included in the mounting bracket kit.

Vertical Pole Mount


For poles up to 3 inches in diameter when using a U-bolt:

- Thread two 1/2 inch nuts onto the U-bolt.
- Position the U-bolt on the pole and place the pole mount bracket section on the U bolt. Adjust the two 1/2 inch inner nuts until the pole mount bracket section is against the pole and the U-bolt can be secured tightly to the pole at the desired mounting location.
- Place the angle adapter bracket section on the U-bolt with the open slot connections on the bottom and align it with the pole mount section. Attach with two 1/2 inch nuts. Tighten all nuts to 300 inch pounds (lbf-in).
- Position the Access Point bracket section so the bottom of the section with



the straight (not bevel cut) side is oriented toward the bottom side of the

AP with the gore vent. Using a torque wrench or a ratchet and a 10mm socket, or an adjustable wrench, attach (but don't tighten) the Access Point bracket section to the AP-7562 with the four M6 flange screws.

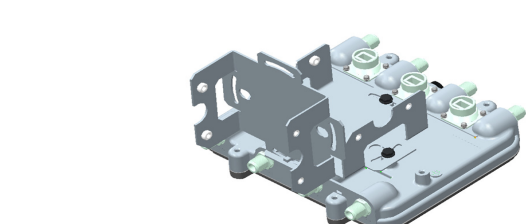

- To adjust the position of the Access Point, rotate the Access Point bracket section (plus or minus 15 degrees) and tilt the angle adapter bracket section (up to 45 degrees).
- Tighten all hex flange screws to 60 inch pounds (lbf-in).

Refer to the *ExtremeWireless WiNG AP-7562 Installation Guide* for information on pole mounting the AP-7562 with band clamps or using extension arms.

Wall Mounted Installations

For wall mounted installations, use only the Access Point bracket section and angle adjust bracket section if required.

- With the open slot connections facing down, attach the angle adjust bracket section at the desired mounting location using four #10/32 lag bolts.



Note: The lag bolts are not included in the mounting bracket kit.

- With the Access Point positioned so the gore vent is facing down, insert the two M6 hex flange screws in the bottom holes on the sides of the Access Point bracket section into the open slot connections on the bottom of the angle adapter bracket section. Rotate the Access Point bracket section upward and align the top holes on the sides with the top holes on the angle adapter bracket section. Insert two M6 hex flange screws into the top holes on the angle adapter bracket section.
- To adjust the position of the Access Point, rotate the Access Point bracket section (plus or minus 15 degrees) and tilt the angle adapter bracket section (up to 45 degrees).
- Use a torque wrench or a ratchet and a 10mm socket, or an adjustable wrench, to tighten all screws when all adjustments are complete.
- Tighten all hex flange screws to 60 inch pounds (lbf-in).

Refer to the *ExtremeWireless WiNG AP-7562 Installation Guide* for information on wall mounting the AP-7562 using extension arms or as Vehicle Mounted Modem (VMM).

Basic Access Point Configuration

Refer to the *ExtremeWireless WiNG AP-7562 Installation Guide* to configure the device and access management functions.

Regulatory and Compliance Information Wireless Device Country Approvals

Regulatory markings, subject to certification, are applied to the device signifying the radio(s) is/are approved for use in the following countries: United States, Canada, Japan, China, S. Korea, Australia, and Europe.

Please refer to the Declaration of Conformity (DoC) for details of other country markings. This is available at: www.extremenetworks.com



Note: For 2.4GHz or 5GHz Products: Europe includes, Austria, Belgium, Bulgaria, Czech Republic, Cyprus, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Liechtenstein, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovak Republic, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.



Caution: Operation of the device without regulatory approval is illegal.

Country Selection

Select only the country in which you are using the device. Any other selection will make the operation of this device illegal. Some Access Points are specifically designed to operate in certain countries (Example: -US for the United States, -EU for the European Union).

Country Roaming

This device incorporates the International Roaming feature (IEEE802.11d) which will ensure the product operates on the correct channels for the particular country of use.

For product available in the USA/Canada market, only channel 1-11 can be operated. Selection of other channels is not possible.

Pour les produits disponibles aux États-Unis / Canada du marché, seul le canal 1 à 11 peuvent être exploités. Sélection d'autres canaux n'est pas possible.

Frequency of Operation – FCC and IC 2.4 GHz Only

The available channels for 802.11bg operation in the US are Channels 1 to 11. The range of channels is limited by firmware.



Note: The EIRP for all outdoor antennas used in the 5.15 - 5.25 GHz band should not exceed a maximum 125 mW EIRP (21dBm) at any elevation angle above 30 degrees (21dBm). Refer to the WiNG CLI Reference for information on setting elevation gain. The guide is available at www.extremenetworks.com/support/.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Professional installation is required

Dynamic Frequency Selection (DFS) for devices operating in the bands 5250- 5350 MHz, 5470-5600 MHz and 5650-5725 MHz.

Sélection dynamique de fréquences (DFS) pour les dispositifs fonctionnant dans les bandes 5250-5350 MHz, 5470-5600 MHz et 5650-5725 MHz.

The maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit.

le gain maximal d'antenne permis pour les dispositifs utilisant les bandes 5250-5350 MHz et 5470-5725 MHz doit se conformer à la limite de p.i.r.e.

The maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate.

le gain maximal d'antenne permis (pour les dispositifs utilisant la bande 5725-5850 MHz)

doit se conformer à la limite de p.i.r.e. spécifiée pour l'exploitation point à point et non point à point, selon le cas.

Industry Canada Statement:

Caution: The device for the band 5150-5250 MHz is only for indoor usage to reduce potential for harmful interference to co-Channel mobile satellite systems. High power radars are allocated as primary users (meaning they have priority) of 5250-5350 MHz and 5650-5850 MHz and these radars could cause interference and/or damage to LE-LAN devices.

Avertissement: Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Ant.	P/N	Antenna Type	Connector	Indoor/ Outdoor	Antenna Gain (dBi)		Cable Loss (dB)			True Gain (dBi)		
					2.4G	5G	2.4G	5G	2.4G	5G		
1	ML-5299-HPA5-01	Dipole	N Male	Indoor/ Outdoor	-	5.6	-	0.9	-	-	4.7	
2	ML-2452-HPAG4A6-01	Dipole	N Male	Indoor/ Outdoor	4	7.3	-	-	4	-	7.3	
3	ML-2499-FHPA5-01R	Dipole	N Male	Indoor/ Outdoor	5.3	-	0.7	-	4.6	-	-	
4	ML-2499-HPA4-01	Dipole	N Male	Indoor/ Outdoor	4.5	-	0.7	-	3.8	-	-	
5	ML-2452-HPA6X-036	Dipole	N Male	Indoor/ Outdoor	4	6	0.7	0.9	3.3	5.1	-	
6	ML-2452-HPA6-01	Dipole	N Male	Indoor/ Outdoor	5.3	6.1	-	-	5.3	6.1	-	
7	ML-2499-SPNL-72-N	Panel	N Male	Indoor/ Outdoor	6.5	-	-	-	6.5	-	-	
8	ML-2452-PNA5-01R	Panel	N Male	Indoor/ Outdoor	5.5	6	0.7	0.9	4.8	5.1	-	
9	ML-2452-PNL3M3-1	CROSS- POLARIZED PANEL ANTENNA*	N Female	Indoor/ Outdoor	Note 1						-	-

Note 1:

Antenna	Antenna Gain (dBi)		Cable loss (dB)		True Gain (dBi)	
	2.4GHz	5GHz	2.4GHz	5GHz	2.4GHz	5GHz
A	9.5	9.2	0.7	0.9	8.8	8.3
B	6.6	6.8	0.7	0.9	5.9	5.9
C	9.7	9.1	0.7	0.9	9	8.2

Health and Safety Recommendations Warnings for the use of Wireless Devices



Warning: Please observe all warning notices with regard to the usage of wireless devices.

Potentially Hazardous Atmospheres – Fixed Installations

You are reminded of the need to observe restrictions on the use of radio devices in fuel depots, chemical plants etc. and areas where the air contains chemicals or particles (such as grain, dust, or metal powders).

Safety in Hospitals

Wireless devices transmit radio frequency energy and may affect medical electrical equipment. When installed adjacent to other equipment, it is advised to verify that the adjacent equipment is not adversely affected.

Pacemakers

Pacemaker manufacturers recommended that a minimum of 15cm (6 inches) be maintained between a handheld wireless device and a pacemaker to avoid potential interference with the pacemaker. These recommendations are consistent with independent research and recommendations by Wireless Technology Research.

Persons with Pacemakers:

- Should ALWAYS keep the device more than 15cm (6 inches) from their pacemaker when turned ON.
- Should not carry the device in a breast pocket.
- Should use the ear furthest from the pacemaker to minimize the potential for interference.
- If you have any reason to suspect that interference is taking place, turn OFF your device.

Other Medical Devices

Please consult your physician or the manufacturer of the medical device, to determine if the operation of your wireless product may interfere with the medical device.

RF Exposure Guidelines

Safety Information

Reducing RF Exposure - Use Properly

Only operate the device in accordance with the instructions supplied.

International

The device complies with internationally recognized standards covering human exposure to electromagnetic fields from radio devices. For information on "International" human exposure to electromagnetic fields refer to the Declaration of Conformity (DoC) at: www.extremenetworks.com

Declaration of Conformity in Languages of the European Community

Hereby, Extreme Networks, Inc. declares that the radio equipment type Wireless LAN Access Point is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following Internet address: <http://www.extremenetworks.com/> - Located under Wireless Communications and Health.

EU

Remote and Standalone Antenna Configurations

To comply with EU RF exposure requirements, antennas that are mounted externally at remote locations or operating near users at stand-alone desktop of similar configurations must operate with a minimum separation distance of 35 cm from all persons.

US and Canada

Co-located statement

To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must not be co-located or operating in conjunction with any other transmitter/ antenna except those already approved in this filing.

To satisfy US and Canadian RF exposure requirements, a transmitting device must operate with a minimum separation distance of 35 cm or more from a person's body.

Pour satisfaire aux exigences Américaines et Canadiennes d'exposition aux radiofréquences, un dispositif de transmission doit fonctionner avec une distance de séparation minimale de 35 cm ou plus de corps d'une personne.

Federal Communications Commission (FCC) Notice:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Radio Transmitters (Part 15)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Radio Frequency Interference Requirements - Canada

CAC ICES-3 (B)/NMB-3(B) Radio Transmitters

For RLAN Devices: The use of 5 GHz RLAN's, for use in Canada, have the following restrictions:

- Restricted Band 5.60 – 5.65 GHz

This device complies with RSS 247 of Industry Canada. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Label Marking: The Term "IC:" before the radio certification only signifies that Industry Canada technical specifications were met.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that permitted for successful communication.

The device could automatically discontinue transmission in case of absence of information to trans-mit, or operational failure. Note that this is not intended to prohibit transmission of control or signaling information or the use of repetitive codes where required by the technology.

In compliance with respective local regulatory law, Access Point software provides professional installers the option to configure the antenna type and antenna gain for approved antennas.

This radio transmitter MODEL: AP-7562 has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Le présent émetteur radio MODEL: AP-7562 a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

CE Marking and European Economic Area (EEA)

The use of 2.4GHz RLAN's, for use through the EEA, have the following restrictions:

- Maximum radiated transmit power of 100 mW EIRP in the frequency range 2.400 -2.4835 GHz.

Statement of Compliance

Extreme Networks hereby declares that this radio equipment is in compliance with Directive 2011/65/EU and 1999/5/EC or 2014/53/EU (2014/53/EU supersedes 1999/5/EC from 13thJune 2017).

Other Countries

Australia

Use of 5GHz RLAN's in Australia is restricted in the following band 5.50 – 5.65GHz.

Brazil

Regulatory Declarations for AP-7562 - BRAZIL

For more information consult the website <http://www.anatel.gov.br>.
Declarações Regulamentares para AP-7562 - Brasil

Nota: A marca de certificação se aplica ao Transceptor, modelo AP-7562. Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primário. Para maiores informações sobre ANATEL consulte o site: <http://www.anatel.gov.br>.

Chile

Este equipo cumple con la Resolución No 403 de 2008, de la Subsecretaria de telecomunicaciones, relativa a radiaciones electromagnéticas.

China

通过访问以下网址可下载当地语言支持的产品说明书

确认进网标贴和证书真伪可查询网址

Hong Kong

In accordance with HKTA1039, the band 5.15GHz - 5.35GHz is for indoor operation only.

Japan

For VCCI 32-1 (corresponding to CISPR 32) Registered Class B ITE:
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div></div></div> <div>この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いをして下さい。</div> <div>VCCI-B</div>

Translation:

This is a Class B equipment. Although this equipment is intended for use in a residential environment, it could cause poor reception if used near a radio or a television receiver. Please follow instructions in the instruction manual.

Mexico

Restrict Frequency Range to: 2.450 – 2.4835 GHz.

La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

S. Korea

For a radio equipment using 2400-2483.5MHz or 5725-5825MHz, the following two expression should be displayed;

무선설비는 운용 중 전파혼신 가능성이 있음

당해 무선설비 는전파혼 신 가능성이 있으므로 민명안전과 관련된 서비스는 할 수 없습니다.

Taiwan

臺灣

低功率電波輻射性電機管理辦法

第十二條

<p>經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。</p> <p>第十四條</p> <p>低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。</p> <p>前項合法通信，指依電信規定作業之無線電通信。</p> <p>低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。</p> <p>無線接入點 (專業安裝)</p> <ol style="list-style-type: none">「本公司於說明書中提供所有必要資訊以指導使用者/安裝者正確的安裝及操作」警語。並於該中文使用說明書及器材上標示 「本器材須經專業工程人員安裝及設定，始得設置使用，且不得直接販售給一般消費者」警語。
--

「電磁波曝露量MPE標準值1mW/cm²，本產品使用時建議應距離人體：35 cm」。

Ukraine

Дане обладнання відповідає вимогам технічного регламенту №1057, № 2008 на обмеження щодо використання деяких небезпечних речовин в електричних та електронних пристроях.

Thailand

เครื่องโทรคมนาคมและอุปกรณ์นี้ มีความสอดคล้องตามข้อกำหนดของ กททช.

TURKISH WEEE Statement of Compliance

EEE Yönetmeliğine Uygundur

European Waste Electrical and Electronic Equipment (WEEE) Notice



In accordance with Directive 2012/19/EU of the European Parliament on waste electrical and electronic equipment (WEEE):

- The symbol above indicates that separate collection of electrical and electronic equipment is required.
- When this product has reached the end of its serviceable life, it cannot be disposed of as unsorted municipal waste. It must be collected and treated separately.
- It has been determined by the European Parliament that there are potential negative effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment.

It is the users’ responsibility to utilize the available collection system to ensure WEEE is properly treated.

For information about the available collection system, please contact Extreme Customer Support at 353 61 705500 (Ireland).

Access Point China ROHS Compliance

部件名称 (Parts)	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
金属部件 (Metal Parts)	X	0	0	0	0	0
电路模块 (Circuit Modules)	X	0	0	0	0	0
电缆及电缆组件 (Cables and Cable Assemblies)	X	0	0	0	0	0
塑料和聚合物部件 (Plastic and Polymeric Parts)	0	0	0	0	0	0
光学和光学组件 (Optics and Optical Components)	0	0	0	0	0	0
电池 (Batteries)	0	0	0	0	0	0

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572 规定的限量要求。

(企业可在此处，根据实际情况对上表中打“x”的技术原因进行进一步说明。)

NCC Statement

無線資訊傳輸設備避免影響附近雷達系統之操作。

無線資訊傳輸設備高增益指向性天線只得應用於固定式點對點系統。

Ant.	PN	Antenna Type	2.4GHz	5GHz Band 1	5GHz Band 2	5GHz Band 3	5GHz Band 4
1	ML-5299-HPA5-01	Dipole	-	23.83	17.91	22.69	23.78
2	ML-2452-HPAG4A6-01	Dipole	24.20	23.83	17.91	22.69	23.78
3	ML-2499-FHPA5-01R	Dipole	24.20	-	-	-	-
4	ML-2499-HPA4-01	Dipole	24.20	-	-	-	-
5	ML-2452-HPA6XG-036	Dipole	24.20	23.83	17.91	22.69	23.78
6	ML-2452-HPA6-01	Dipole	24.20	23.83	17.91	22.69	23.78
7	ML-2499-5PNL-72-N	Panel	24.53	-	-	-	-
8	ML-2452-PNA5-01R	Panel	24.53	24.71	20.11	20.12	23.39
9	ML-2452-PNL3M3-1	CROSS-POLARIZED PANEL ANTENNA*	24.08	24.72	21.69	20.63	24.13

CE Information

The device is restricted to indoor use only when operating in the 5150 to 5350 MHz frequency range.

AT	BE	BG	HR	CY	CZ	DK
EE	FI	FR	DE	EL	HU	IE
IT	LV	LT	LU	MT	NL	PL
PT	RO	SK	SI	ES	SE	UK

MPE Statement – Mobile device

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

All operational modes
2.4GHz: 802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40)
5GHz: 802.11a, 802.11n (HT20), 802.11n (HT40), 802.11ac (VHT20), 802.11ac (VHT40), 802.11ac (VHT80)

The frequency and the maximum transmitted power in EU are listed below:
2412-2472MHz: 19.98 dBm
5180-5240MHz: 22.98 dBm
5260-5320MHz: 22.98 dBm
5500-5700MHz: 29.99 dBm
5725-5875MHz: 35.98 dBm

Extreme Wireless™ WiNG™ Access Point

Quick Reference

AP-7562-67040-US

AP-7562-67040-1-WR

AP-7562-670042-US

AP-7562-670042-1-WR

AP-7562-6704M-US

AP-7562-6704M-1-WR

Notice

Copyright © 2018 Extreme Networks, Inc. All Rights Reserved.

Legal Notices

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, please see: www.extremenetworks.com/company/legal/trademarks/

Documentation & Support

For product support, including documentation, visit: www.extremenetworks.com/support/



P/N 9035177-02 Rev01