



Access Point System Reference Guide

WiNG 7.9.4.0

9037763-03 Rev AA
March 2024



Copyright © 2024 Extreme Networks, Inc. All rights reserved.

Legal Notice

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, see: <https://www.extremenetworks.com/about-extreme-networks/company/legal/trademarks>

Open Source Declarations

Some software files have been licensed under certain open source or third-party licenses.

End-user license agreements and open source declarations can be found at: <https://www.extremenetworks.com/support/policies/open-source-declaration/>



Table of Contents

Preface.....	11
Text Conventions.....	11
Platform-Dependent Conventions.....	13
Send Feedback.....	13
Help and Support.....	13
Subscribe to Product Announcements.....	14
Documentation and Training.....	14
Open Source Declarations.....	14
Training.....	14
About this Guide.....	15
New in this Guide.....	16
Release 7.9.4.....	16
Revision AA.....	16
Release 7.9.3.....	17
Revision AA.....	17
Release 7.9.2.....	17
Revision AA.....	17
Release 7.9.1.0.....	17
Revision AB.....	17
Revision AA.....	18
Revision 7.9.0.0.....	18
Newly Supported Access Points.....	18
Secure Connection to Imagotag Server on Cloud.....	19
Access to WiNG Controllers from ExtremeCloud IQ.....	19
WiNG 7 Operating System Overview.....	20
About the WiNG Software.....	21
Distributed Intelligence.....	23
High Availability Networks.....	23
Gap-free Security.....	23
Outdoor Wireless and Mesh Networking.....	23
Network Services, Routing and Switches.....	23
Management, Deployment and Troubleshooting.....	24
Web UI Features.....	25
Accessing the Web UI.....	25
Browser and System Requirements.....	25
Connecting to Web UI.....	26
Glossary of Icons Used.....	27
Global Icons.....	28
Dialog Box Icons.....	28

Table Icons.....	29
Status Icons.....	29
Configurable Object Icons.....	29
Configuration Object Icons.....	31
Configuration Operation Icons.....	31
Access Type Icons.....	32
Administrative Role Icons.....	32
Device Icons.....	32
Quick Start.....	34
Using the Initial Setup Wizard.....	34
Dashboard.....	51
System Dashboard.....	51
System Health.....	51
System Inventory.....	53
RF Domain Dashboard.....	54
RF Domain Health.....	55
RF Domain Inventory.....	58
Access Point Dashboard.....	60
Access Point Health.....	60
Access Point Inventory.....	63
Network View.....	64
Network View Display Options.....	66
Device Specific Information.....	67
Device Configuration.....	68
RF Domain.....	68
RF Domain Basic Configuration.....	69
RF Domain Sensor Configuration.....	71
RF Client Name Configuration.....	73
RF Domain Alias Configuration.....	74
Configure Access Point Profile Settings.....	83
System Profile Configuration - General Screen.....	84
Profile Radio Power.....	86
Profile Adoption (Auto Provisioning) Configuration.....	87
Profile Wired 802.1X Configuration.....	90
Profile Interface Configuration.....	90
Profile Network Configuration.....	164
Profile Security Configuration.....	244
Virtual Router Redundancy Protocol.....	282
List of Critical Resources.....	287
Profile Services Configuration.....	290
Management Settings.....	294
Meshpoint Configuration.....	299
Environmental Sensor Configuration.....	310
Advanced Profile Configuration.....	311
Managing Virtual Controllers.....	329
Device Overrides.....	331
Basic Configuration.....	332
Certificates Configuration.....	335

Wired 802.1x Configuration.....	354
RF Domain Overrides.....	355
Device Profile Overrides.....	358
Auto-Provisioning Policies.....	609
Configuring Auto-Provisioning Policy Rules.....	612
Configuring Auto-Provisioning Policy Adoption Criteria.....	618
Managing an Event Policy.....	619
Wireless Configuration.....	621
Manage Wireless LAN Policies.....	622
Configure WLAN Basic Settings.....	624
Configure WLAN Security.....	627
Configuring WLAN Firewall Settings.....	647
Configure WLAN Client Settings.....	662
Configure WLAN Accounting Settings.....	666
Configure WLAN Service Monitoring Settings.....	668
Configure Client Load-Balancing Settings.....	671
Configure Advanced WLAN Settings.....	672
Configure Auto Shutdown Settings.....	678
WLAN QoS Policies.....	680
Configure a WLAN's QoS WMM Settings.....	680
Configure a WLAN's QoS Rate Limit Settings.....	686
Configure Multimedia Optimizations.....	693
WLAN QoS Deployment Considerations.....	696
Manage Radio QoS Policies.....	696
Configure a Radio QoS Policy.....	698
Radio QoS Configuration and Deployment Considerations.....	709
Configure Association ACL.....	709
Association ACL Deployment Considerations.....	712
Smart RF Policies.....	712
Configure Smart RF Basic Settings.....	714
Configuring Smart RF Channel & Power Settings.....	717
Configuring Smart RF Scanning Configuration.....	720
Configuring Smart RF Neighbor Recovery Settings.....	722
Configuring Smart RF Select Shutdown Settings.....	728
Smart RF Configuration and Deployment Considerations.....	729
MeshConnex Policies.....	730
Configuring a MeshConnex Policy.....	731
Mesh QoS Policy.....	737
Configuring a Mesh QoS Policy.....	738
Passpoint Policy.....	746
Configuring a Passpoint Policy.....	748
Sensor Policy.....	757
Configuring a Sensor Policy.....	758
Location Policy.....	761
Adding Location Policy.....	763
Network Configuration.....	765
Policy Based Routing (PBR).....	765
L2TP V3 Configuration.....	770

Crypto CMP Policy.....	774
AAA Policy.....	778
Netflow Policy Configuration.....	789
AAA TACACS Policy.....	792
IPv6 Router Advertisement Policy.....	798
Alias.....	801
Network Basic Alias Configuration.....	802
Network Group Alias Configuration.....	805
Network Service Alias Configuration.....	808
Application Policy.....	810
Application.....	814
Application Group.....	816
Schedule Policy.....	819
URL Filtering.....	820
Web Filtering.....	824
Network Deployment Considerations.....	825
Security Configuration.....	826
Wireless Firewall.....	826
Defining a Firewall Configuration.....	827
Configuring IP Firewall Rules.....	841
Setting an IPv4 or IPv6 Firewall Policy.....	841
Setting an IP SNMP ACL Policy.....	846
Setting a Network Group Alias.....	847
Setting a Network Service Alias.....	849
Wireless Client Roles.....	850
Configuring a Client's Role Policy.....	851
Wireless Client Roles.....	860
Add Default Firewall Rules.....	866
Device Fingerprinting.....	867
Configuring MAC Firewall Rules.....	874
Wireless IPS (WIPS).....	877
Device Categorization.....	888
Security Deployment Considerations.....	891
Services Configuration.....	893
Captive Portal Policy.....	893
Captive Portal Policy Basic Configuration.....	895
Setting the DNS Whitelist Configuration.....	908
Setting the DHCP Configuration.....	909
Defining DHCP Pools.....	911
Defining DHCP Server Global Settings.....	920
DHCP Class Policy Configuration.....	922
DHCP Deployment Considerations.....	923
Setting the Bonjour Gateway Configuration.....	924
Configuring a Bonjour Discovery Policy.....	924
Configuring a Bonjour Forwarding Policy.....	927
Setting the DHCPv6 Server Policy.....	928
Defining DHCPv6 Options.....	930
DHCPv6 Pool Configuration.....	932

Setting the RADIUS Configuration.....	935
Creating RADIUS Groups.....	936
Defining User Pools.....	940
Configuring RADIUS Server Policy.....	945
Setting the URL List.....	955
Configure ImagoTag Policy.....	957
ImagoTag Firmware Updates.....	960
Adding/Editing ImagoTag Policy Settings.....	960
Services Deployment Considerations.....	962
Management Access.....	963
Adding or Editing a Management Access Policy.....	964
Configure Management User Account.....	964
Setting the Access Control Configuration.....	969
Setting the Authentication Configuration.....	973
Setting the SNMP Configuration.....	976
Setting SNMP Trap Configuration.....	979
Management Access Deployment Considerations.....	981
Diagnostics.....	982
Fault Management.....	982
Filter Events.....	982
View Events.....	984
Event History.....	985
Crash Files.....	987
Advanced.....	988
UI Debugging.....	988
Viewing UI Logs.....	989
View Sessions.....	991
Operations.....	992
Device Operations.....	992
Upgrading Device Firmware.....	992
Adopted Device Upgrades.....	993
Using the File Management Browser.....	1001
Crypto CMP Certificate.....	1004
Restarting Adopted Devices.....	1005
Captive Portal Configuration.....	1007
RF Domain - Device Upgrade Operation.....	1010
Certificates.....	1011
Certificate Management.....	1011
RSA Key Management.....	1020
Certificate Creation.....	1024
Generating a Certificate Signing Request.....	1026
Smart RF.....	1029
Managing Smart RF for an RF Domain.....	1029
Operations Deployment Considerations.....	1032
Statistics.....	1033
System Statistics.....	1034
Health.....	1034
Inventory.....	1036

Adopted Devices.....	1037
Pending Adoptions.....	1038
Offline Devices.....	1039
Device Upgrade.....	1041
WIPS Summary.....	1042
RF Domain Statistics.....	1044
Health.....	1045
Inventory.....	1048
Devices.....	1049
AP Detection.....	1050
Device Upgrade.....	1052
Wireless Clients.....	1054
Wireless LANs.....	1055
Radios.....	1057
Bluetooth.....	1061
Mesh.....	1063
Mesh Point.....	1064
SMART RF - Overview.....	1081
WIPS.....	1089
Captive Portal.....	1092
Application Visibility.....	1093
Coverage Hole Detection.....	1098
Access Point Statistics.....	1101
AP Health.....	1102
AP Device.....	1104
AP Web Filtering.....	1108
AP Application Visibility (AVC).....	1110
View Application Policy - AP Stats.....	1115
AP Device Upgrade.....	1116
AP Adoption.....	1118
AP Detection.....	1122
AP Wireless Clients.....	1123
AP Wireless LANs.....	1125
AP Policy Based Routing.....	1127
AP Radios.....	1128
AP Mesh.....	1133
AP Interfaces.....	1134
AP RTLS.....	1144
AP PPPoE.....	1146
AP OSPF.....	1148
AP Bluetooth.....	1161
AP L2TPv3 Tunnels.....	1163
AP VRRP.....	1165
AP Critical Resources.....	1166
AP LDAP Agent Status.....	1167
AP MiNT Links.....	1169
AP Guest Users.....	1171
AP GRE Tunnel.....	1173
AP Dot 1X.....	1174

AP Network.....	1176
AP DHCPv6 Relay & Client.....	1197
AP DHCP Server.....	1198
AP Firewall.....	1202
AP VPN.....	1213
AP Certificates.....	1216
AP WIPS.....	1219
AP Sensor Servers.....	1221
AP Bonjour Services.....	1222
AP Captive Portal.....	1224
AP Network Time.....	1225
AP Load Balancing.....	1228
AP Environment Statistics.....	1230
AP IOT Imagotag.....	1235
Wireless Client Statistics.....	1237
Client Health.....	1237
Client Details.....	1240
Client Traffic.....	1244
Client WMM TSPEC.....	1247
Client Association History.....	1248
Client Graph.....	1249
WiNG Events.....	1250
WiNG Event Messages.....	1251
AP3000 Features.....	1271
AP3000/X Series Radios and 6 GHz Support.....	1271
AP3000X Professional Install Settings.....	1272
AP5010 Features.....	1274
AP5010 Radios and 6 GHz Support.....	1274
AP5010 Power Management.....	1276
AP5010 Power Source Feature Restrictions.....	1276
AP505 and AP510: Dual Mode Capability.....	1277
Understanding Dual Mode Capability.....	1277
Auto-discovery of AP's Mode of Operation.....	1277
Manually-setting AP's Mode of Operation.....	1278
Resetting an AP's Mode of Operation.....	1280
WiNG AP505 and AP510 REV AA Upgrade Procedure.....	1283
Introduction.....	1283
How to determine if your AP requires an upgrade?.....	1283
Bulk 'Rev: AA' AP505/AP510 Upgrade through Virtual Controller.....	1284
Bulk 'Rev:AA' AP5XX Upgrade through WiNG Controller/ExtremeCloud Appliance.....	1288
AP Specifications.....	1290
AP3000/X Specifications.....	1290
AP5010 Specifications.....	1291
AP302W Specifications.....	1292
AP305C/CX Specifications.....	1293
AP310i/e Specifications.....	1293

AP360i/e Specifications.....	1294
AP410C Specifications.....	1294
AP410i/e Specifications.....	1295
AP460C, AP460S6C, and AP460S12C Specifications.....	1296
AP460i/e Specifications.....	1296
AP505i Specifications.....	1297
AP510e Specifications.....	1297
AP510i Specifications.....	1298
AP560h Specifications.....	1298
AP560i Specifications.....	1299
Glossary.....	1300



Preface

Read the following topics to learn about:

- The meanings of text formats used in this document.
- Where you can find additional information and help.
- How to reach us with questions and comments.

Text Conventions

Unless otherwise noted, information in this document applies to all supported environments for the products in question. Exceptions, like command keywords associated with a specific software version, are identified in the text.

When a feature, function, or operation pertains to a specific hardware product, the product name is used. When features, functions, and operations are the same across an entire product family, such as Extreme Networks switches or SLX routers, the product is referred to as *the switch* or *the router*.

Table 1: Notes and warnings






Icon	Notice type	Alerts you to...
	Tip	Helpful tips and notices for using the product
	Note	Useful information or instructions
	Important	Important features or instructions
	Caution	Risk of personal injury, system damage, or loss of data
	Warning	Risk of severe personal injury

Table 2: Text

Convention	Description
screen displays	This typeface indicates command syntax, or represents information as it is displayed on the screen.
The words <i>enter</i> and <i>type</i>	When you see the word <i>enter</i> in this guide, you must type something, and then press the Return or Enter key. Do not press the Return or Enter key when an instruction simply says <i>type</i> .
Key names	Key names are written in boldface, for example Ctrl or Esc . If you must press two or more keys simultaneously, the key names are linked with a plus sign (+). Example: Press Ctrl+Alt+Del
Words in italicized type	Italics emphasize a point or denote new terms at the place where they are defined in the text. Italics are also used when referring to publication titles.
NEW!	New information. In a PDF, this is searchable text.

Table 3: Command syntax

Convention	Description
bold text	Bold text indicates command names, keywords, and command options.
<i>italic text</i>	Italic text indicates variable content.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, such as passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member [member...]</i> .
\	In command examples, the backslash indicates a “soft” line break. When a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Platform-Dependent Conventions

Unless otherwise noted, all information applies to all platforms supported by Switch Engine software, which are the following:

- ExtremeSwitching® switches
- SummitStack™

When a feature or feature implementation applies to specific platforms, the specific platform is noted in the heading for the section describing that implementation in the Switch Engine command documentation (see the Extreme Documentation page at www.extremenetworks.com/documentation/). In many cases, although the command is available on all platforms, each platform uses specific keywords. These keywords specific to each platform are shown in the Syntax Description and discussed in the Usage Guidelines sections.

Send Feedback

The User Enablement team at Extreme Networks has made every effort to ensure that this document is accurate, complete, and easy to use. We strive to improve our documentation to help you in your work, so we want to hear from you. We welcome all feedback, but we especially want to know about:

- Content errors, or confusing or conflicting information.
- Improvements that would help you find relevant information.
- Broken links or usability issues.

To send feedback, email us at documentation@extremenetworks.com.

Provide as much detail as possible including the publication title, topic heading, and page number (if applicable), along with your comments and suggestions for improvement.

Help and Support

If you require assistance, contact Extreme Networks using one of the following methods:

Extreme Portal

Search the GTAC (Global Technical Assistance Center) knowledge base; manage support cases and service contracts; download software; and obtain product licensing, training, and certifications.

The Hub

A forum for Extreme Networks customers to connect with one another, answer questions, and share ideas and feedback. This community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC.

Call GTAC

For immediate support: (800) 998 2408 (toll-free in U.S. and Canada) or 1 (408) 579 2800. For the support phone number in your country, visit www.extremenetworks.com/support/contact.

Before contacting Extreme Networks for technical support, have the following information ready:

- Your Extreme Networks service contract number, or serial numbers for all involved Extreme Networks products
- A description of the failure
- A description of any actions already taken to resolve the problem
- A description of your network environment (such as layout, cable type, other relevant environmental information)
- Network load at the time of trouble (if known)
- The device history (for example, if you have returned the device before, or if this is a recurring problem)
- Any related RMA (Return Material Authorization) numbers

Subscribe to Product Announcements

You can subscribe to email notifications for product and software release announcements, Field Notices, and Vulnerability Notices.

1. Go to [The Hub](#).
2. In the list of categories, expand the **Product Announcements** list.
3. Select a product for which you would like to receive notifications.
4. Select **Subscribe**.
5. To select additional products, return to the **Product Announcements** list and repeat steps 3 and 4.

You can modify your product selections or unsubscribe at any time.

Documentation and Training

Find Extreme Networks product information at the following locations:

[Current Product Documentation](#)

[Release Notes](#)

[Hardware and Software Compatibility](#) for Extreme Networks products

[Extreme Optics Compatibility](#)

[Other Resources](#) such as articles, white papers, and case studies

Open Source Declarations

Some software files have been licensed under certain open source licenses. Information is available on the [Open Source Declaration](#) page.

Training

Extreme Networks offers product training courses, both online and in person, as well as specialized certifications. For details, visit the [Extreme Networks Training](#) page.



About this Guide

This guide describes how to use the *Access Point Graphical User Interface* to configure settings required to deploy Extreme Networks access points within a ExtremeWireless WiNG™ managed network.

The ExtremeWireless WiNG software supports the access points listed in [WiNG 7 Operating System Overview](#) on page 20.

See the sections at the end of this guide for a summary of access point features and specifications.

For detailed product information about access points, including minimum firmware requirements, refer to the relevant product documentation and current release notes: visit <https://www.extremenetworks.com/support/documentation/>.



New in this Guide

- [Release 7.9.4](#) on page 16
- [Release 7.9.3](#) on page 17
- [Release 7.9.2](#) on page 17
- [Release 7.9.1.0](#) on page 17
- [Revision 7.9.0.0](#) on page 18

The sections that follow summarize the new features and updates added, or changes made to this Guide in the 7.9.X.X releases.

Release 7.9.4

Revision AA

The following updates have been made in Revision AA of this guide.

Updates	Description
<ul style="list-style-type: none">• Client Bridge Settings on page 143• Profile Overrides - Client Bridge on page 421• Profile Overrides - Radio Settings on page 409	AP3000 and AP300X now support 6 GHz Client Bridge on Radio 1.
AP3000/X Series Radios and 6 GHz Support on page 1271	AP3000 and AP300X now support 6 GHz Mesh on Radio 1.

Release 7.9.3

Revision AA

The following updates have been made in Revision AA of this guide.

Updates	Description
AP3000/X	Support added for AP3000 and AP3000X access points.
Imagotag	Enhancement for Imagotag firmware updates.
CX9000	Support added for Intel NIC on CX9000.

Release 7.9.2

Revision AA

The following updates have been made in Revision AA of this guide.

Updates	Description
CX9000	Support for CX9000, the first containerized application to run on the Extreme Networks® Universal Compute Platform (UCP). This containerized application leverages Extreme qualified 4120C hardware that can host applications based on the customer's deployment needs. The Universal Compute Platform is a multipurpose appliance that ships with a middleware package that enables it to deploy its persona or application.

Release 7.9.1.0

Revision AB

The following updates have been made in Revision AB of this guide.

Updates	Description
GRE Tunnel Configuration on page 178	The devices that support GRE Tunneling and the Maximum GRE Tunnels Supported have been corrected.

Revision AA

The following changes and updates have been made in Revision AA of this guide.

Update	Description
About this Guide	This chapter has been removed. Hardware descriptions and specifications have been relocated to the Appendices in this Guide.
WiNG 7 Operating System Overview on page 20	Hardware descriptions and specifications contained in this chapter have been relocated to the Appendices in this Guide.
<ul style="list-style-type: none"> • Radio Settings on page 130 • Profile Overrides - Radio Settings on page 409 	Radio settings configuration adds support for 6 GHz radio 3
Client Bridge Settings on page 143	Client bridge configuration is supported for 6 GHz radio 3
GRE Tunnel Configuration on page 178	Support for configuring up to 1000 GRE tunnels added on NX7500, NX9500, NX9600 and NX9610 platforms
<ul style="list-style-type: none"> • Meshpoint Configuration on page 299 • Adding and Editing Meshpoint Settings on page 301 • Adding and Editing ACS Dynamic Root Selection Configuration on page 304 • Adding and Editing ACS Path Method SNR Configuration on page 306 • Adding and Editing ACS Path Method Root Path Metric Configuration on page 308 	Meshpoint configuration is supported for 6 GHz radio 3
Configure WLAN Client Settings on page 662	Corrected documented default setting for the Radio Resource Measurement parameter: the correct default setting is enabled.
Configuring Smart RF Channel & Power Settings on page 717	Smart RF channel and power configuration are supported for 6 GHz radio 3
Configuring a MeshConnex Policy on page 731	MeshConnex policy configuration is supported for 6 GHz radio 3

Revision 7.9.0.0

The following changes have been made in Revision AA of this guide.

Newly Supported Access Points

The following access points are supported in this release:

- AP5010

- AP310i/e
- AP360i/e

For more information about the features and specifications of these access points, see the related Appendices in this Guide.

Secure Connection to Imagotag Server on Cloud

Introducing secure capability to connect to the Imagotag server on Cloud. Your AP will not be able to communicate with the ESL server with existing or older versions of Imagotag configuration. Unencrypted mode of communication between AP and ESL server is not supported.

For more information on configuring Imagotag policy, see the following commands in the [Wireless Controller, Service Platform and Access Point CLI Reference Guide](#):

- `iot-device-type-imagotag-policy`
- `ssl (iot-device-type-imagotag-policy)`

Access to WiNG Controllers from ExtremeCloud IQ

WiNG devices can now be managed from ExtremeCloud IQ. Any WiNG controller that is onboarded to ExtremeCloud IQ supports this feature. Users can use SSH proxy option on ExtremeCloud IQ to open SSH connection with WiNG controller for accessing the Command Line Interface (CLI). This feature is also supported on WiNG access points configured in virtual controller mode.



WiNG 7 Operating System Overview

[About the WiNG Software](#) on page 21

The WiNG 7 operating system is a solution designed for 802.11n, 802.11ac and 802.11ax networking. It is a convergence of the legacy ExtremeWireless™ WiNG (5.9.X) and ExtremeWireless™ (10.X) wireless operating systems. It offers a high-level of flexibility and scalability covering both campus and distributed modes of deployment.

ExtremeWireless WiNG 7.X.X brings together the following key benefits of both deployment topologies under one fold:

- ExtremeWireless WiNG software provides a secure, highly scalable, cost-effective solution based on the IEEE 802.11 standard. The system is intended for enterprise networks operating on multiple floors in more than one building, and is ideal for public environments, such as airports and convention centers that require multiple access points. It is an ideal solution for high-density, campus and stadium deployments. It is well suited to meet the needs of enterprises in the education, healthcare, sports and entertainment verticals. The ExtremeWireless OS key strengths are:
 - Extensive Policy Framework
 - Contextual Device and Application Control
 - Application Visibility & Control with Analytics
 - BYOD - Single SSID with Programmable Data Path
 - Voice & Video Optimized with Seamless Roaming
- ExtremeWireless WiNG architecture is a solution designed for 802.11n and 802.11ac networking. It is designed for standalone or distributed hierarchical networks. The ExtremeWireless WiNG software distributes intelligence right to the network edge, empowering every controller and access point with the intelligence needed to be network-aware, able to identify and dynamically route traffic over the most efficient path available at that time. It is highly scalable and well suited to meet the needs of large, geographically distributed enterprises. It is an ideal wireless networking solution for the retail, manufacturing, transportation & logistics, and hospitality verticals. The ExtremeWireless OS key strengths are:
 - Simple Guest Access with Analytics
 - Contextual Application Control
 - Advanced Diagnostics and Remote Troubleshooting
 - Intrusion, Compliance and WiFi Forensics
 - Scale-out 1000s of APs with Rapid Rollout

- Self-tuning RF (Smart-RF)
- Distributed Service Intelligence

Going forward, this unified, common, wireless, infrastructure WiNG 7.X. OS will power the ExtremeWireless WiNG product family. WiNG OS supports the following Access Points, and Service and Virtual platforms:

- Access points AP3000/X, AP5010-WW, Universal, and Worldwide 6E capable access points.
- Universal access points (802.11ax) - AP305C, AP305CX, AP302W, AP410C, AP460C, AP460S6C, AP460S12C
- Access points (802.11ax) – AP360i, AP360e, AP310i, AP310e, AP410i, AP410e, AP460i, AP460e, AP560i, AP560h, AP510i, AP510e, AP505i
- Access points (802.11ac) – AP7522, AP7532, AP7562, AP7612, AP7632, AP7662, AP8432, AP8533
- Service platforms – NX5500, NX7500, NX9500, NX9600
- Virtual platforms – CX9000, VX9000

The WiNG 7, 802.11ax AP5xx, AP4xx, and AP3xx model APs have the capability of operating in the **Distributed** and **Centralized** modes. For a newly-manufactured, out-of-the-box AP the mode of operation is not specified.

**Note**

For more information, see [Dual Mode Capability](#).

About the WiNG Software

Extreme Networks' WiNG operating system is the next generation in the evolution of WLAN architectures. This OS is designed to scale efficiently from the smallest networks to large, geographically dispersed deployments. The co-operative, distributed control plane innovation in the WiNG architecture offers a *software-defined networking* (SDN)-ready operating system that can distribute controller functionality to every access point in your network. Now, every access point is network aware, providing the intelligence required to truly unleash optimal performance, all wireless LAN infrastructure can work together to ensure every transmission is routed through the most efficient path, every time.

The WiNG OS brings you the resiliency of a standalone access point network without the vulnerability of a centralized controller, with advancements that take performance, reliability, security, scalability and manageability to a new level. The result? Maximum network uptime and security with minimal management. And true seamless and dependable mobility for your users.

WiNG OS advances the following technology:

Comprehensive Wi-Fi support - WiNG supports all Wi-Fi protocols, including 802.11a/b/g/n/ac/ax, allowing you to create a cost-effective migration plan based on the needs of your business.

Extraordinary scalability - With WiNG, you can build any size network, from a small WLAN network in a single location to a large multi-site network that reaches all around the globe.

Extraordinary flexibility - No matter what type of infrastructure you deploy, WiNG OS delivers intelligence to all: standalone independent access points or adaptive access points that can be adopted by a controller but can switch to independent mode; virtual controllers; physical controllers in branch offices, the NOC (*network operating center*) or the cloud.

Distributed intelligence - WiNG distributes intelligence right to the network edge, empowering every controller and access point with the intelligence needed to be network-aware, able to identify and dynamically route traffic over the most efficient path available at that time.

Extraordinary network flexibility and site survivability - WiNG provides the best of both worlds: true hierarchical management that delivers a new level of management simplicity and resiliency by enabling controllers to adopt and manage other controllers and access points, while allowing adopted infrastructure to also stand on its own.

Cap-free security - When it comes to security, there can be no compromises. WiNG's comprehensive security capabilities keep your network and your data safe, ensuring compliance with PCI, HIPAA and other government and industry security regulations.

Connectivity for large indoor and outdoor spaces - In addition to enabling a robust indoor WLAN, our patented MeshConnex™ technology enables the extension of Wi-Fi networks to the largest of outdoor spaces from an expansive outdoor campus environment to an entire city.

Powerful centralized management - With WiNG you get complete control over every aspect of your WLAN. This single powerful windowpane enables zero touch infrastructure deployment, rich analytics that can help you recognize and correct brewing issues before they impact service quality and user connectivity, along with centralized and remote troubleshooting and issue resolution of the entire network.

Application visibility and control -

With WiNG you get visibility & control over layer-7 applications with an embedded *Deep Packet Inspection* DPI engine that inspects every flow of every user at the access point. The embedded DPI engine in the WiNG OS is capable of detecting and identifying thousands of applications real time. You can configure your access points to report this real-time, network statistics to the Extreme NSight. Network administrators can get in-depth insight into every dimension of the network including layer-7 application visibility, client devices, device & OS types and users. Administrators can discern, at a glance, the top applications by usage or by count at every level of the network from site level to access points and clients. In addition to detection, firewall and QoS policies can leverage the application context to enforce policies.

Distributed Intelligence

WiNG OS enables all WLAN infrastructure with the intelligence required to work together to determine the most efficient path for every transmission. The need to route all traffic through a controller is eliminated, along with the resulting congestion and latency, resulting in higher throughput and superior network performance. Since all features are available at the access layer, they remain available even when the controller is offline, for example, due to a WAN outage, ensuring site survivability and extraordinary network resilience. In addition, you get unprecedented scalability, large networks can support as many as 10,000 nodes without impacting throughput or manageability, providing unprecedented scalability.

High Availability Networks

The WiNG OS enables the creation of highly reliable networks, with several levels of redundancy and failover mechanisms to ensure continuous network service in case of outages. APs in remote sites coordinate with each other to provide optimized routing and self-healing, delivering a superior quality of experience for business critical applications. Even when WiNG site survivable APs lose communication with the controller, they continue to function, able to bridge traffic while still enforcing QoS and security policies, including stateful inspection of Layer2 (locally bridged) or Layer 3 traffic.

Gap-free Security

When it comes to wireless security, one size does not fit all. A variety of solutions are required to meet the varying needs and demands of different types of organizations. Regardless of the size of your WLAN or your security requirements, our tiered approach to security allows you to deploy the features you need to achieve the right level of security for your networks and your data. And where a hub-and-spoke architecture can't stop threats until they reach the controller inside your network, WiNG OS distributes security features to every access point, including those at the very edge of your network, creating an around-the-clock constant network perimeter guard that prevents threats from entering your network for unprecedented gap free security.

Outdoor Wireless and Mesh Networking

When you need to extend your wireless LAN to outdoor spaces, our patented MeshConnex technology combines with comprehensive mesh networking features to enable you to create secure, high performance, flexible and scalable mesh networks. With our mesh technology, you can cover virtually any area without installing cabling, enabling the creation of cost-effective outdoor wireless networks that provide coverage to enterprise workers in vast campus-style environments as well as public safety personnel in patrol cars.

Network Services, Routing and Switches

The WiNG OS integrates network services like built-in DHCP server, AAA server and routing protocols like policy based routing and OSPF, Layer 2 protocols like MSTP and

Link Aggregation. Integration of services and routing/ switching protocols eliminates the need for additional servers or other networking gear in small offices thereby reducing *Total Cost of Ownership* (TOC). In large networks, where such services are deployed on a dedicated server/ router at the NOC, this provides a backup solution for remote sites when the WAN link to the NOC is temporarily lost. Integrating also provides the added benefit of coordination across these services on failover from primary to standby, assisting a more meaningful behavior, rather than when each fails over independently of the other for the same root cause.

Management, Deployment and Troubleshooting

The WiNG OS is a comprehensive, end-to-end management system that covers deployment through day-to-day management. You get true zero-touch deployment for access points located anywhere in the world, the simplicity of a single window into the entire network, plus the ability to remotely troubleshoot and resolve issues. And since our management technology is manufacturer-agnostic, you can manage your Extreme Networks WLAN infrastructure as well as any legacy equipment from other manufacturers, allowing you to take advantage of our advanced WLAN infrastructure without requiring a costly rip and replace of your existing WLAN.



Web UI Features

[Accessing the Web UI](#) on page 25

[Glossary of Icons Used](#) on page 27

The access point's on-board user interface contains a set of features specifically designed to enable either Virtual Controller AP, Standalone AP or Adopt to Controller functionality. In Virtual Controller AP mode, an access point can adopt and manage other access points. With the introduction of Heterogeneous AP management, access points are able to adopt and manage different types of AP model when functioning as a virtual controller. In Standalone mode, an access point functions as an autonomous, non adopted, access point servicing wireless clients. If adopted to controller, an access point is reliant on its connected controller for its configuration and management.

For information on how to access and use the Web UI, refer to the sections that follow.

Accessing the Web UI

Access points, controllers and service platforms use a GUI that can be accessed using any supported Web browser on a client connected to the subnet the Web UI is configured on.

Browser and System Requirements

To access the GUI, a browser supporting Flash Player 11 is recommended. The system accessing the GUI should have a minimum of 1 GB of RAM for the UI to display and function properly, with the exception of NX service platforms, which require 4 GB of RAM. The Web UI is based on Flex, and does not use Java as the underlying UI framework. A resolution of 1280 x 1024 pixels for the GUI is recommended.

The following browsers are required to access the WiNG Web UI:

- Firefox 3.5 or higher
- Internet Explorer 7 or higher
- Google Chrome 2.0 or higher
- Safari 3 and higher
- Opera 9.5 and higher



Note

Throughout the Web UI, leading and trailing spaces are not allowed in any text fields. In addition, the “?” character is also not supported in text fields.

Connecting to Web UI

Follow the steps below to connect to an *access point's* (AP's) Web UI for the first time:

1. Connect one end of an Ethernet cable to the AP's LAN port and connect the other end to a computer with a working Web browser.
2. Set the computer to use an IP address between 192.168.0.10 and 192.168.0.250 on the connected port. Set a subnet/network mask of 255.255.255.0.

The AP's IP address is optimally provided using DHCP. A zero config IP address can also be derived if DHCP resources are unavailable. Using zero config, the last two octets in the IP address are the decimal equivalent of the last two bytes in the access point's hard-coded MAC address.

Deriving the AP's IP address using its MAC address.

If the AP's hard-coded MAC address is 00:C0:23:00:F0:0A, follow the steps below to derive the AP's Zero-config IP address:

- a. On your computer, open the Windows calculator. To access the calculator, click **Start → All Programs → Accessories → Calculator**. This path may vary depending on the version of Windows running on your computer.
- b. With the **Calculator** displayed, select **View → Scientific** or **View → Programmer** depending on the version of Windows running on your computer.
- c. Select the **Hex** radio button.
- d. Enter the penultimate octet of the AP's MAC address. In this example, the AP's MAC address is: 00:C0:23:00:F0:0A. Enter F0.
- e. Select the **Dec** radio button. The calculator converts F0 into 240.
- f. Repeat this process for the last octet in the AP's MAC address. Enter A, and select **Dec**. The calculator converts A into 10.

The AP's zero-config IP address is: 169.254.240.10

3. Once obtained, point the Web browser to the access point's IP address. The following login screen displays:

The Web UI login dialog displays:

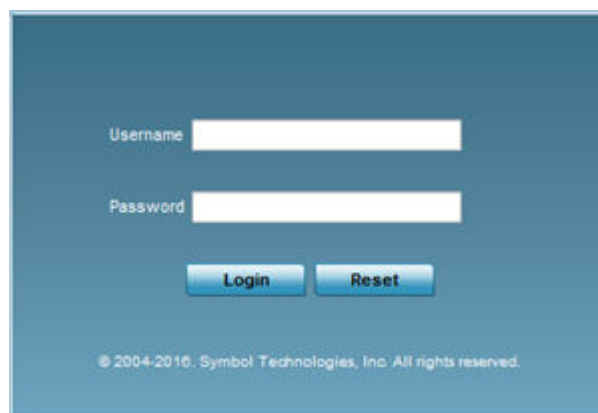


Figure 1: Web UI Login Screen

4. Enter the default username `admin` in the **Username** field.

5. Enter the default password `admin123` in the **Password** field.


When logging in for the first time, you will be prompted to change the password to enhance device security. Set the new password and use it for subsequent logins.

6. Click the **Login** button to load the device's (access point, wireless controller or service platform) management interface.

If you are powering-up the AP for the first time, the AP's management UI opens, and the **Initial Setup Wizard** dialog pops up. Use this wizard to configure the basic settings required to get the AP up and running. For more information on using the Initial Setup Wizard, see [Using the Initial Setup Wizard](#) on page 34.

The AP's Initial Setup Wizard:

Figure 2: The Initial Setup Wizard

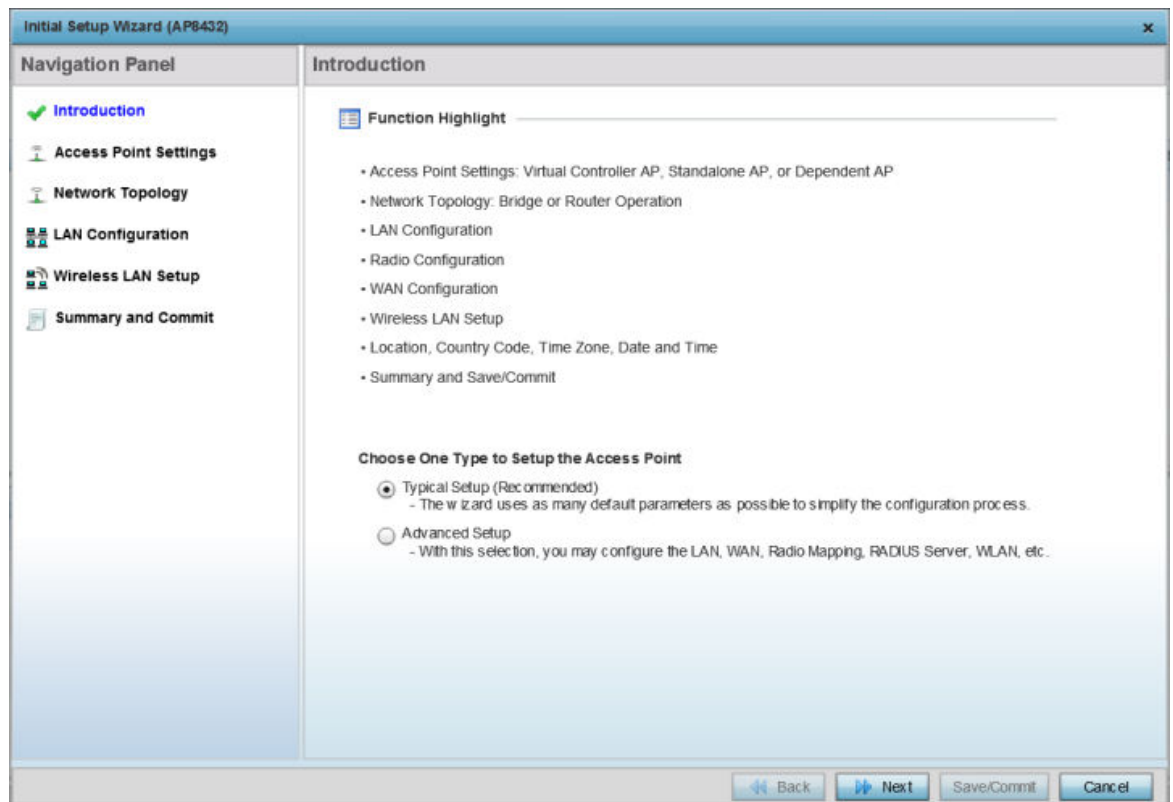

Glossary of Icons Used








The UI uses a number of icons used to interact with the system, gather information, and obtain status for the entities managed by the system. This chapter is a compendium of the icons used. This chapter is organized as follows:

- Global Icons
- Dialog Box Icons
- Table Icons
- Status Icons
- Configurable Objects

- Configuration Objects
- Configuration Operation Icons
- Access Type Icons
- Administrative Role Icons
- Device Icons

Global Icons

This section lists global icons available throughout the interface.

	<i>Logout</i> – Select this icon to log out of the system. This icon is always available and is located at the top right corner of the UI.
	<i>Add</i> – Select this icon to add a row in a table. When selected, a new row is created in the table or a dialog box displays where you can enter values for a particular list.
	<i>Delete</i> – Select this icon to remove a row from a table. When selected, the selected row is deleted.
	<i>More Information</i> – Select this icon to display a pop up with supplementary information that may be available for an item.
	<i>Trash</i> – Select this icon to remove a row from a table. When selected, the row is immediately deleted.
	<i>Create new policy</i> – Select this icon to create a new policy. Policies define different configuration parameters that can be applied to individual device configurations, profiles and RF Domains.
	<i>Edit policy</i> – Select this icon to edit an existing configuration item or policy. To edit a policy, select a policy and this icon.

Dialog Box Icons

These icons indicate the current state of various controls in a dialog. These icons enables you to gather the status of all the controls in a dialog. The absence of any of these icons next to a control indicates the value in that control has not been modified from its last saved configuration.







	<i>Entry Updated</i> – Indicates a value has been modified from its last saved configuration.
	<i>Entry Update</i> – States that an override has been applied to a device profile configuration.
	<i>Mandatory Field</i> – Indicates this control value is a mandatory configuration item. You are not allowed to proceed further without providing all mandatory values in this dialog.
	<i>Error in Entry</i> – Indicates there is an error in a supplied value. A small red popup provides a likely cause of the error.






Table Icons

The following two override icons are status indicators for transactions:

	<i>Table Row Overridden</i> – Indicates a change (profile configuration override) has been made to a table row and the change will not be implemented until saved. This icon represents a change from this device's profile assigned configuration.
	<i>Table Row Added</i> – Indicates a new row has been added to a table and the change is not implemented until saved. This icon represents a change from this device's profile assigned configuration.







Status Icons

















These icons indicate device status, operations, or any other action that requires a status returned to the user.





	<i>Fatal Error</i> – States there is an error causing a managed device to stop functioning.
	<i>Error</i> – Indicates an error exists requiring intervention. An action has failed, but the error is not system wide.
	<i>Warning</i> – States a particular action has completed, but errors were detected that did not prevent the process from completing. Intervention might still be required to resolve subsequent warnings.
	<i>Success</i> – Indicates everything is well within the network or a process has completed successfully without error.
	<i>Information</i> – This icon always precedes information displayed to the user. This may either be a message displaying progress for a particular process, or just be a message from the system.

Configurable Object Icons

These icons represent configurable items within the UI.







	<i>Device Configuration</i> – Represents a configuration file supporting a device category (access point, wireless controller, etc.).
	<i>Auto Provisioning Policy</i> – Represents a provisioning policy. Provisioning policies are a set of configuration parameters that define how access points and wireless clients are adopted and their management configuration supplied.
	<i>Critical Resource Policy</i> – States a critical resource policy has been applied. Critical resources are resources whose availability is essential to the network. If any of these resources is unavailable, an administrator is notified.
	<i>Wireless LANs</i> – States an action impacting a managed <i>WLAN (Wireless Local Area Network)</i> has occurred.
	<i>WLAN QoS Policy</i> – States a <i>quality of service policy (QoS)</i> configuration has been impacted.
	<i>Radio QoS Policy</i> – Indicates a radio's <i>QoS (Quality of Service)</i> configuration has been impacted.

	<i>AAA Policy</i> – Indicates an <i>Authentication, Authorization and Accounting</i> (AAA) policy has been impacted. <i>AAA (Authentication, Authorization, and Accounting)</i> policies define RADIUS authentication and accounting parameters.
	<i>Association ACL</i> – Indicates an <i>Access Control List</i> (ACL) configuration has been impacted. An ACL is a set of configuration parameters either allowing or denying access to network resources.
	<i>Smart RF Policy</i> – States a Smart RF policy has been impacted. Smart RF enables neighboring access point radios to take over for an access point radio if it becomes unavailable. This is accomplished by increasing the power of radios on nearby access points to compensate for the coverage hole created by the non-functioning access point.
	<i>Profile</i> – States a device profile configuration has been impacted. A profile is a collection of configuration parameters used to configure a device or a feature.
	<i>Bridging Policy</i> – Indicates a bridging policy configuration has been impacted. A bridging policy defines which VLANs are bridged, and how local VLANs are bridged between the wired and wireless sides of the network.
	<i>RF Domain</i> – States an RF Domain configuration has been impacted.
	<i>Firewall Policy</i> – Indicates a firewall policy has been impacted. Firewalls provide a barrier that prevents unauthorized access to resources while allowing authorized access to external and internal resources.
	<i>IP Firewall Rules</i> – Indicates an IP firewall rule has been applied. An IP based firewall rule implements restrictions based on the IP address in a received packet.
	<i>MAC Firewall Rules</i> – States a MAC based firewall rule has been applied. A MAC based firewall rule implements network allowance restrictions based on the MAC address in a received data packet.
	<i>Wireless Client Role</i> – Indicates a wireless client role has been applied to a managed client. The role could be either sensor or client.
	<i>WIPS Policy</i> – States the conditions of a WIPS policy have been invoked. WIPS prevents unauthorized access to the network by checking for (and removing) rogue access points and wireless clients.
	<i>Device Categorization</i> – Indicates a device categorization policy has been applied. This is used by the intrusion prevention system to categorize access points or wireless clients as either sanctioned or unsanctioned devices. This enables devices to bypass the intrusion prevention system.
	<i>Captive Portals</i> – States a captive portal is being applied. Captive portal is used to provide temporary controller, service platform or access point access to requesting wireless clients.
	<i>DNS Whitelist</i> – States a DNS Whitelist is being applied. A DNS whitelist is used in conjunction with captive portal to provide access to requesting wireless clients.
	<i>DHCP Server Policy</i> – Indicates a <i>DHCP (Dynamic Host Configuration Protocol)</i> server policy is being applied. DHCP provides IP addresses to wireless clients. A DHCP server policy configures how DHCP provides IP addresses.
	<i>RADIUS Group</i> – Indicates the configuration of RADIUS group has been defined and applied. A RADIUS group is a collection of RADIUS users with the same set of permissions.

	<i>RADIUS User Pools</i> – States a <i>RADIUS (Remote Authentication Dial In User Service)</i> user pool has been applied. RADIUS user pools are a set of IP addresses that can be assigned to an authenticated RADIUS user.
	<i>RADIUS Server Policy</i> – Indicates a RADIUS server policy has been applied. A RADIUS server policy is a set of configuration attributes used when a RADIUS server is configured for AAA.
	<i>Management Policy</i> – Indicates a management policy has been applied. Management policies configure access control, authentication, traps and administrator permissions.
	<i>BGP – Border Gateway Protocol</i> (BGP) is an inter-ISP routing protocol which establishes routing between ISPs. ISPs use BGP to exchange routing and reachability information between <i>Autonomous System (AS)</i> on the Internet. BGP makes routing decisions based on paths, network policies and/or rules configured by network administrators.




Configuration Object Icons

These configuration icons are used to define the following:

	<i>Configuration</i> – Indicates an item capable of being configured by an interface.
	<i>View Events / Event History</i> – Defines a list of events. Click this icon to view events or view the event history.
	<i>Core Snapshots</i> – Indicates a core snapshot has been generated. A core snapshot is a file that records status events when a process fails on a wireless controller or access point.
	<i>Panic Snapshots</i> – Indicates a panic snapshot has been generated. A panic snapshot is a file that records status when a wireless controller or access point fails without recovery.
	<i>UI Debugging</i> – Select this icon/link to view current NETCONF messages.
	<i>View UI Logs</i> – Select this icon/link to view the different logs generated by the UI, FLEX and the error logs.





Configuration Operation Icons

The following operations icons are used to define configuration operations:

	<i>Revert</i> – When selected, any unsaved changes are reverted to their last saved configuration settings.
	<i>Commit</i> – When selected, all changes made to the configuration are written to the system. Once committed, changes cannot be reverted.
	<i>Commit and Save</i> – When selected, changes are saved to the configuration.








Access Type Icons

The following icons display a user access type:

	<i>Web UI</i> – Defines a Web UI access permission. A user with this permission is permitted to access an associated device's Web UI.
	<i>Telnet</i> – Defines a TELNET access permission. A user with this permission is permitted to access an associated device using TELNET.
	<i>SSH</i> – Indicates a SSH access permission. A user with this permission is permitted to access an associated device using SSH.
	<i>Console</i> – Indicates a console access permission. A user with this permission is permitted to access an associated device using the device's serial console.




Administrative Role Icons





The following icons identify the different administrative roles allowed on the system:

	<i>Superuser</i> – Indicates superuser privileges. A superuser has complete access to all configuration aspects of the connected device.
	<i>System</i> – States system user privileges. A system user is allowed to configure general settings, such as boot parameters, licenses, auto install, image upgrades etc.
	<i>Network</i> – Indicates network user privileges. A network user is allowed to configure wired and wireless parameters, such as IP configuration, VLANs, L2/L3 security, WLANs and radios.
	<i>Security</i> – Indicates security user privileges. A security level user is allowed to configure all security related parameters.
	<i>Monitor</i> – Defines a monitor role. This role provides no configuration privileges. A user with this role can view the system configuration but cannot modify it.
	<i>Help Desk</i> – Indicates help desk privileges. A help desk user is allowed to use troubleshooting tools like sniffers, execute service commands, view or retrieve logs. However, help desk personnel <i>are not</i> allowed to conduct controller or service platform reloads.
	<i>Web User</i> – Indicates a web user privilege. A Web user is allowed accessing the device's Web UI.

Device Icons

The following icons represent the different device types managed by the system:

	<i>System</i> – This icon represents the entire WING supported system, and all of its member controller, service platform or access points that may be interacting at any one time.
	<i>Cluster</i> – This icon represents a cluster. A cluster is a set of wireless controllers or service platforms working collectively to provide redundancy and load sharing amongst its members.
	<i>Service Platform</i> – This icon indicates an NX 5500, NX 7500, NX 9500 or NX 9600 series service platform that's part of the managed network

	<i>Wireless Controller</i> – This icon indicates a wireless controller that's not part of the managed network.
	<i>Wireless Controller</i> – This icon indicates a wireless controller that's part of the managed network.
	<i>Access Point</i> – This icon lists any access point that's part of the managed network.
	<i>Wireless Client</i> – This icon defines any wireless client connection within the network.



Quick Start

[Using the Initial Setup Wizard](#) on page 34

WiNG access points utilize an initial setup wizard to streamline getting on the network for the first time. This wizard configures location, network and WLAN settings and assists in the discovery of access points and their connected clients.

Using the Initial Setup Wizard

This chapter describes how to use the **Initial Setup Wizard** to bring up an *term* (AP), with minimal configurations, to access the wireless network. When bringing up an AP for the first time, use the wizard to define the AP's basic, required settings, such as operational mode, deployment location, basic security, network and WLAN settings. Once the AP is up and running, use the AP's GUI to configure the remaining, advanced, user-interface functionalities.

To bring up an AP for the first time, follow the steps below:

1. Install and power up the AP.
For more information, see [Connecting to Web UI](#) on page 26.
2. Point the Web browser to the AP's IP address.

The AP's Web UI login screen displays.



3. Enter the default user name `admin` in the **User name** field.


4. Enter the default password `admin123` in the **Password** field.



Note

When logging in for the first time, you will be prompted to change the password. Set a new password and use it for subsequent logins.

The AP's management interface UI displays, and the **Initial Setup Wizard** landing page pops up.

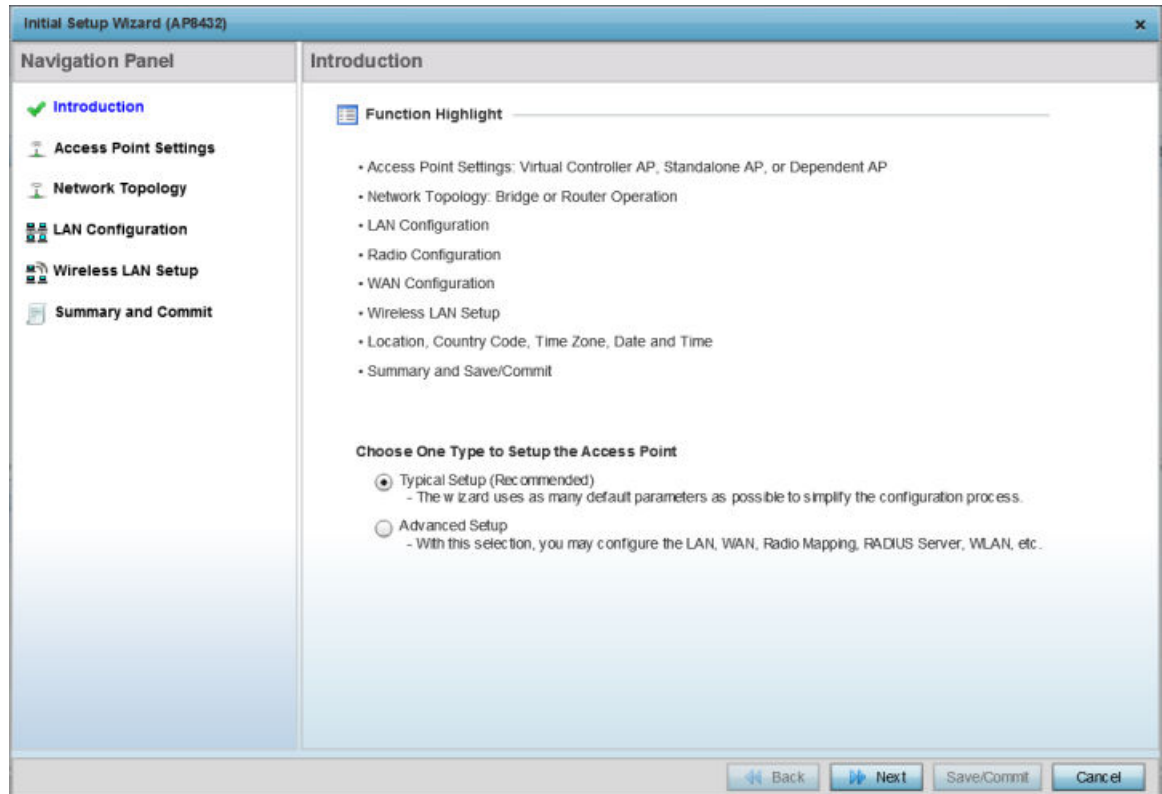

Note

The **Initial Setup Wizard** displays the same pages and content for all the WiNG AP model types – the only difference being the number of radios supported on the AP.

The landing page has the following elements:

Introduction:

Lists the tasks you can perform using this wizard.

Navigation Panel:

Provides links to configuration pages where you can perform the tasks listed in the **Introduction** pane.

Choose One Type to Setup the Access Point


Provides two AP setup wizards. The options are: **Typical Setup** and **Advanced Setup**. The links available on the **Navigation Panel** vary depending on the option you select.

Selecting the Access Point Setup Wizard Type.

5. Select one of the following AP setup wizards:


- **Typical Setup** - Select this option to apply system-provided, default values on the AP. We recommend using this option because it simplifies the configuration process. This option is enabled by default.

The **Typical Setup** → **Navigation Panel** lists the following configurable features:

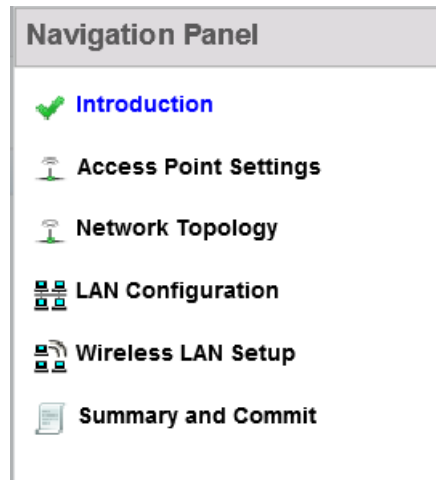

- **Advanced Setup** - Select this option to configure user-specific values instead of applying default settings. This option provides additional configurable features, such as **Radio Configuration**, **System Information**, and **WAN Configuration**.

The **Advanced Setup** → **Navigation Panel** lists the following configurable features:

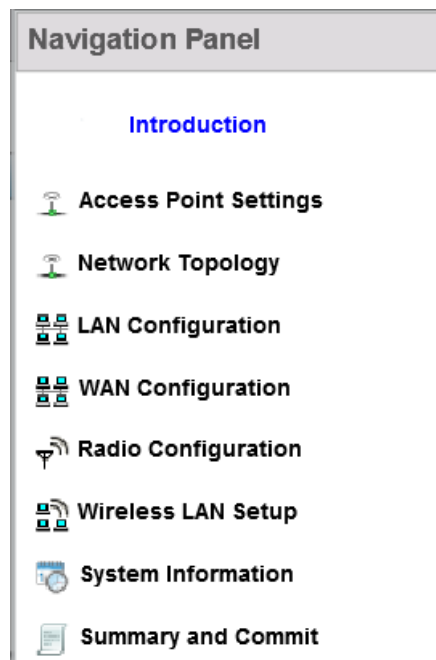

A green check-mark to the left of a task, on the **Navigation Panel**, indicates that the minimum required configurations for that task have been set correctly. It is

mandatory to have each task green check-marked to successfully complete the initial setup.

A red X against a task indicates that at least one mandatory parameter is pending configuration.

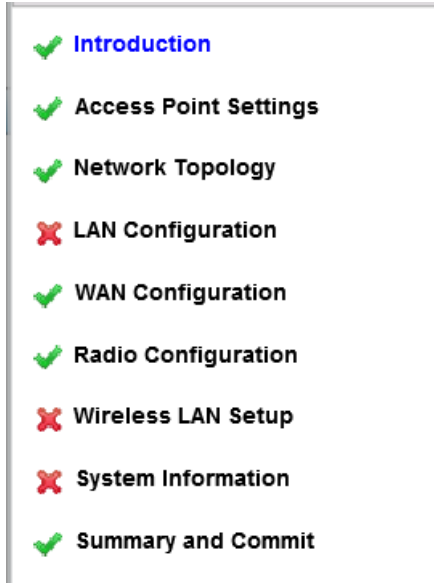


Figure 3: Red, Green Check-marks

6. Select the **Summary and Commit** link, on the **Navigation Panel**, to view and commit your changes.
7. Select **Next** to proceed to the next page.
Select **Back** to revert to the previous page without saving your updates.

Select **Cancel** to close the wizard without committing your changes.

Select **Save/Commit** to save changes made to a page. We recommend that you save your updates before moving to the next page.

Tasks Common to both Wizard Types.

The following steps describe tasks that are common to both wizards.

8. Click **Next**.

The **Access Point Settings** page displays. Use this page to specify the AP's mode of functioning.

Access Point Settings

Access Point Settings

- Virtual Controller AP - When more than one access point is deployed, a single access point can function as a Virtual Controller AP and manage Dependent mode access points. Up to 24 Dependent APs can be connected to a Virtual Controller AP
- Virtual Controller AP Auto - The AP can be elected as a Virtual Controller AP. When more than one access-point is deployed, a single access-point can function as a Virtual Controller AP and manage Dependent mode access-points.
- Standalone AP - Select this option to deploy this access point as an autonomous "fat" access point. A standalone AP isn't managed by a Virtual Controller AP, or adopted by a controller.

Country Code Selection

Country Code

Configuring the Access Point Settings.

9. Set the AP's mode of functioning as one of the following:

- **Virtual Controller AP** - Select to configure the AP to function as a *virtual controller* (VC). In a multiple-AP network, you can configure one of the APs as the VC.
- **Virtual Controller AP Auto** - Select to enable *dynamic virtual controller* (DVC) mode on the AP. When enabled, the AP on being elected as the RF Domain manager takes on the role of the VC. If you have deployed multiple APs in an RF Domain, you can enable DVC on more than one AP. However, only the current RF Domain manager AP has a running instance of the DVC.

If enabling DVC, configure the AP's management interface settings:

Virtual Controller Management Interface VLAN [What is this?](#) *

Virtual Controller Management Interface IP [What is this?](#) *

- Use the **Virtual Controller Management VLAN** spinner control to set the management interface's *virtual local area network* (VLAN). This VLAN is exclusively used by the VC to broadcast MiNT packets, and to adopt APs. The default setting is VLAN 1.
- Enter the management interface IP address and subnet in the **Virtual Controller Management Interface IP** field.

Because of the random nature of DVC, specifying an explicit management interface IP address makes it easier to manage VCs. In case of failover, this IP address is installed as the secondary IP address on the new VC.

Configuring a management interface IP address is mandatory. However, VLAN configuration is optional. If you configure the IP address without specifying the VLAN, the system sets the specified IP address as secondary IP on VLAN 1.

- **Standalone AP** - Select to deploy the AP as an *independent* AP, not managed by a VC, or adopted by a wireless controller/service platform. .



Note

If designating the AP as a Standalone AP, exclusively use the AP's UI, and not the CLI, to configure the AP's settings. The CLI allows you to define more than one profile, whereas the UI does not. Consequently, you might encounter problems if using both interfaces to manage profiles.

- **Adopted to Controller** - Select to deploy the AP as a controller-managed, dependent AP.



Note

The **Adopted to Controller** option is available only on the **Advanced Setup** wizard.



Note

A controller-adopted AP obtains its configuration from a profile stored on its managing controller. Manual changes made on the AP are overwritten by the controller upon reboot.

If enabling controller adoption, configure the following **Adoption Settings**:

Adoption Settings

Automatic controller discovery (L2, DHCP or DNS based)
 Static Controller Configuration

Controller 1 * **Controller 2**

Use DHCP Static IP Address/Subnet *

Default Gateway *

- Select **Automatic controller discovery (L2, DHCP or DNS based)** to enable dynamic discovery and adoption of the AP by any controller within the same subnet. The AP is *Layer 2* (L2) adopted to the controller.
- Select **Static Controller Configuration** to manually configure the controller to which the AP should adopt. This is applicable only in case of *Layer 3* (L3) adoption.

If enabling L3 adoption:

- Enter the IP address of the primary controller in the **Controller 1** field.
- Enter the IP address of the secondary controller in the **Controller 2** field.

When configured, the AP tries to adopt to Controller 1 first. If the controller is unreachable, the AP tries to adopt to Controller 2.

- Select **Use DHCP** to enable dynamic network address assignment. If selected, the AP's IP address is provided by the local DHCP server resource.
- Alternately, select the **Static IP Address/Subnet** option to manually configure the AP's network address.
- Enter the **Default Gateway** IP address to enable the AP to forward traffic destined for other networks.


10. Use the **Country Code Selection** spinner control to set the AP's country of deployment.

Ensure that the country code is set correctly because parameters – for example, the available channels of operation and regulatory compliance rules – are country specific.

This option is available only on the **Typical Setup** wizard.

11. Select **Next**.

The **Networking Mode** page displays. Use this page to define the AP's network-traffic handling mode.

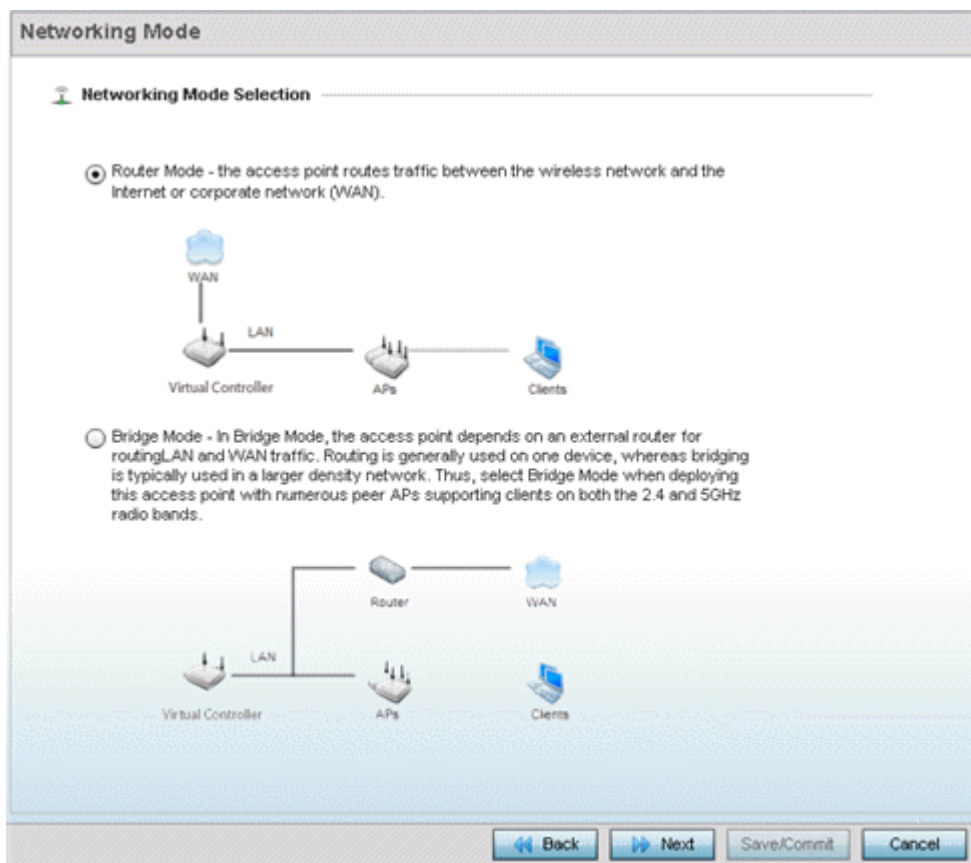

Configuring the AP's Network Topology Settings.

12. Set the AP's **Networking Mode Selection** as:

- **Router Mode** - Select to enable the AP to function as a router. When enabled, the AP routes traffic between the *local area network* (LAN) and the Internet or external *wide area network* (WAN). We recommend using this option in single-AP supported deployments.
- **Bridge Mode** - Select to enable the AP function as a bridge between the LAN and the Internet or WAN. When enabled, the AP uses an external router to bridge traffic. We recommend using this option in multiple-AP deployments, with APs supporting clients on both the 2.4 GHz and 5.0 GHz radio bands.

**Note**

The **Bridge Mode** does not require WAN configurations on the AP. Therefore, if you select this option, the WAN configuration option is disabled.

13. Select **Next**.

The **LAN Configuration** screen displays. Use this screen to configure the AP's LAN address, DHCP server, and DNS server.

LAN Configuration

LAN Configuration

Please configure interface settings for LAN (VLAN 1) which will be used by wireless clients

Use DHCP [What is this?](#)

Static IP Address/Subnet [What is this?](#) *

Default Gateway *

DHCP Server

Use on-board DHCP server to assign IP addresses to wireless clients

Range --

Default Gateway

Domain Name Server (DNS)

DNS Forwarding

Primary DNS Secondary DNS

Configuring the AP's LAN Settings.

14. Select one of the following options to configure the IP address of the AP's LAN interface:

- **Use DHCP** - Select to enable dynamic IP address assignment. When selected, the local DHCP server resource, running on VLAN 1 (the default VLAN), assigns the IP address.

**Note**

If you select this option, the AP's VLAN 1 (the default VLAN interface of the AP) is dynamically assigned an IP address by the DHCP server running on VLAN 1. Therefore, if you select this option, ensure that a DHCP server is up and running on VLAN 1 and is reachable from the AP.

- **Static IP Address/Subnet** - Select to manually configure the AP's IP address and subnet.
 - Enter the AP's LAN interface IP address and subnet in the **Static IP Address/Subnet** field.
 - Enter the default gateway's IP address in the **Default Gateway** field.

**Note**

The AP routes inter-VLAN traffic through the default gateway.

**Note**

If you configure a static IP and subnet for the AP, also enable it to function as an on-board DHCP. Therefore, if you select this option, configure the DHCP server and DNS server settings. For DHCP server configurations, move to step [15](#). For DNS server configurations, move to step [16](#).

15. Set the following **DHCP Server** settings:

- a. Select the **Use on-board DHCP server to assign IP addresses to wireless clients** option to enable the AP to function as the on-board DHCP server resource.

When this option is enabled, the AP provides its IP address to requesting wireless clients on the LAN interface.
- b. Enter the starting and ending IP addresses in the **Range** fields.

The AP assigns IP addresses to authenticated wireless clients from the specified range.

Avoid assigning IP addresses from x.x.x.1 - x.x.x.10 and x.x.x.255, as they are often reserved for standard network services.
- c. Enter the IP address of the default gateway, in the **Default Gateway** field.

16. Select one of the following options to configure the **Domain Name Server** :

- Select the **DNS Forwarding** option to enable DNS forwarding on the AP. This option is enabled by default.

DNS forwarding is useful when a request for a domain name is made, but the DNS server responsible for resolving the name into its corresponding IP address cannot locate the matching IP address.



Note

Disabling **DNS Forwarding** enables the **Primary DNS** and **Secondary DNS** fields.

- Configure the following external DNS server resource parameters:
 - Enter the **Primary DNS** server resource IP address. When specified, the AP forwards DNS resolution requests to the specified resource.
 - Enter the **Secondary DNS** server resource IP address.

Configuring the AP's WAN settings.

17. Select **Next**.


The **WAN Configuration** page displays. Use this page to define network address settings for the AP's WAN interface. The WAN interface connects the AP to the wired local area network or backhaul.



Note

The WAN Configuration option is enabled only if you set the AP in **Router Mode** on the **Networking Mode** page (see step 11).

WAN Configuration

 **WAN Configuration**

Use DHCP [What is this?](#)

Static IP Address/Subnet [What is this?](#) *

Default Gateway *

Enable NAT on the WAN Interface [What is this?](#)


18. Select one of the following options to configure the AP's WAN interface's IP address:

- **Use DHCP** - Select to enable dynamic IP address assignment. When selected, an external DHCP server resource, located on the WAN side of the network, assigns an IP address to the AP's WAN interface.
- **Static IP Address/Subnet** - Select to manually configure IP address and subnet for the AP's WAN interface.
 - Enter the AP's WAN interface IP address and subnet in the **Static IP Address/Subnet** field.
 - Enter the default gateway's IP address in the **Default Gateway** field.

The Default Gateway is a router that serves as the gateway to other networks.

19. Select **Next**.

The **Wireless LAN Setup** page displays. Use this page to configure the AP's *Wireless Local Area Network* (WLAN) settings.

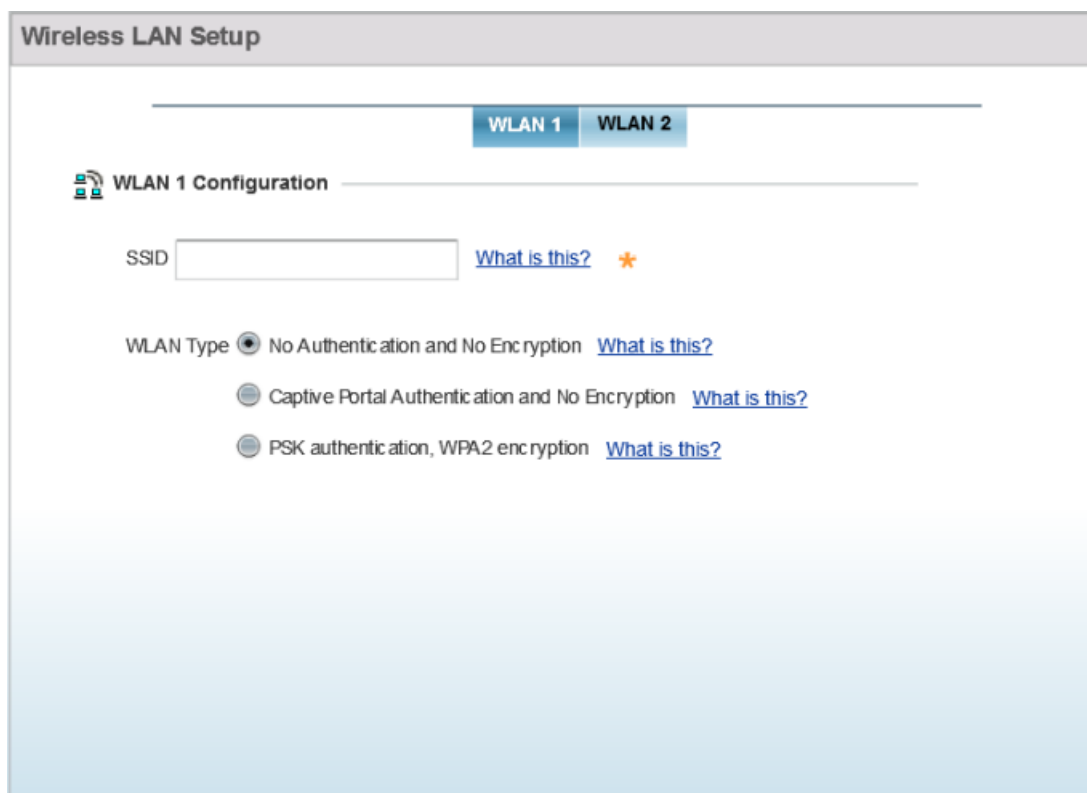

The screenshot shows the 'Wireless LAN Setup' configuration page. At the top, there are two tabs: 'WLAN 1' (selected) and 'WLAN 2'. Below the tabs, the page is titled 'WLAN 1 Configuration'. There is a text input field for 'SSID' with a 'What is this?' link and a star icon to its right. Below the SSID field, there are three radio button options for 'WLAN Type':

- No Authentication and No Encryption [What is this?](#)
- Captive Portal Authentication and No Encryption [What is this?](#)
- PSK authentication, WPA2 encryption [What is this?](#)

A WLAN is a means of flexibly extending the functionality of a *wired LAN*. A WLAN links two or more computers or devices using spread-spectrum or OFDM modulation based technology. WLANs do not require lining up devices for line-of-sight transmission, and are thus desirable for wireless networking. Roaming users can be handed off from one AP to another, as with a cellular phone system. WLANs can therefore be configured around the needs of specific user groups, even when they are not in physical proximity.

Configuring the WLAN Settings.

**Note**

You can configure up to two (2) WLANs for the AP.

20. Set the following WLAN parameters:

- a. Enter the WLAN's **SSID**.
- b. Select the **WLAN Type**.

The WLAN Type defines the encryption and authentication modes used with the WLAN.

- **No Authentication and No Encryption** – Select to configure a network without any authentication or encryption.

**Note**

When selected, any device can access the network. Data transmitted through the network is in plain text.

- **Captive Portal Authentication and No Encryption** – Select to configure a network using Captive Portal (Web page) based authentication.

**Note**

When selected, the network serves a Web page (internally or externally hosted) to wireless clients requesting network access. The clients enter their login credentials on this Web page. These credentials are authenticated by a RADIUS server. On successful authentication clients are granted access. Once on the network, the data transmitted through the network is in plain text.

**Note**

If selecting this option, move to step 21 to configure the RADIUS server details.

- **PSK authentication, WPA2 encryption** – Select to configure a network that uses PSK authentication and WPA2 encryption.

**Note**

When selected, wireless clients are granted network access only if the *pre-shared key* (PSK) configured on the AP matches the PSK configured on the client.

**Note**

If selecting this option, move to step 22 to configure the PSK.

Configuring RADIUS server for the *Captive Portal Authentication and No Encryption* network.

21. Specify the RADIUS Server type as one of the following:

- **External RADIUS Server** - Select to use an externally hosted RADIUS server for user authentication. This is the default setting.

RADIUS Server External RADIUS Server [What is this?](#)
 Onboard RADIUS Server [What is this?](#)

RADIUS Server IP *This field is required.*

RADIUS Shared Secret *This field is required.*

- Enter the external RADIUS server resource IP address in the **RADIUS Server IP** address field.
- Enter the shared secret needed to access the RADIUS server, in the **RADIUS Shared Secret** field.
- **Onboard RADIUS Server** – Select to configure the AP as the RADIUS server that performs user authentication. A **RADIUS Server Configuration** window is displayed, where you add users to the RADIUS server database.

RADIUS Server Configuration

Some WLANs require authentication using the on-board RADIUS server. User accounts must be added for all users that should be authorized by the server.

Username	Description

- Click **Add User** to add a new user. The **Add User** dialog displays.

User name

Enter the client's user name.

Password

Enter the password associated with the specified user name.

Confirm Password

Re-enter the password.

Description

Enter a short description for the user.

- Click **Create** to add the new user and continue adding other users.
- Click **Create & Close** to add the new user and close the dialog.
- To modify an existing user in the RADIUS server database, select the user from those listed and click **Modify User**. In the **Modify User** dialog, make the required changes and click **Modify User**.

**Note**

You cannot modify the Username. However, Password and Description can be modified.

- To delete an existing user in the RADIUS server database, select the user from those listed and click **Delete User**. A confirmation dialog displays. Click **Yes** to confirm deletion.

Configuring PSK for the PSK authentication, WPA2 encryption network.

22.To specify the PSK needed for client authentication:

- a. Use the drop-down menu to specify the PSK type as ASCII or HEX.
- b. Enter the PSK in the **WPA Key** field.

Provide a 64-character HEX key or an 8-63 character ASCII key, based on the PSK type you have selected.

Advanced Setup-specific Tasks.

The following steps describe the tasks specific to the **Advanced Setup** wizard.

23. Click **Next**.

The **Radio Configuration** page displays. Use this page to set the radio's mode of operation. The radio can be set to transmit data to and from wireless clients, or it can be configured to function as a dedicated sensor.

**Note**

The number of configurable radios displayed depends on the AP's model type.

The following image shows an AP with two radios:

Radio Configuration

Radio...

Configure as a Data Radio [What is this?](#)

Power Level (1 – 23) Channel Mode

Configure as a Sensor Radio [What is this?](#)

Disable the Radio Radio 1 will be disabled. Please make sure this is what you want to do.

Radio...

Configure as a Data Radio [What is this?](#)

Power Level (1 – 23) Channel Mode

Configure as a Sensor Radio [What is this?](#)

Disable the Radio Radio 2 will be disabled. Please make sure this is what you want to do.

Configuring the AP's Radio Interface.

24. Set the following parameters for each radio:

- Configure as a Data Radio** - Select to dedicate the radio to WLAN client support in the 2.4 GHz or 5.0 GHz radio bands.
- Power Level** - Use the spinner control to select a 1 - 23 dBm minimum power level to assign to this radio. 1 dBm is the default setting.
- Channel Mode** - Set the channel selection mode to one of the following:

Random

Select to use with 802.11n radios. In the European Union, to comply with *Dynamic Frequency Selection* (DFS) requirements, the 802.11n radio uses a randomly selected channel each time the AP is powered on.

Best

Select to enable the AP to scan non-overlapping channels and listen for beacons from other APs. After the channels are scanned, the AP selects the channel with the fewest APs. In case of multiple APs on the same channel, it selects the channel with the lowest average power level. Selecting **Best** enables the **Constantly Monitor** option. Select this option to enable the AP to continuously scan the network for excessive noise and sources of interference.

Static

Select to assign the AP a permanent channel and scan for noise and interference only when initialized.

- d. **Configure as a Sensor Radio** - Select to dedicate the radio to sensor support exclusively. A sensor radio scans all channels within the 2.4 and 5.0 GHz bands to identify potential threats. If you are dedicating the radio to sensor support, also configure a primary and secondary ADSP server, that receives and analyses inputs from the sensor radio.
 - e. **Disable the Radio** - Select to disable the radio. When disabled, the radio goes offline. Verify this course of action with your network administrator before rendering the radio offline.
25. Click **Next**.

The **Summary and Commit** page displays.

**Note**

This page is available on both the **Typical Setup** and **Advanced Setup** wizards.

Summary and Commit

Access Point Settings Page

Access Point Settings Standalone AP

Network Topology Page

Network Topology Router Mode

LAN Configuration Page

LAN Configuration Type Use DHCP

VLAN ID for the LAN Interface 1

WAN Configuration Page


WAN Configuration Type Use DHCP

Port to External GE1 Port

Navigation buttons: Back, Next, Save/Commit, Cancel

Use this page to review and validate the AP's configuration.

- If the AP's configuration warrants additional changes, click **Back**, navigate to the desired page, and make the changes.
- After you have validated the configurations, click **Save/Commit** to apply the changes.

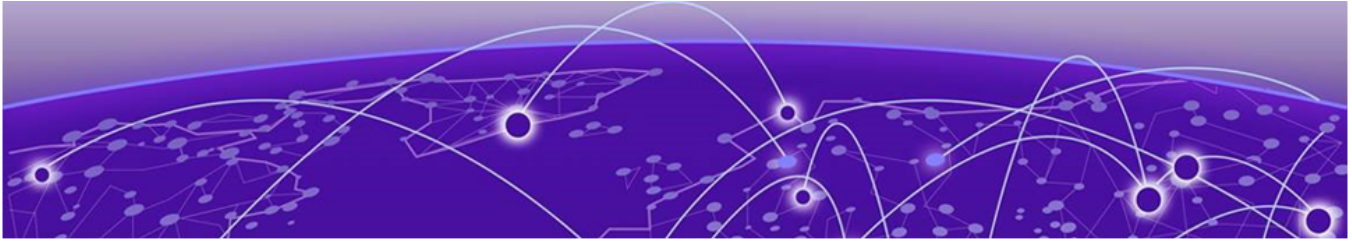

Dashboard

- [System Dashboard](#) on page 51
- [RF Domain Dashboard](#) on page 54
- [Access Point Dashboard](#) on page 60
- [Network View](#) on page 64

The dashboard enables administrators to review and troubleshoot network device operation. Additionally, the dashboard allows the review of the network topology, the assessment of the network's component health and a diagnostic review of device performance.

By default, the **Dashboard** screen displays a **Summary** of the **System** dashboard, which is the top level in the device hierarchy. To view information for RF Domains, controllers/service platforms or access points, expand the **System** node and select the desired, associated item in the tree.

System Dashboard

The dashboard allows network administrators to review and troubleshoot the operation of the devices comprising the access point managed network. Use the dashboard to review the current network topology, assess the network's component health and diagnose problematic device behavior.

By default, the **Dashboard** screen displays the System Dashboard, which is the top level in the device hierarchy.

The **Dashboard** provides the following tools and diagnostics:

- [System Health](#) on page 51
- [System Inventory](#) on page 53

System Health

The **Health** tab displays performance status for managed devices, and includes their RF domain memberships.

To assess system health:

1. Go to **Dashboard** → **Summary** → **System**.

The overall system **Health** tab displays by default.

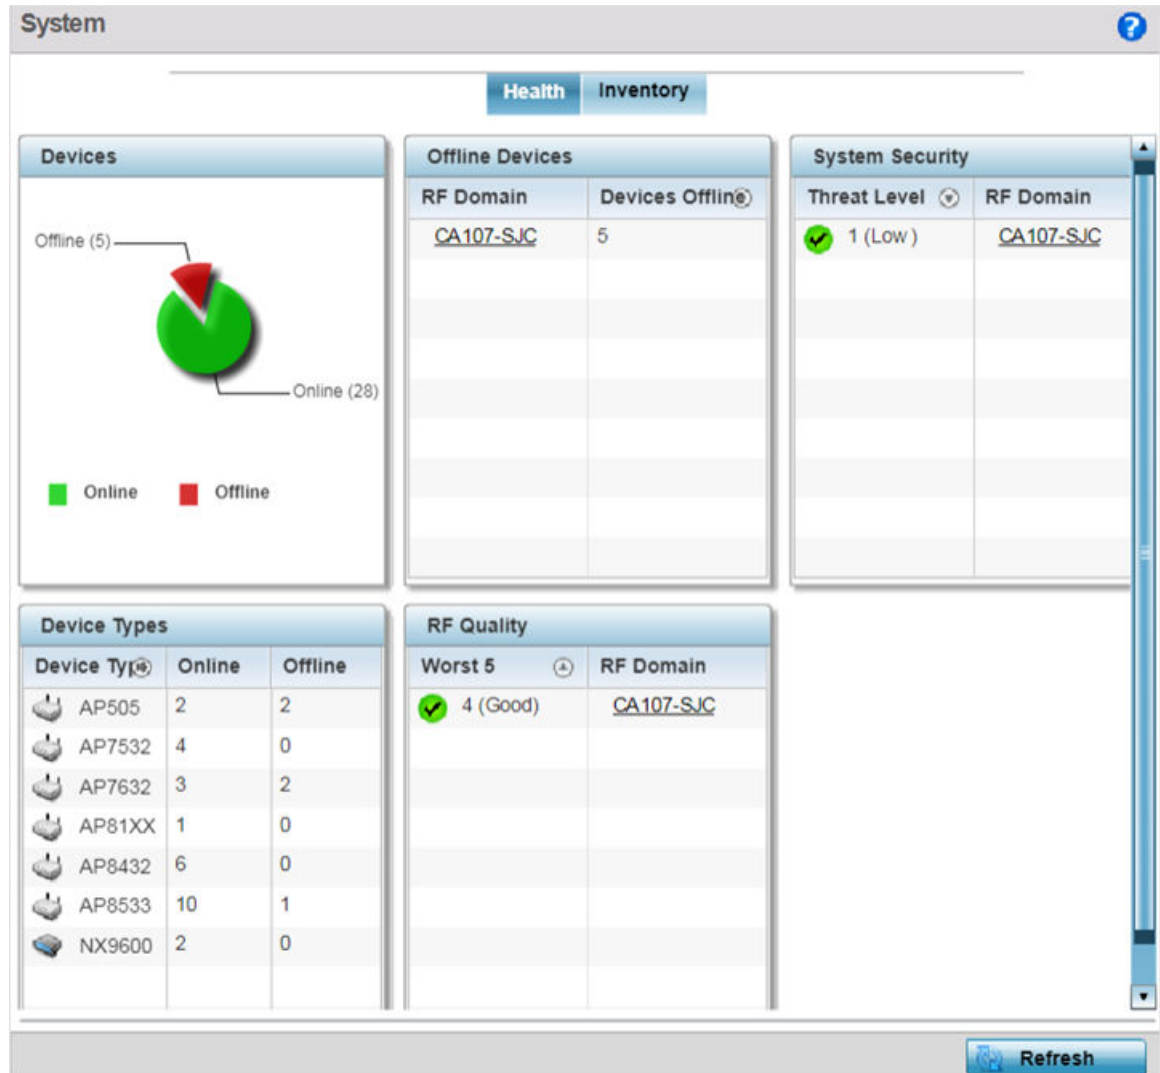


Figure 4: System Dashboard - Health Tab

2. The system health screen is partitioned into the following:
 - The **Devices** field displays a ratio of offline versus online devices within the system. The information is displayed in pie chart format to illustrate device support ratios.
 - The **Device Types** field displays a numerical representation of the different controller, service platform and access point models in the current system. Their online and offline device connections are also displayed. Does this device distribution adequately support the number and types of access point radios and their client load requirements.
 - The **Offline Devices** field displays a table of supported RF domains within the system, with each RF domain listing the number offline devices within that RF

domain. Listed RF domains display as individual links that can be selected to RF domain information in greater detail.

- The **RF Quality** field displays RF quality per RF domain. It is a measure of the overall effectiveness of the RF environment displayed in percentage. It is a function of the connect rate in both directions, retry rate and error rate.

The table lists the bottom five (5) RF quality values for each RF domains. Listed RF domains display as individual links that can be selected to RF domain information in greater detail. Use this diagnostic information to determine what measures can be taken to improve radio performance in respect to wireless client load and the radio bands supported.

The quality is measured as:

- 0-20 - Very poor quality
 - 20-40 - Poor quality
 - 40-60 - Average quality
 - 60-100 - Good quality
- The **System Security** field displays RF intrusion prevention stats and their associated threat level. The greater the number of unauthorized devices, the greater the associated threat level. It also displays a list of up to five (5) RF domains in relation to the number of associated wireless clients. The RF domains appear as links that can be selected to display RF domain information in greater detail.

System Inventory

The **System** screen's **Inventory** tab displays granular data on specific devices supported within the network. The screen provides a complete overview of the number and state

of managed devices. Information is displayed in easy to read tables and graphs. This screen also provides links for more detailed information.

1. Select the **Inventory** tab.

The system inventory screen displays.

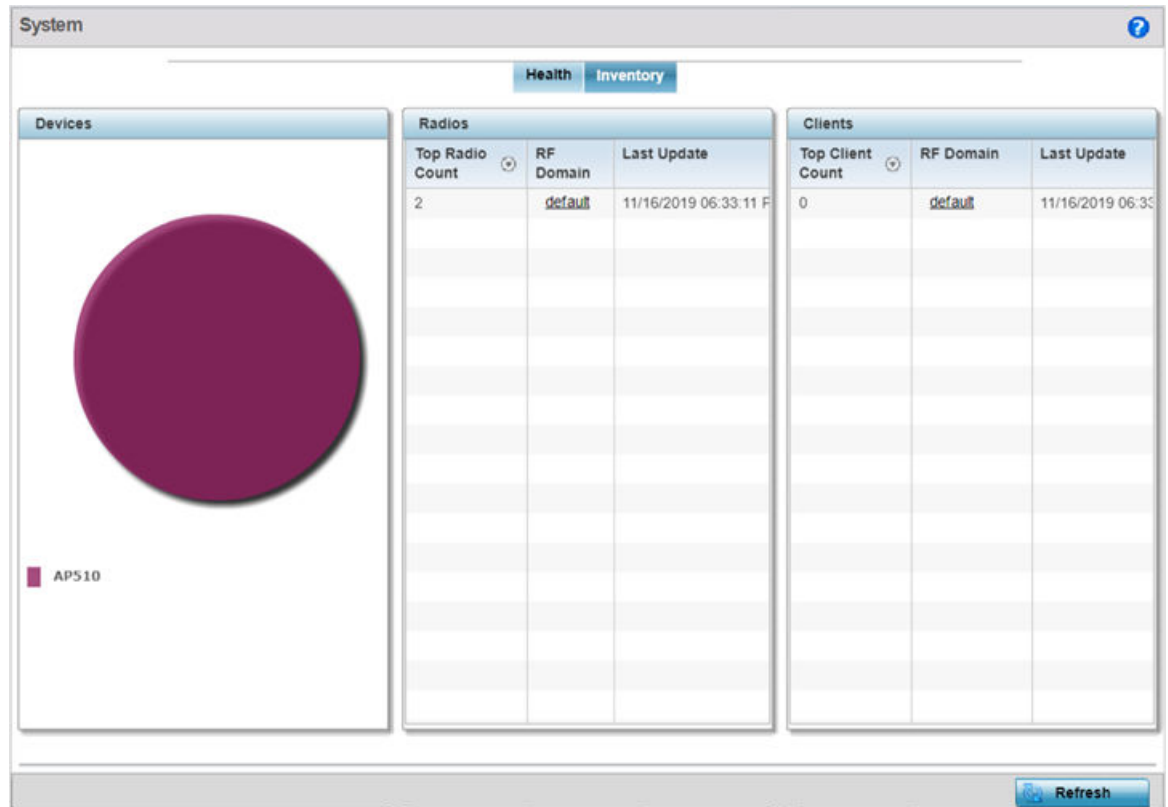


Figure 5: System Screen - Inventory Tab

2. Review the following:
 - The **Devices** field displays a ratio of peer controllers and service platforms as well as their managed access point radios. The information is displayed in pie chart format.
 - The **Radios** field displays top performing radios, their RF Domain memberships, and a status time stamp. RF Domain information can be selected to review RF Domain membership information in greater detail. Information in the Radio area is presented in two tables. The first lists the total number of Radios managed by this system, the second lists the top five RF Domains in terms of the number of available radios.
 - The wireless **Clients** field lists the top five RF Domains with the highest total number of clients managed by connected devices in this system. Select **Refresh** as needed to update the screen to its latest values.

RF Domain Dashboard

RF domains allow administrators to assign configuration data to multiple devices deployed in a common coverage area, such as in a floor, building or site. Each RF

domain contains policies that can determine a Smart RF or WIPS configuration. RF domains enable administrators to override WLAN SSID name and VLAN assignments. This enables the deployment of a global WLAN across multiple sites and unique SSID name or VLAN assignments to groups of access points servicing the global WLAN. This WLAN override technique eliminates the requirement for defining and managing a large number of individual WLANs and profiles.

A configuration contains (at a minimum) one default RF domain and can optionally use additional user defined RF domains:

The **RF Domain** screen displays system-wide network status. The screen is partitioned into the following tabs:

- [RF Domain Health](#) on page 55
- [RF Domain Inventory](#) on page 58

RF Domain Health

The RF Domain **Health** tab displays the status of the RF domain's device membership. To assess the RF domain component health:

1. Select **Dashboard** → **Summary**.
2. Expand the **System** node to display RF domains.

3. Select an RF domain.

The RF Domain **Health** tab displays by default.

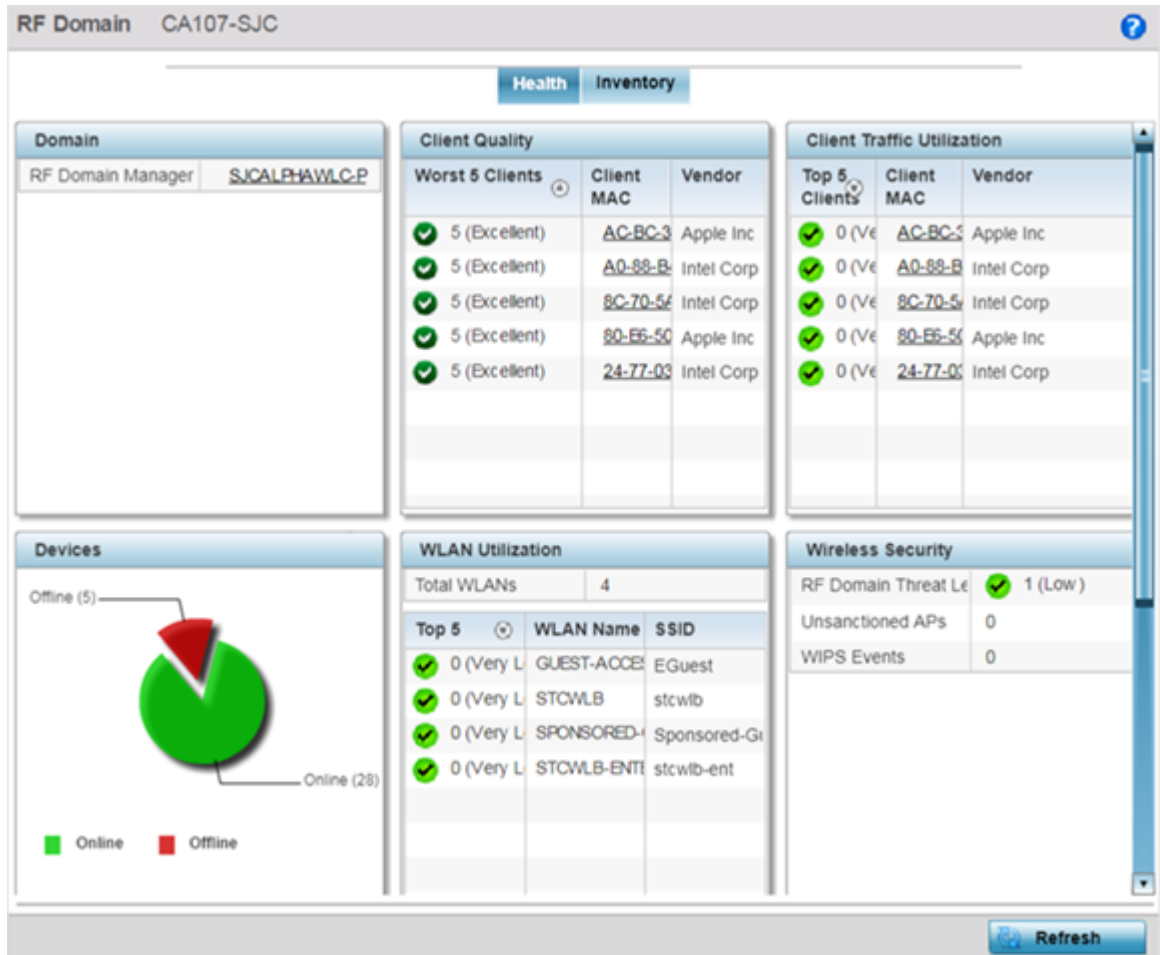


Figure 6: RF Domain Screen - Health Tab

4. Review RF Domain health information for member devices:
 - The **Domain** field lists the RF domain manager reporting utilization statistics. The MAC address displays as a link that can be selected to display RF domain information in at more granular level.
 - The **Devices** field displays the total number of devices and the status of the devices in the network as a graph. This area displays the total device count managed by this device and their status (online vs. offline) as a pie graph.

5. The **Radio Quality** table displays a table of RF quality on a per radio basis. It is a measure of the overall effectiveness of the RF environment displayed in percentage. It is a function of the transmit retry rate in both directions and the error rate. This area of the screen displays the average quality index across all the defined RF domain on the wireless controller. The table lists worst five of the RF quality values of all the radios defined on the wireless controller. The quality is measured as:
- 0-20 - Very poor quality
 - 20-40 - Poor quality
 - 40-60 - Average quality
 - 60-100 - Good quality

**Note**

Select a **Radio Id** to view its statistics in greater detail.

6. Refer to the **Client Quality** table, which displays RF quality for the worst five performing clients. It is a function of the transmit retry rate in both directions and the error rate. This area of the screen displays the average quality index across all the defined RF domain on the wireless controller. The quality is measured as:
- 0-20 - Very poor quality
 - 20-40 - Poor quality
 - 40-60 - Average quality
 - 60-100 - Good quality

**Note**

Select a **Client** to view its statistics in greater detail.

7. The **WLAN Utilization** displays how efficiently the WLANs are used. Traffic utilization is defined as the percentage of current throughput relative to the maximum possible throughput for the WLAN. The total number of WLANs is displayed above the table. The table displays a list of the top five WLANs in terms of overall traffic utilization. It displays the utilization level names, WLAN name and SSIDs for each of the top five WLANs.
8. The **Radio Traffic Utilization** displays how efficiently the RF medium is used. Traffic utilization is defined as the percentage of current throughput relative to the maximum possible throughput for the RF domain. The Traffic Index area displays an overall quality level for radio traffic and the Max User Rate displays the maximum data rate of associated radios. The table displays a list of the top five radios in terms of overall traffic utilization quality. It displays the radio names, MAC Addresses and radio types for each of the top five radios.
9. The **Client Traffic Utilization** displays how efficiently the RF medium is utilized for connected clients. Traffic utilization is defined as the percentage of current throughput relative to the maximum possible throughput for the clients in the RF domain. The table displays a list of the top five performing clients in respect to overall traffic utilization. It displays the client names, MAC Addresses and vendor for each of the top five clients.

10. The **Wireless Security** displays the overall threat index for the system. This index is based on the number of Rogue/Unsanctioned APs and *Wireless Intrusion Protection System* (WIPS) events detected. The index is in the range 0 - 5 where 0 indicates there are no detected threats. An index of 5 indicates a large number of intrusion detection events or rogue/unsanctioned APs detected.
11. The **Traffic Statistics** includes transmit and receive values for Total Bytes, Total Packets, User Data Rate, Broadcast/Multicast Packets, Management Packets, Tx Dropped Packets and Rx Errors.

RF Domain Inventory

The **Inventory** tab displays information on the devices managed by RF domain member devices in the controller, service platform or access point managed network. The Inventory screen enables an administrator to overview of the number and state of the devices in the selected RF domain. Information is displayed in easy to read tables and graphs.

To review the RF domain inventory:

1. Select the **Inventory** tab.

The RF Domain Inventory screen displays.

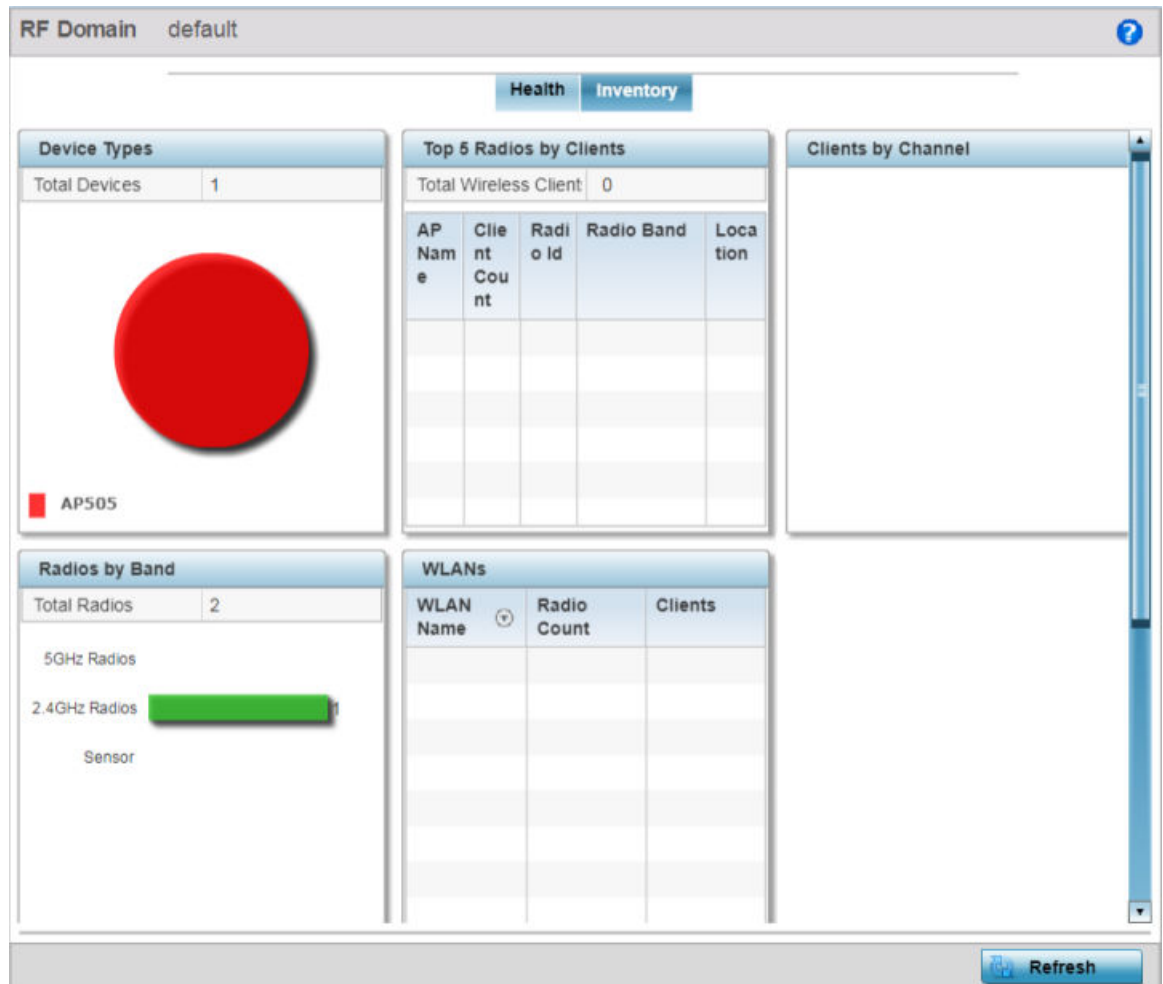


Figure 7: RF Domain Screen - Inventory Tab

2. Review RF Domain inventory data collected by member controllers, service platforms or access points:
 - The **Device Types** table displays the devices types populating the RF domain. The Device Type area displays an exploded pie chart that displays the type of device and their numbers in the RF domain.
 - The **Radios by Band** table displays a bar graph of RF domain member device radios classified by their radio band or sensor dedication. Review this information to assess whether RF domain member radios adequately support client device traffic requirements.
 - The **Radios by Channel** table displays pie charts of the different channels utilized by RF domain member radios. These dedicated channels should be as segregated as possible from one another to avoid interference. If too many radios are utilizing a single channel, consider off-loading radios to non utilized channels to improve RF domain performance.

- The **Top 5 Radios by Clients** table displays a list of radios that have the highest number of clients. This list displays the radio IDs as links that can be selected to display individual radio information in greater detail.
- The **WLANs** table displays a list of WLANs utilized by RF domain member devices. The table is ordered by WLAN member device radio count and their number of connected clients. Use this information to assess whether the WLAN is overly populated by radios and clients contributing to congestion.
- The **Clients by Band** table displays the radio band utilization of connected RF domain member clients. Assess whether the client band utilization adequately supports the intended radio deployment objectives of the connected RF domain member access point radios.
- The **Clients by Channels** table displays a bar-graph of wireless clients classified by their frequency. Information for each channel is further classified by their 802.11x band. In the 5GHz channel, information is displayed classified under 802.11a and 802.11an bands. In the 2.4 GHz channel, information is displayed classified under 802.11b, 802.11bg, and 802.11bgn band.

Access Point Dashboard

The **Access Point** screen displays system-wide network status for standalone or controller-connected access points. The screen is partitioned into the following tabs:

- [Access Point Health](#) on page 60 – The **Health** tab displays information about the state of the access point managed network.
- [Access Point Inventory](#) on page 63 – The **Inventory** tab displays information on the physical devices managed within the access point managed network.

Access Point Health

To assess access point network health:

1. Select **Dashboard** → **Summary**.
2. Expand the **System** node to display RF domains.

- Expand an RF domain and select an access point from the list of managed devices. The selected access point's Health screen displays by default.

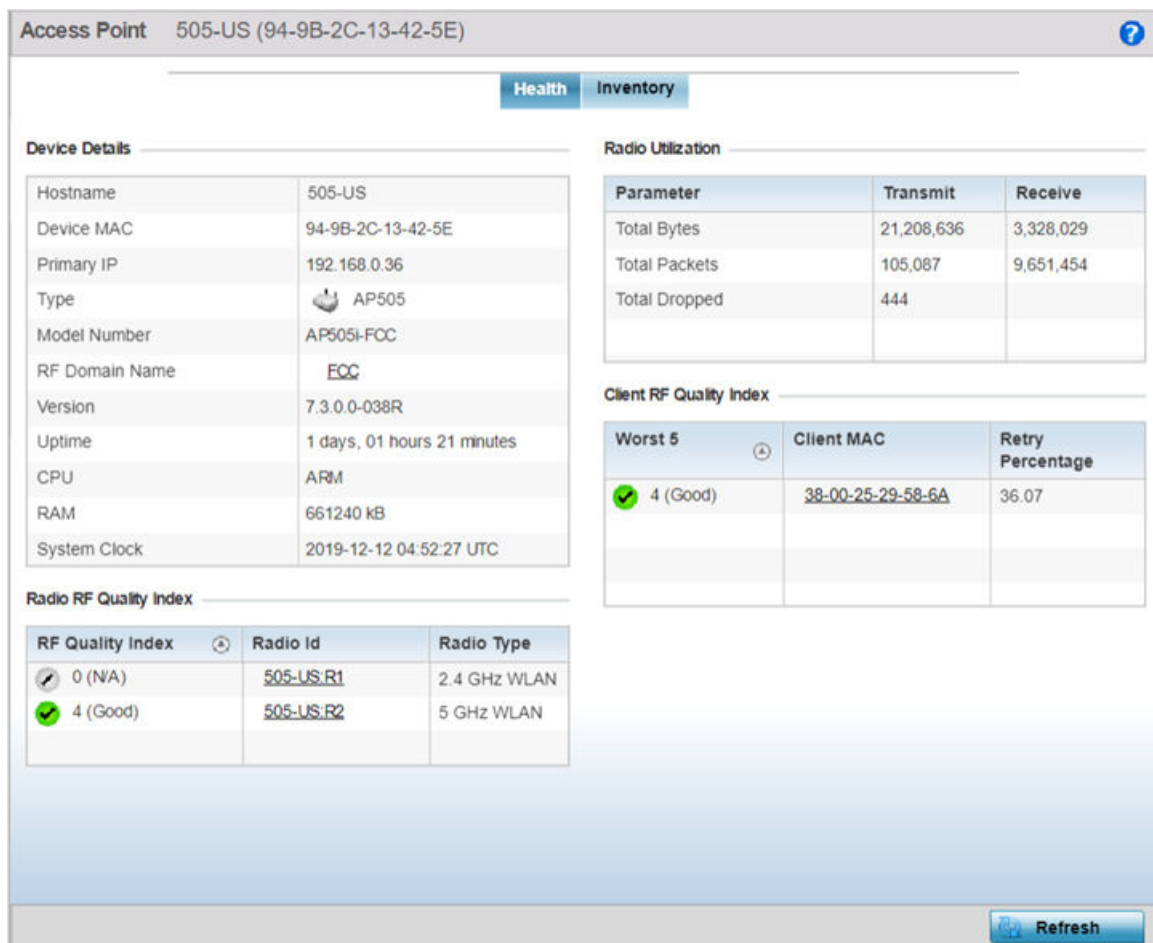


Figure 8: Access Point Screen - Health Tab

- Review the following information:
 - Device Details** - displays the following information for the selected access point:

Hostname	Lists the administrator assigned name of the selected access point.
Device MAC	Lists the factory encoded MAC address of the selected access point.
Primary IP	Lists the IP address assigned to the access point as a network identifier.
Type	Indicates the access point model type. An icon representing the access point is displayed along with the model number.
RF Domain Name	Lists the RF Domain to which the access point belongs. The RF Domain displays as a link that can be selected to display access point RF Domain membership data in greater detail.
Model Number	Lists the specific model number of the access point.

Version	Lists the version of the firmware running on the access point. Compare this version against the version currently on the support site to ensure the access point has the latest feature set available.
Uptime	Displays the duration the access point has been running from the time it was last restarted.
CPU	Displays the CPU installed on this access point.
RAM	Displays the amount of RAM available for use in this system.
System Clock	Displays the current time on the access point.

- **Radio RF Quality Index** - displays the bottom five (5) RF quality values for the access point's single default RF Domain. These values are a measure of the overall effectiveness of the RF environment displayed in percentage. It is a function of the data rate in both directions, the retry rate and error rate. The quality is measured as:
 - 0-20 - Very poor quality
 - 20-40 - Poor quality
 - 40-60 - Average quality
 - 60-100 - Good quality

The access point's RF Domain allows an administrator to assign configuration data to multiple devices deployed in a common coverage area, such as in a floor, building or site. The RF Domain contains policies that can determine a Smart RF or WIPS configuration. Use this diagnostic information to define measures to improve radio performance in respect to wireless client load and radio band.

Periodically select **Refresh** (at the bottom of the screen) to update the RF quality data.

- **Radio Utilization** - field displays how efficiently the RF medium is used by the access point. Radio utilization is defined as the percentage of current throughput relative to the maximum possible throughput for the radio. The Radio Utilization displays radios in terms of the number of associated wireless clients and percentage of utilization. It also lists packets types transmitted and received.

Refer to the number or errors and dropped packets to assess radio performance relative to the number of packets both transmitted and received.

Periodically select **Refresh** (at the bottom of the screen) to update the radio utilization information displayed.

- **Client RF Quality Index** - displays a list of the worst 5 performing clients managed by the selected access point. It is a measure of the overall effectiveness of the RF environment displayed in percentage. It is a function of the connect rate in both directions, the retry rate and the error rate. The quality is measured as:
 - 0-20 - Very poor quality
 - 20-40 - Poor quality
 - 40-60 - Average quality
 - 60-100 - Good quality

Periodically select **Refresh** (at the bottom of the screen) to update client RF quality.

Access Point Inventory

The access point **Inventory** tab displays granular data on devices managed by the selected access point. Information is displayed in easy to read tables and graphs.

To review the access point's inventory of connected devices:

1. Select the **Inventory** tab.

The selected access point's inventory screen displays.

Access Point 505-US (94-9B-2C-13-42-5E) ?

Health **Inventory**

Device Details

Hostname	505-US
Device MAC	94-9B-2C-13-42-5E
Primary IP	192.168.0.36
Type	AP505
Model Number	AP505I-FCC
RF Domain Name	<u>FCC</u>
Version	7.3.0.0-038R
Uptime	1 days, 01 hours 46 minutes
CPU	ARM
RAM	661240 kB
System Clock	2019-12-12 05:17:00 UTC

Radio Utilization

Parameter	Transmit	Receive
Total Bytes	21,331,893	3,381,359
Total Packets	106,721	9,807,020
Total Dropped	444	

Radio RF Quality Index

RF Quality Index	Radio Id	Radio Type
0 (NA)	<u>505-US.R1</u>	2.4 GHz WLAN
4 (Good)	<u>505-US.R2</u>	5 GHz WLAN

Client RF Quality Index

Worst 5	Client MAC	Retry Percent age
4 (Good)	<u>38-00-25-29-58-6A</u>	36.09

Refresh

Figure 9: Access Point Screen - Inventory Tab

2. Review the following access point inventory information:

- The **Radios Type** field displays the total number of radios utilized by this access point. The graph lists the number of radios in both the 2.4 GHz and 5 GHz radio bands. Refer to the **Total Radios** column to review the number of managed radios. Additionally, use the bar graphs to assess the number WLANs utilized by supported radio bands.

Periodically select **Refresh** (at the bottom of the screen) to update the radio information.

- The **WLAN Utilization** table displays the top 5 WLANs utilized by this access point in respect to client support. The first table lists the total number of WLANs managed by this system. The second table lists the top five (5) WLANs in terms of the usage percentage along with their name and network identifying SSID. The utilization index measures how efficiently the RF medium is utilized. It is defined as a percentage of the current throughput relative to the maximum throughput possible.

The quality is measured as:

- 0-20 – Very low utilization
- 20-40 – Low utilization
- 40-60 – Moderate utilization
- 60 and above – High utilization

Periodically select **Refresh** (at the bottom of the screen) to update WLAN utilization information.

- The **Wireless Clients** table displays information about the wireless clients managed by the selected access point. Information is presented in two (2) tables and a graph. The first table lists the total number of clients managed by the listed access point. The second lists the top five (5) radios in terms of the number of connected clients. The graph just below the table lists the number of clients by radio type.

Network View

The **Network View** screen displays device topology association between a selected access point, its RF Domain and its connected clients.

Access points and clients can be selected and viewed using various color schemes in respect to neighboring access points, connected devices and performance criteria. Display options can be utilized to review device performance and utilization, as well as the RF band, channel and vendor. For more information, see [Network View Display Options](#) on page 66.

To review a device's network topology, select **Dashboard → Network View**.

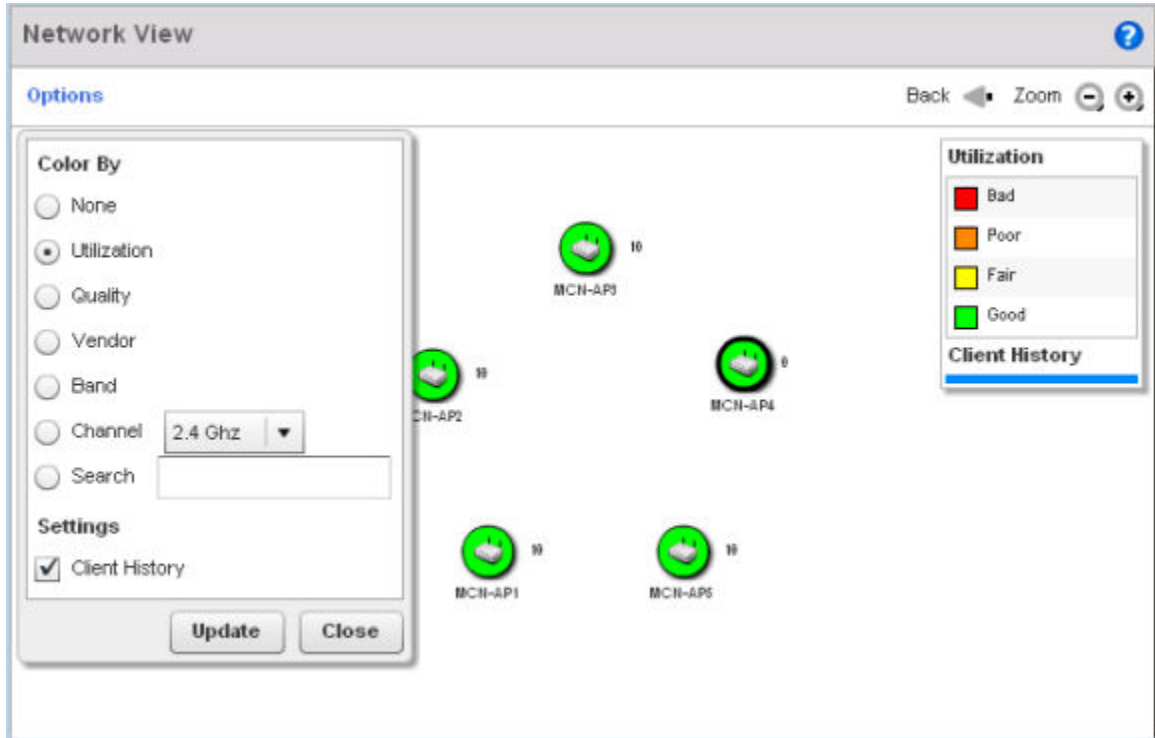


Figure 10: Network View Topology

The left side of the **Network View** screen contains an expandable **System** browser where access points can be selected and expanded to display connected clients. Navigate the System browser to review device connections within the access point managed network. Many of these peer access points are available for connection to access points in Virtual Controller AP mode.


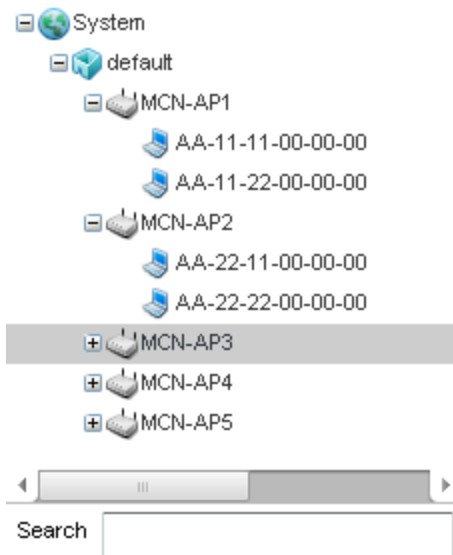


Figure 11: Network View - System Browser

Network View Display Options

To use the Network View options:

1. Select the blue **Options** link right under the **Network View** banner to display a menu for different device interaction display options.

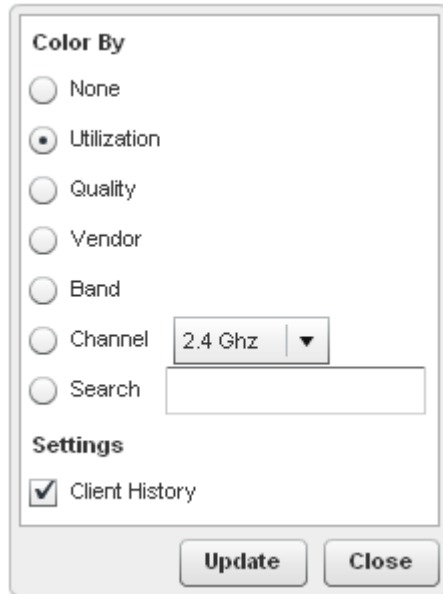

The screenshot shows a dialog box titled "Color By" with several radio button options: None, Utilization (selected), Quality, Vendor, Band, Channel, and Search. The Channel option has a dropdown menu set to "2.4 Ghz". Below the radio buttons is a "Settings" section with a checked checkbox for "Client History". At the bottom of the dialog are "Update" and "Close" buttons.

Figure 12: Network View - Display Options

The following display filter options are available:

None

Select this option to keep the Network View display as it currently appears, without any additional color or device interaction adjustments.

Utilization

Select this option to filter based on the percentage of current throughput relative to maximum throughput. Utilization results include: Red (Bad Utilization), Orange (Poor Utilization), Yellow (Fair Utilization) and Green (Good Utilization).

Quality

Select this option to filter based on the overall RF health. RF health is a ratio of connection rate, retry rates, and error rates. Quality results include: Red (Bad Quality), Orange (Poor Quality), Yellow (Fair Quality) and Green (Good Quality).

Vendor

Displays the device manufacturer.

Band

Select this option to filter based on the 2.4 or 5.0 GHz radio band of connected clients. Results include: Yellow (2.4 GHz radio band) and Blue (5.0 GHz radio band). Selecting band is a good way to determine whether 2.4 and 5.0 GHz radios are optimally deployed in respect to the access point client loads on both bands.

Channel

Use this drop-down menu to filter whether device connections should be displayed in either the 2.4 or 5.0 GHz band.

Search

Enter search criteria in the provided text field and select the Update button to isolate located variables in blue within the Network View display.

2. Select **Update** to update the display with changes made to the filter options.
3. Select **Close** to close the options field and remove it from the Network View.


Device Specific Information

A device-specific information screen is available for individual devices selected from within the **Network View**.

This screen displays the name assigned to the access point, its model, factory encoded MAC address, number of radios within the device, number of connected clients, as well as the highest and lowest reported quality, utilization and SNR (*Signal to Noise Ratio*). This information cannot be modified by the administrator.

To view device-specific information:

1. Go to **Dashboard → Network View**.
2. Expand the **System** node to display associated RF Domains.
3. Expand the desired RF Domain node to display associated devices.
4. Double-click on the desired access point. The device-specific information screen displays.

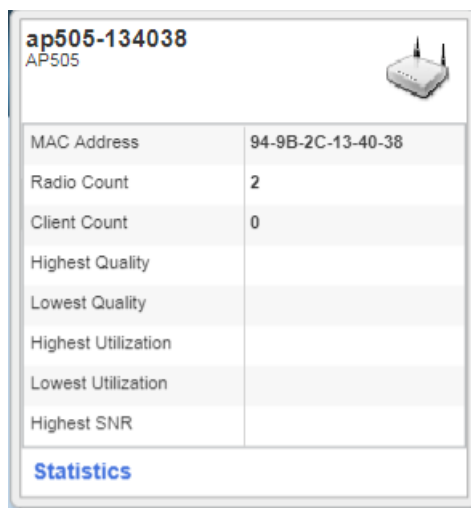

ap505-134038 AP505	
MAC Address	94-9B-2C-13-40-38
Radio Count	2
Client Count	0
Highest Quality	
Lowest Quality	
Highest Utilization	
Lowest Utilization	
Highest SNR	
Statistics	

Figure 13: Network View - Device Specific Information

Optionally select the **Statistics** link at the bottom of the display to open a screen where access point device data can be reviewed on a much more granular level.



Device Configuration

- [RF Domain](#) on page 68
- [Configure Access Point Profile Settings](#) on page 83
- [Managing Virtual Controllers](#) on page 329
- [Device Overrides](#) on page 331
- [Auto-Provisioning Policies](#) on page 609
- [Managing an Event Policy](#) on page 619

Access points can either be assigned unique configurations to support a particular deployment objective or have an existing RF Domain or profile configuration modified (overridden) to support a requirement that deviates its configuration from the configuration shared by its peer access points.

An RF Domain allows an administrator to assign comparable configuration data to multiple access points deployed in a common coverage area (floor, building or site). In such instances, there are many configuration attributes these devices share, as their general client support roles are quite similar. However, access point configurations may need periodic refinement and overrides from their original RF Domain administered design. For more information, see [RF Domain](#) on page 68.

Profiles enable administrators to assign a common set of configuration parameters and policies to access points of the same model. Profiles can be used to assign shared network, wireless and security parameters to access points across a large, multi segment, site. The configuration parameters within a profile are based on the hardware model the profile was created to support. To define a specific access point model profile configuration, refer to [Configure Access Point Profile Settings](#) on page 83.

However, device profile configurations may need periodic refinement from their original administered design. Consequently, a device profile could be applied an override from a configuration shared amongst numerous peer devices deployed within a particular site.

RF Domain

An access point's configuration consists of numerous elements including an RF Domain, WLAN and device specific settings. RF Domains are used to assign regulatory, location and relevant policies to access points.

RF Domain allows an administrator to assign configuration data to multiple access points deployed in a common coverage area (floor, building or site). In such instances,

there are many configuration attributes these access points share, as their general client support roles are quite similar.

However, an access point's RF Domain configuration may need periodic refinement from its original RF Domain designation. Unlike a wireless controller, an access point supports just a single RF domain. Thus, administrators should be aware that overriding an access point's RF Domain configuration results in a separate configuration that must be managed in addition to the RF Domain configuration. Thus, a configuration should only be overridden when needed. For more information, see [RF Domain Overrides in the AP Device Context](#).

The access point's RF Domain can have a WIPS sensor configuration applied. For more information on defining a WIPS sensor configuration for use with the access point's RF Domain, see [RF Domain Sensor Configuration](#) on page 71 .

To review the configurations of existing RF Domains:

1. Go to **Configuration → Devices**.

The **RF Domain** screen displays.

2. Review following (read-only) information to determine whether the RF Domain policy needs to be edited.

RF Domain	Lists each policy's name, as assigned when it was created. The RF Domain name cannot be changed as part of the edit process. Only one RF Domain can be assigned to a controller or access point at one time.
Location	Displays the physical location assigned to the RF Domain. This name could be as specific as the floor of a building, or as generic as an entire site. The location defines the physical area where a common set of devices are deployed using the policy's RF Domain configuration.
Contact	Lists the contact (administrator) assigned to respond to events created by, or impacting, each listed RF Domain.
Time Zone	Displays the geographic time zone set for each RF Domain policy. RF Domains can contain unique country codes and time zone information for controllers and access points deployed across different states or countries, thus making them ideal for managing device configurations across different geographical deployments.
Country Code	Display the two-digit country code set for the policy. The country code must be set accurately to avoid illegal operation, as device radios transmit in specific channels unique to their country of operation.

RF Domain Basic Configuration

An administrator can only edit, rename or replace an access point's RF Domain assignment.

To edit an RF Domain's configuration:

1. On the RF Domain screen, select the RF Domain by double-clicking on it.
The RF Domain **Basic Configuration** tab displays by default with the access point's RF Domain activated.

Figure 14: RF Domain - Basic Configuration Tab

2. Define the following **Basic Configuration** values:

Location	Assign the physical location of the RF Domain. This name could be as specific as the floor of a building, or as generic as an entire site. The location defines the physical area where a common set of access point configurations are deployed and managed by the RF Domain policy.
Contact	Provide the name of the contact E-mail (or administrator) assigned to respond to events created by or impacting the RF Domain.
Time Zone	Set the geographic time zone for the RF Domain. The RF Domain can contain unique country codes and time zone information to access points deployed across different states or countries, thus making them ideal for managing device configurations across different geographical deployments.
Country	Define the two-digit country code set for the RF Domain. The country code must be set accurately to avoid the policy's illegal operation, as device radios transmit in specific channels unique to the country of operation.

3. Refer to the **Smart Scan** field to define the channels for smart scan.

Enable Dynamic Channel	Select this option to enable channel scan.
2.4 GHz Channels	Use the Select drop-down menu to select channels to scan in the 2.4 GHz band. Selected channels are highlighted with a grey-colored background. Unselected channels are highlighted with a white-colored background. Multiple channels can be selected at the same time.
5.0 GHz Channels	Use the Select drop-down menu to select channels to scan in the 5.0 GHz band. Selected channels are highlighted with a grey-colored background. Unselected channels are highlighted with a white-colored background. Multiple channels can be selected at the same time.

4. Refer to the **Statistics** field to define how RF Domain statistics are updated.

Update Interval	Set a statistics update interval of 0 or 5-3600 seconds for updates retrieved from the access point. The default value is 0.
-----------------	--

5. Use the **Initial Setup Wizard** to configure the device.
 6. Select **OK** to save the changes to the Basic Configuration.
 Click **Reset** to revert to the last saved configuration.

RF Domain Sensor Configuration

WIPS (*Wireless Intrusion Protection System*) protects wireless client and access point radio traffic from attacks and unauthorized access. WIPS provides tools for standards compliance and around-the-clock wireless network security in a distributed environment. WIPS allows administrators to identify and accurately locate attacks, rogue devices and network vulnerabilities in real time and permits both a wired and wireless lockdown of wireless device connections upon acknowledgment of a threat.

In addition to dedicated AirDefense sensors, an access point radio can function as a sensor and upload information to a dedicated WIPS server (external to the access point). Unique WIPS server configurations can be used to ensure a WIPS server configuration is available to support the unique data protection needs of a RF Domain.

WIPS is not supported on a WLAN basis, rather, sensor functionality is supported on the access point radio(s) available to each managed WLAN. When an access point radio is functioning as a WIPS sensor, it is able to scan in sensor mode across all legal channels within the 2.4 and 5.0 GHz band. Sensor support requires an AirDefense WIPS Server on the network. Sensor functionality is not provided by the access point alone. The access point works in conjunction with a dedicated WIPS server.

In addition to WIPS support, sensor functionality has been added for Extreme Networks' ExtremeLocation system. locationing system. The ExtremeLocation system for Wi-Fi locationing includes WiNG controllers and access points functioning as sensors. Within the ExtremeLocation architecture, sensors scan for RSSI data on an administrator defined interval and send to a dedicated ExtremeLocation Server resource, as opposed to an ADSP server. The ExtremeLocation Server collects the RSSI data from WiNG sensor devices, and calculates the location of Wi-Fi devices.

To define a WIPS server configuration used with the access point's RF Domain:

1. Go to **Configuration → Devices**.
2. Select an **RF Domain** from those listed on left-hand side of the UI.
The RF Domain configuration menu displays in the left-hand UI.
3. Select **Sensor**.

Sensor Policy

Sensor Policy ⓘ <none> ⊕ ⚙️

Note: If the sensor is being used by ADSP for WIPS, any policy selected here will be discarded by the sensor. Please use ADSP channel settings instead to configure the sensor

ExtremeLocation Appliance Configuration

Server Id	IP Address/Hostname	Port	🗑️

ⓘ + Add Row

ExtremeLocation Tenant Account

Tenant Account ⓘ

Sensor Appliance Configuration

Server Id	IP Address/Hostname	Port	🗑️

ⓘ + Add Row

NSight Sensor

Enable NSight Sensor ⓘ

OK Reset Exit

Figure 15: RF Domain - Sensor Configuration screen

4. Use the **Sensor Policy** drop-down menu to select a sensor policy for sending RSSI information to a dedicated system for device locationing calculations. Different policies can be created with either a default set of scanned channels or with custom channels, widths and weighted scan priorities. Specific channels can also be isolated and locked for specific channel scans.



Note

If a dedicated sensor is utilized with ADSP for rogue detection, any sensor policy selected from the **Sensor Policy** drop-down menu is discarded and not utilized by the sensor. To avoid this situation, use ADSP channel settings exclusively to configure the sensor and not the WiNG interface.

5. Select the **Create** icon to create a new sensor policy or select the **Edit** icon to update the configuration of an existing policy. The Sensor Policy addition screen displays with the *Scan Mode* set to *Default-Scan*. The user configurable parameters available within the screen differ depending on the Scan Mode option selected. For more information, see [Sensor Policy](#) on page 757.
6. In the **ExtremeLocation Appliance Configuration** field, select the **+ Add Row** button to populate the ExtremeLocation server details.

Within the ExtremeLocation Appliance architecture, sensors scan for RSSI data on an administrator defined interval and send to a dedicated ExtremeLocation server resource, as opposed to an ADSP server.

Server Id	Use the spinner control to assign a numerical ID for the ExtremeLocation server resource. Note: As of now only one server is supported.
IP Address/Hostname	Provide the hostname of the ExtremeLocation server resource for receiving RSSI scan data from the AP. Hostname cannot exceed 64 characters or contain an underscore. Note: Enter the ExtremeLocation server's hostname and not the IP address, as the IP address is likely to change periodically in order to balance load across multiple Location server instances.
Port	Use the spinner control to specify the port of the ExtremeLocation sensor server resource receiving RSSI scan data from a dedicated sensor. The default port is 443.

7. Enter the ExtremeLocation Tenant's account number in the **Tenant Account** field.

Use this field to configure your ExtremeLocation Tenant account number. Every Tenant, subscribing for the ExtremeLocation service, is communicated (via, email) an account number that uniquely identifies the Tenant. When configured in the RF Domain context, reports pushed to the ExtremeLocation server by RF Domain APs contain this account number. Including the Tenant account number reinforces the Tenant's identity.

8. Select the **Enable NSight Sensor** checkbox to enable the NSight module
9. Select **OK** to save the changes to the Sensor configuration.
Click **Reset** to revert to the last saved configuration.

RF Client Name Configuration

The RF Domain **Client Name Configuration** screen displays clients connected to RF Domain member access points adopted by networked controllers or service platforms. Use the screen to associate administrator assigned client names to specific connected client MAC addresses for improved client management.

To define a client name configuration used with RF Domain member devices:

1. Go to **Configuration → Devices**.

2. Select an **RF Domain** from those listed on left-hand side of the UI.
The RF Domain configuration menu displays in the left-hand UI.
3. Select **Client Name**.
The **Client Name Configuration** screen displays.

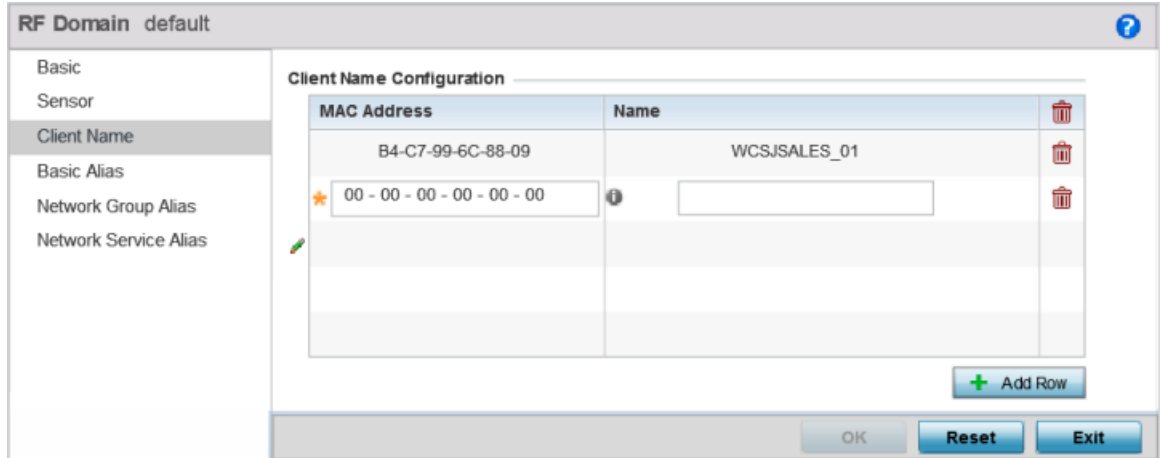


Figure 16: RF Domain - Client Name Configuration Screen

4. Either select the **+ Add Row** button to create a new client configuration or highlight an existing configuration and select the **Delete** icon to remove it.
5. Enter the client's factory coded `MAC Address`.
6. Assign a `Name` to the RF Domain member access point's connected client to assist in its easy recognition.
7. Click **OK** to save the changes to the configuration.
Click **Reset** to revert to the last saved configuration.

RF Domain Alias Configuration

With large deployments, the configuration of remote sites utilizes a set of shared attributes, of which a small set of attributes are unique for each location. For such deployments, maintaining separate configuration (WLANs, profiles, policies and ACLs) for each remote site is complex. Migrating any global change to a particular configuration item to all the remote sites is a complex and time consuming operation.

Also, this practice does not scale gracefully for quick growing deployments.

An alias enables an administrator to define a configuration item, such as a hostname, as an alias once and use the defined alias across different configuration items such as multiple ACLs.

Once a configuration item, such as an ACL, is utilized across remote locations, the alias used in the configuration item (ACL) is modified to meet local deployment requirement. Any other ACL or other configuration items using the modified alias also get modified, simplifying maintenance at the remote deployment.

Aliases have scope depending on where the alias is defined. Aliases are defined with the following scopes:

- Global aliases are defined from the **Configuration → Network → Alias** screen. Global aliases are available for use globally across all devices, profiles and RF Domains in the system.
- Profiles aliases are defined from **Configuration → Devices → System Profile → Network → Alias** screen. These aliases are available for use to a specific group of wireless controllers or access points. Alias values defined in this profile override alias values defined within global aliases.
- RF Domain aliases are defined from **Configuration → Devices → RF Domain → Alias** screen. These aliases are available for use for a site as a RF Domain is site specific. RF Domain alias values override alias values defined in a global alias or a profile alias configuration.
- Device aliases are defined from **Configuration → Devices → Device Overrides → Network → Alias** screen. Device aliases are utilized by a single device only. Device alias values override alias values defined in a global alias, profiles alias or RF Domain alias configuration.

Using an alias, configuration changes made at a remote location override any updates at the management center. For example, if a Network Alias defines a network range as 192.168.10.0/24 for the entire network, and at a remote deployment location, the local network range is 172.16.10.0/24, the network alias can be overridden at the deployment location to suit the local requirement. For the remote deployment location, the network alias works with the 172.16.10.0/24 network. Existing ACLs using this network alias need not be modified and will work with the local network for the deployment location. This simplifies ACL definition and management while taking care of specific local deployment requirements.

Aliases can be classified as:

- [Basic Alias](#) on page 75
- [Network Group Alias](#) on page 78
- [Network Service Alias](#) on page 81

Basic Alias

A basic alias is a set of configurations that consist of VLAN, Host, Network and Address Range alias configurations. VLAN configuration is a configuration for optimal VLAN re-use and management for local and remote deployments. A host alias configuration is for a particular host device's IP address. A network alias configuration is utilized for an IP address on a particular network. An address range alias is a configuration for a range of IP addresses.

A basic alias configuration can contain multiple instances for each of the five (5) alias types.

To edit or delete a basic alias configuration:

1. Go to **Configuration → Devices**.

2. Select an **RF Domain** from the options on left-hand side of the UI, and then go to the **Basic Alias** tab.

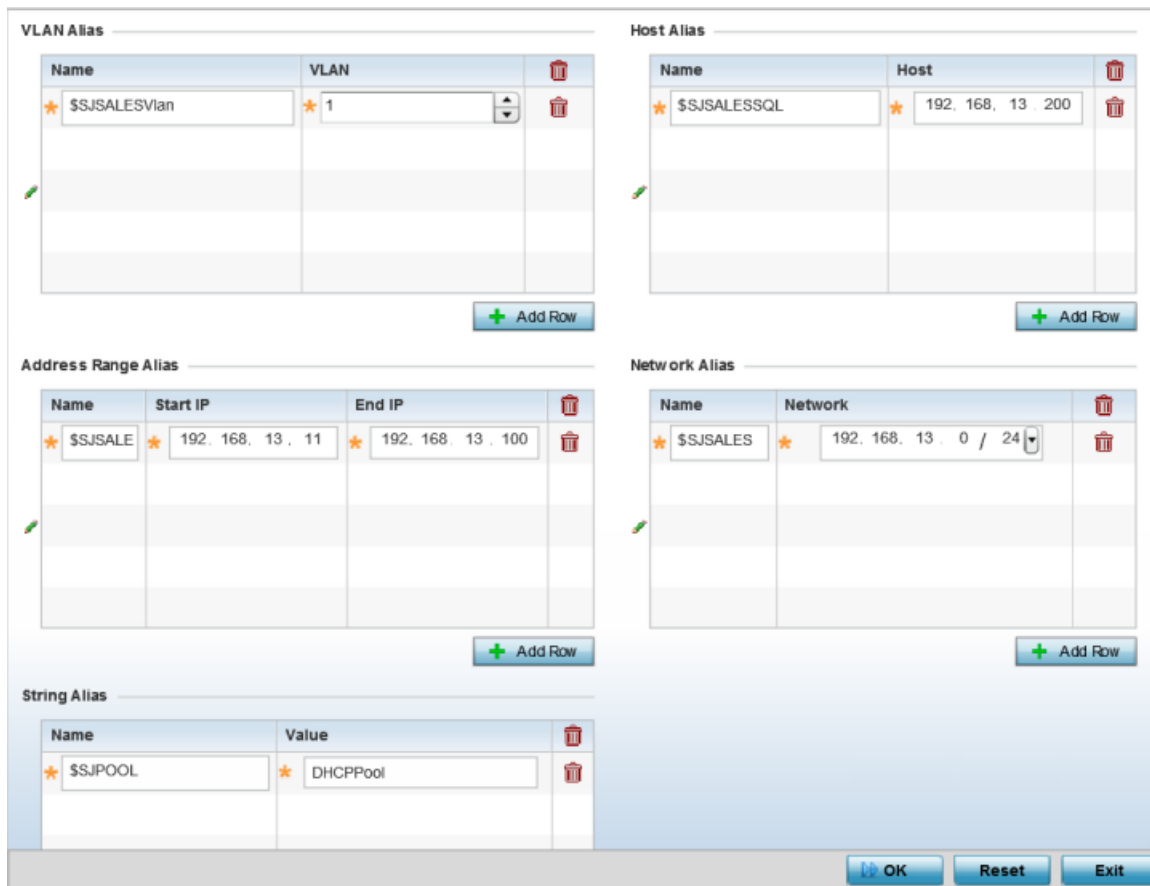


Figure 17: RF Domain - Basic Alias screen

3. Select **+ Add Row** to define **VLAN Alias** settings.
4. Use the **VLAN Alias** field to create unique aliases for VLANs that can be used at different deployments. For example, if a named VLAN is defined as 10 for the central network, and the VLAN is set at 26 at a remote location, the VLAN can be overridden at the deployment location with an alias. At the remote deployment location, the network is functional with a VLAN ID of 26 but utilizes the name defined at the centrally managed network. A new VLAN need not be created specifically for the remote deployment.

Name	If adding a new VLAN Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
VLAN	Use the spinner control to set a numeric VLAN from 1 - 4094.

A VLAN alias can be used to replace VLANs in the following locations:

- Bridge VLAN
- IP Firewall Rules
- L2TPv3

- Switchport
 - Wireless LANs
5. Select **+ Add Row** to define **Address Range Alias** settings.
 6. Use the **Address Range Alias** field to create aliases for IP address ranges that can be utilized at different deployments. For example, if an ACL defines a pool of network addresses as 192.168.10.10 through 192.168.10.100 for an entire network, and a remote location's network range is 172.16.13.20 through 172.16.13.110, the remote location's ACL can be overridden using an alias. At the remote location, the ACL works with the 172.16.13.20-110 address range. A new ACL need not be created specifically for the remote deployment location.

Name	If adding a new Address Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Start IP	Set a starting IP address used with a range of addresses utilized with the address range alias.
End IP	Set a ending IP address used with a range of addresses utilized with the address range alias.

An address range alias can be used to replace an IP address range in IP firewall rules.

7. Select **+ Add Row** to define **Host Alias** settings:
8. Use the **Host Alias** field to create aliases for hosts that can be utilized at different deployments. For example, if a central network DNS server is set a static IP address, and a remote location's local DNS server is defined, this host can be overridden at the remote location. At the remote location, the network is functional with a local DNS server, but uses the name set at the central network. A new host need not be created at the remote location. This simplifies creating and managing hosts and allows an administrator to better manage specific local requirements.

Name	If adding a new Host Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Host	Set the IP address of the host machine.

A host alias can be used to replace hostnames in the following locations:

- IP Firewall Rules
 - DHCP
9. Select **+ Add Row** to define **Network Alias** settings:
 10. Use the **Network Alias** field to create aliases for IP networks that can be utilized at different deployments. For example, if a central network ACL defines a network as 192.168.10.0/24, and a remote location's network range is 172.16.10.0/24, the ACL can be overridden at the remote location to suit their local (but remote) requirement. At the remote location, the ACL functions with the 172.16.10.0/24 network. A new

ACL need not be created specifically for the remote deployment. This simplifies ACL definition and allows an administrator to better manage specific local requirements.

Name	If adding a new Network Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Network	Provide a network address in the form of host/mask.

A network alias can be used to replace network declarations in the following locations:

- IP Firewall Rules
- DHCP

11. Select **+ Add Row** to define **String Alias** settings.
12. Use the **String Alias** field to create aliases for strings that can be utilized at different deployments. For example, if the main domain at a remote location is called loc1.domain.com and at another deployment location it is called loc2.domain.com, the alias can be overridden at the remote location to suit the local (but remote) requirement. At one remote location, the alias functions with the loc1.domain.com domain and at the other with the loc2.domain.com domain.

Name	If adding a new String Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Value	Provide a string value to use in the alias.

A string alias can be used to replace a domain name string in DHCP.

13. Select **OK** when completed to update the basic alias rules. Select **Reset** to revert the screen back to its last saved configuration.

Network Group Alias

A network group alias is a set of configurations that consist of host and network configurations. Network configurations are complete networks in the form 192.168.10.0/24 or IP address range in the form 192.168.10.10-192.168.10.20. Host configuration is in the form of single IP address, 192.168.10.23.

A network group alias can contain multiple definitions for host, network, and IP address range. A maximum of eight (8) host entries, eight (8) network entries and eight (8) IP addresses range entries can be configured inside a network group alias. A maximum of 32 network group alias entries can be created.

A network group alias is used in IP firewall rules to substitute hosts, subnets and IP address ranges:

To edit or delete a network alias configuration:

1. Go to **Configuration → Devices**.

2. Select an **RF Domain** from the options on left-hand side of the UI, and then go to the **Network Group Alias** tab.

The Network Group Alias screen displays.

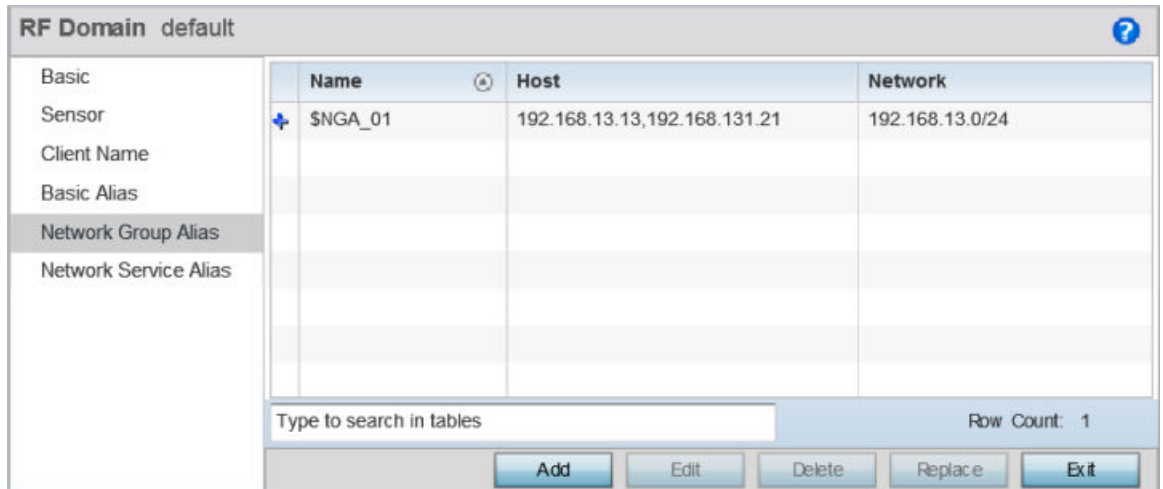


Figure 18: RF Domain - Network Group Alias screen

3. Review the following information to determine if an existing alias configuration needs modification or deletion. Or, if a new alias needs to be created.

Name	Displays the administrator assigned name of the network group alias.
Host	Displays all host aliases configured in this network group alias. Displays a blank column if no host alias is defined.
Network	Displays all network aliases configured in this network group alias. Displays a blank column if no network alias is defined.

Adding/Editing Network Group Alias

You can add a new network group alias, or edit an existing alias.

1. Select **Edit** to modify the attributes of an existing policy or **Delete** to remove obsolete policies from the list of those available. Select **Add** to create a new network group alias. Select **Copy** to copy an existing policy or **Rename** to rename an existing policy.

2. If adding a new network group alias, provide it a name of up to 32 characters.



Note

The network group alias name always starts with a dollar sign (\$).

Network Group Alias

Name: \$NGA_01

Host: [Input Field] [Dropdown Arrow]

[Add Row] 192.168.13.13 [Dropdown Arrow]

Network: [Input Field] [Dropdown Arrow]

[Add Row] 192.168.13.0/24 [Dropdown Arrow]

Range

Start IP	End IP	[Trash Icon]
192.168.13.13	192.168.13.27	[Trash Icon]
[Add Row]		

OK Reset Exit

Figure 19: RF Domain - Network Group Alias Add screen

3. Define the following network group alias parameters:

Host	Specify the host IP address. You can add up to eight IP addresses supporting network aliasing. Select the down arrow to add the IP address to the table.
Network	Specify the netmask for up to eight IP addresses supporting network aliasing. Subnets can improve network security and performance by organizing hosts into logical groups. Applying the subnet mask to an IP address separates the address into a host address and an extended network address. Select the down arrow to add the mask to the table.

4. Within the **Range** table, use the **+ Add Row** button to specify the **Start IP** address and **End IP** address for the alias range or double-click on an existing alias range entry to edit it.
5. Select **OK** when completed to update the network group alias rules. Select **Reset** to revert the screen back to its last saved configuration.

Network Service Alias

Use a service alias to associate more than one IP address to a network interface, providing multiple connections to a network from a single IP node.

Network service aliases can be used in the following location to substitute protocols and ports:

- IP Firewall Rules

The Network Service Alias main screen displays existing network service aliases,

To edit or delete a service alias configuration:

1. Go to **Configuration → Devices**.
2. Select an **RF Domain** from the options on left-hand side of the UI, and then go to the **Network Service Alias** tab.

The screen displays network service aliases existing within the managed system.

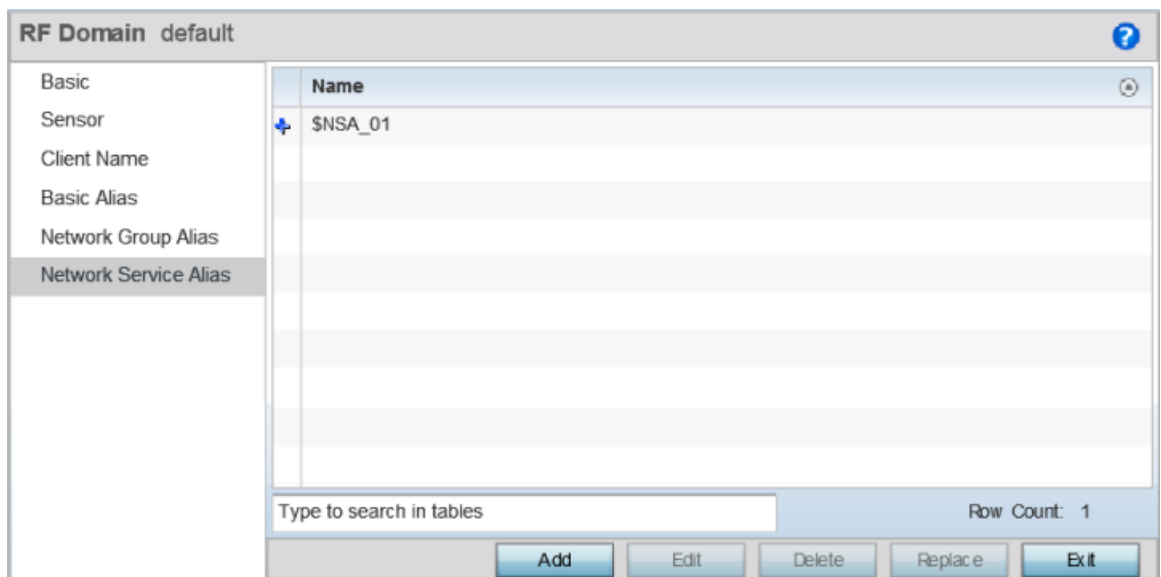


Figure 20: RF Domain - Network Service Alias screen

Adding/Editing Network Service Alias

You can add a new network service alias, or edit an existing network service alias.

1. Select **Edit** to modify the attributes of an existing policy or **Delete** to remove obsolete policies from the list of those available. Select **Add** to create a new Network Service Alias.

- If adding a new network service alias, provide it a name of up to 32 characters.



Note

The network service alias name always starts with a dollar sign (\$).

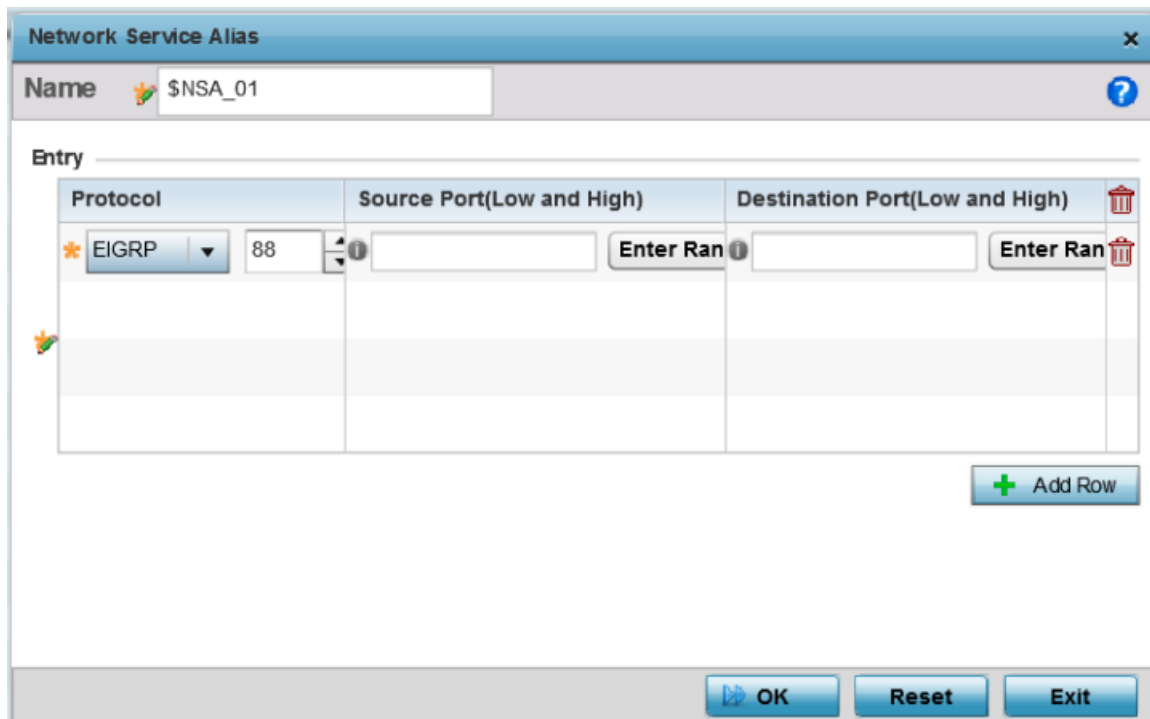


Figure 21: RF Domain - Network Service Alias Add screen

- Within the **Range** field, use the **+ Add Row** button to specify the Start IP address and End IP address for the service alias range or double-click on an existing service alias range entry to edit it.

Protocol	Specify the protocol for which the alias has to be created. Use the drop-down menu to select the protocol (eigrp, gre, icmp, igmp, ip, vrrp, igp, ospf, tcp and udp). Select other if the protocol is not listed. When a protocol is selected, its protocol number is automatically selected.
Source Port (Low and High)	Use this field only if the protocol is tcp or udp. Specify the source ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.
Destination Port (Low and High)	Use this field only if the protocol is tcp or udp. Specify the destination ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.

- Select **OK** when completed to update the network service alias rules.
Select **Reset** to revert the screen back to its last saved configuration.

Configure Access Point Profile Settings

An access point profile enables an administrator to assign a common set of configuration parameters and policies to access points of the same model. Profiles can be used to assign common or unique network, wireless and security parameters across a large, multi-segment site. The configuration parameters within a profile are based on the hardware model the profile was created to support. All WiNG OS supported access point models support a single profile that is either shared amongst multiple access point or not. The central benefit of a profile is the ability to update access points collectively without having to modify individual configurations.

A profile allows access point administration across large wireless network segments. Changes made to a profile are automatically inherited by all member access points. You can override the profile settings at the device level. It is important to remember that individual access points with overrides applied no longer share the profile based configuration previously deployed. These devices require careful administration, as they no longer can be tracked and as profile members. Their customized configurations overwrite their profile assignments until the profile can be re-applied to the access point.

Each access point model is automatically assigned a default profile. The default profile is available within the access point's configuration file. Default profiles are ideal for single-site deployments where several access points may need to share a common configuration.



Note

Default profiles are used as pointers for an access point's configuration, not just templates from which the configuration is copied. Therefore, if a change is made in one of the parameters in a profile, the change is reflected across all access points using that profile.

For more information, refer to the following:

- [System Profile Configuration - General Screen](#) on page 84
- [Profile Radio Power](#) on page 86
- [Profile Adoption \(Auto Provisioning\) Configuration](#) on page 87
- [Profile Wired 802.1X Configuration](#) on page 90
- [Profile Interface Configuration](#) on page 90
- [Profile Network Configuration](#) on page 164
- [Profile Security Configuration](#) on page 244
- [Virtual Router Redundancy Protocol](#) on page 282
- [List of Critical Resources](#) on page 287
- [Profile Services Configuration](#) on page 290
- [Management Settings](#) on page 294
- [Meshpoint Configuration](#) on page 299
- [Environmental Sensor Configuration](#) on page 310
- [Advanced Profile Configuration](#) on page 311

System Profile Configuration - General Screen

An access point profile requires unique clock synchronization settings as part of its general configuration.

The NTP (*Network Time Protocol*) is a client-server implementation that manages time and/or network clock synchronization within the network. Controllers, service platforms, and access points (NTP clients) periodically synchronize their clock with a master clock (an NTP server). For example, an access point resets its clock to 07:04:59 upon reading a time of 07:04:59 from its designated NTP server.

To define a profile's general configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the Web UI.

A list of device profiles is displayed in the right-hand UI. This list contains default and user-defined profiles.

2. Select a device profile from the list.

General configuration options display by default, with the profile activated for use with this access point model.

Virtual Controller

Virtual Controller

Set as Virtual Controller AP

Enable Auto Election of VC

Auto Provisioning Rule

Adopt Unknown n APs Automatically (Applicable only if AP is configured as Virtual Controller)

Management interface of Auto-Elected Virtual Controller

IP Address of Auto-elected VC /

Reachable VLAN (1 to 4,094)

Network Time Protocol (NTP)

Server IP	Key Number	Key	Preferred	Autokey	Version	Minimum Polling Interval	Maximum Polling Interval	

RF Domain Manager

Capable

Priority (1 to 255)

Figure 22: General Profile Screen

3. Select the **Set as Virtual Controller AP** checkbox, to configure this AP as VC.

**Note**

WiNG 7.1 does not support VC configuration on AP505 and AP510 model access points.

4. If you set the AP is a VC, select the **Adopt Unknown APs Automatically** checkbox.

**Note**

WiNG 7.1 does not support VC configuration on AP505 and AP510 model access points.

5. Select **+ Add Row** below the **Network Time Protocol (NTP)** table to define the configurations of NTP server resources used to obtain system time. Up to three NTP servers can be configured. Set the following parameters to define the NTP configuration:

Server IP	Set the IP address of each server added as a potential NTP resource.
Key Number	Select the number of the associated authentication peer key for the NTP resource.
Key	Enter a 64 character maximum key used when the autokey setting is set to false (disabled). Select the Show option to expose the actual character string comprising the key.
Preferred	Select this option to designate this NTP resource as a preferred NTP resource. This setting is disabled by default.
AutoKey	Select the check box to enable an autokey configuration for the NTP resource. The default setting is disabled.
Version	Use the spinner control to specify the version number used by this NTP server resource. The default setting is 0.
Minimum Polling Interval	Use the drop-down menu to select the minimum polling interval. Once set, the NTP resource is polled no sooner than the defined interval. Options include 64, 128, 256, 512 or 1024 seconds. The default setting is 64 seconds.
Maximum Polling Interval	Use the drop-down menu to select the maximum polling interval. Once set, the NTP resource is polled no later than the defined interval. Options include 64, 128, 256, 512 or 1024 seconds. The default setting is 1024 seconds.

6. Use the **RF Domain Manager** field to configure how this access point behaves in standalone mode. Set the following parameters:

Capable	Select to enable this access point to act as a RF Domain Manager in a particular RF Domain.
Priority	Select to prioritize this access point in becoming a RF Domain Manager in its; particular RF Domain. The higher the value, the more likely the device becomes the RF Domain Manager for the domain.

7. Select **OK** to save the changes made to the general profile configuration.
Select **Reset** to revert to the last saved configuration.

Profile Radio Power

Use the **Power** screen to set one of two power modes (3af or Auto) for the access point profile. When Automatic is selected, the access point safely operates within available power. Once the power configuration is determined, the access point configures its operating power characteristics based on its model and power configuration.

An access point uses a *complex programmable logic device* (CPLD) to manage power. The CPLD determines proper supply sequencing, the maximum power available and other status information. One of the primary functions of the CPLD is to determine the maximum power budget. When an access point is powered on (or performing a cold reset), the CPLD determines the maximum power provided by the POE device and the budget available to the access point. The CPLD also determines the access point hardware SKU (model) and the number of radios.

If the access point's POE resource cannot provide sufficient power to run the access point (with all intended interfaces enabled), some of the following interfaces could be disabled or modified:

- The access point's transmit and receive algorithms could be negatively impacted
- The access point's transmit power could be reduced due to insufficient power
- The access point's WAN port configuration could be changed (either enabled or disabled)

To define an access point's power configuration:

1. Select **Configuration** → **Devices** → **System Profile** → **Power** from the web UI.

Power Mode Configuration on this AP

Power Mode ⓘ Automatic ▼

! AP must be restarted for power-management change to take effect.

802.3af Power Mode

802.3af Mode ⓘ Throughput ▼

802.3at Power Mode

802.3at Mode ⓘ Throughput ▼

OK Reset Exit

Figure 23: Device Configuration - System Profile - Power Screen

2. Use the **Power Mode** drop-down menu to set the **Power Mode Configuration on this AP**.

**Note**

Single radio model access points always operate using a full power configuration. The power management configurations described in this section do not apply to single radio access point models.

When an access point is powered on for the first time, it determines the power budget available. Using the **Automatic** setting, the access point automatically determines the best power configuration based on the available power budget. Automatic is the default setting.

If **802.3af** is selected, the access point assumes 12.95 watts are available. If the mode is changed, the access point requires a reset to implement the change. If **802.3at** is selected, the access point assumes 23 - 26 watts are available.

3. Set the access point radio's **802.3af Power Mode** and the radio's **802.3at Power Mode**.

Use the drop-down menu for each power mode to define a mode of either **Range** or **Throughput**.

Select **Throughput** to transmit packets at the radio's highest defined basic rate (based on the radio's current basic rate settings). This option is optimal in environments where the transmission range is secondary to broadcast/multicast transmission performance.

Select **Range** when range is preferred over performance for broadcast/multicast (group) traffic. The data rates used for range are the lowest defined basic rates. Throughput is the default setting for both **802.3af** and **802.3at**.

4. Select **OK** to save the changes made to the access point power configuration. Select **Reset** to revert to the last saved configuration.

Profile Adoption (Auto Provisioning) Configuration

Adoption is the process an access point uses to discover an available controller or service platform, pick the most desirable one, establish an association and optionally obtain an image upgrade and configuration. Adoption settings are configurable and supported within a device profile and applied to other access points supported by the profile. Individual attributes of an access point's auto provisioning policy can be overridden as specific parameters require modification.

At adoption, an access point solicits and receives multiple adoption responses from controllers and service platforms available on the network. These adoption responses contain loading policy information the access point uses to select the optimum controller or service platform for adoption. By default, an auto provisioning policy generally distributes AP adoption evenly amongst available controllers and service

platforms. Modify existing adoption policies or create a new one as needed to meet access point adoption requirements and profile settings.



Note

A device configuration does not need to be present for an auto provisioning policy to take effect. Once adopted, and the device's configuration is defined and applied by the controller, the auto provisioning policy mapping does not have an impact on subsequent adoptions by the same device.

To define the access point profile's adoption configuration:

1. Select **Configuration** → **Devices** → **System Profile** → **Adoption** from the web UI.

The screenshot shows the 'Adoption' configuration screen for a system profile. It contains the following sections and fields:

- Controller Group:** A text input field labeled 'Preferred Group' with an information icon.
- Controller VLAN:** A section with a 'VLAN' input field set to '1' and a range '(1 to 4,094)', along with an information icon.
- Auto-Provisioning Policy:** A dropdown menu for 'Auto-Provisioning Policy' with an information icon, a green plus icon, and a gear icon. Below it is a checked checkbox for 'Learn and Save Network Configuration'.
- Controller Hello Interval:** Two input fields: 'Hello Interval' set to '1' (range '1 to 120') and 'Adjacency Hold Time' set to '2' (range '2 to 600').
- Controller Adoption Settings:** An input field for 'Offline Duration' set to '10' (range '5 to 43,200') with an information icon.
- Controller Hostnames:** A table with columns: Host, Pool, Routing Level, IPsec Secure, IPsec GW, Force, Remote VPN Client, and a delete icon. The table is currently empty.

At the bottom right of the form, there is an 'Add Row' button with a green plus icon, and 'OK' and 'Reset' buttons.

Figure 24: Device Configuration - System Profile - Adoption Screen

2. Define the **Preferred Group** used as optimal group of controllers for the access point's adoption. The name of the preferred group cannot exceed 64 characters. The preferred group is the controller group the access point would prefer to connect upon adoption.

3. Select the **VLAN** option to define a VLAN the access point's associating Virtual Controller AP is reachable on. VLANs 0 and 4,095 are reserved and cannot be used. This setting is disabled by default.
4. Set the following **Auto-Provisioning Policy** settings for access point adoptions:

Auto-Provisioning Policy	Select an auto provisioning policy from the drop-down menu. To create a new auto provisioning policy, select the Create icon or modify an existing one by selecting the Edit icon.
Learn and Save Network Configuration	Select this option to enable allow the controller tor service platform to maintain a local configuration records of devices requesting adoption and provisioning. This feature is enabled by default.
Hello Interval	Select this option to define the hello packet exchange interval (from 1 - 120 seconds) between the controller or service platform and an adoption requesting access point.

5. Define the **Hello Interval** value in seconds.

The Hello interval is the interval between two consecutive hello keep alive messages exchanged between the access point and the adopting wireless controller. These messages serve as a connection validation mechanism to ensure the availability of the adopting wireless controller. Use the spinner to set a value from 1 - 120 seconds.

6. Define the **Adjacency Hold Time** value. This value sets the time after which the preferred controller group is considered down and unavailable to provide services. Use the spinner to set a value from 2 - 600 seconds.
7. Enter **Controller Hostnames** as needed to define resources for adoption. Click **+Add Row** to add controllers. Set the following parameters to define Controller Hostnames:

Allow Adoption of Devices	Select either access points or Controllers (or both) to refine whether this controller or service platform can adopt just networked access points or peer controller devices as well.
Allow Adoption of this Controller	Select this option to enable this controller or service platform to be capable of adoption by other controllers or service platforms. This setting is disabled by default and must be selected to allow peer adoptions.
Preferred Group	If Allow Adoption of this Controller is selected, provide the controller group preferred as the adopting entity for this controller or service platform. If utilizing this feature, ensure the appropriate group is provided within the Controller Group field.
Hello Interval	Select this option to define the hello packet exchange interval (from 1 - 120 seconds) between the controller or service platform and an adoption requesting access point.
Adjacency Hold Time	Select this option to set a hold time interval (from 2 - 600 seconds) for the transmission of hello packets.

8. Select **+ Add Row** as needed to populate the table with IP addresses or hostnames of adoption resources.
9. Select **OK** to save the changes made to the general profile configuration. Select **Reset** to revert to the last saved configuration.

Profile Wired 802.1X Configuration

802.1X provides administrators secure, identity based access control as another data protection option to utilize with a device profile.

802.1X is an IEEE standard for media-level (Layer 2) access control, providing the capability to permit or deny connectivity based on user or device identity.

1. Select **Configuration** → **Devices** → **System Profile** → **Wired 802.1x** from the web UI.

Wired 802.1X Settings

Dot1x Authentication Control

Dot1x AAA Policy ▼

Dot1x Guest VLAN Control

Dot1x Hold Time Minutes ▼ (0 to 10)

MAC Authentication AAA Policy ▼ + ⚙️

OK Reset Exit

Figure 25: Device Configuration - System Profile - Wired 802.1X screen

2. Review the **Wired 802.1x Settings** area to configure the following parameters:

Dot1x Authentication Control	Select this option to globally enable 802.1x authentication. 802.1x authentication is disabled by default.
Dot1x AAA Policy	Select a AAA policy to associate with wired 802.1x traffic. If a suitable AAA policy does not exist, click the Create icon to create a new policy or the Edit icon to modify an existing policy.
Dot1x Guest VLAN Control	Select this option to globally enable 802.1x guest VLANs for the selected device. This setting is disabled by default.
MAC Authentication AAA Policy	Select a AAA authentication policy for MAC address authentication. If a suitable MAC AAA policy does not exist, click the Create icon to create a new policy or the Edit icon to modify an existing policy.

3. Click **OK** to save the changes made to the 802.1x configuration.
Click **Reset** to revert to the last saved configuration.

Profile Interface Configuration

A access point profile can support customizable Ethernet port, virtual interface, port channel, radio and PPPoE configurations unique to each supported access point model.

A profile's interface configuration process consists of the following:

- [Ethernet Port Configuration](#) on page 91
- [Virtual Interface Configuration](#) on page 104

- [Port Channel Configuration](#) on page 121
- [Access Point Radio Configuration](#) on page 128
- [PPPoE Configuration](#) on page 156
- [Bluetooth Configuration](#) on page 160

Additionally, deployment considerations and guidelines for profile interface configurations are available for review prior to defining a configuration that could significantly impact the performance of the network. For more information, see [WAN Backhaul Deployment Considerations](#) on page 156.

Ethernet Port Configuration

To define a profile's physical Ethernet port configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.
2. Expand the **Interface** menu and select **Ethernet Ports**.

Name	Type	Description	Admin Status	Mode	Native VLAN	Tag Native VLAN	Allowed VLANs
ge1	Ethernet		Enabled	Access	1		
ge2	Ethernet		Enabled	Access	1		

Row Count: 2

Add Edit Replace Exit

Figure 26: Device Configuration - System Profile - Interfaces - Ethernet Ports screen

3. Refer to the following to assess port status, mode and VLAN configuration:


Name	Displays the physical port name reporting runtime data and statistics. Supported ports vary depending on model.
Type	Displays the physical port type.
Description	Displays an administrator defined description for each listed port.
Admin Status	A green check mark means the port is active and currently enabled with the profile. A red "X" means the port is currently disabled and not available for use. The interface status can be modified with the port configuration as needed.

Mode	<p>The profile's switching mode: either Access or Trunk (as defined on the Ethernet Port Basic Configuration screen).</p> <p>If Access is selected, the port accepts packets only from the native VLAN. Frames are forwarded untagged with no 802.1Q header. All frames received on the port are expected as untagged and mapped to the native VLAN.</p> <p>If Trunk is selected, the port allows packets from a list of VLANs added to the trunk. The port supports multiple 802.1Q tagged VLANs and one native VLAN which can be tagged or untagged.</p>
Native VLAN	<p>The VLAN ID (1 - 4094) for the native VLAN. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN over which untagged traffic is directed when using a port in Trunk mode.</p>
Tag Native VLAN	<p>A green check mark means the native VLAN is tagged. A red "X" means the native VLAN is untagged.</p> <p>When a frame is tagged, the 12-bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12-bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. A native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame.</p>
Allowed VLANs	<p>The VLANs allowed to send packets over the listed port. Allowed VLANs are listed only when the port is in Trunk mode.</p>

Basic Ethernet Port Configuration

To define a profile's Ethernet port basic configuration:

1. To edit the configuration of an existing port, select it from amongst those displayed and select the **Edit** button. The Ethernet port **Basic Configuration** screen displays by default.

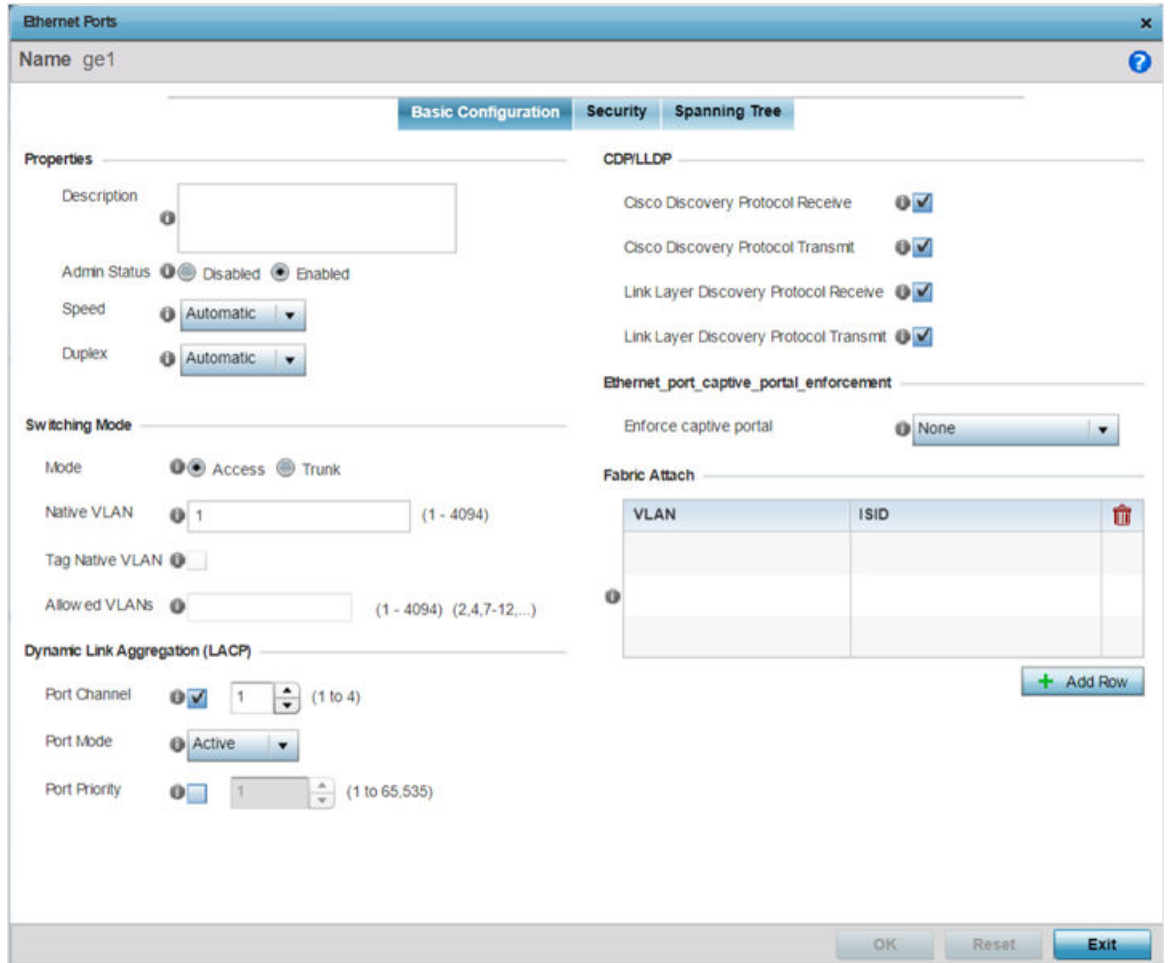

2. Set the following Ethernet port **Properties**:

Description	Enter a brief description for the port (64 characters maximum). The description should reflect the port's intended function to differentiate it from others with similar configurations or perhaps just the name of the physical port.
Admin Status	Select the Enabled radio button to define this port as active to the controller profile it supports. Select the Disabled radio button to disable this physical port in the profile. It can be activated at any future time when needed.

Speed	Select the speed at which the port can receive and transmit the data. Select either 10 Mbps , 100 Mbps or 1000 Mbps . Select either of these options to establish a 10, 100 or 1000 Mbps data transfer rate for the selected half duplex or full duplex transmission over the port. These options are not available if Auto is selected. Select Automatic to enable the port to automatically exchange information about data transmission speed and duplex capabilities. Auto negotiation is helpful when in an environment where different devices are connected and disconnected on a regular basis. <i>Automatic</i> is the default setting.
Duplex	Select either half , full or automatic as the duplex option. Select <i>Half</i> duplex to send data over the port, then immediately receive data from the same direction in which the data was transmitted. Like a full-duplex transmission, a half-duplex transmission can carry data in both directions, just not at the same time. Select <i>Full</i> duplex to transmit data to and from the device port at the same time. Using Full duplex, the port can send data while receiving data as well. Select <i>Automatic</i> to dynamically duplex as port performance needs dictate. <i>Automatic</i> is the default setting.

3. Enable or disable the following **CDP/LLDP** parameters used to configure *Cisco Discovery Protocol* and *Link Layer Discovery Protocol* for this profile's Ethernet port configuration:

Cisco Discovery Protocol Receive	Select this box to allow the Cisco discovery protocol to be received on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors. This option is enabled by default.
Cisco Discovery Protocol Transmit	Select this box to allow the Cisco discovery protocol to be transmitted on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors.
Link Layer Discovery Protocol Receive	Select this box to allow the Link Layer discovery protocol to be received on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors. This option is enabled by default.
Link Layer Discovery Protocol Transmit	Select this box to allow the Link Layer discovery protocol to be transmitted on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors.

4. Set the following **Power Over Ethernet (PoE)** parameters for this profile's Ethernet port configuration:

Enable POE	Select the check box to configure the selected port to use Power over Ethernet. To disable PoE on a port, clear this option. Power over Ethernet is supported on RFS 4000 model controllers only. When enabled, the controller supports 802.3af PoE on each of its ge ports. The PoE allows users to monitor port power consumption and configure power usage limits and priorities for each ge port.
Power Limit	Use the spinner control to set the total watts available for Power over Ethernet on the defined ge port. Set a value between 0 - 40 watts.
Power Priority	Set the power priority for the listed port to either to either <i>Low</i> , <i>Medium</i> or <i>High</i> . This is the priority assigned to this port versus the power requirements of the other ports on the controller.

5. Define the following **Switching Mode** parameters to apply to the Ethernet port configuration:

Mode	Select either the Access or Trunk radio button to set the VLAN switching mode over the port. If Access is selected, the port accepts packets only from the native VLANs. Frames are forwarded out the port untagged with no 802.1Q header. All frames received on the port are expected as untagged and are mapped to the native VLAN. If the mode is set to Trunk, the port allows packets from a list of VLANs you add to the trunk. A port configured as Trunk supports multiple 802.1Q tagged VLANs and one Native VLAN which can be tagged or untagged. Access is the default mode.
Native VLAN	Use the spinner control to define a numerical <i>Native VLAN ID</i> between 1 - 4094. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN which untagged traffic will be directed over when using a port in trunk mode. The default VLAN is 1.

Tag Native VLAN	<p>Select the check box to tag the native VLAN. WiNG managed devices support the IEEE 802.1Q specification for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs to. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, the 12 bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12 bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This feature is disabled by default.</p>
Allowed VLANs	<p>Selecting Trunk switching mode enables the <i>Allowed VLANs</i> parameter to add VLANs that exclusively send packets over the listed port.</p>

6. In the **Dynamic Link Aggregation (LACP)** area, set the following parameters to enable link aggregation on the selected GE port:

Port Channel	<p>Select to configure the selected port as a member of a LAG (<i>link aggregation group</i>). Link aggregation is supported only on the following platforms: AP7502, AP7602, AP7612, AP8432, AP8533, NX5500, NX7500, NX9500, NX9600, and VX900.</p> <p>LACP enables combining and managing multiple physical connections like Ethernet ports as a single logical channel as defined in the IEEE 802.1ax standard. LACP provides redundancy and increase in throughput for connections between two peers. It also provides automatic recovery in cases where one or more of the physical links - making up the aggregation - fail. Similarly, LACP also provides a theoretical boost in speed compared to an individual physical link.</p> <p>Note: if enabling LACP, disable or physically disconnect interfaces that do not use spanning tree to prevent loop formation until LACP is fully configured on both the local WiNG device and the remote device.</p>
Port Mode	<p>Set the port mode as Active or Passive. If setting the port as a LAG member, specify whether the port is an active or passive member within the group.</p> <p>An active member initiates and participates in LACP negotiations. It is the active port that always transmits LACPDU irrespective of the remote device's port mode.</p> <p>The passive port only responds to LACPDU received from its corresponding active port.</p> <p>At least one port within a LAG, on either of the two negotiating peers, should be in the active mode. LACP negotiations are not initiated if all LAG member ports are passive. Further, the peer-to-peer LACP negotiations are always initiated by the peer with the lower system-priority value.</p>
Port Priority	<p>Select this check box and set the selected Ethernet Port's priority value, within the LAG, from 1-65535.</p> <p>The selected port's actual priority within the LAG is determined by the port-priority value specified here along with the port's number. Higher the value, lower is the priority. Use this option to manipulate a port's priority. For example, in a LAG having five physical ports, four active and one standby, manually increasing the standby port's priority ensures that if one of the active port fails, the standby port is included in the LAG during re-negotiation.</p>

7. Select a **Captive Portal Enforcement** option for the selected Ethernet port interface.

Captive portal enforcement allows wired network users to pass traffic through the captive portal without being redirected to an authentication page. Authentication instead takes place when the RADIUS server is queried against the wired user's MAC address. If the MAC address is in the RADIUS server's user database, the user can pass traffic on the captive portal. If **None** is selected, captive portal policies are

not enforced on the wired interface. If **Authentication Failure** is selected, captive portal policies are enforced only when RADIUS authentication of the client's MAC address is not successful. If **Always** is selected, captive portal policies are enforced regardless of whether the client's MAC address is in the RADIUS server's user database.

- Click **+ Add Row** and set or override the **Fabric Attach** parameters. This option enables WiNG devices (access points and controllers) as FA (*Fabric Attach*) Clients.



Note

To enable FA Client feature, the Ethernet port's switching mode should be set to trunk.

VLAN	Set the VLAN from 1 - 4094.
ISID	<p>User the spinner control to specify the ISID from 1 - 16777214. This is the ISID (<i>Individual Service Identifier</i>) associated with the VLAN interface specified above. Configuring a VLAN to ISID assignment, enables FA client operation on the selected Ethernet port.</p> <p>The FA Client requests acceptance of the VLAN to ISID mapping from the FAS within the FC (<i>Fabric Connect</i>) network. Once acceptance is achieved, the FC edge switch applies the ISID to the VLAN traffic from the device (AP or controller), and uses this ISID inside the Fabric.</p> <p>Note: A maximum of 94 pairs of I-SID to VLAN mappings can be configured per Ethernet port.</p>

FA-enabled switches, in the FC network, send out LLDP messages with TLV extensions of Organization-specific TLV with OUI, to discover FA clients and advertise capabilities.

The FA-enabled client associates with the FAS (*FA Server*), and obtains provisioning information (management VLAN interface details, and whether the interface is tagged or not) that allows the client to be configured with parameters that allow traffic to flow through the Fabric to the WLAN controller. Use this option to configure the ISID to VLAN mapping that the FA Client uses to negotiate with the FAS.

You can configure FA Client capability on a device's profile as well as device contexts.

- Optionally select the **Port Channel** checkbox and define a setting between 1 - 3 using the spinner control. This sets the channel group for the port.
- Select **OK** to save the changes made to the Ethernet Port Basic Configuration. Select **Reset** to revert to the last saved configuration.

Configure Ethernet Port Security

To define a profile's Ethernet port security configuration:

- Select the **Security** tab.

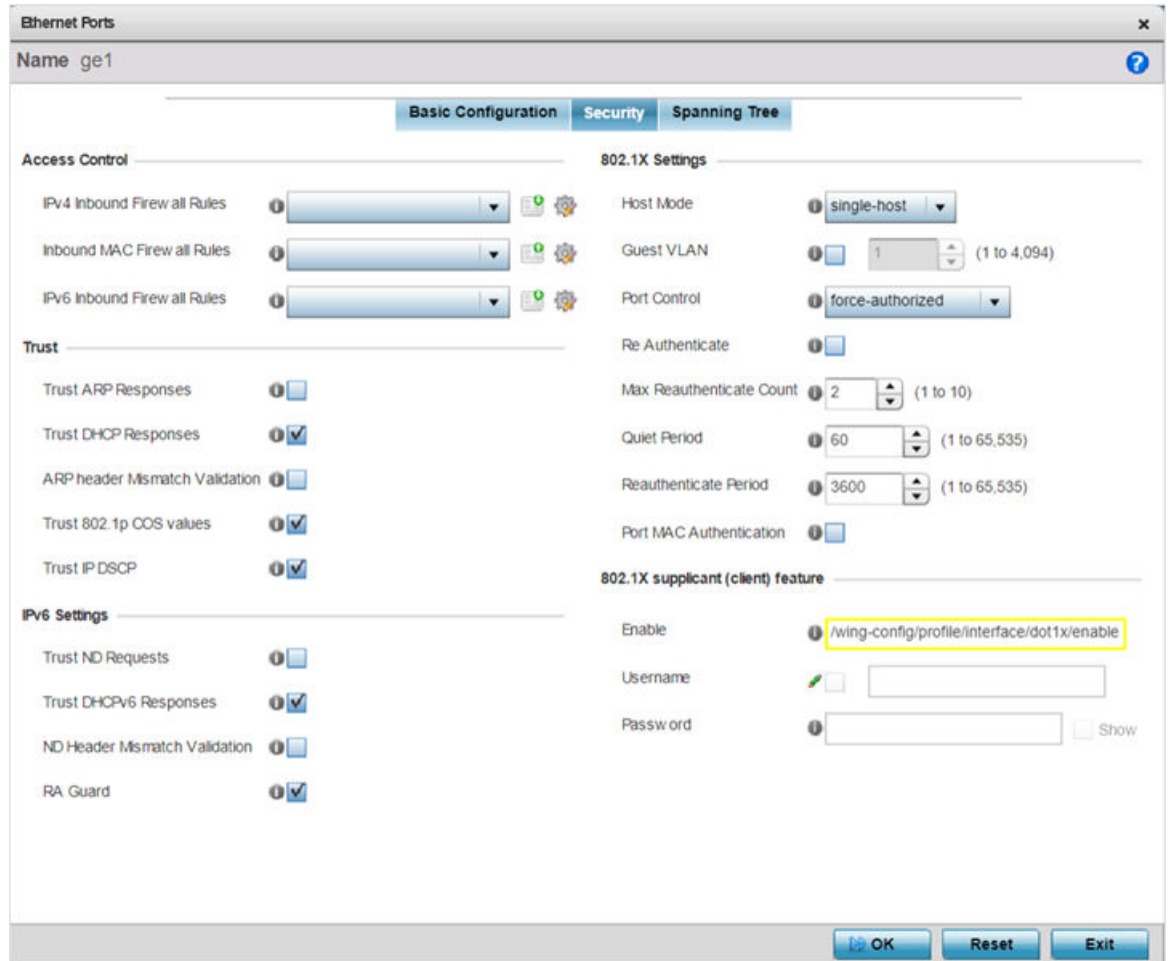


Figure 27: Interface GE Port - Security Tab

2. Refer to the **Access Control** field. As part of the port's security configuration, Inbound IP and MAC address firewall rules are required.

Use the **Inbound IP Firewall Rules** and **MAC Inbound Firewall Rules** pull-down menus to select the firewall rules to apply to this profile's Ethernet port configuration.

The firewall inspects IP and MAC traffic flows and detects attacks typically not visible to traditional wired firewall appliances.

3. If a firewall rule does not exist suiting the data protection needs of the target port configuration, select the **Create** icon to define a new rule configuration. For more information, see [Wireless Firewall](#) on page 826.

4. Refer to the **Trust** field to define the following:

Trust ARP Responses	Select the check box to enable ARP trust on this port. ARP packets received on this port are considered trusted and information from these packets is used to identify rogue devices within the network. The default value is disabled.	
Trust DHCP Responses	Select the check box to enable DHCP trust on this port. If enabled, only DHCP responses are trusted and forwarded on this port, and a DHCP server can be connected only to a DHCP trusted port. The default value is enabled.	
ARP header Mismatch Validation	Select this option to enable a mismatch check for the source MAC in both the ARP and Ethernet header. The default value is disabled.	
Trust 802.1p COS values	Select the check box to enable 802.1p COS values on this port. The default value is enabled.	
Trust IP DSCP	Select the check box to enable IP DSCP values on this port. The default value is enabled. Note: Some vendor solutions with VRRP enabled send ARP packets with Ethernet SMAC as a physical MAC and inner ARP SMAC as VRRP MAC. If this configuration is enabled, a packet is allowed, despite a conflict existing.	

5. Set the following **IPv6 Settings**:

Trust ND Requests	Select this option to enable the trust of neighbor discovery requests required on an IPv6 network on this Ethernet port. This option is disabled by default.
Trust DHCPv6 Responses	Select this option to trust all DHCPv6 responses on this Ethernet port. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. This option is enabled by default.
ND Header Mismatch Validation	Select this option to enable a mismatch check for the source MAC within the ND header and Link Layer Option. This option is disabled by default.
RA Guard	Select this option to enable router advertisements or ICMPv6 redirects from this Ethernet port. This option is enabled by default.

6. Set the following **802.1X Settings**:

Host Mode	Use the drop-down menu to select the host mode configuration to apply to this port. Options include single-host or multi-host . The default setting is single-host.
Guest VLAN	Specify a guest VLAN for this port from 1 - 4094. This is the VLAN traffic is bridged on if this port is unauthorized and the guest VLAN is globally enabled.
Port Control	Use the drop-down menu to set the port control state to apply to this port. Options include force-authorized , force-unauthorized and automatic . The default setting is force-authorized.
Re Authenticate	Select this setting to force clients to re-authenticate on this port. The default setting is disabled, thus clients do not need to re-authenticate for connection over this port until this setting is enabled.
Max Reauthenticate Count	Set the maximum re-authentication attempts (1 - 10) before this port is moved to unauthorized. The default setting is 2.
Maximum Request	Set the maximum number of authentication requests (1 - 10) before returning a failed message to the requesting client. The default setting is 2.
Quiet Period	Set the quiet period for this port from 1 - 65,535 seconds. This is the maximum wait time 802.1x waits upon a failed authentication attempt. The default setting is 60 seconds.
Reauthenticate Period	Use the spinner control to set the re-authentication period for this port from 1 - 65,535 seconds. The default setting is 60 seconds.
Port MAC Authentication	When enabled, a port's MAC address is authenticated, as only one MAC address is supported per wired port. When successfully authenticated, packets from the source are processed. Packets from all other sources are dropped. Port MAC authentication may be enabled on ports in conjunction with Wired 802.1x settings for a MAC Authentication AAA policy.

7. Select **Enable** within the **802.1x supplicant (client) feature** field to enable a username and password pair used when authenticating users on this port. This setting is disabled by default.

**Note**

The password cannot exceed 32 characters.

8. Select **OK** to save the changes made to the Ethernet port's security configuration. Select **Reset** to revert to the last saved configuration.

Spanning Tree Configuration

To define an Ethernet port's spanning tree configuration:


1. Select **Configuration** → **Devices** → **System Profile**.

The **Profile** screen, listing device profiles is displayed.

2. Select a device profile from those listed on the screen.

The selected device profile's configuration menu displays.

3. Expand the **Interface** menu and select **Ethernet Ports**.
4. To edit the configuration of an existing port, select it from amongst those displayed and select the **Edit** button.
5. Select the **Spanning Tree** tab.

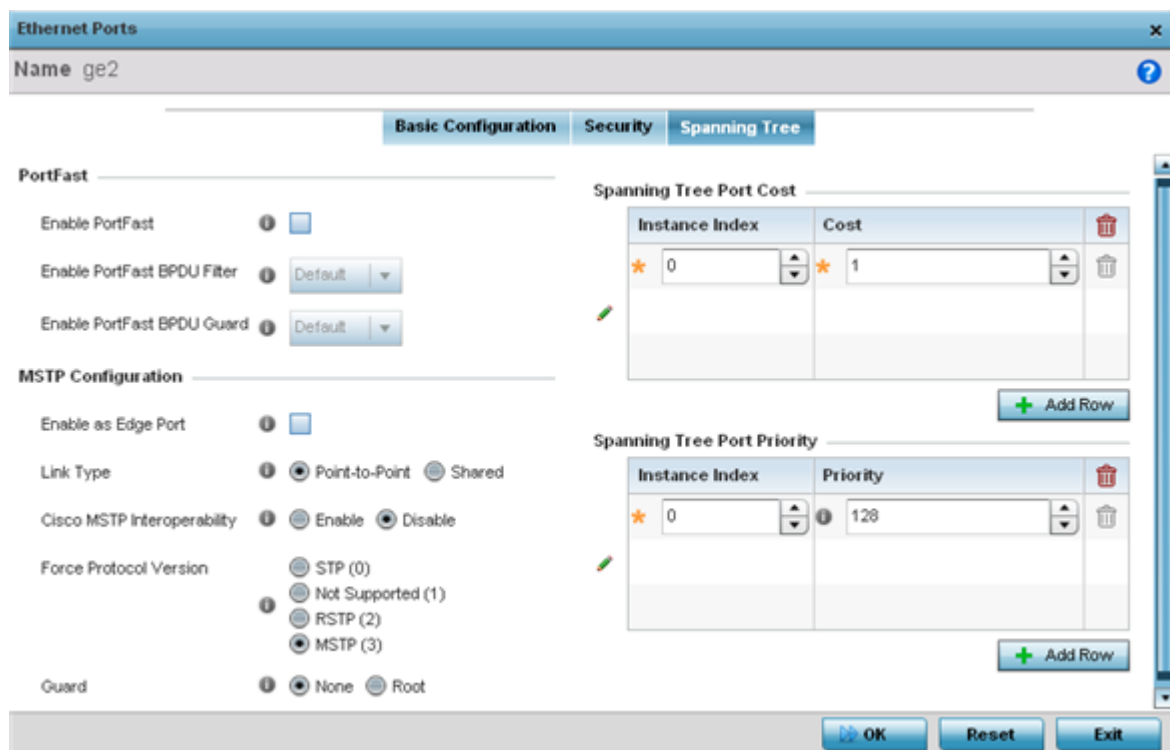

6. Define the following **PortFast** parameters for the port's MSTP configuration:

Enable PortFast	Select the check box to enable pull-down menus for both the Enable Portfast BPDU Filter and Enable Portfast BPDU guard options for the port.
PortFast BPDU Filter	Select enable to invoke a BPDU filter for this portfast enabled port. Enabling the BPDU filter feature ensures this PortFast enabled port does not transmit or receive BPDUs.
PortFast BPDU Guard	Select enable to invoke a BPDU guard for this portfast enabled port. Enabling the BPDU Guard feature means this portfast-enabled port will shutdown on receiving a BPDU. Thus, no BPDUs are processed.

7. Set the following **MSTP Configuration** parameters:

Enable as Edge Port	Select the check box to define this port as an edge port. Using an edge (private) port, isolate devices to prevent connectivity over this port.
Link Type	Select either the Point-to-Point or Shared radio button. Selecting Point-to-Point indicates the port should be treated as connected to a point-to-point link. Selecting Shared indicates this port should be treated as having a shared connection. A port connected to a hub is on a shared link, while one the connected to a controller is a point-to-point link.
Cisco MSTP Interoperability	Select either the Enable or Disable radio buttons. This enables interoperability with Cisco's version of MSTP over the port, which is incompatible with standard MSTP.
Force Protocol Version	Sets the protocol version to either STP (0) , Not Supported (1) , RSTP (2) or MSTP (3) . MSTP is the default setting.
Guard	Determines whether the port enforces root bridge placement. Setting the guard to <i>Root</i> ensures the port is a designated port. Typically, each guard root port is a designated port, unless two or more ports (within the root bridge) are connected together. If the bridge receives superior (BPDUs) on a guard root-enabled port, the guard root moves the port to a root-inconsistent STP state. This state is equivalent to a listening state. No data is forwarded across the port. Thus, the guard root enforces the root bridge position.

8. Refer to the **Spanning Tree Port Cost** table.

9. Define an **Instance Index** using the spinner control, then set the **Cost**. The default path cost depends on the speed of the port. The cost helps determine the role of the port in the MSTP network. The designated cost is the cost for a packet to travel from this port to the root in the MSTP configuration. The slower the media, the higher the cost.

Speed	Default Path Cost
<=100000 bits/sec	200000000
<=1000000 bits/sec	20000000
<=10000000 bits/sec	2000000
<=100000000 bits/sec	200000
<=1000000000 bits/sec	20000
<=10000000000 bits/sec	2000
<=100000000000 bits/sec	200
<=1000000000000 bits/sec	20
>1000000000000 bits/sec	2

10. Select **+ AddRow** as needed to include additional indexes.

11. Refer to the **Spanning Tree Port Priority** table.

Define an **Instance Index** using the spinner control and assign a **Priority** value. The lower the priority, a greater likelihood of the port becoming a designated port. Thus applying an higher value impacts the port's likelihood of becoming a designated port.

12. Select **+ Add Row** needed to include additional indexes.
13. Select **OK** to save the changes made to the Ethernet Port's spanning tree configuration. Select **Reset** to revert to the last saved configuration.

Virtual Interface Configuration

A virtual interface is required for layer 3 (IP) access to a controller or service platform or provide to layer 3 service on a VLAN. The virtual interface defines which IP address is associated with each VLAN ID the controller or service platform is connected to. A virtual interface is created for the default VLAN (VLAN 1) to enable remote administration. A virtual interface is also used to map VLANs to IP address ranges. This mapping determines the destination for routing.

To review existing virtual interface configurations and create a new virtual interface configuration, modify (override) an existing configuration or delete an existing configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.
A list of device profiles is displayed in the right-hand UI. This list contains default and user-defined profiles.
2. Select a profile from those listed on the screen.
The profile's configuration menu is displayed.
3. Expand the **Interface** menu and select **Virtual Interfaces**.

Name	Type	Description	Admin Status	VLAN	IP Address
vlan1	VLAN		Enabled	1	dhcp

Row Count: 1

Add Edit Delete Replace Exit

Figure 28: Profile Interface - Virtual Interfaces screen

4. Review the following parameters unique to each virtual interface configuration:

Name	The name of each listed virtual interface assigned when it was created. The name is between 1 - 4094, and cannot be modified as part of a virtual interface edit.
Type	The type of virtual interface for each listed interface.
Description	The description defined for the virtual interface, either when it was created or when it was edited.
Admin Status	A green check mark means the listed virtual interface configuration is active and enabled with its supported profile. A red "X" means the virtual interface is currently shut down. The interface status can be modified when a new virtual interface is created or an existing one modified.
VLAN	The numerical VLAN ID associated with each listed interface.
IP Address	Whether DHCP was used to obtain the primary IP address used by the virtual interface configuration.

After reviewing the configurations of existing virtual interfaces, determine whether a new interface needs to be created, an existing virtual interface needs to be edited (overridden), or an existing virtual interface needs to be deleted.

General Configuration

To configure the VLAN's basic configurations:

1. Select **Add** to define a new virtual interface configuration, **Edit** to modify or override the configuration of an existing virtual interface, or **Delete** to permanently remove a selected virtual interface.

The **Basic Configuration** screen displays by default, regardless of a whether a new virtual interface is being created or an existing one is being modified. Select the **General** tab if it is not selected by default.

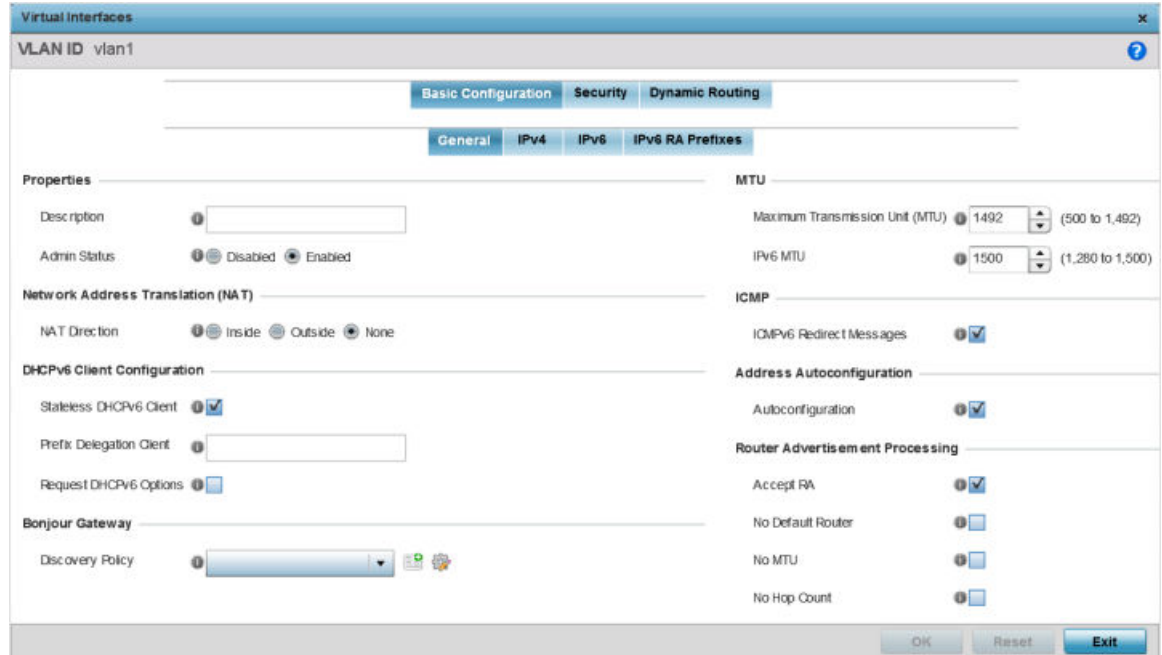


Figure 29: Profile Overrides - Virtual Interfaces Basic Configuration Screen

2. If you are creating a new virtual interface, use the **VLAN ID** spinner control to define a numeric VLAN ID from 1 - 4094.
3. Define or override the following parameters in the **Properties** field:

Description	Provide or edit a description (up to 64 characters) for the virtual interface that helps differentiate it from others with similar configurations.
Admin Status	Select Disabled or Enabled to define this interface's current status within the managed network. When set to Enabled , the virtual interface is operational and available to the controller or service platform. The default value is enabled.

4. Define or override the **Network Address Translation (NAT)** direction.
Select one of the following options:

Inside

The inside network is transmitting data over the network its intended destination. On the way out, the source IP address is changed in the header and replaced by the (public) IP address.

Outside

Packets passing through the NAT on the way back to the managed LAN are searched against to the records kept by the NAT engine. There the destination IP address is changed back to the specific internal private class IP address in order to reach the LAN over the switch managed network.

None

No NAT activity takes place. This is the default setting.

5. Set the following **DHCPv6 Client Configuration**.

The DHCPv6 (*Dynamic Host Configuration Protocol for IPv6*) provides a framework for passing configuration information.

Stateless DHCPv6 Client	Select this option to request information from the DHCPv6 server using stateless DHCPv6. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. This setting is disabled by default.
Prefix Delegation Client	Specify a 32-character maximum request prefix for prefix delegation from a DHCPv6 server over this virtual interface. Devices use prefixes to distinguish destinations that reside on-link from those reachable using a router.
Request DHCPv6 Options	Select this option to request DHCPv6 options on this virtual interface. DHCPv6 options provide configuration information for a node that must be booted using the network rather than locally. This setting is disabled by default.

6. Define the **Bonjour Gateway** settings.

Bonjour is Apple's implementation of zeroconfiguration networking (Zeroconf). Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates devices such as printers, other computers, and services that these computers offer over a local network.

Bonjour provides a general method to discover services on a *local area network* (LAN). It allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour works within a single broadcast domain. However, with special DNS configuration, it can be extended to find services across broadcast domains.

Select the **Bonjour Gateway Discover** policy from the drop-down menu. Click the **Create** icon to define a new Bonjour Gateway policy configuration, or click the **Edit** icon to modify an existing Bonjour Gateway policy configuration.

7. Define the following **MTU** settings for the virtual interface:

Maximum Transmission Unit (MTU)	Set the PPPoE client MTU from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
IPv6 MTU	Set an IPv6 MTU for this virtual interface from 1,280 - 1,500. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. The default is 1,500.

8. In the **ICMP** field, define whether ICMPv6 redirect messages are sent. Redirect requests data packets be sent on an alternative route.

This setting is enabled by default.

9. In the **Address Autoconfiguration** field, define whether to configure IPv6 addresses on this virtual interface based on the prefixes received in router advertisement messages. Router advertisements contain prefixes used for link determination, address configuration and maximum hop limits.

This setting is enabled by default.

10. Set the following **Router Advertisement Processing** settings for the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

Accept RA	Enable this option to allow router advertisements over this virtual interface. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters. This setting is enabled by default.
No Default Router	Select this option to consider routers unavailable on this interface for default router selection. This setting is disabled by default.
No MTU	Select this option to not use the existing MTU setting for router advertisements on this virtual interface. If the value is set to zero, no MTU options are sent. This setting is disabled by default.
No Hop Count	Select this option to not use the hop count advertisement setting for router advertisements on this virtual interface. This setting is disabled by default.


11. Click **OK** to save the changes.
Click **Reset** to revert to the last saved configuration.

IPv4 Configuration

IPv4 is a connectionless protocol. It operates on a best effort delivery model that does not guarantee delivery or assures proper sequencing or avoidance of duplicate delivery (unlike TCP).

To configure the VLAN IPv4 configuration:

1. Select the **IPv4** tab.

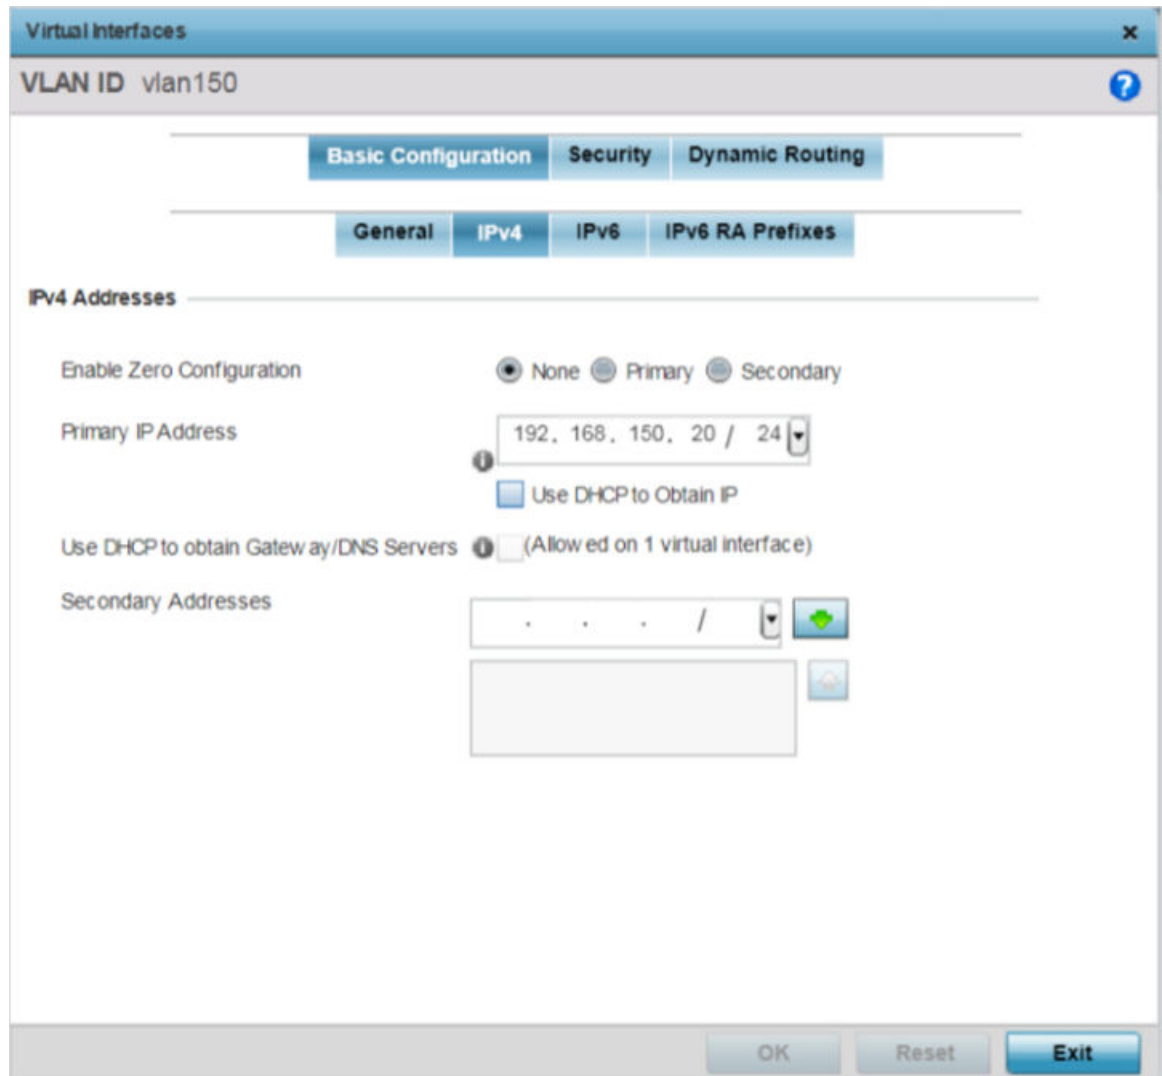

The screenshot shows the 'Virtual Interfaces' configuration window for 'VLAN ID vlan150'. The 'Basic Configuration' tab is selected, and the 'IPv4' sub-tab is active. The 'IPv4 Addresses' section includes the following options:

- Enable Zero Configuration:** Radio buttons for None (selected), Primary, and Secondary.
- Primary IP Address:** A text field containing '192.168.150.20 / 24' with a dropdown arrow on the right.
- Use DHCP to Obtain IP:** A checkbox that is currently unchecked.
- Use DHCP to obtain Gateway/DNS Servers:** A checkbox that is unchecked, with a note '(Allowed on 1 virtual interface)'.
- Secondary Addresses:** A text field with a dropdown arrow and a green plus icon to the right, and a light blue icon below it.

At the bottom of the window are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 30: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv4 Tab

2. Set the following network information in the **IPv4 Addresses** field:

Enable Zero Configuration	Zero configuration can be a means of providing a primary or secondary IP addresses for the virtual interface. Zero configuration (or zero config) is a wireless connection utility included with Microsoft Windows XP and later as a service dynamically selecting a network to connect based on a user's preferences and various default settings. Zero config can be used instead of a wireless network utility from the manufacturer of a computer's wireless networking device. This value is set to None by default.
Primary IP Address	Define the IP address for the VLAN associated virtual interface.
Use DHCP to Obtain IP	Select this option to allow DHCP to provide the IP address for the virtual interface. Selecting this option disables the Primary IP Address field.
Use DHCP to Obtain Gateway/DNS Servers	Select this option to allow DHCP to obtain a default gateway address and DNS resource for one virtual interface. This setting is disabled by default and only available when the Use DHCP to Obtain IP option is selected.
Secondary Addresses	Use this parameter to define additional IP addresses to associate with VLAN IDs. The address provided in this field is used if the primary IP address is unreachable.

3. Click **OK** to save the changes to the IPv4 configuration.

Click **Reset** to revert to the last saved configuration.

IPv6 Configuration

IPv6 is the latest revision of the IP (*Internet Protocol*), designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters.

To configure the VLAN IPv6 configuration:

1. Select the **IPv6** tab.

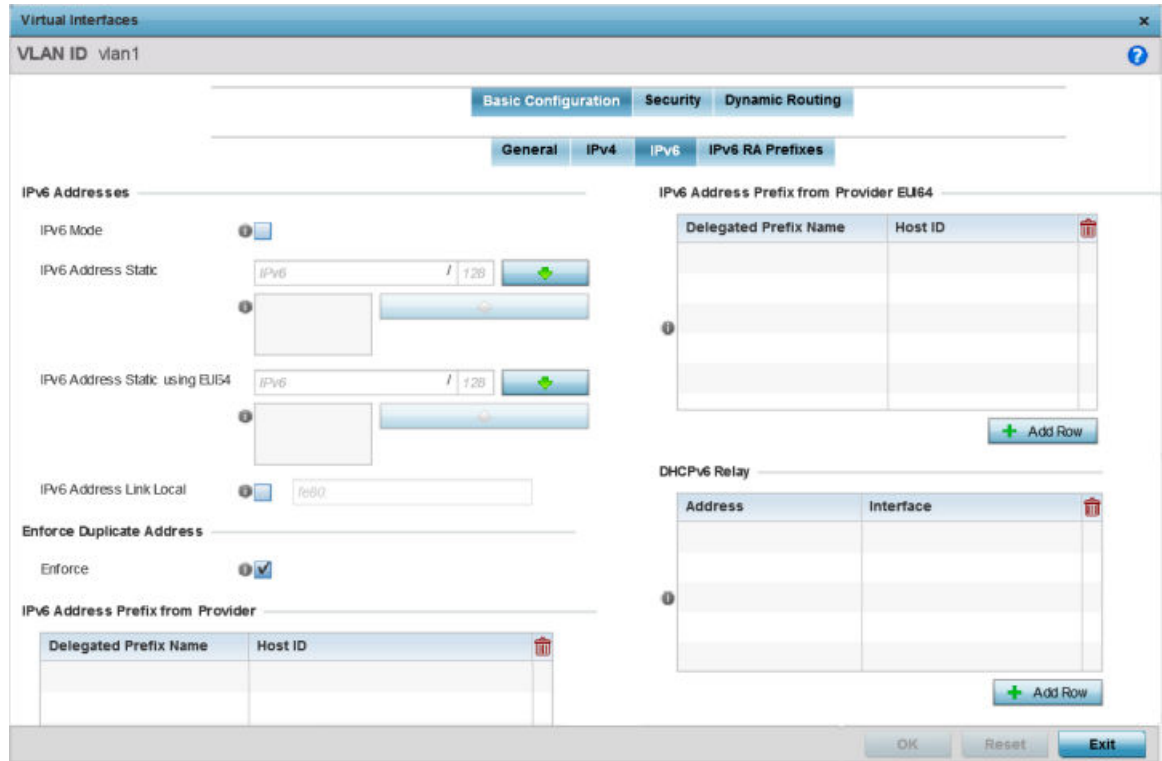


Figure 31: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab

2. Refer to the **IPv6 Addresses** field to define how IP6 addresses are created and utilized:

IPv6 Mode	Select this option to enable IPv6 support on this virtual interface. IPv6 is disabled by default.
IPv6 Address Static	Define up to 15 global IPv6 IP addresses that can be created statically. IPv6 addresses are represented as eight groups of four hexadecimal digits separated by colons.
IPv6 Address Static using EUI64	Optionally, set up to 15 global IPv6 IP addresses (in the EUI-64 format) that can be created statically. The IPv6 EUI-64 format address is obtained through a 48-bit MAC address. The MAC is initially separated into two 24-bit segments, with one being an OUI (<i>Organizationally Unique Identifier</i>) and the other being client specific. A 16-bit 0xFFFE is then inserted between the two 24-bit segments for the 64-bit EUI address. IEEE has chosen FFFE as a reserved value which can only appear in EUI-64 generated from an EUI-48 MAC address.
IPv6 Address Link Local	Provide the IPv6 local link address. IPv6 requires a link local address assigned to every interface the IPv6 protocol is enabled, even when one or more routable addresses are assigned.

3. Enable the **Enforce Duplicate Address** option to enforce duplicate address protection when any wired port is connected and in a forwarding state. This option is enabled by default.

4. Refer to the **IPv6 Address Prefix from Provider** table to create IPv6 format prefix shortcuts as supplied by an ISP.

Select **+ Add Row** to launch a screen in which a new delegated prefix name and host ID can be defined.

The screenshot shows a dialog box titled "Add Row" with a close button (X) in the top right corner. The main title is "IPv6 Address Prefix from Provider". Below the title, there are two main sections:

- Delegated Prefix Name**: A text input field with an asterisk (*) to its left.
- Host ID**: A section containing a text input field with "IPv6" entered, a separator "/" and "128", a dropdown menu with a green arrow, and a larger empty text input field with an asterisk (*) to its left.

At the bottom of the dialog box, there are two buttons: "OK" and "Exit".

Figure 32: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add Address Prefix from Provider

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 address prefix from your provider.
Host ID	Define the subnet ID, host ID, and prefix length.

5. Click **OK** to save the changes to the IPv6 configuration.
Click **Exit** to close the screen without saving any updates.
6. Refer to the **IPv6 Address Prefix from Provider EUI64** table to set an (abbreviated) IP address prefix in EUI64 format.
Select **+ Add Row** to launch a screen in which a new delegated prefix name and host ID can be defined in EUI64 format.

Figure 33: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add Address Prefix from Provider EUI64

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 prefix from your provider in EUI format. Using EUI64, a host can automatically assign itself a unique 64-bit IPv6 interface identifier without manual configuration or DHCP.
Host ID	Define the subnet ID and prefix length.

- Click **OK** to save the changes to the new IPv6 prefix from provider in EUI64 format. Click **Exit** to close the screen without saving any updates.
- Refer to the **DHCPv6 Relay** table to set the address and interface of the DHCPv6 relay.

The DHCPv6 relay enhances an extended DHCP relay agent by providing support in IPv6. DHCP relays exchange messages between a DHCPv6 server and client. A client and relay agent exist on the same link. When a DHCP request is received from the client, the relay agent creates a relay forward message and sends it to a specified server address. If no addresses are specified, the relay agent forwards the message to all DHCP server relay multicast addresses. The server creates a relay reply and sends it back to the relay agent. The relay agent then sends back the response to the client.

Select **+ Add Row** to launch a screen in which a new DHCPv6 relay address and interface VLAN ID can be set.

Figure 34: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add DHCPv6 Relay

Address	Enter an address for the DHCPv6 relay. These DHCPv6 relay receive messages from DHCPv6 clients and forward them to DHCPv6 servers. The DHCPv6 server sends responses back to the relay, and the relay then sends these responses to the client on the local network.
Interface	Select this option to enable a spinner control to define a VLAN ID from 1 - 4,094 used as the virtual interface for the DHCPv6 relay. The interface designation is only required for link local and multicast addresses. A local link address is a locally derived address designed for addressing on a single link for automatic address configuration, neighbor discovery or when no routing resources are available.

- Click **OK** to save the changes to the DHCPv6 relay configuration.
Click **Exit** to close the screen without saving any updates.

IPv6 RA Prefixes Configuration

To configure the VLAN IPv6 RA Prefixes configuration:

1. Select the **IPv6 RA Prefixes** tab.

The screenshot shows the 'Virtual Interfaces' configuration window for 'vlan1'. The 'IPv6 RA Prefixes' tab is selected. Below the tabs, there is a 'Router Advertisement Policy' dropdown menu. The main area contains a table for configuring IPv6 RA Prefixes. The table has the following columns: Prefix Type, Prefix or Id, Site Prefix, Valid Lifetime Type, Valid Lifetime Sec, Valid Lifetime Date, Valid Lifetime Time, Preferred Lifetime Type, Preferred Lifetime Sec, Preferred Lifetime Date, Autoc onfig, Preferred Lifetime Time, and On Link. There is an 'Add Row' button at the bottom right of the table.

Prefix Type	Prefix or Id	Site Prefix	Valid Lifetime Type	Valid Lifetime Sec	Valid Lifetime Date	Valid Lifetime Time	Preferred Lifetime Type	Preferred Lifetime Sec	Preferred Lifetime Date	Autoc onfig	Preferred Lifetime Time	On Link

Figure 35: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 RA Prefixes Tab

2. Use the **Router Advertisement Policy** drop-down menu to select and apply a policy to the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

- Review the configurations of existing IPv6 advertisement policies.
If necessary, select + **Add Row** to define the configuration for an additional IPv6 RA prefix.

The screenshot shows a configuration window titled "Add Row" for "IPv6 RA Prefixes". The settings are as follows:

- Prefix Type: **Prefix**
- Prefix or Id: **IPv6 / 128**
- Site Prefix: **IPv6 / 128**
- Valid Lifetime Type: **External (Fixed)**
- Valid Lifetime Sec: **30 Days**
- Valid Lifetime Date: (empty)
- Valid Lifetime Time: **1 : 00 AM**
- Preferred Lifetime Type: **External (Fixed)**
- Preferred Lifetime Sec: **7 Days**
- Preferred Lifetime Date: (empty)
- Preferred Lifetime Time: **1 : 00 AM**
- Autoc onfig:
- On Link:

Figure 36: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 RA Prefix

- Define the following **IPv6 RA Prefix** settings:

Prefix Type	Set the prefix delegation type used with this configuration. Options include Prefix , and prefix-from-provider . The default setting is Prefix . A prefix allows an administrator to associate a user defined name to an IPv6 prefix. A provider assigned prefix is made available from an ISP (<i>Internet Service Provider</i>) to automate the process of providing and informing the prefixes used.
Prefix or ID	Set the actual prefix or ID used with the IPv6 router advertisement.
Site Prefix	The site prefix is added into a router advertisement prefix. The site address prefix signifies the address is only on the local link.

Valid Lifetime Type	Set the lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Valid Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is External (fixed).
Valid Lifetime Sec	If the lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Valid Lifetime Date	If the lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Valid Lifetime Time	If the lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Preferred Lifetime Type	Set the administrator preferred lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Preferred Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is External (fixed).
Preferred Lifetime Sec	If the administrator preferred lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Preferred Lifetime Date	If the administrator preferred lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Preferred Lifetime Time	If the administrator preferred lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Autoconfig	Autoconfiguration includes generating a link-local address, global addresses via stateless address autoconfiguration and duplicate address detection to verify the uniqueness of the addresses on a link. This setting is enabled by default.
On Link	Select this option to keep the IPv6 RA prefix on the local link. The default setting is enabled.

5. Click **OK** to save the changes to the IPv6 RA prefix configuration.

Click **Exit** to close the screen without saving any updates. Or, click **Reset** to revert to the last saved configuration.

Security Configuration

Use this screen to configure firewalls. The firewall inspects packet traffic to and from connected clients. If there is no firewall rule that meets the data protection needs of this virtual interface, select the **Create** icon to define a new firewall rule configuration or the **Edit** icon to modify or override an existing configuration. For more information, see [Wireless Firewall](#) on page 826.

To set the VLAN security configuration:

1. Select the **Security** tab.

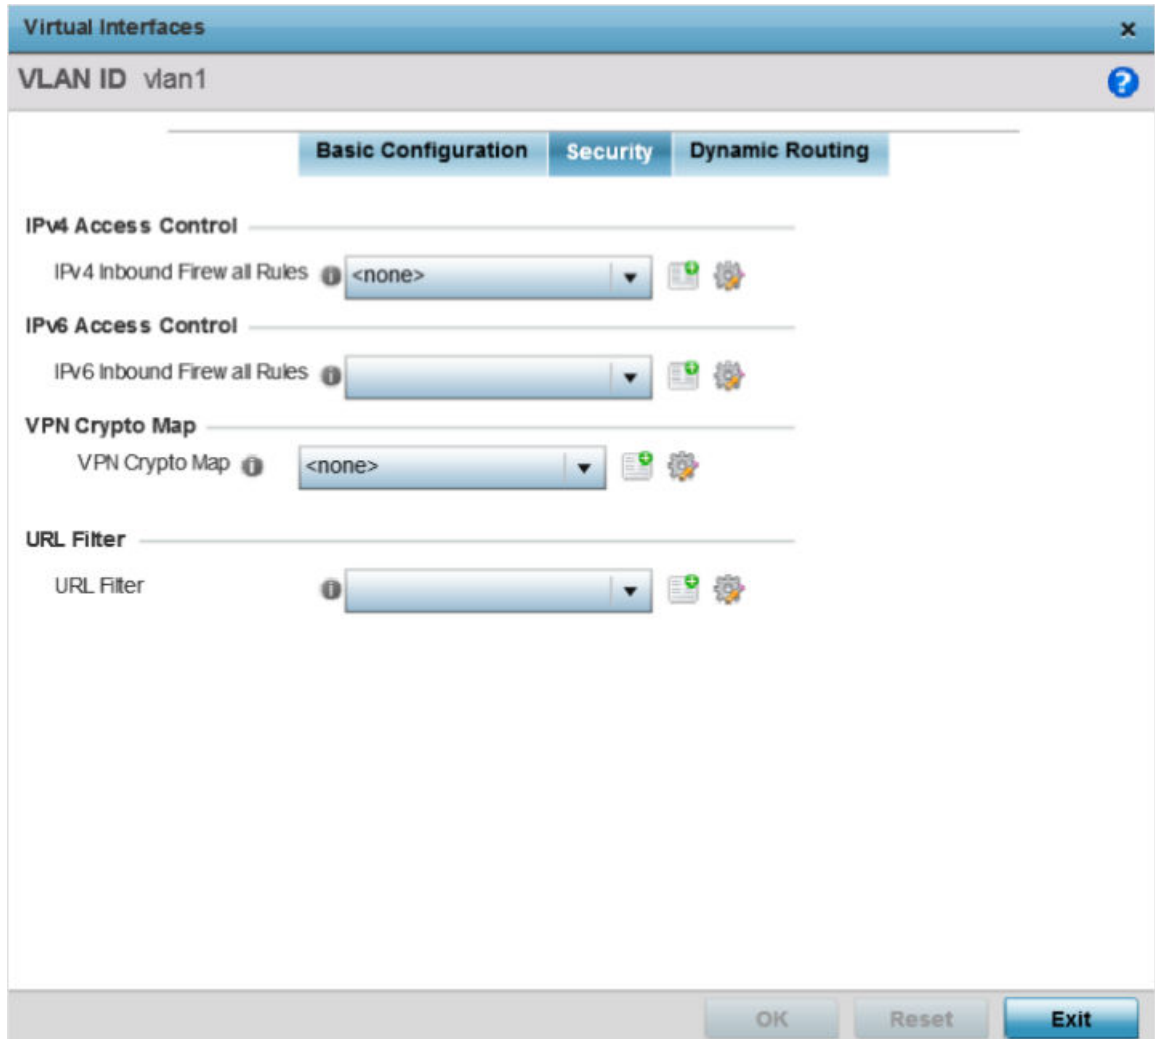


Figure 37: Profile Overrides - Virtual Interfaces Security Screen

2. Use the **IPv4 Inbound Firewall Rules** drop-down menu to select the IPv4 specific inbound firewall rules to apply to this profile's virtual interface configuration.
Click the **Create** icon to define a new IPv4 firewall rule configuration, or click the **Edit** icon to modify an existing configuration.

IPv4 is a connectionless protocol for packet switched networking. IPv4 operates as a best effort delivery method, since it does not guarantee delivery, and does not ensure proper sequencing or duplicate delivery (unlike (TCP). For more information on creating IPv4 firewall rules, see [Configuring IP Firewall Rules](#) on page 841.

IPv4 and IPv6 are different enough to warrant separate protocols. IPv6 devices can alternatively use stateless address autoconfiguration. IPv4 hosts can use link local addressing to provide local connectivity.

3. Use the **IPv6 Inbound Firewall Rules** drop-down menu to select the IPv6 specific inbound firewall rules to apply to this profile's virtual interface configuration.
Click the **Create** icon to define a new IPv6 firewall rule configuration, or click the **Edit** icon to modify an existing configuration.

IPv6 is the latest revision of the IP (*Internet Protocol*) replacing IPv4. IPv6 provides enhanced identification and location information for systems routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. For more information on creating IPv6 firewall rules, see [Configuring IP Firewall Rules](#) on page 841.

4. Use the **VPN Crypto Map** drop-down menu to select or override the Crypto Map configuration applied to this virtual interface.

The VPN Crypto Map entry defines the type of VPN connection and its parameters. For more information see [Defining Profile VPN Settings](#) on page 244.

5. Click **OK** to save the changes and overrides to the **Security** screen.
Click **Reset** to revert to the last saved configuration.

Dynamic Routing Configuration

To configure the VLAN Dynamic Routing configuration:

1. Select the **Dynamic Routing** tab.

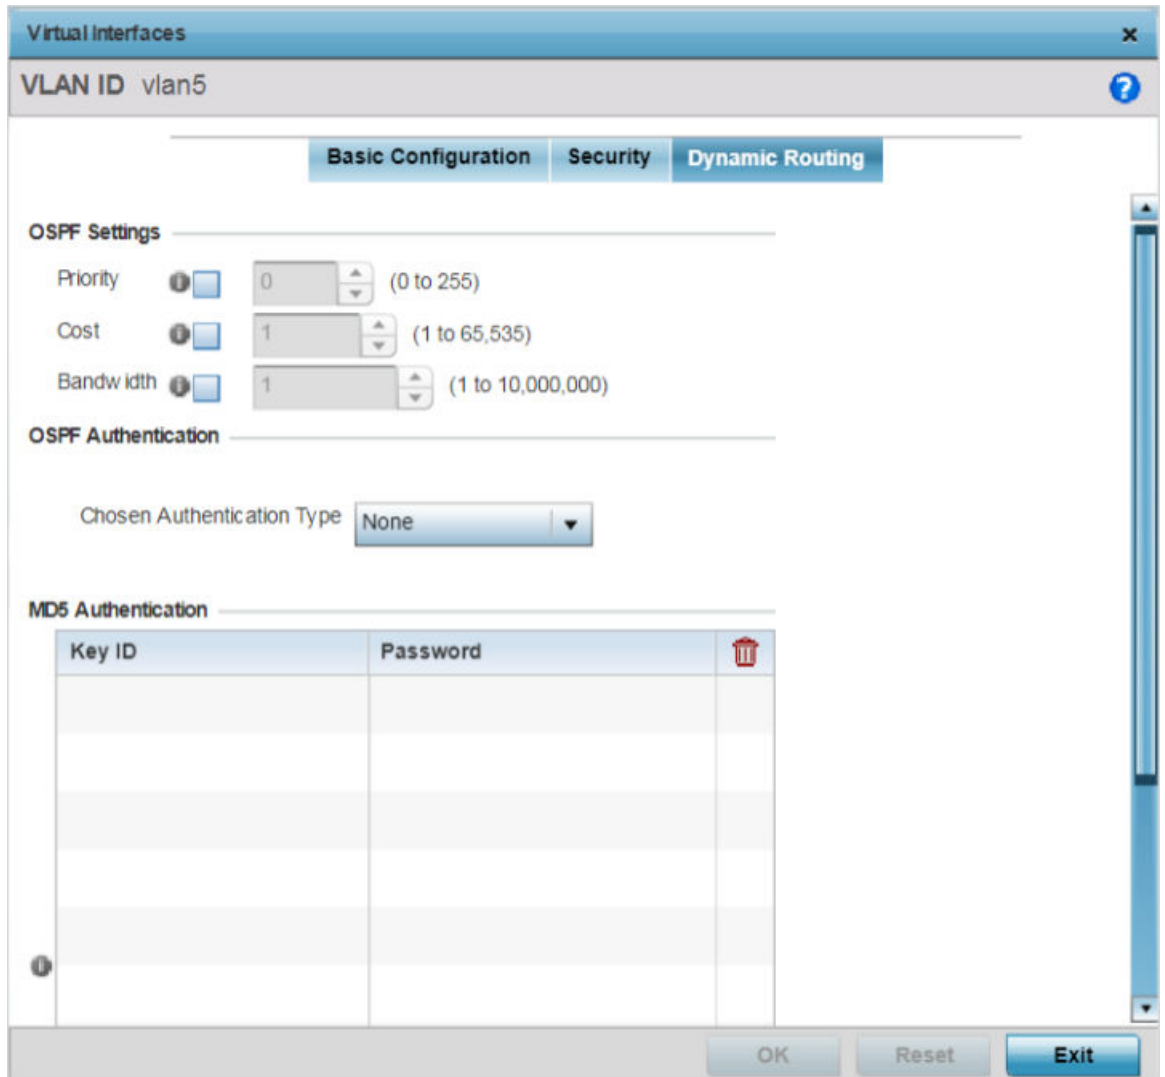


Figure 38: Profile Overrides - Virtual Interfaces Dynamic Routing Screen

2. Define or override the following parameters in the **OSPF Settings** field:

Priority	Select this option to enable or disable OSPF priority settings. Use the spinner to configure a value from 0 - 255. This option sets the priority of this interface becoming the DR (<i>Designated Router</i>) for the network. DRs provide routing updates to the network by maintaining a complete topology table of the network and sends the updates to the other routers in the network using multicast. Setting a high value increases the chance of this interface becoming a DR. Setting this value to zero prevents this interface from being elected a DR.
Cost	Select this option to enable or disable OSPF cost settings. Use the spinner to configure a cost value from 1 - 65535. Use this option to set the OSPF cost of this interface. OSPF cost is the overhead required to send a packet over this interface.
Bandwidth	Set the OSPF bandwidth from 1 - 10,000,000 Kbps.

3. Configure the **OSPF Authentication Type** settings by selecting from the drop-down list.

The available options are **None**, **null**, **simple-password**, and **message-digest**.

4. Select **+ Add Row** at the bottom of the **MD5 Authentication** table to add the Key ID and Password used for an MD5 validation of authenticator credentials.

Key ID	Use the spinner control to set the unique OSPF message digest authentication key ID. The available range is from 1 - 255. The password is the OSPF key either displayed as series or asterisks or in plain text (by selecting Show).
Password	Set the OSPF password. This value is displayed as "asterisk" (*). Select Show to expose the characters in the password.

5. Click **OK** to save the changes and overrides to the **Security** screen.

Click **Reset** to revert to the last saved configuration.

Port Channel Configuration

Controller, service platform and access point profiles can be applied customized port channel settings as part of their interface configuration.



Note

WiNG 7.1 release does not support Port Channel configuration on AP505i and AP510i model access points.

To define a port channel configuration for a device profile:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

A list of device profiles is displayed in the right-hand UI. This list contains default and user-defined profiles.

2. Select a profile from those listed on the screen.

The profile's configuration menu is displayed.

- Expand the **Interface** menu and select **Port Channels**.

The Port Channels screen displays.

Name	Type	Description	Admin Status
port-channel1	Port Channel		✓ Enabled
port-channel2	Port Channel	lancelot	✗ Disabled

Type to search in tables Row Count: 2

- Refer to the following to review existing port channel configurations and their current status:


Name	Displays the port channel's numerical identifier assigned to it when it was created. The numerical name cannot be modified as part of the edit process.
Type	Displays whether the type is port channel.
Description	Lists a short description (64 characters maximum) describing the port channel or differentiating it from others with similar configurations.
Admin Status	A green checkmark defines the listed port channel as active and currently enabled with the profile. A red "X" defines the port channel as currently disabled and not available for use. The interface status can be modified with the port channel configuration as required.

Port Channel Basic Configuration

You can add a new port channel configuration or edit an existing configuration.

- Select **Add** to create a new manual session, **Edit** to modify an existing configuration. To remove a selected port channel configuration select **Delete**.

The port channel **Basic Configuration** screen displays by default.

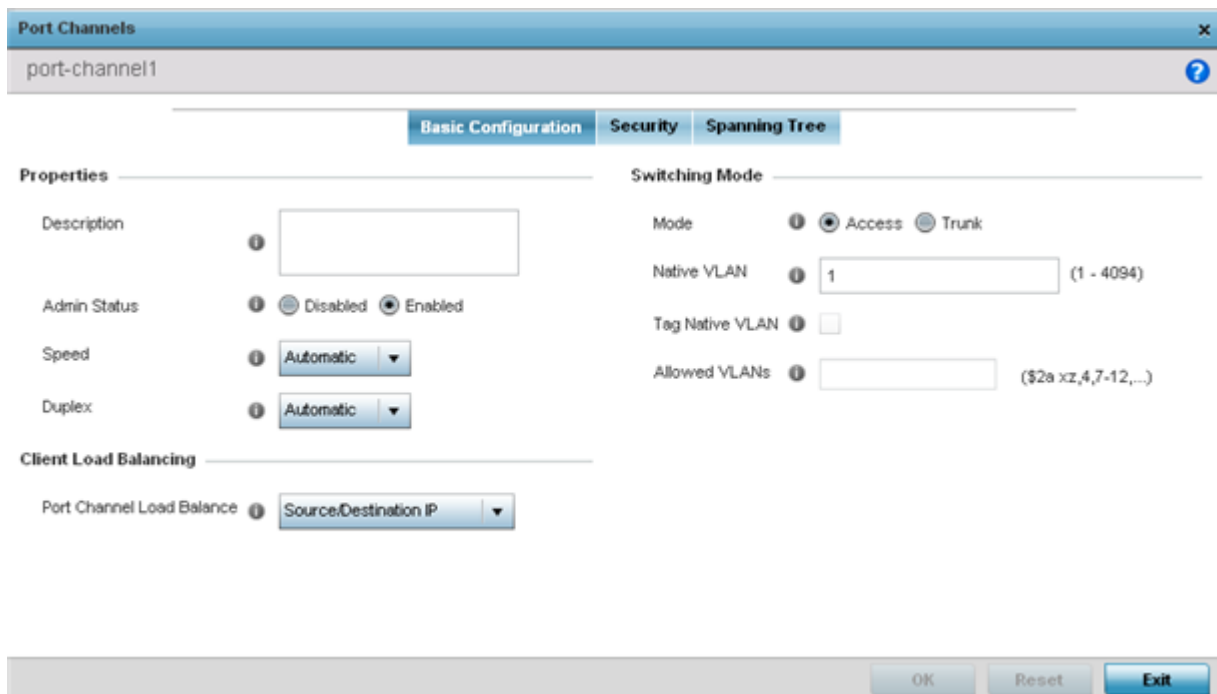

2. Set the following port channel **Properties**:

Description	Enter a brief description for the port channel (64 characters maximum). The description should reflect the port channel's intended function.
Admin Status	Select the <i>Enabled</i> radio button to define this port channel as active to the profile it supports. Select the <i>Disabled</i> radio button to disable this port channel configuration within the profile. It can be activated at any future time when needed. The default setting is enabled.
Speed	Select the speed at which the port channel can receive and transmit the data. Select either <i>10 Mbps</i> , <i>100 Mbps</i> , <i>1000 Mbps</i> . Select either of these options to establish a 10, 100 or 1000 Mbps data transfer rate for the selected half duplex or full duplex transmission over the port. These options are not available if <i>Automatic</i> is selected. Select <i>Automatic</i> to enable the port channel to automatically exchange information about data transmission speed and duplex capabilities. Auto negotiation is helpful when in an environment where different devices are connected and disconnected on a regular basis. Automatic is the default setting.
Duplex	Select either <i>Half</i> , <i>Full</i> or <i>Automatic</i> as the duplex option. Select <i>Half duplex</i> to send data over the port channel, then immediately receive data from the same direction in which the data was transmitted. Like a <i>Full duplex</i> transmission, a <i>Half duplex</i> transmission can carry data in both directions, just not at the same time. Select <i>Full duplex</i> to transmit data to and from the port channel at the same time. Using <i>Full duplex</i> , the port channel can send data while receiving data as well. Select <i>Automatic</i> to dynamically duplex as port channel performance needs dictate. Automatic is the default setting.

3. Use the **Port Channel Load Balance** drop-down menu to define whether port channel load balancing is conducted using a Source/Destination IP or a Source/Destination MAC. Source/Destination IP is the default setting.

4. Define the following **Switching Mode** parameters to apply to the port channel configuration:


Mode	Select either the <i>Accessor Trunk</i> radio button to set the VLAN switching mode over the port channel. If Access is selected, the port channel accepts packets only from the native VLANs. Frames are forwarded out the port untagged with no 802.1Q header. All frames received on the port are expected as untagged and are mapped to the native VLAN. If the mode is set to Trunk, the port channel allows packets from a list of VLANs you add to the trunk. A port channel configured as Trunk supports multiple 802.1Q tagged VLANs and one Native VLAN which can be tagged or untagged. Access is the default setting.
Native VLAN	Use the spinner control to define a numerical ID between 1 - 4094. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN which untagged traffic will be directed over when using trunk mode. The default value is 1.
Tag the Native VLAN	Select the checkbox to tag the native VLAN. WiNG managed devices support the IEEE 802.1Q specification for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs to. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, the 12 bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12 bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This setting is disabled by default.
Allowed VLANs	Selecting <i>Trunk</i> as the mode enables the Allowed VLANs parameter. Add VLANs that exclusively send packets over the port channel.

5. Select **OK** to save the changes made to the port channel Basic Configuration. Select **Reset** to revert to the last saved configuration.

Port Channel Security

To define a port channel's security configuration.

1. Select the **Security** tab.

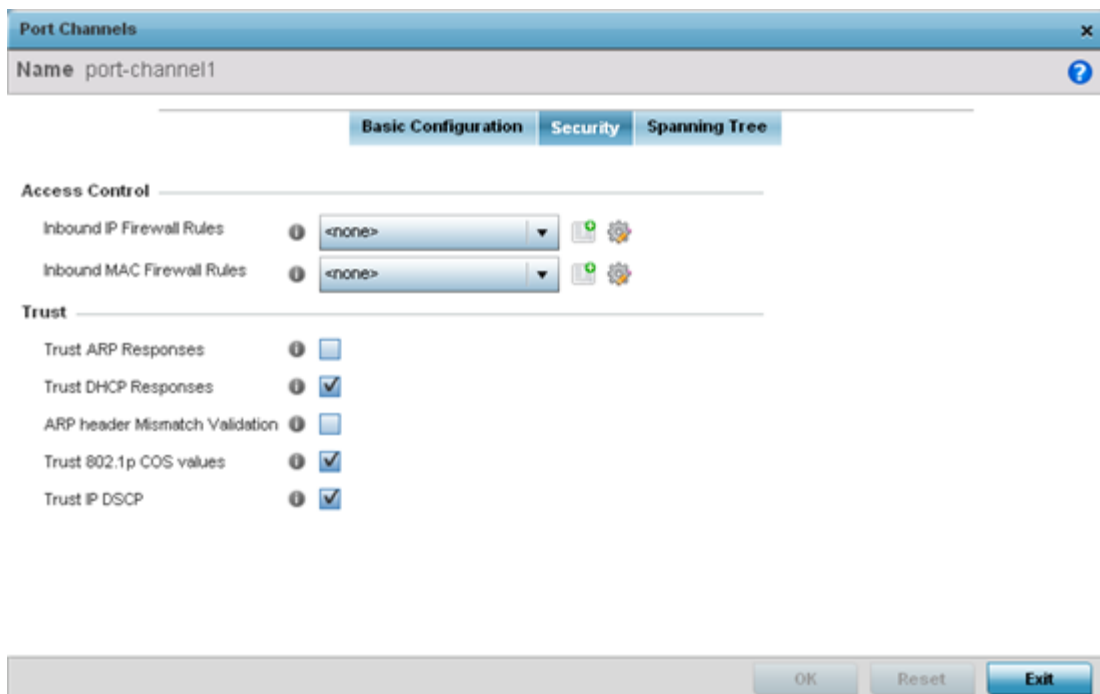

2. Refer to the **Access Control** section. As part of the port channel's security configuration, Inbound IP and MAC address firewall rules are required.

Use the **Inbound IP Firewall Rules** and **MAC Inbound Firewall Rules** drop-down menus to select firewall rules to apply to this profile's port channel configuration.

The firewall inspects IP and MAC traffic flows and detects attacks typically not visible to traditional wired firewall appliances.

If a firewall rule does not exist suiting the data protection needs of the target port channel configuration, select the **Create** icon to define a new rule configuration or the **Edit** icon to modify an existing firewall rule configuration. For more information, see [Wireless Firewall](#) on page 826.

3. Refer to the **Trust** field to define the following:

Trust ARP Responses	Select the check box to enable ARP trust on this port channel. ARP packets received on this port are considered trusted and information from these packets is used to identify rogue devices within the network. The default value is disabled.
Trust DHCP Responses	Select the check box to enable DHCP trust. If enabled, only DHCP responses are trusted and forwarded on this port channel, and a DHCP server can be connected only to a DHCP trusted port. The default value is enabled.
ARP header Mismatch Validation	Select the check box to enable a mismatch check for the source MAC in both the ARP and Ethernet header. The default value is enabled.

Trust 802.Ip COS values	Select the check box to enable 802.Ip COS values on this port channel. The default value is enabled.
Trust IP DSCP	Select the check box to enable IP DSCP values on this port channel. The default value is enabled.

4. Set the following **IPv6 Settings**:


Trust ND Requests	Select to enable the trust of neighbor discovery requests required on an IPv6 network. This setting is disabled by default.
Trust DHCPv6 Responses	Select to enable the trust all DHCPv6 responses. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. This setting is enabled by default.
ND Header Mismatch Validation	Select to enable a mismatch check for the source MAC within the ND header and Link Layer Option. This option is disabled by default.
RA Guard	Select this option to enable router advertisements or ICMPv6 redirects from this Ethernet port. This option is disabled by default.

5. Select **OK** to save the changes to the security configuration. Select **Reset** to revert to the last saved configuration.

Port Channel Spanning Tree

To define a port channel' spanning tree configuration:

1. Select the **Spanning Tree** tab.

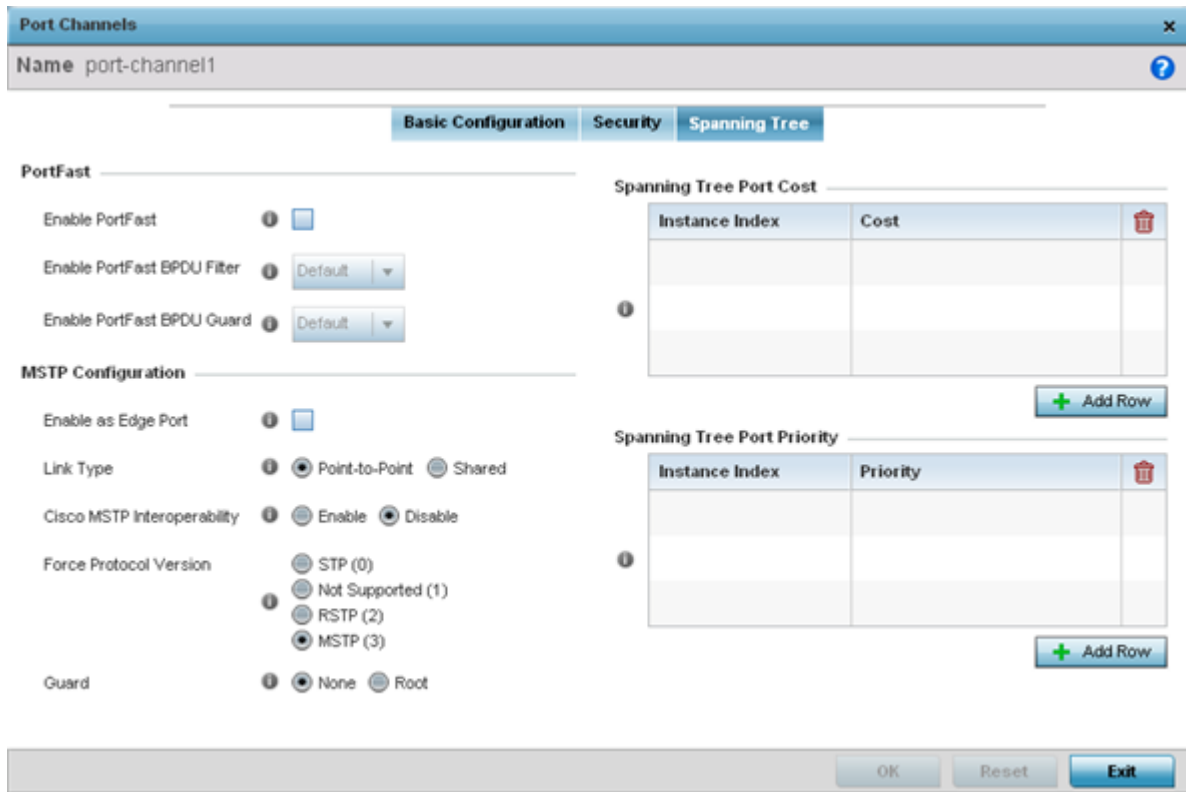

2. Define the following **PortFast** parameters for the port channel's MSTP configuration:

Enable PortFast	Select the check box to enable drop-down menus for both the port Enable Portfast BPDU Filter and Enable Portfast BPDU guard options. This setting is disabled by default.
PortFast BPDU Filter	Select <i>Enable</i> to invoke a BPDU filter for this portfast enabled port channel. Enabling the BPDU filter feature ensures this port channel does not transmit or receive any BPDUs. The default setting is None.
PortFast BPDU Guard	Select <i>Enable</i> to invoke a BPDU guard for this portfast enabled port channel. Enabling the BPDU Guard feature means this port will shutdown on receiving a BPDU. Thus, no BPDUs are processed. The default setting is None.

3. Set the following **MSTP Configuration** parameters for the port channel:

Enable as Edge Port	Select the check box to define this port as an edge port. Using an edge (private) port, you can isolate devices to prevent connectivity over this port channel. This setting is disabled by default.
Link Type	Select either the <i>Point-to-Point</i> or <i>Shared</i> radio button. Selecting Point-to-Point indicates the port should be treated as connected to a point-to-point link. Selecting Shared indicates this port should be treated as having a shared connection. A port connected to a hub is on a shared link, while the one connected to the wireless device is a point-to-point link. Point-to-Point is the default setting.
Cisco MSTP Interoperability	Select either the <i>Enable</i> or <i>Disable</i> radio buttons. This enables interoperability with Cisco's version of MSTP, which is incompatible with standard MSTP. This setting is disabled by default.
Force Protocol Version	Sets the protocol version to either <i>STP(0)</i> , <i>Not Supported(1)</i> , <i>RSTP(2)</i> or <i>MSTP(3)</i> . MSTP is the default setting.
Guard	Determines whether the port channel enforces root bridge placement. Setting the guard to <i>Root</i> ensures the port is a designated port. Typically, each guard root port is a designated port, unless two or more ports (within the root bridge) are connected together. If the <i>bridge receives superior</i> (BPDUs) on a guard root-enabled port, the guard root moves the port to a root-inconsistent STP state. This state is equivalent to a listening state. No data is forwarded across the port. Thus, the guard root enforces the root bridge position.

4. Refer to the **Spanning Tree Port Cost** table. Select **+ AddRow** as needed to include additional indexes.

Define an **Instance Index** using the spinner control and then set the **Cost**. The default path cost depends on the user defined port speed. The cost helps determine the role of the port channel in the MSTP network. The designated cost is the cost for a packet to travel from this port to the root in the MSTP configuration. The slower the media, the higher the cost.

Speed	Default Path Cost
<=100000 bits/sec	200000000
<=1000000 bits/sec	20000000

Speed	Default Path Cost
<=100000000 bits/sec	2000000
<=1000000000 bits/sec	200000
<=10000000000 bits/sec	20000
<=100000000000 bits/sec	2000
<=1000000000000 bits/sec	200
<=10000000000000 bits/sec	20
>10000000000000 bits/sec	2

- 5.
6. Refer to the **Spanning Tree Port Priority** table. Select **+ Add Row** needed to include additional indexes.

Define an **Instance Index** using the spinner control and then set the **Priority**. The lower the priority, a greater likelihood of the port becoming a designated port.

7. Select **OK** to save the changes made to the Ethernet Port Spanning Tree configuration. Select **Reset** to revert to the last saved configuration.

Access Point Radio Configuration

Access points can have their radio configurations modified by their management controller, service platform or peer access point. Take care not to modify an access point's configuration using its resident Web UI, CLI or SNMP interfaces when managed by a profile, or risk the access point having a configuration independent from the profile until the profile can be uploaded to the access point again from its managing device.

To define an access point radio configuration from an associated peer access point controller AP, controller or NX service platform:

1. Select **Configuration → Devices → System Profile** from the web UI.

A list of device profiles is displayed in the right-hand UI. This list contains default and user-defined profiles.

2. Select a profile from those listed on the screen.

The profile's configuration menu is displayed.

3. Expand the **Interface** menu and select **Radios**.

Name	Type	Description	Shutdown	RF Mode	Channel	Transmit Power
radio1	Radio	radio1	Enabled	2.4 GHz WLAN	smart	smart
radio2	Radio	radio2	Enabled	5 GHz WLAN	smart	smart
radio3	Radio	radio3	Enabled	Sensor	smart	smart

Row Count: 3

4. Review the following to determine whether a radio configuration requires modification to better support the managed network:

Name	Displays whether the reporting radio is the access point's radio1, radio2 or radio3.
Type	Displays the type of radio housed by each listed access point.
Description	Displays a brief description of the radio provided by the administrator when the radio's configuration was added or modified.
Admin Status	A green checkmark defines the listed radio as active and enabled with its supported profile. A red "X" defines the radio as currently disabled.
RF Mode	Displays whether each listed radio is operating in the 802.11a/n or 802.11b/g/n radio band. If the radio is a dedicated sensor, it will be listed as a sensor to define the radio as not providing typical WLAN support. If the radio is a client-bridge, it provides a typical bridging function and does not provide WLAN support. The radio band is set from within the Radio Settings tab.

Channel	Lists the channel setting for the radio. Smart is the default setting. If set to smart, the access point scans non-overlapping channels listening for beacons from other access points. After the channels are scanned, it selects the channel with the fewest access points. In the case of multiple access points on the same channel, it selects the channel with the lowest average power level.
Transmit Power	Lists the transmit power for each radio displayed as a value in milliwatts.


5. If required, select a radio configuration and select the **Edit** button to modify its configuration.

Radio Settings

Use the **Radio Settings** screen to apply QoS, ACL, operational mode, WLAN attributes and sensor configuration settings to the radio.

To edit an access point's radio settings:

1. Select the radio, then select **Edit**.

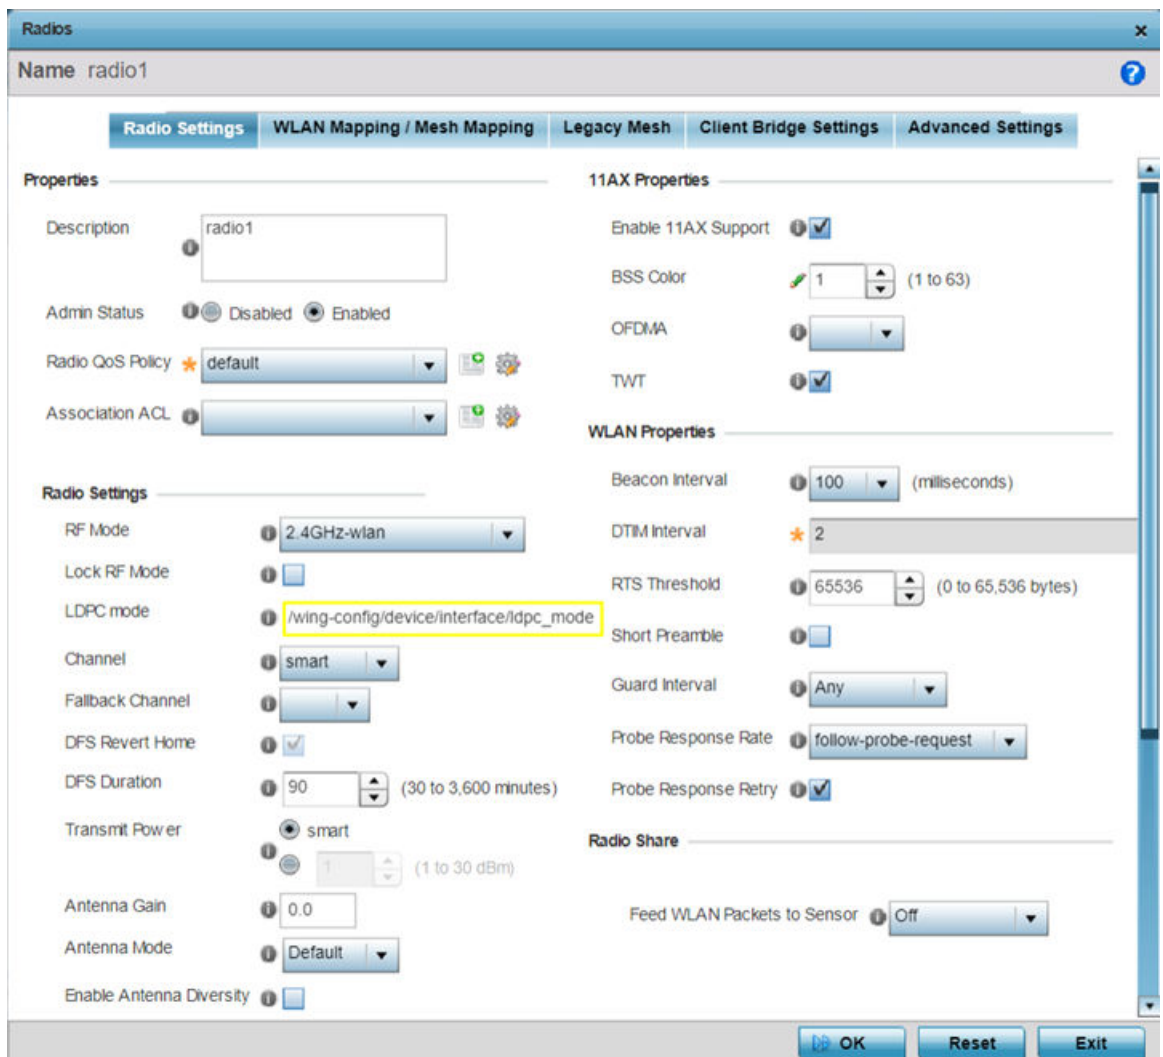

The **Radio Settings** tab displays by default.

- Define the following radio configuration parameters from within the **Properties** field:

Description	Provide or edit a description (1 - 64 characters in length) for the radio that helps differentiate it from others with similar configurations.
Admin Status	Select the <i>Enabled</i> radio button to define this radio as active to the profile it supports. Select the <i>Disabled</i> radio button to disable this radio configuration within the profile. It can be activated at any future time when needed. The default setting is enabled.
Radio QoS Policy	Use the drop-down menu to specify an existing QoS policy to apply to the access point radio in respect to its intended radio traffic. If there's no existing suiting the radio's intended operation, select the <i>Create</i> icon to define a new QoS policy that can be applied to this profile.
Association ACL	Use the drop-down menu to specify an existing Association ACL policy to apply to the access point radio. An Association ACL is a policy-based ACL that either prevents or allows wireless clients from connecting to an access point radio. An ACL is a sequential collection of permit and deny conditions that apply to packets. When a packet is received on an interface, its compared against applied ACLs to verify the packet has the required permissions to be forwarded. If a packet does not meet any of the criteria specified in the ACL, the packet is dropped. Select the <i>Create</i> icon to define a new Association ACL that can be applied to this profile.

3. Set the following profile **Radio Settings** for the selected access point radio:

RF Mode	<p>The radio can be configured to provide WLAN service for 2.4 GHz, 5 GHz and 6 GHz enabled clients. You can also set the radio to provide sensor support, scan-ahead support, or function as a client bridge.</p> <p>Set the mode to either <i>2.4 GHz WLAN</i>, <i>5 GHz WLAN</i> or <i>6 GHz WLAN</i> depending on the radio's intended client support requirement.</p> <p>Set the mode to <i>Sensor</i> if using the radio for rogue device detection. To set a radio as a detector, disable Sensor support on the other access point radio.</p> <p>Set the mode to <i>scan-ahead</i> in DFS aware countries to allow a mesh points secondary radio to scan for an alternative channel for backhaul transmission in the event of a radar event on the principal radio. The secondary radio is continually monitoring the alternate channel, which means the principal radio can switch channels and transmit data immediately without waiting for the channel availability check.</p> <p>Set the mode to <i>bridge</i> to configure the radio as a client bridge. A client bridge enables the access point to connect to a third party access point and bridge frames to it.</p> <p>The client-bridge is supported only on the following access point models: AP3000/X, AP5010, AP6522, AP6562, AP7522, AP7532, AP7612, AP7632, and AP7662</p> <p>Note: For AP510 model access points, you can configure 5 GHz WLAN support on both radio 1 and radio 2.</p> <p>Note: The <i>scan-ahead</i> and <i>bridge</i> RF modes are not supported on the AP505i and AP510i model access points.</p> <p>Note: For information on the possible modes of operations for AP505 and AP510 radios, see ap510i and ap505i.</p>
Lock RF Mode	Select the check box to lock Smart RF for this radio. The default setting is disabled.
DFS Revert Home	Select this option to revert to the home channel after a DFS evacuation period.

Channel	Use the drop-down menu to select the channel of operation for the radio. Only a trained installation professional should define the radio channel. Select Smart for the radio to scan non-overlapping channels listening for beacons from other access points. After channels are scanned, the radio selects the channel with the fewest access points. In the case of multiple access points on the same channel, it selects the channel with the lowest average power level. The default value is Smart. Channels with a "w" appended to them are unique to the 40 MHz band. Channels with a "ww" appended to them are 802.11ac specific, and are unique to the 80 MHz band.
Transmit Power	Set the transmit power of the selected access point radio. If using a dual or three radio model access point, each radio should be configured with a unique transmit power in respect to its intended client support function. A setting of 0 defines the radio as using Smart RF to determine its output power. 20 dBm is the default value.
Antenna Gain	Set the antenna between 0.00 - 15.00 dBm. The access point's <i>Power Management Antenna Configuration File</i> (PMACF) automatically configures the access point's radio transmit power based on the antenna type, its antenna gain (provided here) and the deployed country's regulatory domain restrictions. Once provided, the access point calculates the power range. Antenna gain relates the intensity of an antenna in a given direction to the intensity that would be produced ideally by an antenna that radiates equally in all directions (isotropically), and has no losses. Although the gain of an antenna is directly related to its directivity, its gain is a measure that takes into account the efficiency of the antenna as well as its directional capabilities. Only a professional installer should set the antenna gain. The default value is 0.00.
Antenna Mode	Set the number of transmit and receive antennas on the access point. 1x1 is used for transmissions over just the single "A" antenna, 1x3 is used for transmissions over the "A" antenna and all three antennas for receiving. 2x2 is used for transmissions and receipts over two antennas for dual antenna models. 3x3x3 is used for transmissions and receipts over three antennas models. The default setting is dynamic based on the access point model deployed and its transmit power settings.
Enable Antenna Diversity	Select this box to enable antenna diversity on supported antennas. Antenna diversity uses two or more antennas to increase signal quality and strength. This option is disabled by default.
Wireless Client Power	Select this option to specify the transmit power on supported wireless clients. If this is enabled set a client power level between 0 to 20 dBm. This option is disabled by default.

Dynamic Chain Selection	Select this option for the radio to dynamically change the number of transmit chains. This option is enabled by default.
Data Rates	<p>When the RF mode is selected, the Data Rates drop-down menu populates with rate options depending on whether you select the 2.4, 5, or 6 GHz band.</p> <p>If the radio band is set to Sensor or Detector, the Data Rates drop-down menu is not enabled, as the rates are fixed and not user configurable.</p> <p>If 2.4 GHz is selected as the radio band, select separate 802.11b, 802.11g and 802.11n rates and define how they are used in combination.</p> <p>If 5 GHz or 6 GHz is selected as the radio band, select separate 802.11a and 802.11n rates then define how they are used together. When using 802.11n (in either the 2.4 or 5 GHz band), Set a MCS (modulation and coding scheme) in respect to the radio's channel width and guard interval. A MCS defines (based on RF channel conditions) an optimal combination of 8 data rates, bonded channels, multiple spatial streams, different guard intervals and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).</p> <p>If dedicating the radio to either 2.4, 5 GHz, or 6 GHz support, a Custom Rates option is available to set a <i>modulation and coding scheme</i> (MCS) in respect to the radio's channel width and guard interval. A MCS defines (based on RF channel conditions) an optimal combination of rates, bonded channels, multiple spatial streams, different guard intervals and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).</p> <p>If Basic is selected within the 802.11n Rates field, the MCS0-7 option is auto selected as a Supported rate and that option is greyed out.</p> <p>If Basic is not selected, any combination of MCS0-7, MCS8-15 and MCS16-23 can be supported, including a case where MCS0-7 and MCS16-23 are selected and not MCS8-15. The MCS0-7 and MCS8-15 options are available to each support access point. However, the MCS16-23 option is only available to AP 8132 model access points and its ability to provide 3x3x3 MIMO support.</p> <p>Refer to SUPPORTED DATA RATES for details about 802.11an and 802.11ac MCS data rates, with and without <i>short guard intervals</i> (SGI).</p>
Radio Placement	Use the drop-down menu to specify whether the radio is located <i>Indoors</i> or <i>Outdoors</i> . The placement should depend on the country of operation and its regulatory domain requirements for radio emissions. The default setting is Indoors.

Max Clients	Use the spinner control to set a maximum permissible number of clients to connect with this radio. The available range is between 0 - 256 clients. The default value is 256. Note: The AP505 and AP510 support a maximum of 250 clients per radio.
Rate Selection Method	Specify a radio selection method for the radio. The selection methods are: <i>Standard</i> : standard monotonic radio selection method will be used. <i>Opportunistic</i> : sets opportunistic radio link adaptation as the radio selection method. This mode uses opportunistic data rate selection to provide the best throughput.

4. Set the following profile **WLAN Properties** for the selected access point radio.

Beacon Interval	Set the interval between radio beacons in milliseconds (either 50, 100 or 200). A beacon is a packet broadcast by adopted radios to keep the network synchronized. The beacon includes the WLAN service area, radio address, broadcast destination addresses, time stamp and indicators about traffic and delivery such as a DTIM. Increase the DTIM/beacon settings (lengthening the time) to let nodes sleep longer and preserve battery life. Decrease these settings (shortening the time) to support streaming-multicast audio and video applications that are jitter-sensitive. The default value is 100 milliseconds.
DTIM Interval BSSID	Set a DTIM Interval to specify a period for DTIM (<i>Delivery Traffic Indication Messages</i>). A DTIM is periodically included in a beacon frame transmitted from adopted radios. The DTIM period determines how often the beacon contains a DTIM, for example, 1 DTIM for every 10 beacons. The DTIM indicates broadcast and multicast frames (buffered at the access point) are soon to arrive. These are simple data frames that require no acknowledgment, so nodes sometimes miss them. Increase the DTIM/ beacon settings (lengthening the time) to let nodes sleep longer and preserve their battery life. Decrease these settings (shortening the time) to support streaming multicast audio and video applications that are jitter-sensitive.

RTS Threshold	<p>Specify a RTS (<i>Request To Send</i>) threshold (between 1 - 2,347 bytes) for use by the WLAN's adopted access point radios. RTS is a transmitting station's signal that requests a CTS (<i>Clear To Send</i>) response from a receiving client. This RTS/CTS procedure clears the air where clients are contending for transmission time. Benefits include fewer data collisions and better communication with nodes that are hard to find (or hidden) because of other active nodes in the transmission path.</p> <p>Control RTS/CTS by setting an RTS threshold. This setting initiates an RTS/CTS exchange for data frames larger than the threshold, and sends (without RTS/CTS) any data frames smaller than the threshold.</p> <p>Consider the trade-offs when setting an appropriate RTS threshold for the WLAN's access point radios. A lower RTS threshold causes more frequent RTS/CTS exchanges. This consumes more bandwidth because of additional latency (RTS/CTS exchanges) before transmissions can commence. A disadvantage is the reduction in data-frame throughput. An advantage is quicker system recovery from electromagnetic interference and data collisions. Environments with more wireless traffic and contention for transmission make the best use of a lower RTS threshold.</p> <p>A higher RTS threshold minimizes RTS/CTS exchanges, consuming less bandwidth for data transmissions. A disadvantage is less help to nodes that encounter interference and collisions. An advantage is faster data-frame throughput. Environments with less wireless traffic and contention for transmission make the best use of a higher RTS threshold.</p>
Short Preamble	<p>If using an 802.11bg radio, select this checkbox for the radio to transmit using a short preamble. Short preambles improve throughput. However, some devices (SpectraLink/Polycomm phones) require long preambles. The default value is disabled.</p>
Guard Interval	<p>Use the drop-down menu to specify a <i>Long</i> or <i>Any</i> guard interval. The guard interval is the space between the packets being transmitted. The guard interval is there to eliminate ISI (<i>inter-symbol interference</i>). ISI occurs when echoes or reflections from one transmission interfere with another. Adding time between transmissions allows echo's and reflections to settle before the next packet is transmitted. A shorter guard interval results in a shorter times which reduces overhead and increases data rates by up to 10%.The default value is Long.</p>
Probe Response Rate	<p>Use the drop-down menu to specify the data transmission rate used for the transmission of probe responses. Options include, <i>highest-basic</i>, <i>lowest-basic</i> and <i>follow-probe-request</i> (default setting).</p>
Probe Response Retry	<p>Select the check box to retry probe responses if they are not acknowledged by the target wireless client. The default value is enabled.</p>

- Select a mode from the **Feed WLAN Packets to Sensor** check box in the **Radio Share** section to enable this feature.

Select either *Inline* or *Promiscuous* mode to allow the packets the radio is switching to also be used by the WIPS analysis module. This feature can be enabled in two modes: an inline mode where the wips sensor receives the packets from the radios with radio operating in normal mode. A promiscuous mode where the radio is configured to a mode where it receives all packets on the channel whether the destination address is the radio or not, and the wips module can analyze them.

Supported Data Rates

802.11n MCS rates are defined as follows for MCS 1-3 streams, both with and without SGI:

<i>MCS-1Stream Index</i>	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	1	6.5	7.2	13.5	15
1	1	13	14.4	27	30
2	1	19.5	21.7	40.5	45
3	1	26	28.9	54	60
4	1	39	43.4	81	90
5	1	52	57.8	108	120
6	1	58.5	65	121.5	135
7	1	65	72.2	135	150

<i>MCS-2Stream Index</i>	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	2	13	14.4	27	30
1	2	26	28.9	54	60
2	2	39	43.4	81	90
3	2	52	57.8	108	120
4	2	78	86.7	162	180
5	2	104	115.6	216	240
6	2	117	130	243	270
7	2	130	144.4	270	300

<i>MCS-3Stream Index</i>	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	3	19.5	21.7	40.5	45
1	3	39	43.3	81	90
2	3	58.5	65	121.5	135

<i>MCS-3Stream Index</i>	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
3	3	78	86.7	162	180
4	3	117	130.7	243	270
5	3	156	173.3	324	360
6	3	175.5	195	364.5	405
7	3	195	216.7	405	450

802.11ac MCS rates (theoretical throughput for single spatial streams) are defined as follows, both with and without SGI:

<i>MCS Index</i>	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI	80 MHz No SGI	80 MHz With SGI
0	6.5	7.2	13.5	15	29.3	32.5
1	13	14.4	27	30	58.5	65
2	19.5	21.7	40.5	45	87.8	97.5
3	26	28.9	54	60	117	130
4	39	43.3	81	90	175.5	195
5	52	57.8	108	120	234	260
6	58.5	65	121.5	135	263.3	292.5
7	65	72.2	135	150	292.5	325
8	78	86.7	162	180	351	390
9	N/A	N/A	180	200	390	433.3

6. Select **OK** to save the changes made within the screen. Select **Reset** to revert to the last saved configuration.

Table 4: AP510 Radio 1 and Radio 2: Possible Modes of Operation

Option 1	<i>Radio 1:</i>	Set to 2.4 GHz WLAN, Channels 1 - 11 in the 20 MHz /40 MHz bandwidths
	<i>Radio 2:</i>	Set to 5 GHz WLAN, Channels 36 - 165 in the 20 MHz /40 MHz /80 MHz /160 MHz bandwidths
Option 2	<i>Radio 1:</i>	Set to Sensor
	<i>Radio 2:</i>	Set to 5 GHz WLAN, Channels 36 - 165 in the 20 MHz /40 MHz /80 MHz /160 MHz bandwidths

Table 4: AP510 Radio 1 and Radio 2: Possible Modes of Operation (continued)

Option 3	<i>Radio 1:</i>	Set to 5 GHz, Channels 36 - 64 in the 20 MHz /40 MHz /80 MHz /160 MHz bandwidths
	<i>Radio 2:</i>	Set to 5 GHz, Channels 100 - 165 in the 20 MHz /40 MHz /80 MHz /160 MHz bandwidths

Table 5: AP505i Radio 1 and Radio 2: Possible Modes of Operation

Option 1	<i>Radio 1:</i>	Set to 2.4 GHz WLAN, Channels 1 - 11 in the 20 MHz /40 MHz bandwidths
	<i>Radio 2:</i>	Set to 5 GHz WLAN, Channels 36 - 165 in the 20 MHz /40 MHz /80 MHz /160 MHz
Option 2	<i>Radio 1:</i>	Set to Sensor.
	<i>Radio 2:</i>	Set to Sensor.

WLAN Mapping / Mesh Mapping


You can assign each WLAN its own BSSID. If using a single-radio access point, there are 8 BSSIDs available. If you are using a dual-radio access point there are 8 BSSIDs for the 802.11b/g/n radio and 8 BSSIDs for the 802.11a/n radio.

**Note**

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This feature will be supported in future releases.

To set a radio's WLAN mapping configuration:

1. Select the **WLAN Mapping** tab.

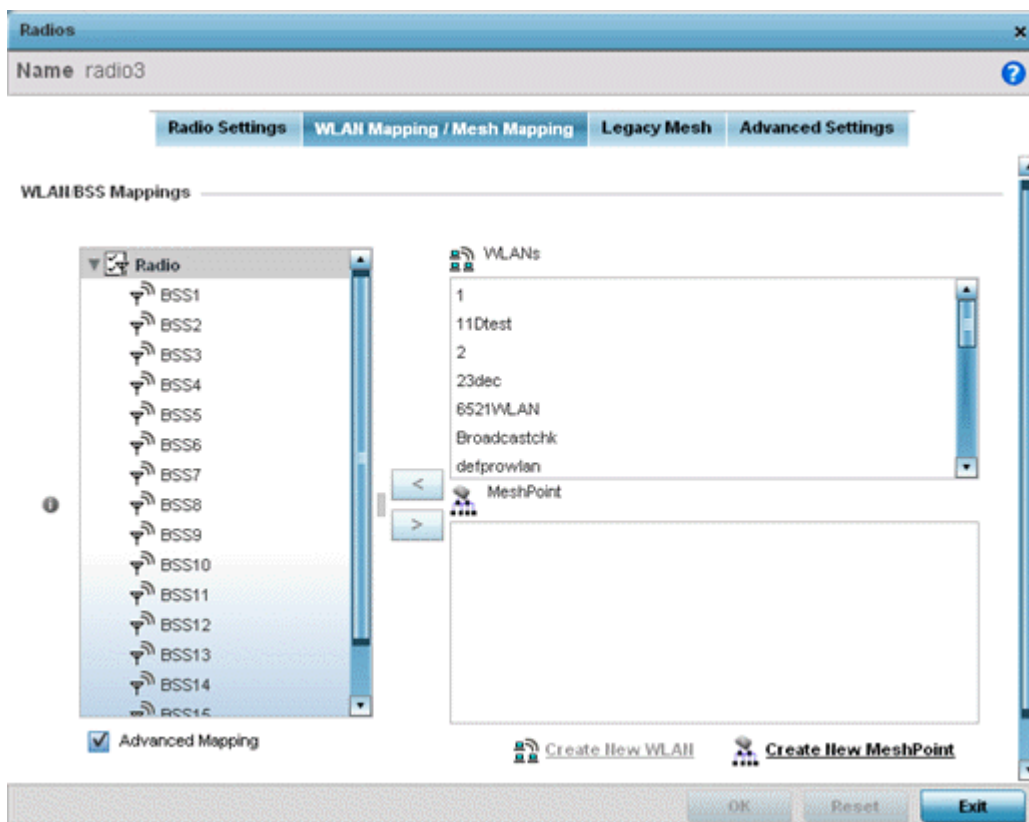

2. Refer to the **WLAN/BSS Mappings** field to set WLAN BSSID assignments for an existing access point deployment.

Use the '<' or '>' buttons to assign WLANs and mesh points to the available BSSIDs.

You can assign each WLAN its own BSSID. If using a single-radio access point, there are 8 BSSIDs available. If using a dual-radio access point there are 8 BSSIDs for the 802.11b/g/n radio and 8 BSSIDs for the 802.11a/n radio. Each supported access point model can support up to 8 BSS IDs.

3. Select **Advanced Mapping** to enable WLAN mapping to a specific BSS ID.
4. Select **OK** to save the changes to the WLAN Mapping. Select **Reset** to revert to the last saved configuration.

Mesh Legacy

Each radio can have a unique mesh mode and link configuration. This provides a customizable set of connections to other mesh supported radios within the same radio coverage area.



Note

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This feature will be supported in future releases.

To set/override a radio's legacy mesh configuration:

1. Select the **Legacy Mesh** tab.

Radios [x]

Name radio2 [?]

Radio Settings | **WLAN Mapping / Mesh Mapping** | **Legacy Mesh** | **Advanced Settings**

Settings

Mesh [i] Disabled [v]

Mesh Links [i] 6 [u] [d] (1 to 6)

Mesh PSK [i] [text] ASCII [v] [Show]

Preferred Peer Devices

Peer MAC	Priority	
[i] 00 - 00 - 00 - 00 - 00 - 00	[*] 1 [u] [d]	[trash]

[+ Add Row]

[OK] [Reset] [Exit]

- Refer to the **Advanced Settings** field to define basic mesh settings for the access point radio.

Mesh	Use the drop-down menu to set the mesh mode for this radio. Available options are <i>Disabled</i> , <i>Portal</i> or <i>Client</i> . Setting the mesh mode to Disabled deactivates all mesh activity on this radio. Setting the mesh mode to Portal turns the radio into a mesh portal. This will start the radio beaconing immediately and accept connections from other mesh nodes. Setting the mesh mode to client enables the radio to operate as a mesh client and scan and connect to mesh portals or nodes connected to portals.	
Mesh Links	Specify the number of mesh links allowed by the radio. The radio can have between 1-6 mesh links when the radio is configured as a Portal or Client.	
Mesh PSK	Provide the encryption key in either ASCII or Hex format. Administrators must ensure this key is configured on the access point when staged for mesh, added to the mesh client and to the portal access point's configuration on the controller or service platform. Select Show to expose the characters used in the PSK. Note: Only single hop mesh links are supported at this time. Note: The mesh encryption key is configurable from the CLI using the command 'mesh → psk'. Administrators must ensure this key is configured on the AP when it is being staged for mesh, and also added to the mesh client as well as to the portal APs configuration on the controller.	

- Refer to the **Preferred Peer Device** table to add mesh peers. For each peer added, enter its MAC Address and a Priority between 1 and 6. The lower the priority number the higher priority it'll be given when connecting to mesh infrastructure.

4. Select the **+ Add Row** and define the following MAC addresses to preferred mesh connection mappings:

Priority	Use this spinner control to set a priority (1 -6) for connection preference.
Peer MAC	For each priority value, define the MAC address of the associated peer device. Use this option to define MAC addresses representing peer devices for the radio to connect to in mesh mode.

5. Select **OK** to save the changes. Select **Reset** to revert to the last saved configuration.

Client Bridge Settings

An access point's radio can be configured to form a bridge between its wireless/wired clients and an infrastructure WLAN. The bridge radio authenticates and associates with an infrastructure WLAN access point. After successful association, the access point switches frames between its bridge radio and wired/wireless client(s) connected either to its GE port(s) or to the other radio, thereby providing the clients access to the infrastructure WLAN resources.

The client-bridge is supported only on the following access point models: AP505i, AP510i, AP3000, AP3000X, AP5010, AP6522, AP6562, AP7522, AP7532, AP7612, AP7632, and AP7662.

To configure a radio's client bridge settings:

1. Select the **Client Bridge Settings** tab.

The selected radio's client bridge configuration screen displays.

Figure 39: Radio Interface - Client Bridge Configuration Screen

2. Define the following **General** settings:

SSID	Set the infrastructure WLAN's SSID, with which the client-bridge access point associates.
VLAN	Set the VLAN to which the bridged clients' sessions are mapped after successful association with the infrastructure WLAN. Once mapped, the client bridge communicates with permitted hosts over the infrastructure WLAN. Specify the VLAN from 1 to 4095.
Max Clients	Set the maximum number of client-bridge access points that can associate with the infrastructure WLAN. Specify a value from 1 to 64. The default value is 64.

Connect through Bridges	Select this option to enable the client-bridge access point radio to associate with the infrastructure WLAN through another client-bridge radio thereby forming a chain. This is referred to as daisy chaining of client-bridge radios. This option is disabled by default.
Channel Dwell Time	Set the channel-dwell time from 50 to 2000 milliseconds. This is the time the client-bridge radio dwells on each channel (configured in the list of channels) when scanning for an infrastructure WLAN. The default is 150 milliseconds.
Authentication	Set the mode of authentication with the infrastructure WLAN. The authentication mode specified here should be the same as that configured on the infrastructure WLAN. The options are None and EAP . If you select EAP , specify the EAP authentication parameters. The default setting is <i>None</i> . For information on WLAN authentication, see Configure WLAN Security on page 627.
Encryption	Set the packet encryption mode. The encryption mode specified here should be the same as that configured on the infrastructure WLAN. The options are None , CCMP , and TKIP . The default setting is <i>None</i> . For information on WLAN encryption, see Configure WLAN Security on page 627.

3. Refer to the **EAP Parameters** field and define the following EAP authentication parameters:

Type	Select the EAP authentication method used by the supplicant. The options are TLS and PEAP-MS-CHAPv2 . The default EAP type is PEAP-MS-CHAPv2 .
Username	Set the 32-character maximum user name for an EAP authentication credential exchange.
Password	Set the 32-character maximum password for the specified EAP user name.
Pre-shared Key	Set the PSK (<i>pre-shared key</i>) used with EAP. Note that the authenticating algorithm and PSK should be the same as on the infrastructure WLAN.
Handshake Basic Rate	Set the basic rate of exchange of handshake packets between the client-bridge and infrastructure WLAN Access Points. The options are highest and normal . The default value is highest .
Trustpoint CA	Set the <i>Trustpoint CA</i> name (this is the trustpoint installed on the RADIUS server host). This parameter is applicable to both EAP-TLS and PEAP-MS-CHAPv2 authentication modes. In case of both EAP-TLS and PEAP-MS-CHAPv2 authentication, provide the RADIUS server TP name to enable RADIUS server certificate validation at the client end. This parameter is not mandatory for enabling TP-based authentication of CB (<i>Client-Bridge</i>) AP.

Trustpoint Client	Set the <i>Trustpoint Client</i> name (this is the TP installed on the CB AP). This parameter is applicable only for EAP-TLS authentication mode. When configured, this client certificate is sent across a TLS tunnel and matched for authentication at the RADIUS server host. This configuration is mandatory for enabling TP-based authentication of CB AP.
Trustpoint Expiry	<p>Use the drop-down menu to specify whether the wireless client-bridge is to be continued or discontinued in case of certificate expiry.</p> <p>In EAP-TLS authentication, a CA-signed certificate is used to authenticate the CB AP and RADIUS server host to establish the wireless CB. Use this option to specify whether the wireless CB is to be continued or terminated on expiration of this certificate.</p> <p>continue – Enables continuation of the CB even after the certificate (CA/client) has expired. When selected, this option enables automatic CA certificate deployment as and when new CA certificates are available. This is the default setting.</p> <p>discontinue – Terminates the CB once the certificate (CA/client) has expired.</p> <p>Note: Configure this parameter only if the CB AP and the RADIUS server host are using a crypto CMP policy for automatic certificate renewal. For more information, see Crypto CMP Policy on page 774.</p>

4. Refer to the **Channel Lists** field and define the list of channels the client-bridge radio scans when scanning for an infrastructure WLAN.

Band A	Define a list of channels for scanning across all the channels in the 5.0 GHz radio band.
Band BG	Define a list of channels for scanning across all the channels in the 2.4 GHz radio band.

5. Refer to the **Keepalive Parameters** field and define the following configurations:

Keepalive Type	Set the keepalive frame type exchanged between the client-bridge and infrastructure access points. This is the type of packets exchanged between the client-bridge and infrastructure access points, at specified intervals, to keep the client-bridge link up and active. The options are null-data and WNMP packets. The default value is null-data .
Keepalive Interval	Set the keepalive interval from 0 to 86,400 seconds. This is the interval between two successive keepalive frames exchanged between the client-bridge and infrastructure Access Points. The default value is 300 seconds.
Inactivity Timeout	Set the inactivity timeout for each bridge MAC address from 0 to 864,000 seconds. This is the time for which the client-bridge access point waits before deleting a wired/wireless client's MAC address from which a frame has not been received for more than the time specified here. For example, if the inactivity time is set at 120 seconds, and if no frames are received from a client (MAC address) for 120 seconds, it is deleted. The default value is 600 seconds.

6. Refer to the **Radio Link Behaviour** field and define the following configurations:

Shutdown Other Radio when Link Goes Down	Select this option to enable shutting down of the non-client bridge radio (this is the radio to which wireless clients associate) when the link between the client-bridge and infrastructure access points is lost. When enabled, wireless clients associated with the non-client bridge radio are pushed to search for and associate with other access points having backhaul connectivity. This option is disabled by default. If you enable this option, specify the time for which the non-client bridge radio is shut down. Use the spinner to specify a time from 1 - 1,800 seconds.
Refresh VLAN Interface when Link Comes Up	Select this option to enable the SVI to refresh on re-establishing client bridge link to the infrastructure access point. If you are using a DHCP assigned IP address, this option also causes a DHCP renew. This option is enabled by default.

7. Refer to the **Roam Criteria** field and define the following configurations:

Seconds for Missed Beacons	Set this interval from 0 to 60 seconds. This is the time for which the client-bridge access point waits, after missing a beacon from the associated infrastructure WLAN access point, before roaming to another infrastructure access point. For example, if Seconds for Missed Beacon is set to 30 seconds, and if more than 30 seconds have passed since the last beacon received from the infrastructure access point, the client-bridge access point resumes scanning for another infrastructure access point. The default value is 20 seconds.
Minimum Signal Strength	Set the minimum signal-strength threshold for signals received from the infrastructure access point. Specify a value from -128 to -40 dBm. If the RSSI value of signals received from the infrastructure access point falls below the value specified here, the client-bridge access point resumes scanning for another infrastructure access point. The default is -75 dBm.

8. Click **OK** to save the changes and overrides to the client bridge settings screen.

Click **Reset** to revert to the last saved configuration.

Advanced Settings

A radio's profile configuration is customizable to define how transmit and receive data frames are processed. A radio's sniffer redirect settings can be refined to adjust how captured packets are directed. Additionally, channel scanning settings can be refined in respect to channel scanning requirements on either the 2.4 or 5 GHz radio bands.

To set or edit the selected radio's advanced settings:

1. Select the **Advanced Settings** tab.

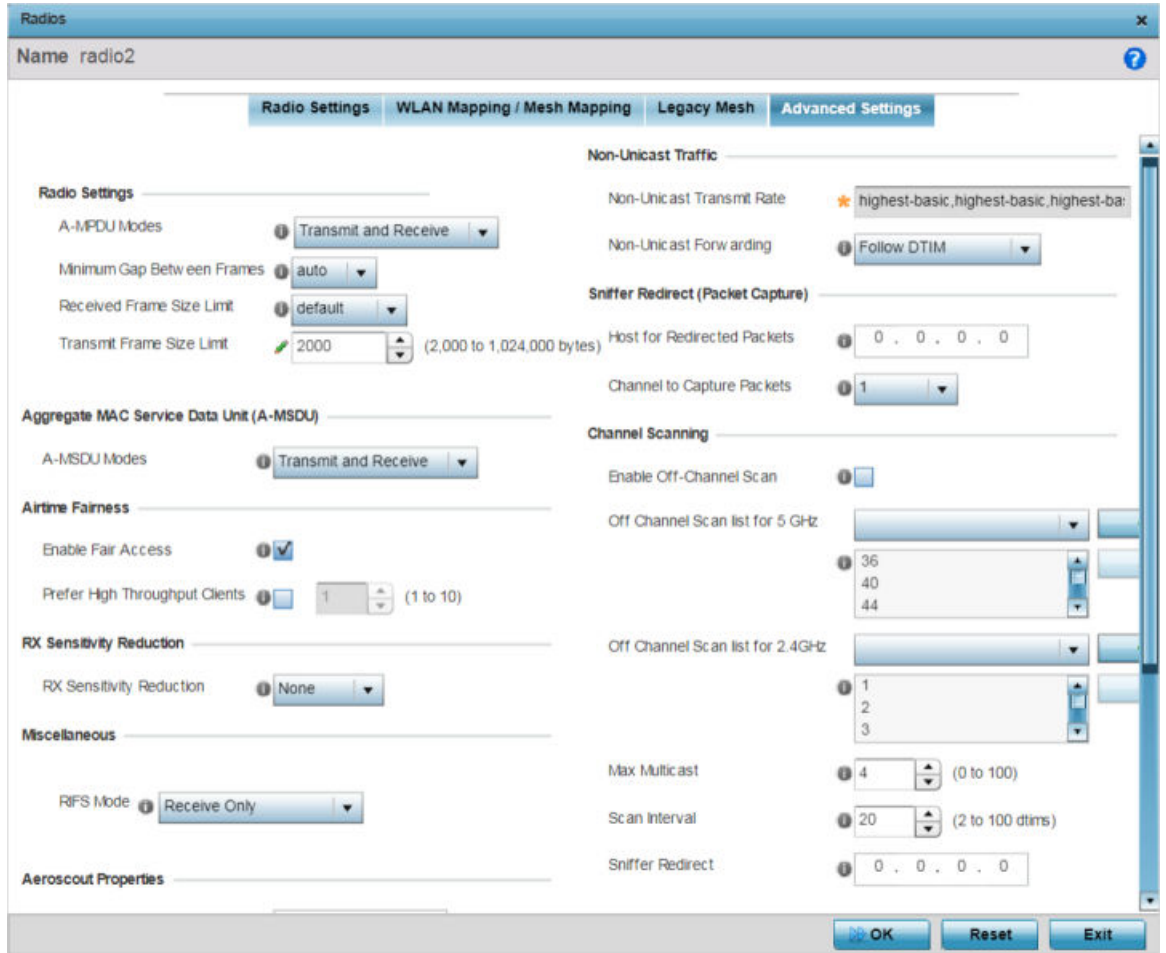


Figure 40: Access Point - Radio Interface - Advanced Settings Screen

2. Refer to the **Radio Settings** field to define how MAC service frames are aggregated by the access point radio.

A-MPDU Modes	Use the drop-down menu to define the A-MPDU mode supported. Options include Transmit Only , Receive Only , Transmit and Receive and None . The default value is Transmit and Receive. Using the default value, long frames can be both sent and received (up to 64 KB). When enabled, define either a transmit or receive limit (or both).
Minimum Gap Between Frames	Use the drop-down menu to define, in microseconds, the minimum gap between consecutive A-MPDU frames. The options include: <ul style="list-style-type: none"> • 0 – Configures the minimum gap as 0 microseconds • 1 – Configures the minimum gap as 1 microseconds • 2 – Configures the minimum gap as 2 microseconds • 4 – Configures the minimum gap as 4 microseconds • 8 – Configures the minimum gap as 8 microseconds • 16 – Configures the minimum gap as 16 microseconds • auto – Auto configures the minimum gap depending on the platform and radio type (default setting)

Received Frame Size Limit	<p>If the A-MPDU mode is set to <i>Receive Only</i> or <i>Transmit and Receive</i>, use this option to define an advertised maximum limit for received A-MPDU aggregated frame size. The options include:</p> <ul style="list-style-type: none"> • 8191 - Advertises the maximum received frame size limit as 8191 bytes. • 16383 - Advertises the maximum received frame size limit as 16383 bytes. • 32767 - Advertises the maximum received frame size limit as 32767 bytes. • 65535 - Advertises the maximum received frame size limit as 65535 bytes. • 128000 - Advertises the maximum received frame size limit as 128000 bytes. • 256000 - Advertises the maximum received frame size limit as 256000 bytes. • 512000 - Advertises the maximum received frame size limit as 512000 bytes. • 1024000 - Advertises the maximum received frame size limit as 1024000 bytes. • default - This option auto configures the maximum received frame size based on the platform and radio type. This is the default setting.
Transmit Frame Size Limit	<p>If the A-MPDU mode is set to <i>Transmit Only</i> or <i>Transmit and Receive</i>, use the spinner control to set limit on transmitted A-MPDU aggregated frame size.</p> <p>The range depends on the AP type and the radio selected.</p> <p>For 802.11ac capable APs, the range is as follows:</p> <ul style="list-style-type: none"> • 2000 - 65,535 bytes - For radio 1, the range is 2000 - 65,535 bytes. The default value is 65,535 bytes. <p>Note: The WiNG <i>AP7662</i> and <i>AP7632</i> access points are an exception to the above rule. For the <i>AP7662</i> and <i>AP7632</i> access point models, the radio 1 range is <i>2000 - 1,024,000 bytes</i>. And the default value is 1,024,000 bytes.</p> <ul style="list-style-type: none"> • 2000 - 1,024,000 bytes - For radio 2, the range is 2000 - 1,024,000 bytes. The default value is 1,024,000 bytes. <p>Note: The WiNG 802.11ac capable APs are: <i>AP7522</i>, <i>AP7532</i>, <i>AP7562</i>, <i>AP7602</i>, <i>AP7612</i>, <i>AP7632</i>, <i>AP7662</i>, <i>AP8432</i>, and <i>AP8533</i>.</p> <p>For non 802.11ac capable APs the range is as follows:</p> <ul style="list-style-type: none"> • 2000 - 65,535 bytes - For both radio 1 and radio 2 the range is 2000 - 65,535 bytes. The default value is 65,535 bytes.

3. in the **Aggregate MAC Service Data Unit (A-MSDU)** section , use the **A-MSDU Modes** drop-down menu to set the supported A-MSDU mode.

Available modes include **Receive Only** and **Transmit and Receive**. Transmit and Receive is the default value. Using Transmit and Receive, frames up to 4 KB can be sent and received. The buffer limit is not configurable.

- Use the **Airtime Fairness** fields to optionally prioritize wireless access to devices.

Enable Fair Access	Select this option to enable this feature and provide equal access client access to radio resources.
Prefer High Throughput Clients	Select this option to prioritize clients with higher throughput (802.11n clients) over clients with slower throughput (802.11 a/b/g) clients. Use the spinner control to set a weight for the higher throughput clients.

- Use the **Rx Sensitivity Reduction** drop-down menu to set the selected radio's receive sensitivity reduction threshold level.

This threshold determines the RSSI (in dBm) at which the radio acknowledges the SOP (*Start of Packet*) frames received from the client, and begins to demodulate and decode the packets.

In highly dense environments, or single-channel networks, having two or more radios sharing a channel, CCI (*co-channel interference*) adversely impacts network performance. By setting this threshold, you can control the radio's receive sensitivity to interference and noise, thereby reducing the impact of CCI. You are basically configuring the AP to not decode packets that have a signal strength below the specified threshold level.

The available *rx-sensitivity-reduction* threshold levels are: **High**, **Low**, **Medium** and **None**. Set the threshold level as *High*, to force your radio to ignore all traffic having a signal strength below the high threshold level value. This results in fewer traffic interruptions due to collision and Wi-Fi interference. Note, the default setting is *None*.

The following table provides the *rx-sensitivity-reduction threshold level* to *RSSI* mapping for the 2.4 GHz and 5 GHz bands:

802.11 Bands	High Threshold	Medium Threshold	Low Threshold
2.4 GHz	-79 dBm	-82 dBm	-85 dBm
5 GHz	-76 dBm	-78 dBm	-80 dBm



Note

This feature is supported only on the following access points: AP-7522, AP 7532, AP-7562, AP-8432, AP-8533

6. Set the following **Aeroscout Properties**:

Forward	Select enable to forward Aeroscout packets to a specified MAC address. Aeroscout tags associate with an access point, then communicate with a location engine. This setting is disabled by default.
MAC to be Forwarded	Specify the MAC address to be forwarded.

7. Set the following **Ekahau Properties**:

Forward Host	Specify the Ekahau engine IP address. Using Ekahau small, battery powered Wi-Fi tags are attached to tracked assets or carried by people. Ekahau processes locations, rules, messages and environmental data and turns the information into locationing maps, alerts and reports.
Forwarding Host	Use the spinner control to set the Ekahau TZSP port used for processing information from locationing tags.
MAC to be Forwarded	Specify the MAC address to be forwarded.

8. Set the following **Non-Unicast Traffic** values for the profile's supported access point radio and its connected wireless clients:

Broadcast/Multicast Transmit Rate	Use the drop-down menu to define the data rate broadcast and multicast frames are transmitted. Seven different rates are available if the not using the same rate for each BSSID, each with a separate menu.
Broadcast/Multicast Forwarding	Define whether client broadcast and multicast packets should always follow DTIM, or only follow DTIM when using Power Save Aware mode. The default setting is Follow DTIM.

9. Refer to the **Sniffer Redirect (Packet Capture)** field to define the radio's captured packet configuration.

Host for Redirected Packets	If packets are re-directed from a connected access point radio, define an IP address resource (additional host system) to capture the re-directed packets. This address is the numerical (non DNS) address of the host used to capture re-directed packets.
Channel to Capture Packets	Use the drop-down menu to specify the specific channel used to capture re-directed packets. The default value is channel 1.

10. Refer to the **Channel Scanning** field to define the radio's captured packet configuration.

Enable Off Channel Scan	Enable this option to scan across all channels using this radio. Channel scans use access point resources and can be time consuming, so only enable when your sure the radio can afford the bandwidth be directed towards to the channel scan and does not negatively impact client support.
Off Channel Scan list for 5GHz	Define a list of channels for off channel scans using the 5GHz access point radio. Restricting off channel scans to specific channels frees bandwidth otherwise utilized for scanning across all the channels in the 5GHz radio band.

Off Channel Scan list for 2.4GHz	Define a list of channels for off channel scans using the 2.4GHz access point radio. Restricting off channel scans to specific channels frees bandwidth otherwise utilized for scanning across all the channels in the 2.4GHz radio band.
Max Multicast	Set the maximum number (from 0 - 100) of multicast/broadcast messages used to perform off channel scanning. The default setting is four.
Scan Interval	Set the interval (from 2 - 100 dtims) off channel scans occur. The default setting is 20dtims.
Sniffer Redirect	Specify the IP address of the host to which captured off channel scan packets are redirected.

11. Select **OK** to save the changes to the advanced settings screen. Select **Reset** to revert to the last saved configuration.

WAN Backhaul Configuration

A *Wireless Wide Area Network (WWAN)* card is a specialized network interface card that allows a network device to connect, transmit and receive data over a Cellular Wide Area Network. The WWAN card uses *point to point protocol (PPP)* to connect to the *Internet Service Provider (ISP)* and gain access to the Internet. PPP is the protocol used for establishing internet links over dial-up modems, DSL connections, and many other types of point-to-point communications. PPP packages your system's TCP/IP packets and forwards them to the serial device where they can be put on the network. PPP is a full-duplex protocol that can be used on various physical media, including twisted pair or fiber optic lines or satellite transmission. It uses a variation of *High Speed Data Link Control (HDLC)* for packet encapsulation.

The following 3G cards are supported:

- Verizon V740
- Verizon PC770
- Sprint C777
- Novatel Merlin XU870
- Sierra Aircard 880E
- Telstra Elite Mobile Broadband
- Option GT Ultra Express
- Vodaphone Mobile Connect E3730
- Aircard 503
- Aircard 504 / AT & T 890

To define a WAN Backhaul configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

- Expand the **Interface** menu and select **WAN Backhaul**.

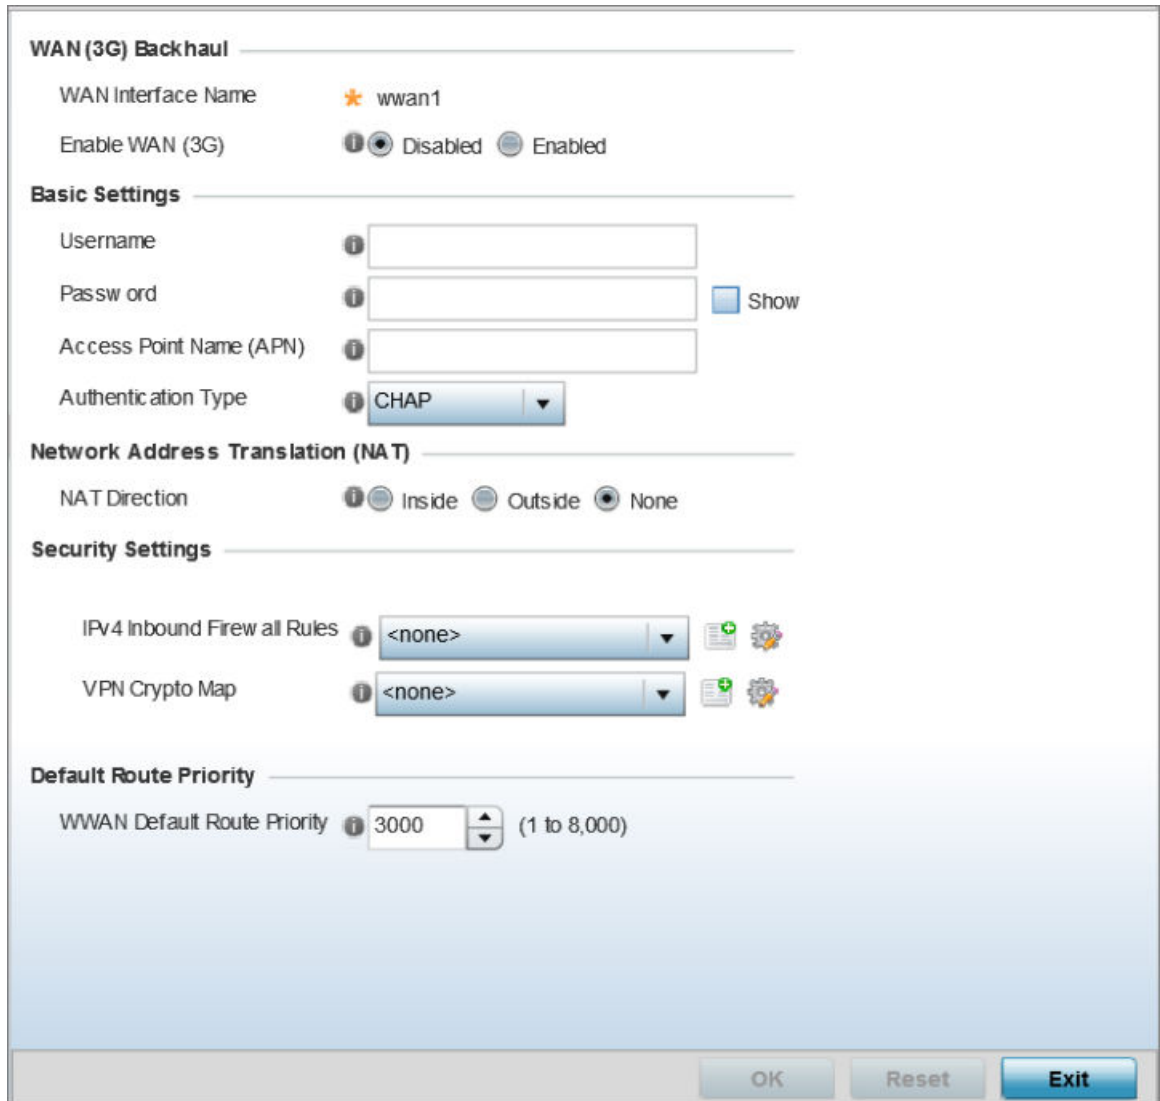


Figure 41: Profile Interface - WAN Backhaul screen

- Refer to the **WAN (3G) Backhaul** configuration to specify the access point’s WAN card interface settings:

WAN Interface Name	Displays the WAN Interface name for the WAN 3G Backhaul card.
Enable WAN (3G)	Select this option to enable 3G WAN card support on the access point. A supported 3G card must be connected for this feature to work.
Username	Provide username for authentication support by the cellular data carrier.
Password	Provide password for authentication support by the cellular data carrier.
Access Point Name (APN)	Enter the name of the cellular data provider if necessary. This setting is needed in areas with multiple cellular data providers

	using the same protocols such as Europe, the Middle East and Asia.
Authentication Type	Use the drop-down menu to specify authentication type used by the cellular data provider. Supported authentication options include None , PAP , CHAP , MSCHAP , and MSCHAP-v2 .

4. Use the NAT Direction field to specify the NAT direction used with the access point's WAN card. Options include **Inside**, **Outside** or **None**. The default is None.
5. Configure the **IPv4 Inbound Firewall Rules**. Use the drop-down menu to select a firewall (set of IP access connection rules) to apply to the PPPoE client connection. If a firewall rule does not exist suiting the data protection needs of the PPPoE client connection, select the Create icon to define a new rule configuration or the Edit icon to modify an existing rule.
6. Select the **VPN Crypto Map** to use with this WWAN configuration. Use the drop-down menu to apply an existing crypto map configuration to this WWAN interface.
7. Use the **WWW Default Route Priority** spinner to set a default route priority for this interface. The default value is 3000.
8. Select **OK** to save the changes to the Advanced Settings screen. Select Reset to revert to the last saved configuration.

WAN Backhaul Deployment Considerations

Before defining a profile's WAN Backhaul configuration refer to the following deployment guidelines to ensure these configuration are optimally effective:

- If the WAN card does not connect after a few minutes after a no shutdown, check the access point's syslog for a *detected ttyUSB0 No such file* event. If this event has occurred, linux didn't detect the card. Re-seat the card.
- If the WAN card has difficulty connecting to an ISP (syslog shows that it retries LCP ConfReq for a long time), ensure the SIM card is still valid and is plugged in correctly.
- If a modem doesn't responding with an OK during the dialing sequence, the WAN card is in an unknown state and will not accept a command. Re-seat the card and begin the dialup sequence again until the card is recognized.
- If encountering a *panic* when conducting a hotplug, power off the access point for one minute. The access point could continue to panic or detect the descriptor of the last utilized WAN card. Thus, it's a good idea to clear the panic state by temporarily disconnecting then re-applying access point power.
- If wanting to unplug the WAN card, ensure sure you shutdown first, as the probability of getting a panic is reduced. With the new high-speed WAN cards currently being utilized, the chances of getting a panic significantly increase.

PPPoE Configuration

PPP over Ethernet (PPPoE) is a data-link protocol for dialup connections. PPPoE allows the access point to use a broadband modem (DSL, cable modem, etc.) for access to high-speed data and broadband networks. Most DSL providers support (or deploy) the PPPoE protocol. PPPoE uses standard encryption, authentication, and compression methods as specified by the PPPoE protocol.

PPPoE enables controllers, service platforms, and access points to establish a point-to-point connection to an ISP over existing Ethernet interface.

To provide this point-to-point connection, each PPPoE session learns the Ethernet address of a remote PPPoE client, and establishes a session. PPPoE uses both a discover and session phase to identify a client and establish a point-to-point connection. By using such a connection, a Wireless WAN failover is available to maintain seamless network access if the access point's Wired WAN should fail.

**Note**

PPPoE-enabled devices continue to support VPN, NAT, PBR, and 3G failover on the PPPoE interface. Multiple PPPoE sessions are supported using a single user account user account if RADIUS is configured to allow simultaneous access.

When PPPoE client operation is enabled, it discovers an available server and establishes a PPPoE link for traffic flow. When a wired WAN connection failure is detected, traffic flows through the WWAN interface in fail-over mode (if the WWAN network is configured and available). When the PPPoE link becomes accessible again, traffic is redirected back through the access point's wired WAN link.

When the access point initiates a PPPoE session, it first performs a discovery to identify the Ethernet MAC address of the PPPoE client and establish a PPPoE session ID. In discovery, the PPPoE client discovers a server to host the PPPoE connection.

To create a PPPoE point-to-point configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

- Expand the **Interface** menu and select **PPPoE**.

Figure 42: Profile Interface - PPPoE screen

- Use the **Basic Settings** field to enable PPPoE and define a PPPoE client.

Enable PPPoE	Select this option to support a high speed client mode point-to-point connection using the PPPoE protocol. The default setting is disabled.
Service	Enter the 128-character maximum PPPoE client service name provided by the service provider.

DSL Modem Network (VLAN)	Set the PPPoE VLAN (client local network) connected to the DSL modem. This is the local network connected to the DSL modem. The available range is 1 - 4,094. The default value is 1.
Client IP Address	Provide the numerical (non hostname) IP address of the PPPoE client.

4. Define the following **Authentication** parameters for PPPoE client interoperation:

Username	Provide the 64 character maximum username used for authentication support by the PPPoE client.
Password	Provide the 64 character maximum password used for authentication by the PPPoE client. Click Show to display the characters that make up the password.
Authentication Type	Specify the authentication type used by the PPPoE client, and whose credentials must be shared by its peer access point. Supported authentication options include None , PAP , CHAP , MSCHAP , and MSCHAP-v2 .

5. Define the following **Connection** settings for the PPPoE point-to-point connection with the PPPoE client:

Maximum Transmission Unit (MTU)	Set the PPPoE client <i>maximum transmission unit</i> (MTU) from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
Client Idle Timeout	Set a timeout in either Seconds (1 - 65,535), Minutes (1 - 1,093) or Hours (1-18). The access point uses the defined timeout so it does not sit idle waiting for input from the PPPoE client and server that may never come. The default setting is 10 minutes.
Keep Alive	Select this option to ensure that the point-to-point connection to the PPPoE client is continuously maintained and not timed out. This setting is disabled by default.

6. Set the **Network Address Translation (NAT)** direction for the PPPoE configuration.

NAT converts an IP address in one network to a different IP address or set of IP addresses in another network. The access point router maps its local (**Inside**) network addresses to WAN (**Outside**) IP addresses, and translates the WAN IP addresses on incoming packets to local IP addresses. NAT is useful because it allows the authentication of incoming and outgoing requests, and minimizes the number of WAN IP addresses needed when a range of local IP addresses is mapped to each WAN IP address. The default setting is **None** (neither inside nor outside).

7. Define the following **Security Settings** for the PPPoE configuration:

Inbound IP Firewall Rules	Select a firewall (set of IP access connection rules) to apply to the PPPoE client connection. If there is no firewall rule that meets the data protection needs of the PPPoE client connection, select the Create icon to define a new rule configuration or the Edit icon to modify an existing rule. For more information, see Wireless Firewall on page 826.
VPN Crypto Map	Use the drop-down menu to apply an existing crypto map configuration to this PPPoE interface.

8. Set the **Default Route Priority** for the default route learned using PPPoE.
Select from 1 - 8,000. The default setting is 2,000.
9. Click **OK** to save the changes and overrides made to the **PPPoE** screen.
Click **Reset** to revert to the last saved configuration. Saved configurations are persistent across reloads.

Bluetooth Configuration

The AP7602, AP7612, AP7632, AP7662, AP8432 and AP8533 model access points utilize a built in Bluetooth chip for specific Bluetooth functional behaviors in a WiNG managed network.

AP-8432 and AP-8533 models support both Bluetooth classic and Bluetooth low energy technology.

These platforms can use their Bluetooth classic enabled radio to sense other Bluetooth enabled devices and report device data (MAC address, RSSI and device calls) to an ADSP server for intrusion detection. If the device presence varies in an unexpected manner, ADSP can raise an alarm.

BLE enabled access points support Bluetooth beaconing to emit either iBeacon or Eddystone- URL beacons. The access point's Bluetooth radio sends non-connectable, undirected low-energy (LE) advertisement packets on a periodic basis. These advertisement packets are short, and they are sent on Bluetooth advertising channels that conform to already-established iBeacon and Eddystone-URL standards. Portions of the advertising packet are still customizable, however.



Note

The WiNG 7.1 release does not provide Bluetooth support on AP505i and AP510i model access points. This feature will be supported in future releases.

To define a Bluetooth radio interface configuration:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

- Expand the **Interface** menu and select **Bluetooth**.

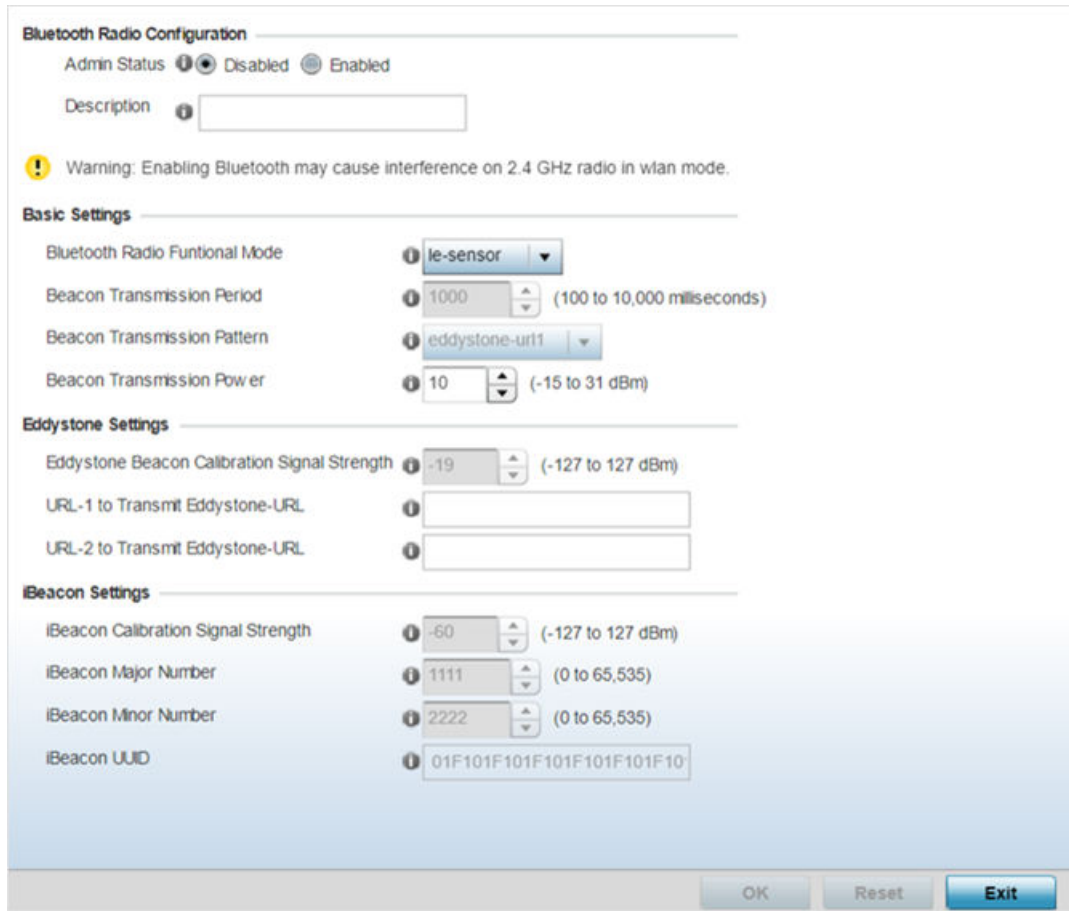


Figure 43: Profile Interface - Bluetooth Screen

- Set the following **Bluetooth Radio Configuration** parameters:

Admin Status	Enable or Disable Bluetooth support capabilities for the access point radio transmissions. The default value is disabled.
Description	Define a 64 character maximum description for the access point's Bluetooth radio to differentiate this radio interface from other Bluetooth supported radio's that might be members of the same RF Domain.

4. Set the following **Basic Settings**:

Bluetooth Radio Functional Mode	<p>Set the access point's Bluetooth radio functional mode to either bt-sensor, le-beacon, le-tracking or le-sensor.</p> <ul style="list-style-type: none"> • bt-sensors are Bluetooth classic sensors providing robust wireless connections for legacy devices. Typically these connections are not ideally suited for the newer Bluetooth low energy technology supported devices. • le-beacons are newer Bluetooth low energy beacons ideal for applications requiring intermittent or periodic transfers of small amounts of data. le-beacons are not designed as replacements for classic beacon sensors. The <i>bt-sensor</i> option is the default setting. <p>Note: Setting the Bluetooth Radio Functional mode to 'le-beacon' enables the Beacon Transmission Period and Beacon Transmission Pattern options.</p>
Beacon Transmission Period	<p>Set the Bluetooth radio's beacon transmission period from 100 - 10,000 milliseconds. As the defined period increases, so does the CPU processing time and the number packets incrementally transmitted (typically one per minute). The default setting is 1,000 milliseconds.</p>
Beacon Transmission Pattern	<p>When the Bluetooth radio's mode is set to le-beacon, use the enabled drop-down menu to set the beacon's emitted transmission pattern to eddystone_url1, eddystone_url2, or ibeacon.</p> <p>An eddystone-URL frame broadcasts a URL using a compressed encoding scheme to better fit within a limited advertisement packet. Once decoded, the URL can be used by a client for internet access. If an eddystone-URL beacon broadcasts <code>https:anysite</code>, then clients receiving the packet can access that URL.</p> <p>iBeacon was created by Apple for use in iOS devices (beginning with iOS version 7.0). Apple has made three data fields available to iOS applications: a UUID for device identification, a Major value for device class, and a Minor value for more refined information like product category.</p>

5. Define the following **Eddystone Settings** if you have set the **Beacon Transmission Pattern** to either **eddytone_url1** or **eddytone_url2**:

Eddystone Beacon Calibration Signal Strength	Set the Eddystone Beacon measured calibration signal strength, from -127 dBm to 127 dBm, at 0 meters. Mobile devices can approximate their distance to beacons based on received signal strength. However, distance readings can fluctuate since they depend on several external factors. The closer you are to a beacon, the more accurate the reported distance. This setting is the projected calibration signal strength at 0 meters. The default setting is -19 dBm.
URL-1 to Transmit Eddystone-URL	Enter a 64-character maximum Eddystone-URL1. The URL must be 18 characters or less once auto-encoding is applied. URL encoding is used when placing text in a query string to avoid confusion with the URL itself. It is typically used when a browser sends data to a web server.
URL-2 to Transmit Eddystone-URL	Enter a 64-character maximum Eddystone-URL2. The URL must be 18 characters or less once auto-encoding is applied. URL encoding is used when placing text in a query string to avoid confusion with the URL itself. It is typically used when a browser sends data to a web server.

6. Define the following **iBeacon Settings** if you have set the **Beacon Transmission Pattern** to **ibeacon**:

Beacon Calibration Signal Strength	Set the iBeacon measured calibration signal strength, from -127 dBm to 127 dBm, at 1 meter. Mobile devices can approximate their distance to beacons based on received signal strength. However, distance readings can fluctuate since they depend on several external factors. The closer you are to a beacon, the more accurate the reported distance. This setting is the projected calibration signal strength at 1 meter. The default setting is -60 dBm.
iBeacon Major Number	Set the iBeacon major value from 0 - 65, 535. Major values identify and distinguish groups. For example, each beacon on a specific floor in a building could be assigned a unique major value. The default value is 1,111.
iBeacon Minor Number	Set the iBeacon minor value from 0 - 65, 535. Minor values identify and distinguish individual beacons. Minor values help identify individual beacons within a group of beacons assigned a major value. The default setting is 2,222.
iBeacon UUID	Define a 32 hex character maximum <i>Universally Unique Identifier</i> (UUID). The UUID classification contains 32 hexadecimal digits, split into 5 groups, separated by dashes – for example, f2468da6-5fa8-2e84-1134-bc5b71e0893e. The UUID distinguishes iBeacons in the network from all other beacons in networks outside of your direct administration.

7. Select **OK** to save the changes to the Bluetooth configuration.

Select **Reset** to revert to the last saved configuration. Saved configurations persist across reloads.

Profile Network Configuration

Setting an access point profile's network configuration is a large task comprised of numerous administration activities.

Before defining a profile's network configuration, refer to the following deployment guidelines to ensure the profile configuration is optimally effective:

- Administrators often need to route traffic to interoperate between different VLANs. Bridging VLANs are only for non-routable traffic, like tagged VLAN frames destined to some other device which will untag it. When a data frame is received on a port, the VLAN bridge determines the associated VLAN based on the port of reception.
- Static routes, while easy, can be overwhelming within a large or complicated network. Each time there is a change, someone must manually make changes to reflect the new route. If a link goes down, even if there is a second path, the router would ignore it and consider the link down.
- Static routes require extensive planning and have a high management overhead. The more routers that exist in a network, the more routes need to be configured. If you have N number of routers and a route between each router is needed, then you must configure N x N routes. Thus, for a network with nine routers, you will need a minimum of 81 routes ($9 \times 9 = 81$).

An access point profile network configuration process consists of the following:

- [DNS Configuration](#) on page 165
- [ARP Configuration](#) on page 166
- [L2TPv3 Configuration](#) on page 168
- [GRE Tunnel Configuration](#) on page 178
- [IGMP Snooping Configuration](#) on page 181
- [MLD Snooping Configuration](#) on page 183
- [QoS Traffic Shaping Basic Configuration](#) on page 185
- [Spanning Tree Configuration](#) on page 190
- [IPv4 Routing Configuration](#) on page 194
- [OSPF Settings Configuration](#) on page 198
- [Forwarding Database Configuration](#) on page 219
- [Bridge VLAN Configuration](#) on page 220
- [Cisco Discovery Protocol Configuration](#) on page 229
- [Link Layer Discovery Protocol Configuration](#) on page 230
- [Miscellaneous Network Configuration](#) on page 232
- [Network Basic Alias](#) on page 233
- [IPv6 Neighbor Configuration](#) on page 242

DNS Configuration

DNS (*Domain Name System*) is a hierarchical naming system for resources connected to the Internet or a private network. Primarily, DNS resources translate domain names into IP addresses. If one DNS server doesn't know how to translate a particular domain name, it asks another one until the correct IP address is returned. DNS enables access to resources using human friendly notations. DNS converts human friendly domain names into notations used by different networking equipment for locating resources.

As a resource is accessed (using human-friendly hostnames), it's possible to access the resource even if the underlying machine friendly notation name changes. Without DNS, in the simplest terms, you would need to remember a series of numbers (123.123.123.123) instead of an easy to remember domain name (for example, *www.domainname.com*).

To define the DNS configuration:

1. Go to **Configuration** → **Devices** → **System Profile** .
The AP's **Profile** configuration menu displays.
2. Expand the **Network** menu and select **DNS**.

Domain Name System (DNS)

Domain Name

Enable Domain Lookup

DNS Server Forwarding

DNS Servers

Name Servers	IP Address	
<input type="text"/>	0 . 0 . 0 . 0	Clear
<input type="text"/>	0 . 0 . 0 . 0	Clear
<input type="text"/>	0 . 0 . 0 . 0	Clear

DNS Servers IPv6

IPv6 DNS Name Server

IPv6 DNS Server Forwarding

OK Reset Exit

Figure 44: Network - DNS Screen

3. Set the following **Domain Name System (DNS)** configuration data:

Domain Name	Provide the default Domain Name used to resolve DNS names. The name cannot exceed 64 characters.
Enable Domain Lookup	Select the check box to enable DNS. When enabled, human friendly domain names are converted into numerical IP destination addresses. The radio button is selected by default.
DNS Server Forwarding	Select this option to enable the forwarding DNS queries to external DNS servers if a DNS query cannot be processed by local DNS resources. This feature is disabled by default.

4. In the **Name Servers** field, provide the IP addresses of up to three DNS server resources available to the access point.

5. Set the following **DNS Servers IPv6** configuration data when using IPv6:

IPv6 DNS Name Server	Provide the default domain name used to resolve IPv6 DNS names. When an IPv6 host is configured with the address of a DNS server, the host sends DNS name queries to the server for resolution. A maximum of three entries are permitted.
IPv6 DNS Server Forward	Select the check box to enable IPv6 DNS domain names to be converted into numerical IP destination addresses. The setting is disabled by default.

6. Click **OK** to save the changes made to the DNS configuration.
Click **Reset** to revert to the last saved configuration.

ARP Configuration

ARP (*Address Resolution Protocol*) is a protocol for mapping an IP address to a hardware MAC address recognized on the network. ARP provides protocol rules for making this correlation and providing address conversion in both directions.

When an incoming packet destined for a host arrives, ARP is used to find a physical host or MAC address that matches the IP address. ARP looks in its ARP cache and, if it finds the address, provides it so the packet can be converted to the right packet length and format and sent to its destination. If no entry is found for the IP address, ARP broadcasts a request packet in a special format on the LAN to see if a device knows it has that IP address associated with it. A device that recognizes the IP address as its own returns a reply indicating it. ARP updates the ARP cache for future reference and then sends the packet to the MAC address that replied.

To define an ARP supported configuration:

1. Go to **Configuration** → **Devices** → **System Profile** tab from the Web UI.
The **Profile** screen displays. This screen lists access point profiles supported by the logged device.
2. Select a profile from the list.
The selected profile's configuration menu displays.

- Expand the **Network** node and select **ARP**.

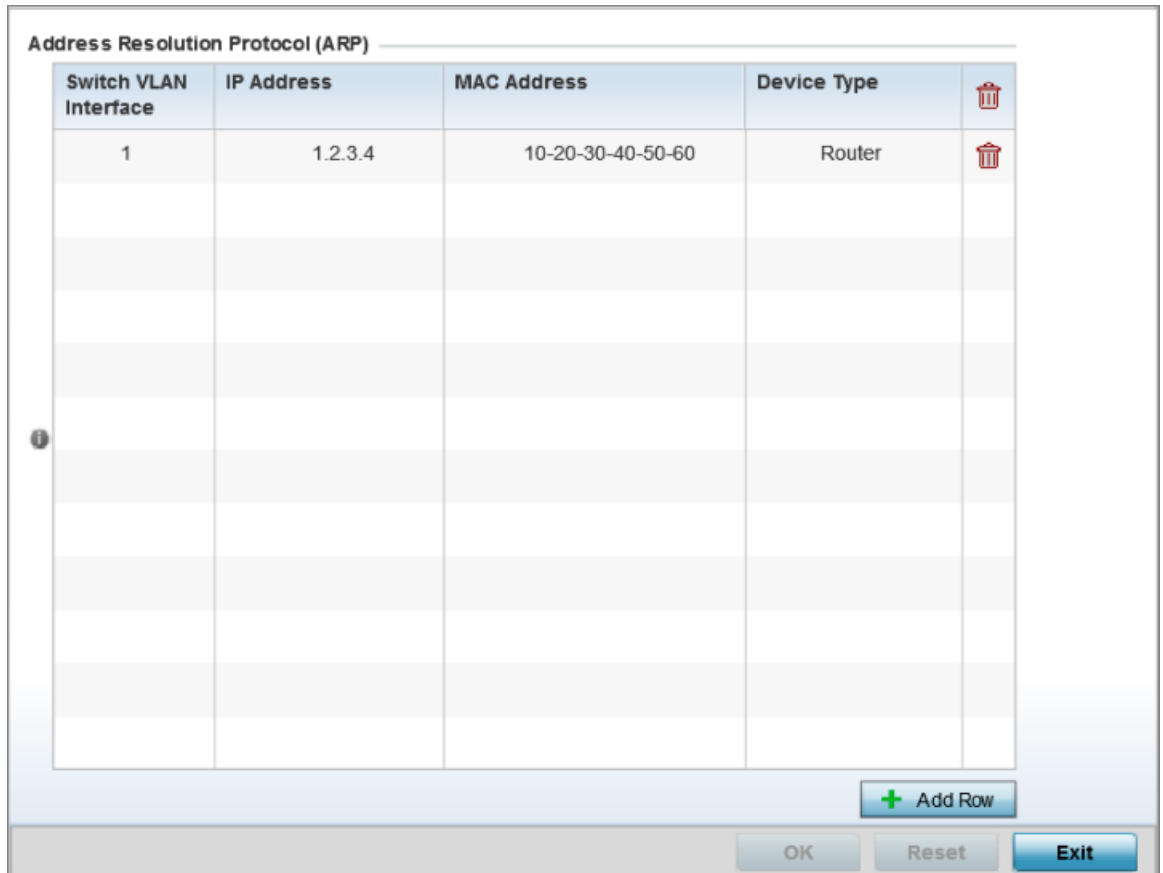


Figure 45: Network - ARP screen

- Select **+ Add Row** from the lower right-hand side of the screen to populate the ARP table with rows used to define ARP network address information.
- Set the following parameters to define the ARP configuration:

Switch VLAN Interface	Use the spinner control to select a virtual interface for an address requiring resolution with the controller, service platform or access point.
IP Address	Define the IP address used to fetch a MAC Address recognized on the wireless network.
MAC Address	Displays the target MAC address subject to resolution. This is the MAC used for mapping an IP address to a MAC address recognized on the network.
Device Type	Specify the device type the ARP entry supports. Host is the default setting.

- Click the **OK** button located at the bottom right of the screen to save the changes to the ARP configuration.
Click **Reset** to revert to the last saved configuration.

L2TPv3 Configuration

L2TP V3 is an IETF standard used for transporting different types of layer 2 frames in an IP network (and profile). L2TP V3 defines control and encapsulation protocols for tunneling layer 2 frames between two IP nodes.

Use L2TP V3 to create tunnels for transporting layer 2 frames. L2TP V3 enables controllers, service platforms and access points to create tunnels for transporting Ethernet frames to and from bridge VLANs and physical ports. L2TP V3 tunnels can be defined between WiNG managed devices and other vendor devices supporting the L2TP V3 protocol.

Multiple pseudowires can be created within an L2TP V3 tunnel. access points support an Ethernet VLAN pseudowire type exclusively.



Note

A pseudowire is an emulation of a layer 2 point-to-point connection over a PSN (*packet-switching network*). A pseudowire was developed out of the necessity to encapsulate and tunnel layer 2 protocols across a layer 3 network.

Ethernet VLAN pseudowires transport Ethernet frames to and from a specified VLAN. One or more L2TP V3 tunnels can be defined between tunnel end points. Each tunnel can have one or more L2TP V3 sessions. Each tunnel session corresponds to one pseudowire. An L2TP V3 control connection (a L2TP V3 tunnel) needs to be established between the tunneling entities before creating a session.

For optimal pseudowire operation, both the L2TP V3 session originator and responder need to know the pseudowire type and identifier. These two parameters are communicated during L2TP V3 session establishment. An L2TP V3 session created within an L2TP V3 connection also specifies multiplexing parameters for identifying a pseudowire type and ID.

The working status of a pseudowire is reflected by the state of the L2TP V3 session. If a L2TP V3 session is down, the pseudowire associated with it must be shut down. The L2TP V3 control connection keep-alive mechanism can serve as a monitoring mechanism for the pseudowires associated with a control connection.



Note

If connecting an Ethernet port to another Ethernet port, the pseudowire type must be *Ethernet port*, if connecting an Ethernet VLAN to another Ethernet VLAN, the pseudowire type must be *Ethernet VLAN*.

To define an L2TPV3 configuration:

1. Go to **Configuration** → **Devices** → **System Profile** .

The **Profile** screen displays. This screen lists access point profiles.

2. Select a profile from the list.

The selected profile's configuration menu displays.

- Expand the **Network** node and select **L2TPv3**.

The L2TPv3 **General** configuration screen displays by default.

Figure 46: Network - L2TPv3 screen - General tab

- In the **General Settings** field, configure the following settings:

Host Name	Define a 64 character maximum hostname to specify the name of the host that's sent tunnel messages. Tunnel establishment involves exchanging 3 message types (SCCRQ, SCCRQ and SCCN) with the peer. Tunnel IDs and capabilities are exchanged during the tunnel establishment with the host.
Router ID	Set either the numeric IP address or the integer used as an identifier for tunnel AVP messages. AVP messages assist in the identification of a tunneled peer.
UDP Listen Port	Select this option to set the port used for listening to incoming traffic. Select a port from 1,024 - 65,535. The default port is 1701.
Tunnel Bridging	Select this option to enable or disable bridge packets between two tunnel end points. This setting is disabled by default.

5. In the **Logging Settings** filed, configure the following settings:


Enable Logging	Select this option to enable the logging of Ethernet frame events to and from bridge VLANs and physical ports on a defined IP address, host or router ID. This setting is disabled by default.
IP Address	Optionally use a peer tunnel ID address to capture and log L2TPv3 events.
Hostname	If not using an IP address for event logging, optionally use a peer tunnel hostname to capture and log L2TPv3 events.
Router ID	If not using an IP address or a hostname for event logging, use a router ID to capture and log L2TPv3 events.

6. Select **OK** to save the changes to the session configuration.
Select **Reset** to revert to the last saved configuration.

L2TPv3 Tunnel

To define an L2TPv3 configuration for a profile:

1. Select the **L2TPv3 Tunnel** tab.

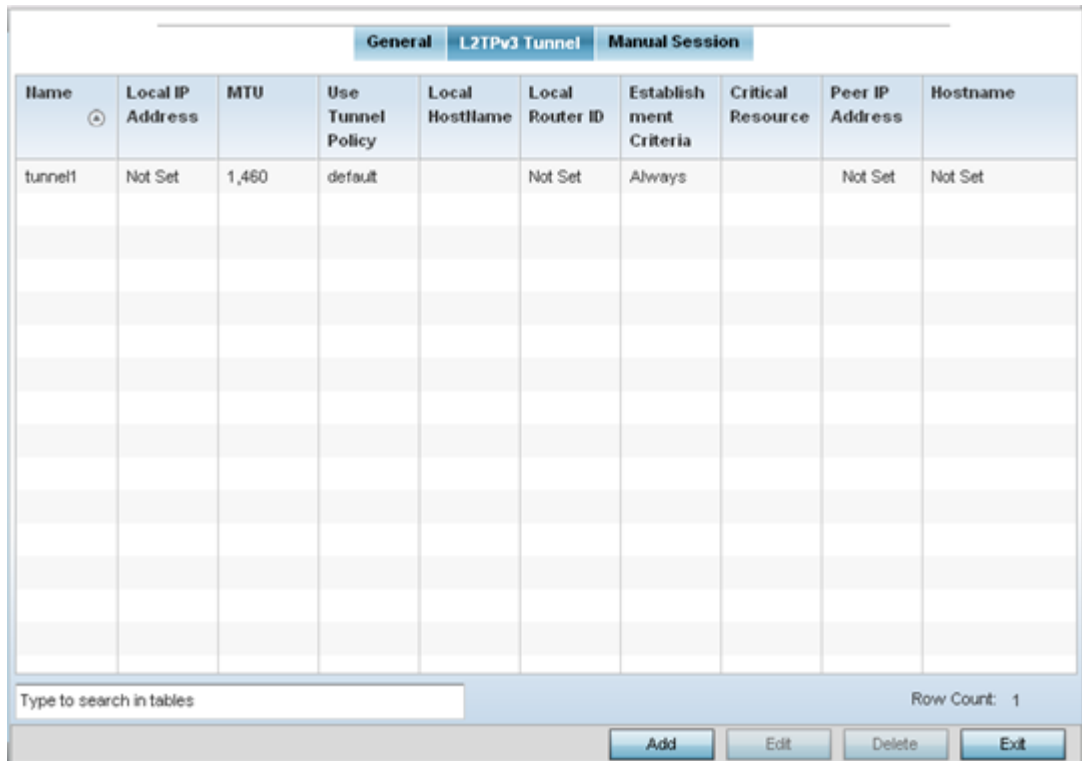

2. Review the following L2TPv3 tunnel configuration data:

Name	Displays the name of each listed L2TPv3 tunnel assigned upon creation.
Local IP Address	Lists the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address.
MTU	Displays the MTU (<i>maximum transmission unit</i>) size for each listed tunnel. The MTU is the size (in bytes) of the largest protocol data unit that the layer can pass between tunnel peers.
Use Tunnel Policy	Lists the L2TPv3 tunnel policy assigned to each listed tunnel.
Local Hostname	Lists the tunnel specific hostname used by each listed tunnel. This is the host name advertised in tunnel establishment messages.
Local Router ID	Specifies the router ID sent in the tunnel establishment messages.

3. Either select **Add** to create a new L2TPv3 tunnel configuration, **Edit** to modify an existing tunnel configuration or **Delete** to remove a tunnel from those available to this profile.

Adding and Editing L2TPV3 Tunnels

You can add a new L2TPv3 tunnel configuration or edit an existing configuration.

1. Select **Add** to create a new L2TPv3 tunnel configuration, **Edit** to modify an existing tunnel configuration or **Delete** to remove a tunnel from those available to this profile.

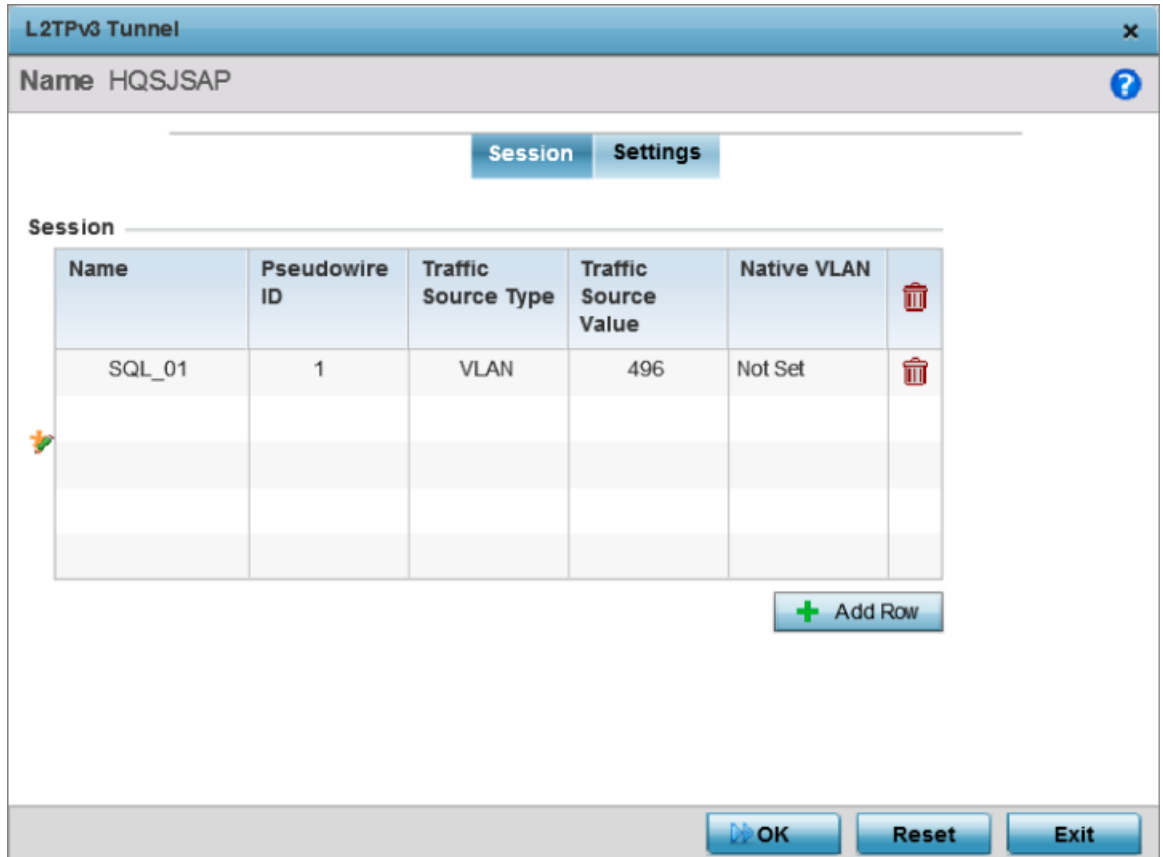


Figure 47: L2TPv3 Tunnel - Session Configuration Screen

2. If creating a new tunnel configuration, assign it a 32 character maximum **Name**.
3. Refer to the **Session** table to review the configurations of the peers available for tunnel connection. Select **+ Add Row** and provide the following L2TPv3 session settings:

Name	Enter a 31 character maximum session name. There is no idle timeout for a tunnel. A tunnel is not usable without a session and a subsequent session name. The tunnel is closed when the last session tunnel session is closed.
Pseudowire ID	Define a pseudowire ID for this session. A pseudowire is an emulation of a layer 2 point-to-point connection over a PSN. A pseudowire was developed out of the necessity to encapsulate and tunnel layer 2 protocols across a layer 3 network.
Traffic Source Type	Lists the type of traffic tunneled in this session (VLAN, etc.).
Traffic Source Value	Define a VLAN range to include in the tunnel session. Available VLAN ranges are from 1 - 4,094.
Native VLAN	Select this option to provide a VLAN ID that will not be tagged in tunnel establishment and packet transfer.

4. Define the following **Settings** required for the L2TP tunnel configuration:

Local IP Address	Enter the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address. This parameter is applicable when establishing the tunnel and responding to incoming tunnel create requests.
MTU	Set the MTU (<i>maximum transmission unit</i>). The MTU is the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers. Define a MTU from 128 - 1,460 bytes. The default setting is 1,460. A larger MTU means processing fewer packets for the same amount of data.
Use Tunnel Policy	Select the L2TPv3 tunnel policy. The policy consists of user defined values for protocol specific parameters which can be used with different tunnels. If none is available, a new policy can be created or an existing one can be modified.
Local Hostname	Provide the tunnel specific hostname used by this tunnel. This is the host name advertised in tunnel establishment messages.
Local Router ID	Specify the router ID sent in tunnel establishment messages with a potential peer device.

5. Define the following **Rate Limit** settings:

Rate limiting manages the maximum rate sent to or received from L2TPv3 tunnel members.

Session Name	Use the drop-down menu to select the tunnel session that will have the direction, burst size and traffic rate settings applied.
Direction	Select the direction for L2TPv3 tunnel traffic rate limiting. Egress traffic is outbound L2TPv3 tunnel data coming to the controller, service platform or access point. Ingress traffic is inbound L2TPv3 tunnel data coming to the controller, service platform or access point.
Max Burst Size	Set the maximum burst size for egress or ingress traffic rate limiting (depending on which direction is selected) on a L2TPv3 tunnel. Set a maximum burst size between 2 - 1024 kbytes. The smaller the burst, the less likely the upstream packet transmission will result in congestion for L2TPv3 tunnel traffic. The default setting is 320 bytes.
Rate	Set the data rate (from 50 - 1,000,000 kbps) for egress or ingress traffic rate limiting (depending on which direction is selected) for an L2TPv3 tunnel. The default setting is 5000 kbps.
Background	Set the random early detection threshold in % for background traffic. Set a value from 1 - 100%. The default is 50%.
Best-Effort	Set the random early detection threshold in % for best-effort traffic. Set a value from 1 - 100%. The default is 50%.

Video	Set the random early detection threshold in % for video traffic. Set a value from 1 - 100%. The default is 25%.
Voice	Set the random early detection threshold in % for voice traffic. Set a value from 1 - 100%. The default is 25%.

6. Review the **Peer** configurations. Select **+ Add Row** and configure a maximum of two peer configurations. Define the following **Peer** parameters:

Peer ID	Define the primary peer ID used to set the primary and secondary peer for tunnel fail over. If the peer is not specified, tunnel establishment does not occur. However, if a peer tries to establish a tunnel with this access point, it creates the tunnel if the hostname and/or Router ID matches.
Router ID	Specify the router ID sent in tunnel establishment messages with this specific peer.
Hostname	Assign the peer a hostname that can be used as matching criteria in the tunnel establishment process.
Encapsulation	Select either IP or UDP as the peer encapsulation protocol. UDP uses a simple transmission model without implicit handshakes. The default setting is <i>IP</i> .
Peer IP Address	Select this option to enter the numeric IP address used as the destination peer address for tunnel establishment.
UDP Port	If UDP encapsulation is selected, use the spinner control to define the UDP encapsulation port.
IPSec Secure	Enable this option to enable security on the connection between the access point and the Virtual Controller.
IPSec Gateway	Specify the IP Address of the IPSec Secure Gateway.

7. Define the following **Fast Failover** parameters:

Enable	When enabled, the device starts sending tunnel requests on both peers, and in turn, establishes the tunnel on both peers. If disabled, tunnel establishment only occurs on one peer, with failover and other functionality the same as legacy behavior. If fast failover is enabled after establishing a single tunnel the establishment is restarted with two peers. One tunnel is defined as active and the other as standby. Both tunnels perform connection health checkups with individual hello intervals. This setting is disabled by default.
Enable Aggressive Mode	When enabled, tunnel initiation hello requests are set to zero. For failure detections, hello attempts are not retried, regardless of defined retry attempts. This setting is disabled by default.

8. Select **OK** to save the changes within the L2TP Tunnel screen. Select **Reset** to revert the screen to its last saved configuration.

Manual Session

After a successful tunnel connection and establishment, individual sessions can be created. Each session is a single data stream. After successful session establishment,

data corresponding to that session (pseudowire) can be transferred. If a session is down, the pseudowire associated with it is shut down as well.

To define an L2TPv3 manual session configuration for a profile:

- 1. Select the **Manual Session** tab.

IP Address	Local Session ID	MTU	Name	Remote Session ID
Not Set	1	1,440	1	1

Type to search in tables Row Count: 1

Figure 48: L2TPv3 Tunnel - Manual Session Configuration Screen

- 2. Refer to the following manual session configurations to determine whether one should be created or modified:

IP Address	Lists the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address. This parameter is applicable when establishing the tunnel session and responding to incoming requests.
Local Session ID	Displays the numeric identifier assigned to each listed tunnel session. This is the pseudowire ID for the session. This pseudowire ID is sent in a session establishment message to the L2TP peer.
MTU	Displays each session’s MTU. The MTU is the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers in this session. A larger MTU means processing fewer packets for the same amount of data.


Name	Lists the name assigned to each listed manual session.
Remote Session ID	Lists the remote session ID passed in the establishment of the tunnel session.

3. Select **Add** to create a new manual session, **Edit** to modify an existing session configuration or **Delete** to remove a selected manual session.

Adding and Editing Manual Sessions

You can add a new L2TPv3 manual session configuration or edit an existing configuration.

1. Select **Add** to create a new manual session, **Edit** to modify an existing session configuration or **Delete** to remove a selected manual session.

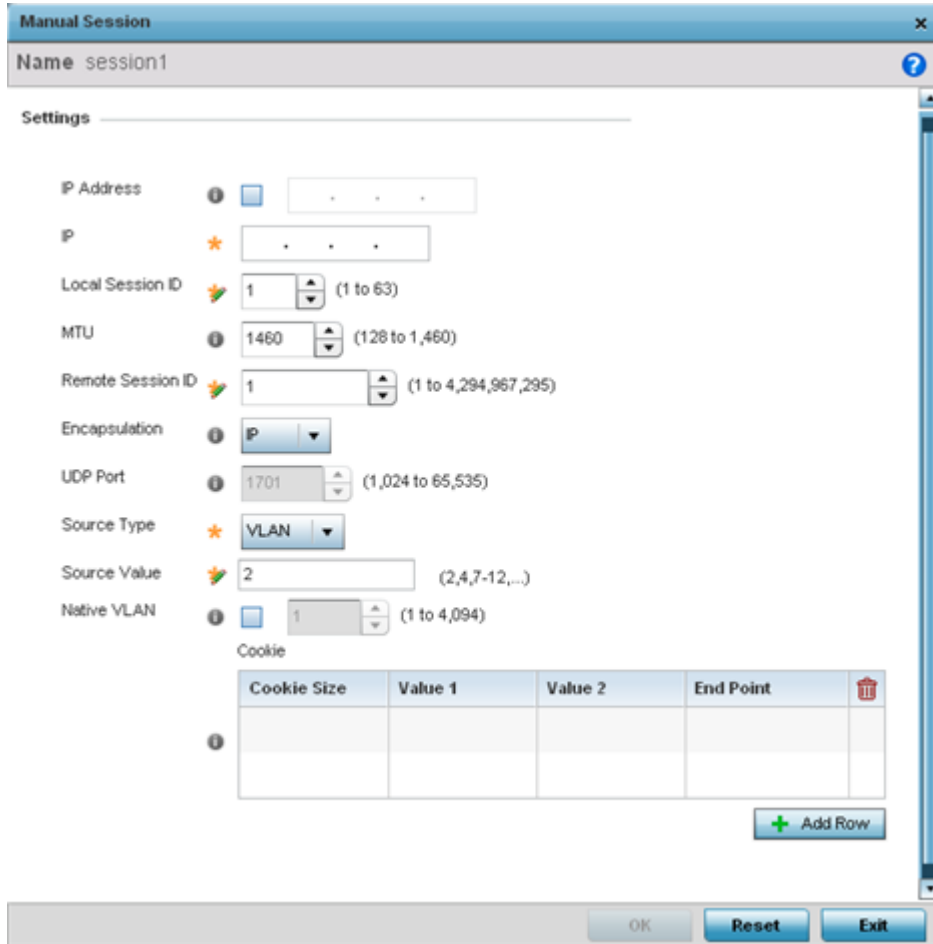

2. Set the following manual session **Settings** parameters:

Name	If creating a new manual session, define a 31 character maximum name for this tunnel session. The session is created after a successful tunnel connection and establishment. Each session name represents a single data stream.
IP Address	Specify the IP address used as the tunnel source IP address. If not specified, the tunnel source IP address is selected automatically based on the tunnel peer IP address. This address is applicable only for initiating the tunnel. When responding to incoming tunnel create requests, it would use the IP address received in the tunnel creation request.
IP	Set the IP address of an L2TP tunnel peer. This is the peer allowed to establish the tunnel.
Local Session ID	Set the numeric identifier for the tunnel session. This is the pseudowire ID for the session. This pseudowire ID is sent in session establishment message to the L2TP peer.
MTU	Define the session MTU as the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers in this session. A larger MTU means processing fewer packets for the same amount of data.

Remote Session ID	Use the spinner control to set the remote session ID passed in the establishment of the tunnel session. Assign an ID in the range of 1 - 4,294,967,295.
Encapsulation	Select either <i>IP</i> or <i>UDP</i> as the peer encapsulation protocol. The default setting is IP. UDP uses a simple transmission model without implicit handshakes.
UDP Port	If UDP encapsulation is selected, use the spinner control to define the UDP encapsulation port. This is the port where the L2TP service is running.
Source VLAN	Define the VLAN range (1 - 4,094) to include in the tunnel. Tunnel session data includes VLAN tagged frames.
Native VLAN	Select this option to define the native VLAN that will not be tagged.

3. Select the **+ Add Row** button in the **Cookie** table to set the following:

Cookie Size	Set the size of the cookie field within each L2TP data packet. Options include 0, 4 and 8. The default setting is 0.
Value 1	Set the cookie value's first word.
Value 2	Set the cookie value's second word.
End Point	Define whether the tunnel end point is <i>local</i> or <i>remote</i> .

4. Select **OK** to save the changes to the session configuration. Select **Reset** to revert to the last saved configuration.

GRE Tunnel Configuration

GRE tunneling can be configured to bridge Ethernet packets between WLANs and a remote WLAN gateway over an IPv4 GRE tunnel. The tunneling of 802.3 packets using GRE is an alternative to MiNT or L2TPv3. Related features like ACLs for extended VLANs are still available using layer 2 tunneling over GRE.

Using GRE, access points map one or more VLANs to a tunnel. The remote endpoint is a user-configured WLAN gateway IP address, with an optional secondary IP address should connectivity to the primary GRE peer be lost. VLAN traffic is expected in both directions in the GRE tunnel. A WLAN mapped to these VLANs can be either open or secure. Secure WLANs require authentication to a remote RADIUS server available within your deployment using standard RADIUS protocols. access points can reach both the GRE peer as well as the RADIUS server using IPv4.

The maximum limits on GRE tunnel configuration for each platform are as follows:

Platform	Maximum GRE Tunnels Supported
NX5500	512
NX7500	1000
NX9610	1024
CX9000	Not supported
VX9000	Not supported

To define a GRE tunnel configuration:

1. Go to **Configuration** → **Devices** → **System Profile** .

The **Profile** screen displays. This screen lists access point profiles.

2. Select a profile from the list.

The selected profile's configuration menu displays.

3. Expand the **Network** node and select **GRE**.

The screen displays existing GRE configurations.

4. Select the **Add** to create a new GRE tunnel configuration or select an existing tunnel and select **Edit** to modify its current configuration. To remove an existing GRE tunnel, select it from amongst those displayed and select the **Delete** button.

GRE Tunnel

Tunnel Name ★

DSCP Options Reflect 1

Tunneled VLANs

Native VLAN (1 to 4,095)

Tag Native VLAN

Peer

Peer index	Peer IP Address	<input type="button" value="🗑️"/>

Failover

Enable Failover

Ping Interval (1 to 21,600)

Number Of Retries (1 to 63)

Adding and Editing GRE Tunnel

You can add a new GRE tunnel configuration or edit an existing tunnel configuration.

1. If creating a new GRE configuration, assign it a name to distinguish its configuration.

2. Define the following GRE tunnel settings:

DSCP Options	Use the spinner control to set the tunnel DSCP / 802.1q priority value from encapsulated packets to the outer packet IPv4 header.
Tunneled VLANs	Define the VLAN connected clients use to route GRE tunneled traffic within their respective VLANs.
Native VLAN	Set a numerical VLAN ID (1 - 4094) for the native VLAN. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN untagged traffic is directed over when using a port in trunk mode.
Tag Native VLAN	Select this option to tag the native VLAN. The IEEE 802.1Q specification is supported for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, the 12 bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12 bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This feature is disabled by default.
MTU	Set an IPv4 tunnel's maximum transmission unit (MTU) from 128 - 1,476. The MTU is the largest physical packet size (in bytes) transmittable within the tunnel. Any messages larger than the MTU are divided into smaller packets before being sent. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. For IPv4, the overhead is 24 bytes (20 bytes IPv4 header + 4 bytes GRE Header), thus the default setting for an IPv4 MTU is 1,476.
MTU6	Set an IPv6 tunnel's MTU from 128 - 1,456. The MTU is the largest physical packet size (in bytes) transmit able within the tunnel. Any messages larger than the MTU are divided into smaller packets before being sent. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. For IPv6, the overhead is 44 bytes (40 bytes IPv6 header + 4 bytes GRE header), thus the default setting for an IPv6 MTU is 1,456.

- In the **Peer** table, review credentials of existing GRE tunnel end points. If needed, click **+ Add Row** to add new GRE tunnel peers. A maximum of two peer configurations can be added.

Peer Index	Assign a numeric index to each peer to help differentiate tunnel end points.
Peer IP Address	Define the IP address of the added GRE peer to serve as a network address identifier.

- Define the following **Failover** parameters:

Enable Failover	Select this option to periodically ping the primary gateway to assess its availability for failover support.
Ping Interval	Set the duration between two successive pings to the gateway. Define this value in seconds from 0 - 86,400.
Number of Retries	Set the number of retry ping opportunities before the session is terminated.

- Select the **OK** button located to save the changes.
Click **Reset** to revert to the last saved configuration.

IGMP Snooping Configuration

The IGMP (*Internet Group Management Protocol*) is used for managing IP multicast group members. Controllers and service platforms listen to IGMP network traffic and forward IGMP multicast packets to radios on which the interested hosts are connected. On the wired side of the network, the controller or service platform floods all the wired interfaces. This feature reduces unnecessary flooding of multicast traffic in the network.

- Go to **Configuration → Devices → System Profile** .
The **Profile** screen displays. This screen lists access point profiles.
- Select a profile from the list.
The selected profile's configuration menu displays.

- Expand the **Network** node and select **IGMP Snooping**.

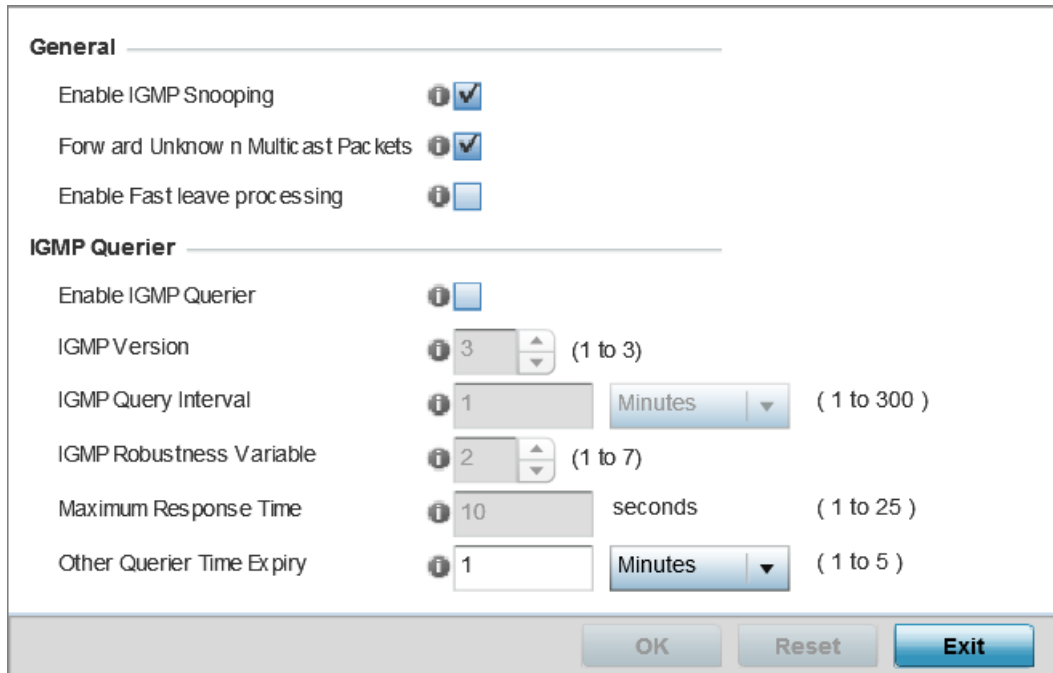


Figure 49: IGMP Snooping Screen

- Set the following parameters to configure **General** IGMP Snooping values:

Enable IGMP Snooping	Select this option to enable IGMP snooping. If disabled, snooping on a per VLAN basis is also disabled. This feature is enabled by default. If disabled, the settings under the bridge configuration are overridden. For example, if IGMP snooping is disabled, but the bridge VLAN is enabled, the effective setting is disabled.
Forward Unknown Multicast Packets	Select this option to enable the forwarding of multicast packets from unregistered multicast groups. If disabled, the unknown multicast forward feature is also disabled for individual VLANs. This setting is enabled by default..

5. Set the following **IGMP Querier** configuration:

Enable IGMP Querier	Select this option to enable IGMP querier. IGMP snoop querier is used to keep host memberships alive. It's primarily used in a network where there's a multicast streaming server and hosts subscribed to the server and no IGMP querier present. An IGMP querier sends out periodic IGMP query packets. Interested hosts reply with an IGMP report packet. IGMP snooping is only conducted on wireless radios. IGMP multicast packets are flooded on wired ports. IGMP multicast packet are not flooded on the wired port. IGMP membership is also learnt on it and only if present, then it is forwarded on that port.
IGMP Version	Use the spinner control to set the IGMP version compatibility to either version 1, 2 or 3. IGMPv1 is defined by RFC 1112, IGMPv2 is defined by RFC 2236 and IGMPv3 defined by RFC 4604 which defines both IGMPv3 and MLDv2. IGMPv2 improves over IGMPv1 by adding the ability for a host to signal desire to leave a multicast group. IGMPv3 improves over IGMPv2 by adding the ability to listen to multicast traffic originating from a set of source IP addresses exclusively. The default setting is 3.
IGMP Query Interval	Set the interval IGMP queries are made. This parameter is used only when the querier functionality is enabled. Define an interval value in Seconds (1 - 18,000), Minutes (1 - 300) and Hours (1 - 5). The default setting is one minute.
IGMP Robustness Variable	Sets the IGMP robustness variable. The robustness variable is a way of indicating how susceptible the subnet is to lost packets. IGMP can recover from robustness variable minus 1 lost IGMP packets. Define a robustness variable from 1 - 7. The default robustness value is 2.
Maximum Response Time	Specify the maximum interval (from 1 - 25 seconds) before sending a responding report. When no reports are received from a radio, radio information is removed from the snooping table. Only multicast packets are forwarded to radios present in the snooping table. For IGMP reports from wired ports, the controller or service platform forwards these reports to the multicast router ports. The default setting is 10 seconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

6. Click the **OK** button located at the bottom right of the screen to save the changes. Click **Reset** to revert to the last saved configuration.

MLD Snooping Configuration

MLD (*Multicast Listener Discovery*) snooping enables a controller, service platform or access point to examine MLD packets and make forwarding decisions based on content. MLD is used by IPv6 devices to discover devices wanting to receive multicast packets destined for specific multicast addresses. MLD uses multicast listener queries and multicast listener reports to identify which multicast addresses have listeners and join multicast groups.

MLD snooping caps the flooding of IPv6 multicast traffic on controller, service platform or access point VLANs. When enabled, MLD messages are examined between hosts and multicast routers and to discern which hosts are receiving multicast group traffic.

The controller, service platform or access point then forwards multicast traffic only to those interfaces connected to interested receivers instead of flooding traffic to all interfaces.

To set an IPv6 MLD snooping configuration:

1. Go to **Configuration → Devices → System Profile** .
The **Profile** screen displays. This screen lists access point profiles.
2. Select a profile from the list.
The selected profile's configuration menu displays.
3. Expand the **Network** node and select **MLD Snooping**.

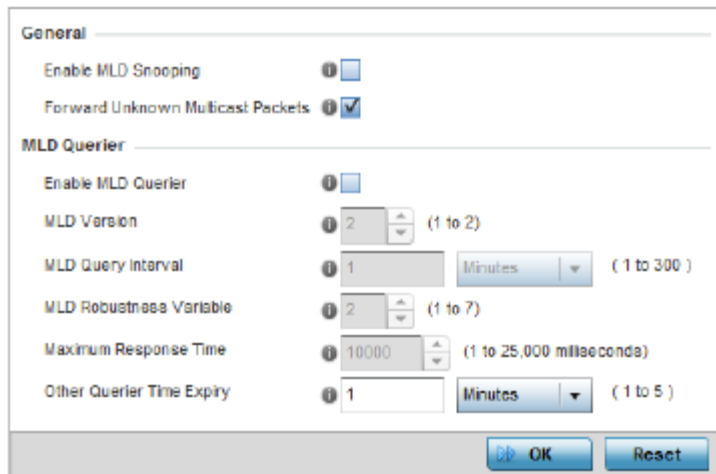


Figure 50: Profile - Network MLD Snooping screen

4. Define the following **General** MLD snooping settings:

Enable MLD Snooping	Enable MLD snooping to examine MLD packets and make content forwarding for this profile. Packets delivered to group members are identified by a single multicast group address. Multicast packets are delivered to a group using best-effort reliability, just like IPv6 unicast. MLD snooping is disabled by default.
Forward Unknown Multicast Packets	Use this option to either enable or disable IPv6 unknown multicast forwarding. This setting is enabled by default.

5. Define the following **MLD Querier** settings for the MLD snooping configuration:

Enable MLD Querier	Select this option to enable MLD querier on the controller, service platform or access point. When enabled, the device sends query messages to discover which network devices are members of a given multicast group. This setting is disabled by default.
MLD Version	Define whether MLD version 1 or 2 is utilized as the MLD querier. MLD version 1 is based on IGMP version 2 for IPv4. MLD version 2 is based on IGMP version 3 for IPv4 and is fully backward compatible. IPv6 multicast uses MLD version 2. The default MLD version is 2.

MLD Query Interval	Set the interval in which query messages are sent to discover device multicast group memberships. Set an interval in either Seconds (1 -18,000), Minutes (1 - 300) or Hours (1 - 5). The default interval is 1 minute.
MLD Robustness Variable	Set a MLD IGMP robustness value (1 - 7) used by the sender of a query. The MLD robustness variable enables refinements to account for expected packet loss on a subnet. Increasing the robust count allows for more packet loss, but increases the leave latency of the subnetwork unless the value is zero. The default variable is 2.
Maximum Response Time	Specify the maximum response time (from 1 - 25,000 milliseconds) before sending a responding report. Queriers use MLD reports to join and leave multicast groups and receive group traffic. The default setting is 10 milliseconds.
Other Querier time Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

6. Select the **OK** button located to save the changes.

Click **Reset** to revert to the last saved configuration.

QoS Traffic Shaping Basic Configuration

The WiNG software uses different *Quality of Service* (QoS) screens to define WLAN and device radio QoS configurations. The **System Profiles → Network → QoS facility** is separate from WLAN and radio QoS configurations, and is used to configure the priority of the different DSCP packet types.

QoS values are required to provide service priority to packets. For example, VoIP packets get higher priority than data packets to provide a better quality of service for high priority voice traffic.

The profile QoS screen maps the 6-bit Differentiated Service Code Point (DSCP) code points to the older 3-bit IP Precedent field located in the Type of Service byte of an IP header. DSCP is a protocol for specifying and controlling network traffic by class so that certain traffic types get precedence. DSCP specifies a specific per-hop behavior that is applied to a packet.

To define an QoS configuration for DSCP mappings:

1. Go to **Configuration → Devices → System Profile**.

- Expand **Network** and select **Quality of Service (QoS)**.

The **Traffic Shaping** → **Basic Configuration** screen displays by default.

The screenshot shows the 'Basic Configuration' tab for Traffic Shaping. At the top, there are tabs for 'Traffic Shaping' and 'Priority Mapping', and sub-tabs for 'Basic Configuration' and 'Advanced Configuration'. An 'Enable' checkbox is present. The 'Bandwidth Configuration' section includes a 'Total Bandwidth' field with a value of 10, a unit dropdown set to 'Mbps', and a range '(1 to 1,000)'. The 'Rate Configuration' section features a table with columns 'Class Index', 'Rate', and 'Rate Unit', and an 'Add Row' button. The 'App-Category to Class Mapping' section has a table with columns 'Application Category' and 'Traffic Shape Class', and an 'Add Row' button. The 'IP ACL to Class Mapping' section has a table with columns 'IP ACL Name' and 'Traffic Shape Class', and an 'Add Row' button. At the bottom, there are 'OK', 'Reset', and 'Exit' buttons.

Figure 51: QoS - Traffic Shaping - Basic Configuration Screen

- Select **Enable** to provide traffic shaping using the defined bandwidth, rate and class mappings.

Apply traffic shaping to specific applications to apply application categories. When application and ACL rules are conflicting, applications have priority, followed by application categories, then ACLs.

- Set the **Total Bandwidth** configurable for the traffic shaper. Set the value from either 1 - 1,000 Mbps, or from 250 - 1,000,000 Kbps.
- Select **+ Add Row** within the **Rate Configuration** table to set the Class Index (1 - 4) and Rate (in either Kbps, Mbps or percentage) for the traffic shaper class. Use the rate configuration to control the maximum traffic rate sent or received on the device. Consider this form of rate limiting on interfaces at the edge of a network to limit traffic into or out of the network. Traffic within the set limit is sent and traffic exceeding the set limit is dropped or sent with a different priority.
- Refer to the **IP ACL Class Mapping** table and select **+ Add Row** to apply an IPv4 formatted ACL to the shaper class mapping. Select **+ Add Row** to add mappings.

7. Refer to the **IPv6 ACL Class Mapping** table and select **+ Add Row** to apply an IPv6 formatted ACL to the shaper class mapping. Select **+ Add Row** to add mappings.



Note

For more information on creating IP based firewall rules, refer to [Configuring IP Firewall Rules](#) on page 841 and [Setting an IPv4 or IPv6 Firewall Policy](#) on page 841.

8. Refer to the **App-Category to Class Mapping** table and select **+ Add Row** to apply an application category to shaper class mapping. Select **+ Add Row** to add mappings by selecting the application category and its traffic shaper class. For more information on creating an application category, refer to [Application](#) on page 814.
9. Refer to the **Application to Class Mapping** table and select **+ Add Row** to apply an application to shaper class mapping. Select **+ Add Row** to add mappings by selecting the application and its traffic shaper class. For more information on creating an application, refer to [Application](#) on page 814.
10. Select the **OK** button to save the traffic shaping basic configuration changes. Select **Reset** to revert to the last saved configuration.

QoS Traffic Shaping Advanced Configuration

To define traffic shaping advanced configuration:

1. Select the **Advanced Configuration** tab.

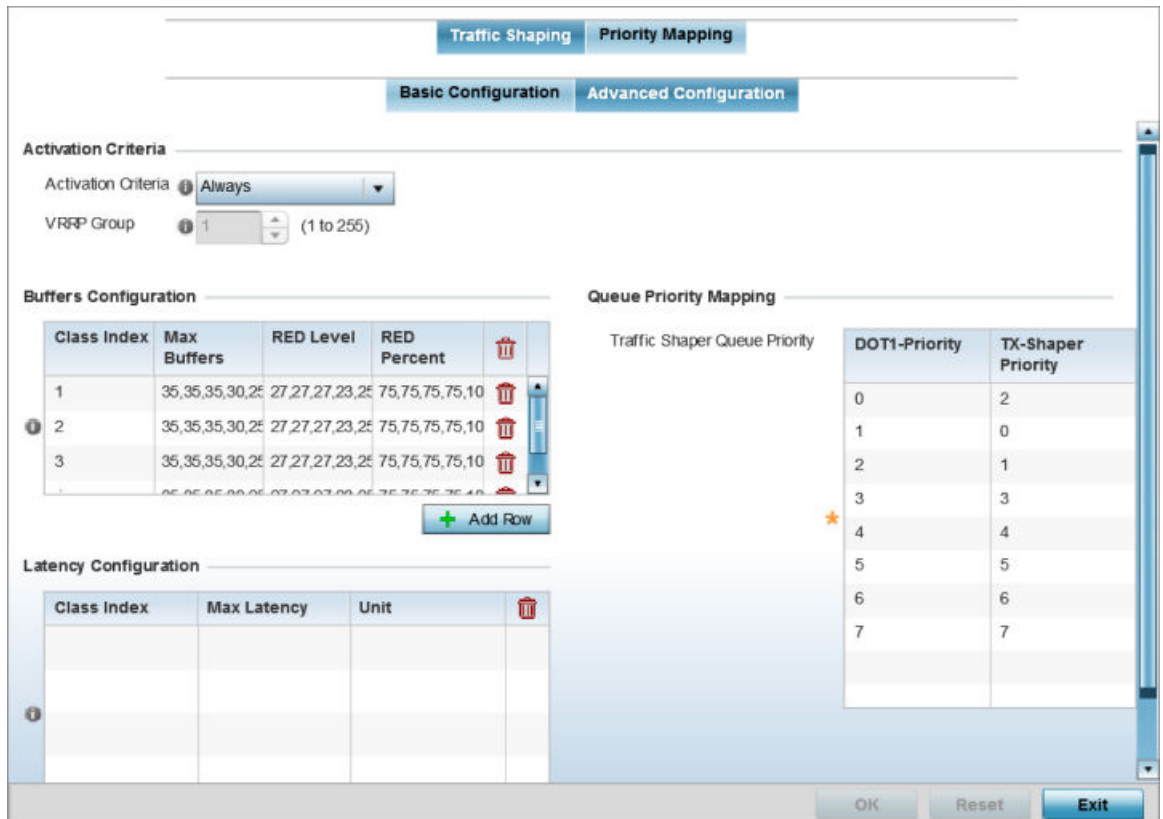


Figure 52: Profile Overrides - Network QoS Traffic Shaping Advanced Configuration Screen

2. In the **Activation Criteria** field, set the following traffic shaper activation criteria:

Activation Criteria	Use the drop-down menu to determine when the traffic shaper is invoked. Options include vrrp-master, cluster-master, rf-domain-manager and Always. A VRRP master responds to ARP requests, forwards packets with a destination link MAC layer address equal to the virtual router MAC layer address, rejects packets addressed to the IP associated with the virtual router and accepts packets addressed to the IP associated with the virtual router. The solitary cluster master is the cluster member elected, using a priority assignment scheme, to provide management configuration and Smart RF data to other cluster members. Cluster requests go through the elected master before dissemination to other cluster members. The RF Domain manager is the elected member capable of storing and provisioning configuration and firmware images for other members of the RF Domain.
VRRP Group	Set the VRRP group ID from 1 - 255. VRRP groups is only enabled when the Establishment Criteria is set to vrrp-master.

3. Select **+ Add Row** within the **Buffers Configuration** table to set the following:

Class Index	Set a class index from 1 - 4.
Max Buffers	Set the Max Buffers to specify the queue length limit after which the queue starts to drop packets. Set the maximum queue lengths for packets. The upper length is 400 for access points.
RED Level	Set the packet queue length for RED. The upper limit is 400 for Access Points. The rate limiter uses the RED (<i>random early detection</i>) algorithm for rate limiting traffic. RED is a queueing technique for congestion avoidance. RED monitors the average queue size and drops or marks packets. If the buffer is near empty, all incoming packets are accepted. When the queue grows, the probability for dropping an incoming packet also grows. When the buffer is full, the probability has reached 1 and all incoming packets are dropped.
RED Percent	Set a percentage (1 - 100) for RED rate limiting at a percentage of maximum buffers.

4. Select **+ Add Row** within the **Latency Configuration** table to set the Class Index (1 - 4), Max Latency and latency measurement Unit. Max latency specifies the time limit after which packets start dropping (maximum packet delay in the queue). The maximum number of entries is 8. Select whether msec (default) or usec is unit for latency measurement.

When a new packet arrives it knows how much time to wait in the queue. If a packet takes longer than the latency value, it is dropped. By default latency is not set, so packets remain in queue for long time.

5. Refer to the **Queue Priority Mapping** table to set the traffic shaper queue priority and specify a particular queue inside a class. There are 8 queues (0 - 7), and traffic is queued in each based on incoming packets mark 802.1p markings.
6. Select the **OK** button located to save the changes to the traffic shaping advanced configuration.

Select **Reset** to revert to the last saved configuration.

QoS Priority Mapping

1. Select the **Priority Mapping** tab.

The **Quality of Service (QoS) → Priority Mapping** screen displays.

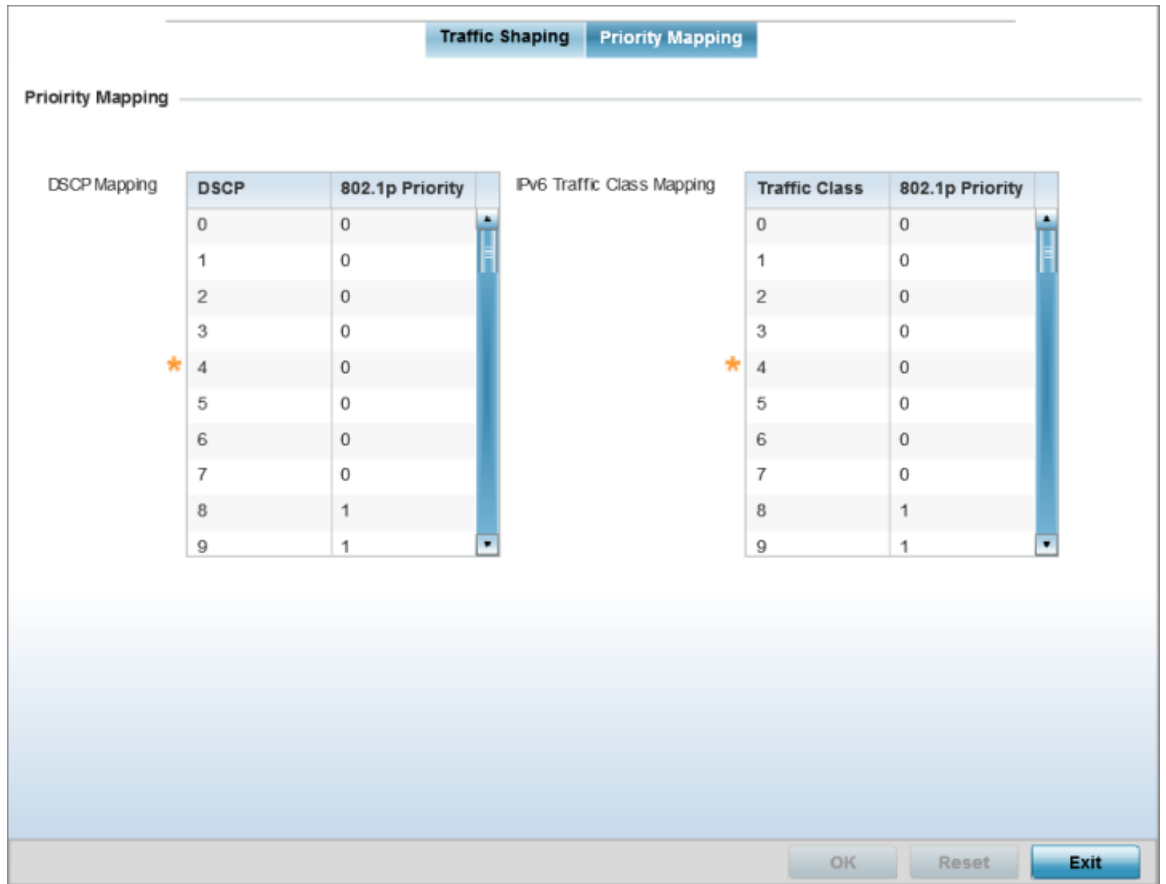


Figure 53: QoS - Priority Mapping Configuration Screen

2. In the **DSCP Mapping** table, set the following IP DSCP mappings for untagged frames:

DSCP	Lists the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification.
802.1p Priority	<p>Assign a 802.1p priority as a 3-bit IP precedence value in the Type of Service field of the IP header used to set the priority. The valid values for this field are 0-7. Up to 64 entries are permitted. The priority values are:</p> <ul style="list-style-type: none"> • 0 – <i>Best Effort</i> • 1 – <i>Background</i> • 2 – <i>Spare</i> • 3 – <i>Excellent Effort</i> • 4 – <i>Controlled Load</i> • 5 – <i>Video</i> • 6 – <i>Voice</i> • 7 – <i>Network Control</i> <p>Note: Use the spinner controls within the 802.1p Priority field for each DSCP row to change its priority value.</p>

3. In the **IPv6 Traffic Class Mapping** table, set or override the following IPv6 DSCP settings for untagged frames:

Traffic Class	Devices that originate a packet must identify different classes or priorities for IPv6 packets. Devices use the traffic class field in the IPv6 header to set this priority.
802.1p Priority	<p>Assign a 802.1p priority as a 3-bit IPv6 precedence value in the Type of Service field of the IPv6 header used to set the priority. The valid values for this field are 0-7. Up to 64 entries are permitted. The priority values are:</p> <ul style="list-style-type: none"> • 0 – <i>Best Effort</i> • 1 – <i>Background</i> • 2 – <i>Spare</i> • 3 – <i>Excellent Effort</i> • 4 – <i>Controlled Load</i> • 5 – <i>Video</i> • 6 – <i>Voice</i> • 7 – <i>Network Control</i>

4. Select **OK** to save the priority mapping changes.

Select **Reset** to revert to the last saved configuration.

Spanning Tree Configuration

The MSTP (*Multiple Spanning Tree Protocol*) provides an extension to RSTP to optimize the usefulness of VLANs. MSTP allows for a separate spanning tree for each VLAN group, and blocks all but one of the possible alternate paths within each spanning tree topology.

If there is just one VLAN in the access point managed network, a single spanning tree works fine. However, if the network contains more than one VLAN, the network

topology defined by single STP would work, but it is possible to make better use of the alternate paths available by using an alternate spanning tree for different VLANs or groups of VLANs.

A MSTP supported deployment uses multiple MST regions with multiple MSTI (*MST instances*). Multiple regions and other STP bridges are interconnected using one single CST (*common spanning tree*). MSTP includes all of its spanning tree information in a single BPDU (*Bridge Protocol Data Unit*) format. BPDUs are used to exchange information bridge IDs and root path costs. Not only does this reduce the number of BPDUs required to communicate spanning tree information for each VLAN, but it also ensures backward compatibility with RSTP. MSTP encodes additional region information after the standard RSTP BPDU as well as a number of MSTI messages. Each MSTI messages conveys spanning tree information for each instance. Each instance can be assigned a number of configured VLANs. The frames assigned to these VLANs operate in this spanning tree instance whenever they are inside the MST region. To avoid conveying their entire VLAN to spanning tree mapping in each BPDU, the access point encodes an MD5 digest of their VLAN to an instance table in the MSTP BPDU. This digest is used by other MSTP supported devices to determine if the neighboring device is in the same MST region as itself.

To define the spanning tree configuration:

1. Go to **Configuration → Devices → System Profile** .
The **Profile** screen displays. This screen lists access point profiles.
2. Select a profile from the list.
The selected profile's configuration menu displays.

3. Expand the **Network** node and select **Spanning Tree**.

Figure 54: Network - Spanning Tree Screen

4. Set the following **MSTP Configuration** parameters:

MSTP Enable	Select this option to enable MSTP for this profile. MSTP is disabled by default, so if requiring different (groups) of VLANs with the profile supported network segment.
Max Hop Count	Define the maximum number of hops the BPDU will consider valid in the spanning tree topology. The available range is from 7 - 127. The default setting is 20.
MST Config Name	Define a 64 character maximum name for the MST region as an identifier.
MST Revision Level	Set a numeric revision value ID for MST configuration information. Set a value from 0 - 255. The default setting is 0.

Cisco MSTP Interoperability	Select either the Enable or Disable radio buttons to enable/disable interoperability with Cisco's version of MSTP, which is incompatible with standard MSTP. This setting is disabled by default.
Hello Time	Set a BPDU hello interval from 1 - 10 seconds. BPDUs are exchanged regularly (every 2 seconds by default) and enable supported devices to keep track of network changes and start/stop port forwarding as required.
Forward Delay	Set the forward delay time from 4 - 30 seconds. When a device is first attached to a port, it does not immediately start to forward data. It first processes BPDUs and determines the network topology. When a host is attached the port always goes into the forwarding state, after a delay of while it goes through the listening and learning states. The time spent in the listening and learning states is defined by the forward delay (15 seconds by default).
Maximum Age	Use the spinner control to set the maximum time (in seconds) to listen for the root bridge. The root bridge is the spanning tree bridge with the smallest (lowest) bridge ID. Each bridge has a unique ID and a configurable priority number, the bridge ID contains both. The available range is from 6 - 40. The default setting is 20.

5. Define the following **Port Fast** parameters for the profile configuration:

PortFast BPDU Filter	Select Enable to invoke a BPDU filter for this portfast enabled port. Enabling the BPDU filter feature ensures this port channel does not transmit or receive any BPDUs. BPDUs are exchanged regularly and enable the access point to keep track of network changes and to start and stop port forwarding as required. The default setting is disabled.
PortFast BPDU Guard	Select Enable to invoke a BPDU guard for the portfast enabled port. Enabling the BPDU Guard feature means this port will shutdown on receiving a BPDU. Thus, no BPDUs are processed. BPDUs are exchanged regularly and enable the access point to keep track of network changes and to start and stop port forwarding as required. The default setting is disabled.

6. Define the following **Error Disable** settings:

Enable Recovery	Select this option to enable a error disable timeout resulting from a BPDU guard. This setting is disabled by default.
Recovery Interval	Define the recovery interval used to enable disabled ports. The available range is from 10 - 1,000,000 seconds with a default setting of 300.

7. Use the **Spanning Tree Instance** table to add indexes to the spanning tree topology.

Add up to 16 indexes and use the Priority setting to define the bridge priority used to determine the root bridge. The lower the setting defined, the greater the likelihood of becoming the root bridge in the spanning tree topology.

8. Use the **Spanning Tree Instance VLANs** table to add VLAN instance indexes (by numeric ID) and VLANs to the spanning tree topology.

9. Select the **OK** button located at the bottom right of the screen to save the changes.

Select **Reset** to revert to the last saved configuration.

IPv4 Routing Configuration

Routing is the process of selecting IP paths to send access point managed network traffic. Use the Routing screen to set destination IP and gateway addresses enabling assignment of static IP addresses for requesting clients without creating numerous host pools with manual bindings. This eliminates the need for a long configuration file and reduces the resource space required to maintain address pools.

Both IPv4 and IPv6 routes are separately configurable using their appropriate tabs. For IPv6 networks, routing is the part of IPv6 that provides forwarding between hosts located on separate segments within a larger IPv6 network where IPv6 routers provide packet forwarding for other IPv6 hosts.

To override the access point profile's static routes:

1. Go to **Configuration** → **Devices** → **System Profiles**.
2. Expand **Network** and select **Routing**.

The **IPv4 Routing** configuration screen displays.

The screenshot shows the IPv4 Routing configuration interface. It includes sections for IP Routing, Policy Based Routing, Static Routes (with a table), and Default Route Priority settings. The Static Routes table is currently empty.

Network Address	Gateway	Default Gateway	

Figure 55: Profile Overrides - IPv4 Routing Configuration Screen

3. Select **IP Routing** to enable static routes using IPv4 addresses. This option is enabled by default.
4. In the **Policy Based Routing** field, use the Policy Based Routing drop-down menu to apply a policy. Select the **Create** icon to create a policy based route or select the **Edit** icon to edit an existing policy after selecting it in the drop-down list. For more information on creating a Policy Based Routing Policy, see [Policy Based Routing \(PBR\)](#) on page 765.
5. In the Statis Routes table, click **Add Row +** and provide the following statis route details:

Network Address	Add network IP addresses and network masks
Gateway	Provide the Gateway's IP address. This is the gateway used to route traffic to the specified network.
Default Gateway	Provide the Default Gateway's IP address. This is the gateway used to route traffic to the specified network.

6. In the **Default Route Priority** field, and set the following parameters:

Static Default Route Priority	Use the spinner control to set the priority value (1 - 8,000) for the default static route. This is weight assigned to this route versus others that have been defined. The default setting is 100.
DHCP Client Default Route Priority	Use the spinner control to set the priority value (1 - 8,000) for the default route learnt from the DHCP client. The default setting is 1000.
Enable Routing Failure	When selected, all default gateways are monitored for activity. The system will failover to a live gateway if the current gateway becomes unusable. This feature is enabled by default.

7. Select the **OK** button to save the IPv4 routing configuration changes.
Select **Reset** to revert to the last saved configuration.

IPv6 Routing Configuration

1. Select the **IPv6 Routing** tab.

IPv6 networks are connected by IPv6 routers. IPv6 routers pass IPv6 packets from one network segment to another.

The IPv6 Routing configuration screen displays.

The screenshot shows the IPv6 Routing configuration interface. It includes the following settings:

- Unicast Routing:**
- Unique Local Address Reject Route:**
- System NS Retransmit Interval:** 1000 (1,000 to 3,600,000 milliseconds)
- System Neighbor Discovery Reachable Time:** 30000 (5,000 to 3,600,000 milliseconds)
- IPv6 Hop Limit:** IPv6 Hop Count: 64 (1 to 255)
- Router Advertisement Conversion to Unicast:** RA Convert: ; Throttle: ; Max RAs: 1 (1 to 256)

The IPv6 Routes table is currently empty:

Network Address	Gateway	Interface	Default Gateway

Figure 56: IPv6 Routing Configuration Screen

2. Select **Unicast Routing** to enable IPv6 unicast routing for this profile. Keeping unicast enabled allows the profile's neighbor advertisements and solicitations in unicast (as well as multicast) to provide better neighbor discovery. This setting is enabled by default.
3. Select **Unique Local Address Reject Route** to enable rejecting local routes in the format FC00::/7.
4. Set a **System NS Retransmit Interval** (from 1,000 to 3,600,000 milliseconds) as the interval between NS (*neighbor solicitation*) messages. NS messages are sent by a node to determine the link layer address of a neighbor, or verify a neighbor is still reachable via a cached link-layer address. The default is 1,000 milliseconds.
5. Set a **System ND Reachable Time** (from 5,000 to 3,600,000 milliseconds) as the time a neighbor is assumed to be reachable after receiving a receiving a ND (*neighbor discovery*) confirmation for their reachability. The default is 30,000 milliseconds.

6. Set an **IPv6 Hop Count** (from 1 - 255) as the maximum number of hops considered valid when sending IP packets. The default setting is 64.
7. Set the following **Router Advertisement Conversion to Unicast** settings:

RA Convert (milliseconds)	Select this option to convert multicast router advertisements (RA) to unicast router advertisements at the dot11 layer. Unicast addresses identify a single network interface, whereas a multicast address is used by multiple hosts. This setting is disabled by default.
Throttle	Select this option to throttle RAs before converting to unicast. Once enabled, set the throttle interval and maximum number of RAs. This setting is disabled by default.
Throttle Interval (milliseconds)	Enable this setting to define the throttle interval (3 - 1,800 seconds). The default setting is 3 seconds.
Max RAs	Enable this setting to define the maximum number of router advertisements per router (1 - 256) during the throttle interval. The default setting is 1.

8. In the **IPv6 Routes** table, click **+ Add Row** and add additional 256 IPv6 route resources.

The IPv6 static route **Add Row** screen displays.

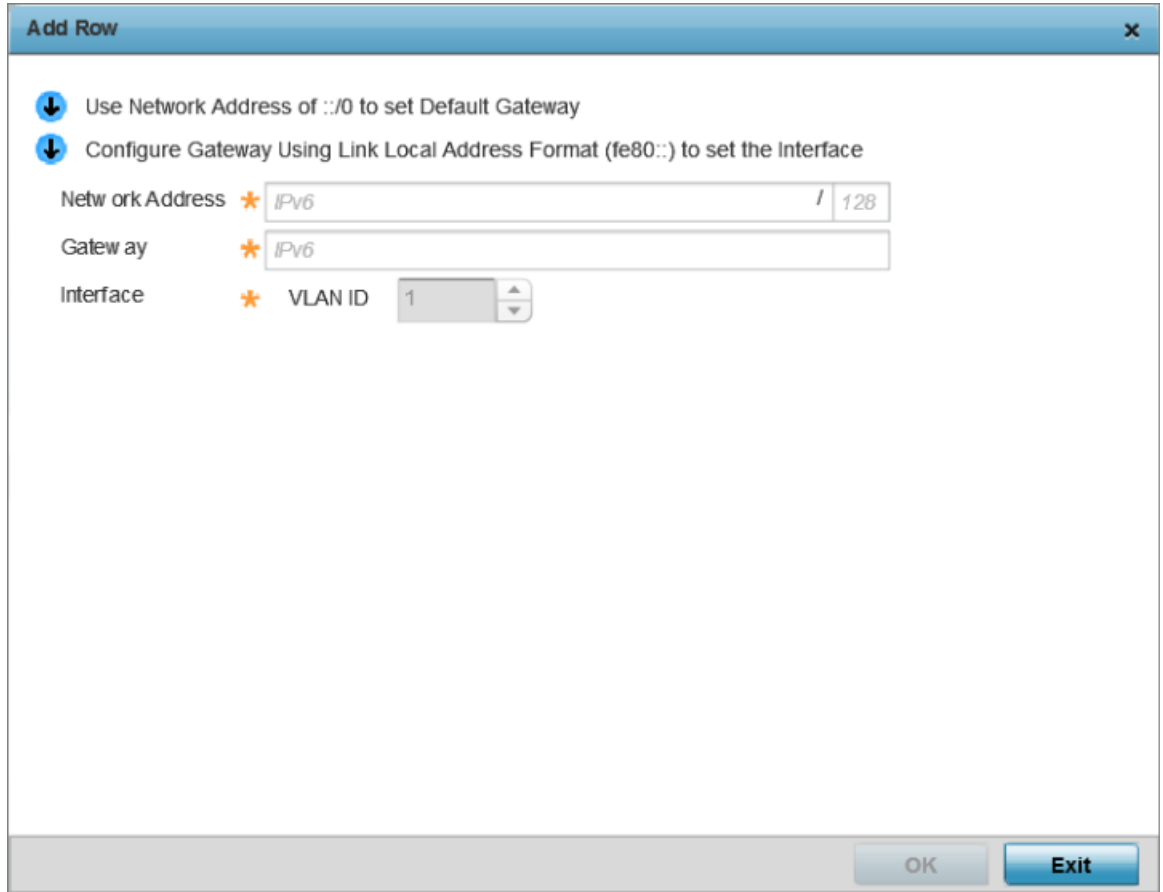


Figure 57: Add IPv6 Static Route Window

Network Address	Set the IPv6 network address. Other than the length and slightly different look versus an IPv4 address, the IPv6 address concept is same as IPv4.
Gateway	Set the IPv6 route gateway. A network gateway in IPv6 is the same as in IPv4. A gateway address designates how traffic is routed out of the current subnet.
Interface	If using a link local address, set the VLAN (1 - 4,094) used a virtual routing interface for the local address.


9. Select **OK** to save the IPv6 static route changes.
 Select **Reset** to revert to the last saved configuration.

OSPF Settings Configuration

1. Go to **Configuration → Devices → System Profiles**.

2. Expand **Network** and select **OSPF** .

The **OSPF Settings** configuration screen displays.

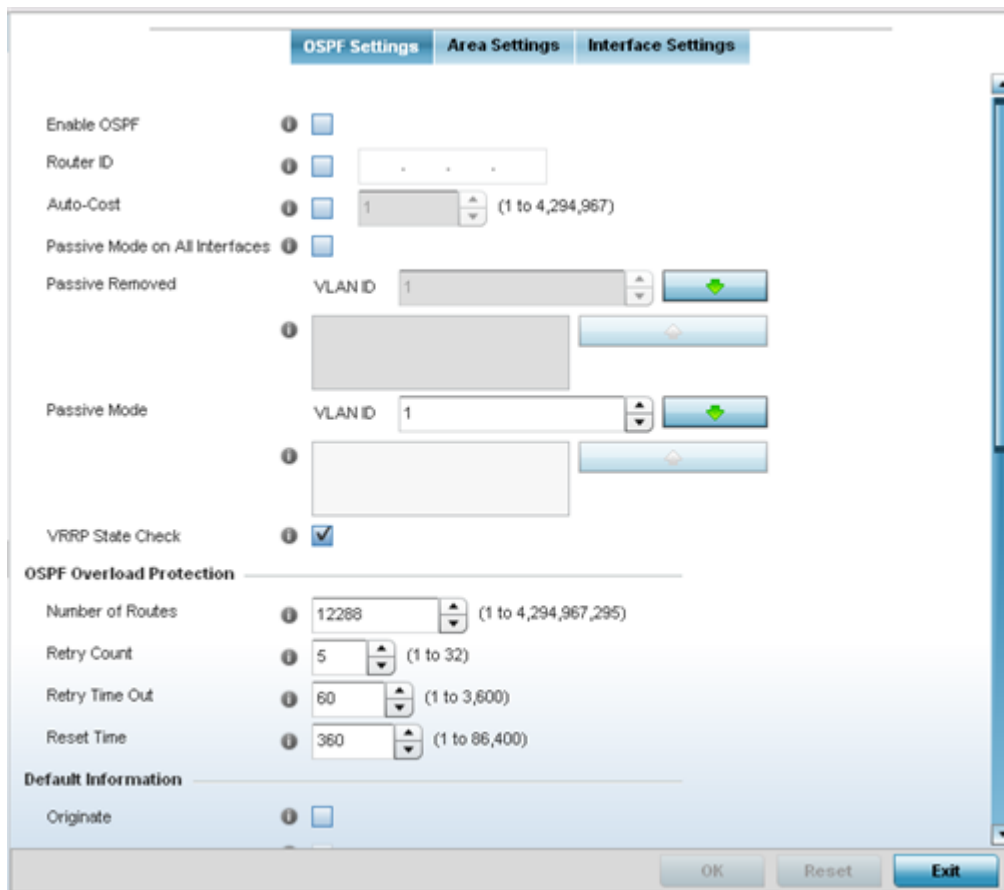

3. Enable/disable OSPF and provide the following dynamic routing settings:

Enable OSPF	Select this option to enable OSPF. OSPF is disabled by default.
Router ID	Select this option to define a router ID (numeric IP address). This ID must be established in every OSPF instance. If not explicitly configured, the highest logical IP address is duplicated as the router identifier. However, since the router identifier is not an IP address, it does not have to be a part of any routable subnet in the network.
Auto-Cost	Select this option to specify the reference bandwidth (in Mbps) used to calculate the OSPF interface cost if OSPF is either STUB or NSSA. The default setting is 1.
Passive Mode on All Interfaces	When selected, all layer 3 interfaces are set as an OSPF passive interface. This setting is disabled by default.
Passive Removed	If <i>enabling</i> Passive Mode on All Interfaces, use the spinner control to select VLANs (by numeric ID) as OSPF <i>non</i> passive interfaces. Multiple VLANs can be added to the list.

Passive Mode	If <i>disabling</i> Passive Mode on All Interfaces, use the spinner control to select VLANs (by numeric ID) as OSPF passive interfaces. Multiple VLANs can be added to the list.
VRRP State Check	Select this option to use OSPF only if the VRRP interface is not in a backup state. The <i>Virtual Router Redundancy Protocol</i> (VRRP) provides automatic assignments of available Internet Protocol (IP) routers to participating hosts. This increases the availability and reliability of routing paths via automatic default gateway selections on an IP subnetwork. This setting is enabled by default.

4. Set the following **OSPF Overload Protection** settings:

Number of Routes	Use the spinner control to set the maximum number of OSPN routes permitted. The available range is from 1 - 4,294,967,295.
Retry Count	Set the maximum number of retries (OSPF resets) permitted before the OSPF process is shut down. The available range is from 1 - 32. The default setting is 5.
Retry Time Out	Set the duration (in seconds) the OSPF process remains off before initiating its next retry. The available range is from 1 - 3,600 seconds. The default is 60 seconds.
Reset Time	Set the reset time (in seconds) that, when exceeded, changes the retry count is zero. The available range is from 1 - 86,400. The default is 360 seconds.

5. Set the following **Default Information**:

Originate	Select this option to make the default route a distributed route. This setting is disabled by default.
Always	Enabling this setting continuously maintains a default route, even when no routes appear in the routing table. This setting is disabled by default.
Metric Type	Select this option to define the exterior metric type (1 or 2) used with the default route.
Route Metric	Select this option to define route metric used with the default route. OSPF uses path cost as its routing metric. It's defined by the speed (bandwidth) of the interface supporting a given route.

6. Refer to the **Route Redistribution** table to set the types of routes that can be used by OSPF.

Select the **+ Add Row** button to populate the table. Set the **Route Type** used to define the redistributed route. Options include *connected*, *kernal* and *static*.

7. Select the **Metric Type** option to define the exterior metric type (1 or 2) used with the route redistribution. Select the **Metric** option to define route metric used with the redistributed route.

8. Use the **OSPF Network** table to define networks (IP addresses) to connect using dynamic routes.

Select the **+ Add Row** button to populate the table. Add the IP address and mask of the **Network(s)** participating in OSPF. Additionally, define the OSPF area (IP address) to which the network belongs.

9. Set an **OSPF Default Route Priority** (1 - 8,000) as the priority of the default route defined from OSPF.

10. Click **OK** to save the changes made within the screen.

Click **Reset** to revert to the last saved configuration.

Area Settings

To define a dynamic routing area configuration:

1. Select the **Area Settings** tab.

An OSPF *Area* contains a set of routers exchanging LSAs (*Link State Advertisements*) with others in the same area. Areas limit LSAs and encourage aggregate routes.

Area ID	Authentication Type	Type
0.0.0.0	message-digest	totally-stub
0.0.0.30	None	non-stub


2. Review the following **Area Setting** configurations to determine if a new configuration needs to be added or existing settings warrants modifications:

Area ID	Displays either the <i>IP address</i> or <i>integer</i> representing the OSPF area.
Authentication Type	Lists the authentication (user validation) types used to validate and authenticate the credentials of the dynamic route connections.
Type	Lists the OSPF area type in each listed configuration.

Adding and Editing Area Settings

You can add a new Area configuration or edit an existing configuration.

1. Select **Add** to create a new OSPF configuration, **Edit** to modify an existing configuration or **Delete** to remove a configuration.

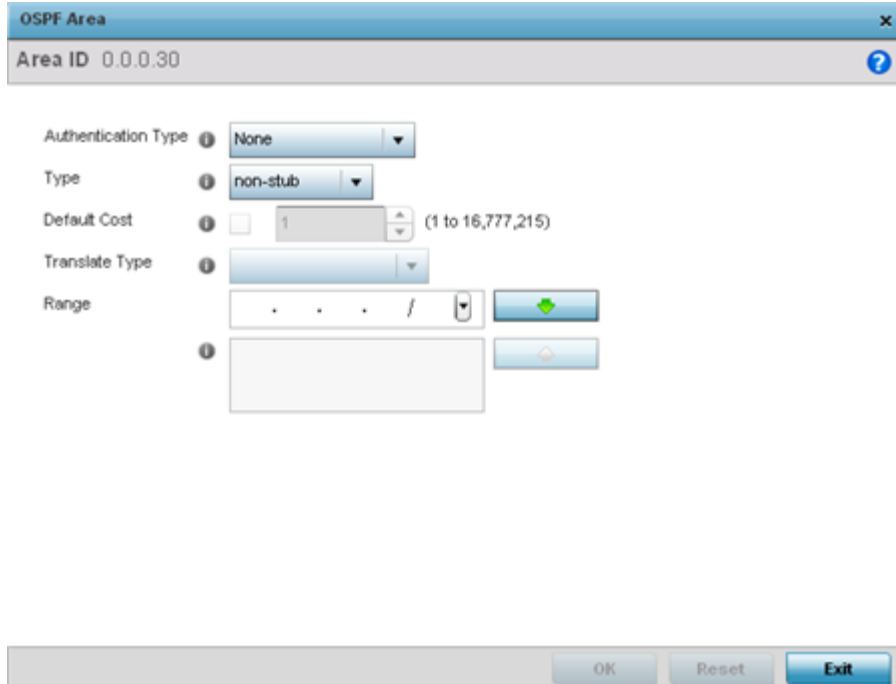

2. Set the following **OSPF Area** configurations:

Area ID	If adding a new OSPF Area, use the drop-down menu and specify the Area ID either as an <i>IP address</i> or <i>Integer</i> .
Authentication Type	Select either <i>None</i> , <i>simple-password</i> or <i>message-digest</i> as the credential validation scheme used with the OSPF dynamic route. The default setting is <i>None</i> (no data protection).
Type	Set the OSPF area type as either <i>stub</i> , <i>totally-stub</i> , <i>nssa</i> , <i>totally-nssa</i> or <i>non-stub</i> .
Default Cost	Select this option to set the default summary cost advertised if creating a stub. Set a value from 1 - 16, 777,215.
Translate Type	Define how messages are translated. Options include <i>translate-candidate</i> , <i>translate always</i> and <i>translate-never</i> . The default setting is <i>translate-candidate</i> .
Range	Specify a range of addresses for routes matching address/mask for OSPF summarization.

3. Select the **OK** button to save the changes to the area configuration. Select **Reset** to revert to the last saved configuration.

OSPF Interface Settings

To define a dynamic routing configuration:

1. Select the **Interface Settings** tab.

OSPF Settings Area Settings Interface Settings						
Name	Type	Description	Admin Status	VLAN	IP Address	
vlan3	VLAN	lanelot	X Disabled	3	dhcp	
Type to search in tables				Row Count: 1		
<input type="button" value="Add"/>		<input type="button" value="Edit"/>		<input type="button" value="Delete"/>		<input type="button" value="Exit"/>

2. Review existing **Interface Settings** using the following:

Name	Displays the name defined for the interface configuration.
Type	Displays the type of interface.
Description	Lists each interface's 32 character maximum description.
Admin Status	Displays whether Admin Status privileges have been <i>enabled</i> or <i>disabled</i> for the OSPF route's virtual interface connection.
VLAN	Lists the VLAN IDs set for each listed OSPF route virtual interface.
IP Address	Displays the IP addresses defined as virtual interfaces for dynamic OSPF routes. Zero config and DHCP can be used to generate route addresses, or a primary and secondary address can be manually set.

3. Select the **Add** button to define a new set of virtual interface basic settings, or **Edit** to update the settings of an existing virtual interface configuration.

Basic General Configuration

To configure the VLAN's basic configurations:

1. Select the **Add** button to define a new set of virtual interface basic settings, or **Edit** to update the settings of an existing virtual interface configuration. The **Basic Configuration** screen displays by default, regardless of whether a new virtual interface is being created or an existing one is being modified. Select the **General** tab if it is not selected by default.

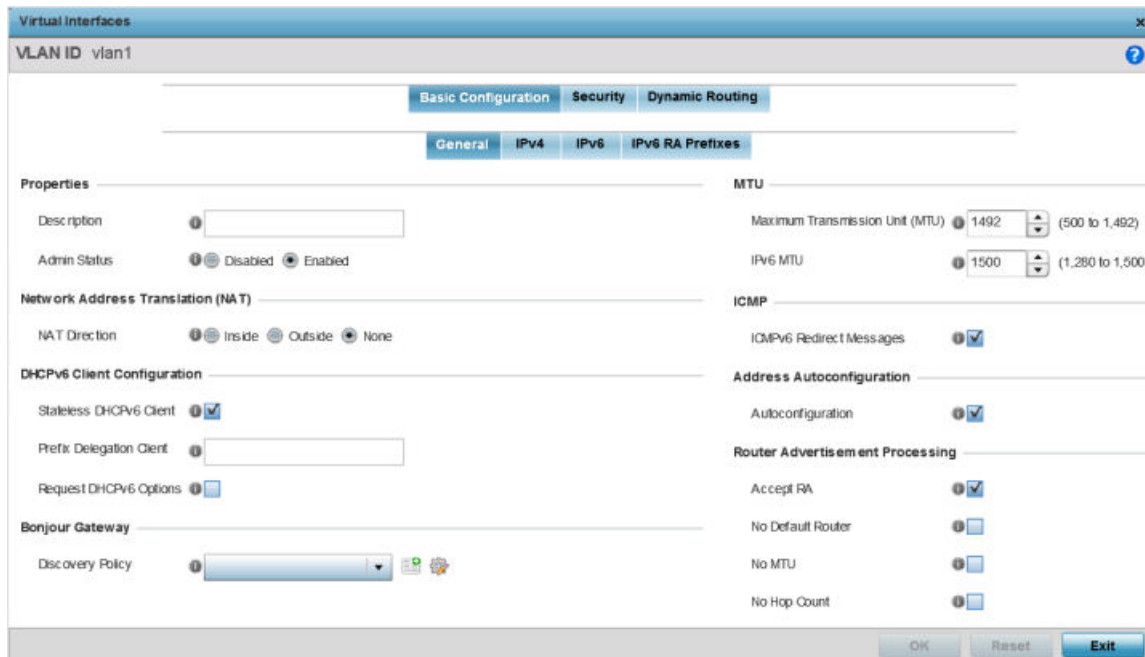


Figure 58: Profile Overrides - Virtual Interfaces Basic Configuration Screen

2. If you are creating a new virtual interface, use the **VLAN ID** spinner control to define a numeric VLAN ID from 1 - 4094.
3. Define or override the following parameters in the **Properties** field:

Description	Provide or edit a description (up to 64 characters) for the virtual interface that helps differentiate it from others with similar configurations.
Admin Status	Select Disabled or Enabled to define this interface’s current status within the network. When set to Enabled , the virtual interface is operational and available. The default value is disabled.

4. Define or override the **Network Address Translation (NAT)** direction.

Select one of the following options:

Inside	The inside network is transmitting data over the network its intended destination. On the way out, the source IP address is changed in the header and replaced by the (public) IP address.
Outside	Packets passing through the NAT on the way back to the managed LAN are searched against to the records kept by the NAT engine. There the destination IP address is changed back to the specific internal private class IP address in order to reach the LAN over the switch managed network.
None	No NAT activity takes place. This is the default setting.

5. Set the following **DHCPv6 Client Configuration**.

The DHCPv6 (*Dynamic Host Configuration Protocol for IPv6*) provides a framework for passing configuration information.

Stateless DHCPv6 Client	Select this option to request information from the DHCPv6 server using stateless DHCPv6. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. This setting is disabled by default.
Prefix Delegation Client	Specify a 32-character maximum request prefix for prefix delegation from a DHCPv6 server over this virtual interface. Devices use prefixes to distinguish destinations that reside on-link from those reachable using a router.
Request DHCPv6 Options	Select this option to request DHCPv6 options on this virtual interface. DHCPv6 options provide configuration information for a node that must be booted using the network rather than locally. This setting is disabled by default.

6. Define the **Bonjour Gateway** settings.

Bonjour is Apple's implementation of zeroconfiguration networking (Zeroconf). Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates devices such as printers, other computers, and services that these computers offer over a local network.

Bonjour provides a general method to discover services on a *local area network* (LAN). It allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour works within a single broadcast domain. However, with special DNS configuration, it can be extended to find services across broadcast domains.

Select the **Bonjour Gateway Discover** policy from the drop-down menu. Click the **Create** icon to define a new Bonjour Gateway policy configuration, or click the **Edit** icon to modify an existing Bonjour Gateway policy configuration.

7. Define the following **MTU** settings for the virtual interface:

Maximum Transmission Unit (MTU)	Set the PPPoE client MTU from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
IPv6 MTU	Set an IPv6 MTU for this virtual interface from 1,280 - 1,500. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. The default is 1,500.

8. In the **ICMP** field, define whether ICMPv6 redirect messages are sent. Redirect requests data packets be sent on an alternative route.

This setting is enabled by default.

9. In the **Address Autoconfiguration** field, define whether to configure IPv6 addresses on this virtual interface based on the prefixes received in router advertisement messages. Router advertisements contain prefixes used for link determination, address configuration and maximum hop limits.

This setting is enabled by default.

10. Set the following **Router Advertisement Processing** settings for the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

Accept RA	Enable this option to allow router advertisements over this virtual interface. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters. This setting is enabled by default.
No Default Router	Select this option to consider routers unavailable on this interface for default router selection. This setting is disabled by default.
No MTU	Select this option to not use the existing MTU setting for router advertisements on this virtual interface. If the value is set to zero, no MTU options are sent. This setting is disabled by default.
No Hop Count	Select this option to not use the hop count advertisement setting for router advertisements on this virtual interface. This setting is disabled by default.

11. Select **OK** to save the changes to the basic configuration. Select **Reset** to revert to the last saved configuration.

Basic IPv4 Configuration

To configure the VLAN IPv4 configuration:

1. Select the **IPv4** tab.

IPv4 is a connectionless protocol. It operates on a best effort delivery model that does not guarantee delivery or assures proper sequencing or avoidance of duplicate delivery (unlike TCP).

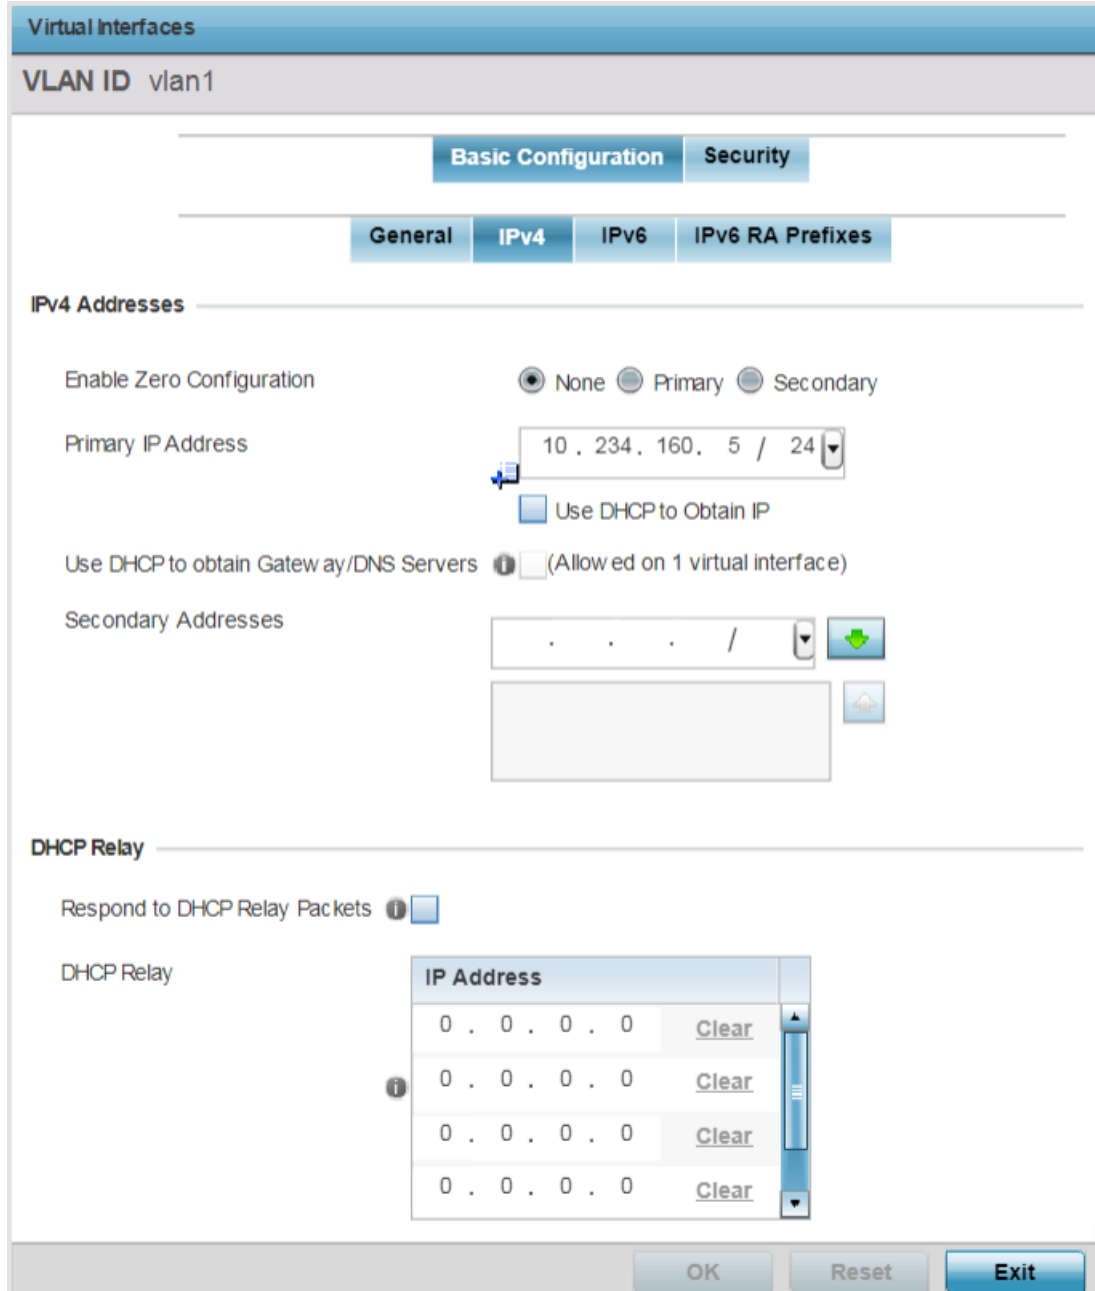


Figure 59: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv4 Tab

2. Set the following network information in the **IPv4 Addresses** field:

Enable Zero Configuration	Zero configuration can be a means of providing a primary or secondary IP addresses for the virtual interface. Zero configuration (or zero config) is a wireless connection utility included with Microsoft Windows XP and later as a service dynamically selecting a network to connect based on a user's preferences and various default settings. Zero config can be used instead of a wireless network utility from the manufacturer of a computer's wireless networking device. This value is set to None by default.
Primary IP Address	Define the IP address for the VLAN associated virtual interface.
Use DHCP to Obtain IP	Select this option to allow DHCP to provide the IP address for the virtual interface. Selecting this option disables the Primary IP Address field.
Use DHCP to Obtain Gateway/DNS Servers	Select this option to allow DHCP to obtain a default gateway address and DNS resource for one virtual interface. This setting is disabled by default and only available when the Use DHCP to Obtain IP option is selected.
Secondary Addresses	Use this parameter to define additional IP addresses to associate with VLAN IDs. The address provided in this field is used if the primary IP address is unreachable.

3. Click **OK** to save the changes to the IPv4 configuration.

Click **Reset** to revert to the last saved configuration.

Basic IPv6 Configuration

IPv6 is the latest revision of the IP (*Internet Protocol*), designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters.

To configure the VLAN IPv6 configuration:

1. Select the **IPv6** tab.

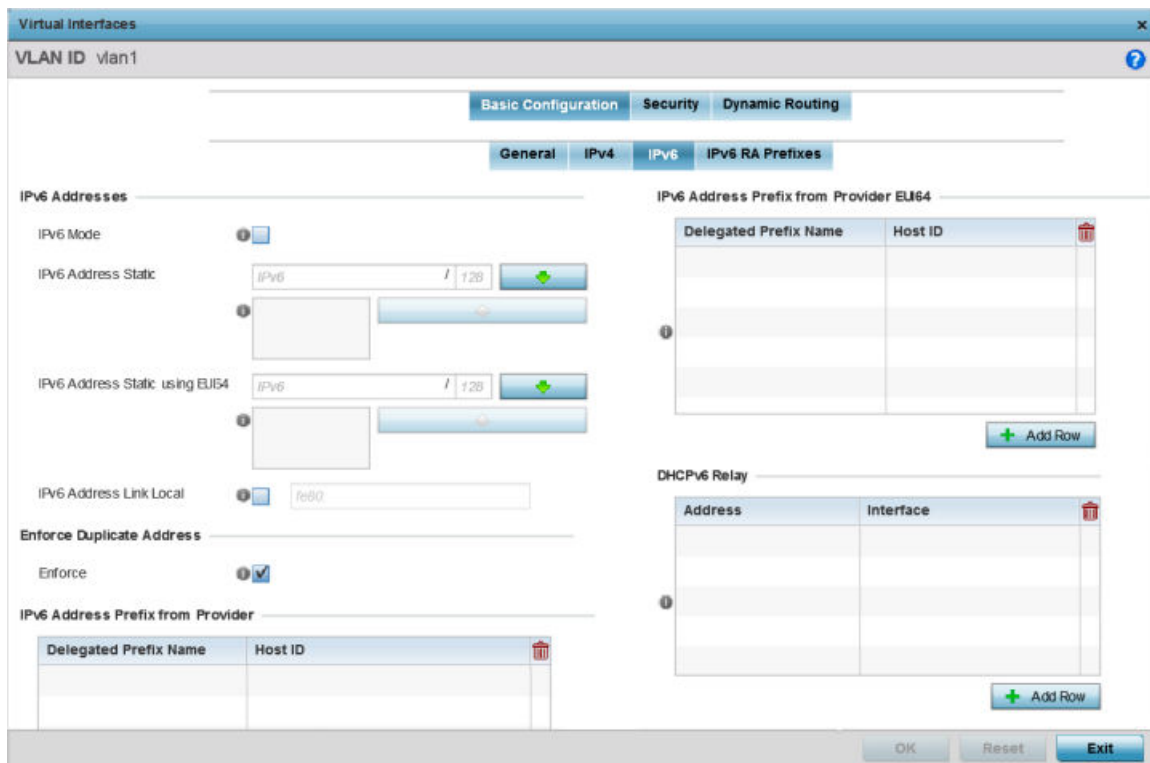


Figure 60: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab

2. Refer to the **IPv6 Addresses** field to define how IP6 addresses are created and utilized:

IPv6 Mode	Select this option to enable IPv6 support on this virtual interface. IPv6 is disabled by default.
IPv6 Address Static	Define up to 15 global IPv6 IP addresses that can be created statically. IPv6 addresses are represented as eight groups of four hexadecimal digits separated by colons.
IPv6 Address Static using EUI64	Optionally, set up to 15 global IPv6 IP addresses (in the EUI-64 format) that can be created statically. The IPv6 EUI-64 format address is obtained through a 48-bit MAC address. The MAC is initially separated into two 24-bit segments, with one being an OUI (<i>Organizationally Unique Identifier</i>) and the other being client specific. A 16-bit 0xFFFE is then inserted between the two 24-bit segments for the 64-bit EUI address. IEEE has chosen FFFE as a reserved value which can only appear in EUI-64 generated from an EUI-48 MAC address.
IPv6 Address Link Local	Provide the IPv6 local link address. IPv6 requires a link local address assigned to every interface the IPv6 protocol is enabled, even when one or more routable addresses are assigned.

3. Enable the **Enforce Duplicate Address** option to enforce duplicate address protection when any wired port is connected and in a forwarding state. This option is enabled by default.

4. Refer to the **IPv6 Address Prefix from Provider** table to create IPv6 format prefix shortcuts as supplied by an ISP.

Select **+ Add Row** to launch a screen in which a new delegated prefix name and host ID can be defined.

The screenshot shows a dialog box titled "Add Row" with a close button (X) in the top right corner. The main title is "IPv6 Address Prefix from Provider". Below the title, there are two main sections:

- Delegated Prefix Name**: A text input field with an asterisk (*) to its left.
- Host ID**: A section containing a text input field with "IPv6" entered, a separator "/" and "128", a dropdown menu with a green arrow, and a larger empty text input field with an asterisk (*) to its left.

At the bottom of the dialog box, there are two buttons: "OK" and "Exit".

Figure 61: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add Address Prefix from Provider

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 address prefix from your provider.
Host ID	Define the subnet ID, host ID, and prefix length.

5. Click **OK** to save the changes to the IPv6 configuration.
Click **Exit** to close the screen without saving any updates.
6. Refer to the **IPv6 Address Prefix from Provider EUI64** table to set an (abbreviated) IP address prefix in EUI64 format.
Select **+ Add Row** to launch a screen in which a new delegated prefix name and host ID can be defined in EUI64 format.

Figure 62: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add Address Prefix from Provider EUI64

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 prefix from your provider in EUI format. Using EUI64, a host can automatically assign itself a unique 64-bit IPv6 interface identifier without manual configuration or DHCP.
Host ID	Define the subnet ID and prefix length.

- Click **OK** to save the changes to the new IPv6 prefix from provider in EUI64 format. Click **Exit** to close the screen without saving any updates.
- Refer to the **DHCPv6 Relay** table to set the address and interface of the DHCPv6 relay.

The DHCPv6 relay enhances an extended DHCP relay agent by providing support in IPv6. DHCP relays exchange messages between a DHCPv6 server and client. A client and relay agent exist on the same link. When a DHCP request is received from the client, the relay agent creates a relay forward message and sends it to a specified server address. If no addresses are specified, the relay agent forwards the message to all DHCP server relay multicast addresses. The server creates a relay reply and sends it back to the relay agent. The relay agent then sends back the response to the client.

Select **+ Add Row** to launch a screen in which a new DHCPv6 relay address and interface VLAN ID can be set.

Figure 63: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 Tab - Add DHCPv6 Relay

Address	Enter an address for the DHCPv6 relay. These DHCPv6 relay receive messages from DHCPv6 clients and forward them to DHCPv6 servers. The DHCPv6 server sends responses back to the relay, and the relay then sends these responses to the client on the local network.
Interface	Select this option to enable a spinner control to define a VLAN ID from 1 - 4,094 used as the virtual interface for the DHCPv6 relay. The interface designation is only required for link local and multicast addresses. A local link address is a locally derived address designed for addressing on a single link for automatic address configuration, neighbor discovery or when no routing resources are available.

- Click **OK** to save the changes to the DHCPv6 relay configuration.
Click **Exit** to close the screen without saving any updates.

IPv6 Prefix RA Configuration

To configure the VLAN IPv6 RA Prefixes configuration:

1. Select the **IPv6 RA Prefixes** tab.

Virtual Interfaces

VLAN ID vlan1

Basic Configuration Security Dynamic Routing

General IPv4 IPv6 IPv6 RA Prefixes

Router Advertisement Policy

Router Advertisement Policy

IPv6 RA Prefixes

Prefix Type	Prefix or Id	Site Prefix	Valid Lifetime Type	Valid Lifetime Sec	Valid Lifetime Date	Valid Lifetime Time	Preferred Lifetime Type	Preferred Lifetime Sec	Preferred Lifetime Date	Autoc onfig	Preferred Lifetime Time	On Link

+ Add Row

OK Reset Exit

Figure 64: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 RA Prefixes Tab

2. Use the **Router Advertisement Policy** drop-down menu to select and apply a policy to the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

- Review the configurations of existing IPv6 advertisement policies.
If necessary, select + **Add Row** to define the configuration for an additional IPv6 RA prefix.

The screenshot shows a configuration window titled "Add Row" for "IPv6 RA Prefixes". The settings are as follows:

- Prefix Type: **Prefix**
- Prefix or Id: **IPv6 / 128**
- Site Prefix: **IPv6 / 128**
- Valid Lifetime Type: **External (Fixed)**
- Valid Lifetime Sec: **30** **Days**
- Valid Lifetime Date: [Calendar icon]
- Valid Lifetime Time: **1** : **0** AM PM
- Preferred Lifetime Type: **External (Fixed)**
- Preferred Lifetime Sec: **7** **Days**
- Preferred Lifetime Date: [Calendar icon]
- Preferred Lifetime Time: **1** : **0** AM PM
- Autoc onfig:
- On Link:

Figure 65: Profile Overrides - Virtual Interfaces Basic Configuration Screen - IPv6 RA Prefix

- Define the following **IPv6 RA Prefix** settings:

Prefix Type	Set the prefix delegation type used with this configuration. Options include Prefix , and prefix-from-provider . The default setting is Prefix . A prefix allows an administrator to associate a user defined name to an IPv6 prefix. A provider assigned prefix is made available from an ISP (<i>Internet Service Provider</i>) to automate the process of providing and informing the prefixes used.
Prefix or ID	Set the actual prefix or ID used with the IPv6 router advertisement.
Site Prefix	The site prefix is added into a router advertisement prefix. The site address prefix signifies the address is only on the local link.

Valid Lifetime Type	Set the lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Valid Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is External (fixed).
Valid Lifetime Sec	If the lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Valid Lifetime Date	If the lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Valid Lifetime Time	If the lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Preferred Lifetime Type	Set the administrator preferred lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Preferred Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is External (fixed).
Preferred Lifetime Sec	If the administrator preferred lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Preferred Lifetime Date	If the administrator preferred lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Preferred Lifetime Time	If the administrator preferred lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Autoconfig	Autoconfiguration includes generating a link-local address, global addresses via stateless address autoconfiguration and duplicate address detection to verify the uniqueness of the addresses on a link. This setting is enabled by default.
On Link	Select this option to keep the IPv6 RA prefix on the local link. The default setting is enabled.

- Click **OK** to save the changes to the IPv6 RA prefix configuration.

Click **Exit** to close the screen without saving any updates. Or, click **Reset** to revert to the last saved configuration.

Security

To define a dynamic routing configuration:

1. Select **Configuration** → **Profiles** → **System Profile**.

A list of device profiles within the system is displayed.

2. Expand the **Network** menu and select **OSPF**.
3. Select the **Add** button to define a new set of virtual interface basic settings, or **Edit** to update the settings of an existing virtual interface configuration.
4. Select the **Security** tab.

The VLAN Interface security configuration screen displays.

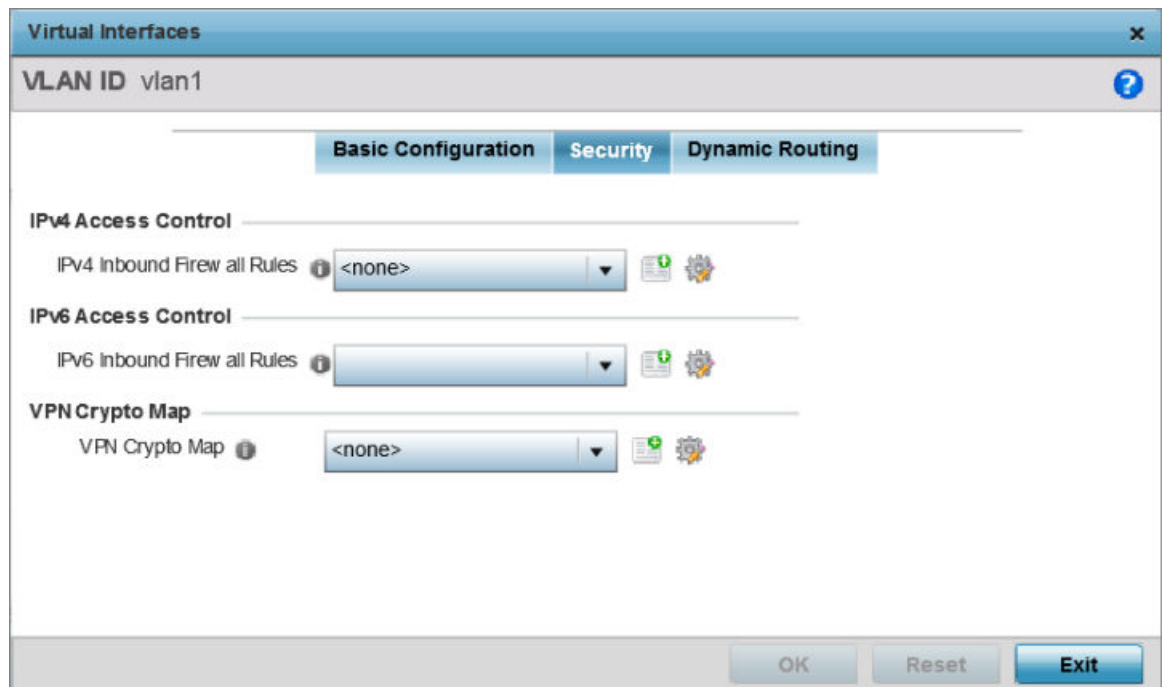


Figure 66: OSPF - VLAN Interface Security Configuration Screen

5. Use the **IPv4 Inbound Firewall Rules** drop-down menu to select the IPv4 specific inbound firewall rules to apply to this profile's virtual interface configuration. Select the **Create** icon to define a new IPv4 firewall rule configuration or select the **Edit** icon to modify an existing configuration.
6. Use the **IPv6 Inbound Firewall Rules** drop-down menu to select the IPv6 specific inbound firewall rules to apply to this profile's virtual interface configuration. Select the **Create** icon to define a new IPv6 firewall rule configuration or select the **Edit** icon to modify an existing configuration.
7. Use the **VPN Crypto Map** drop-down menu to select and apply a VPN crypto map entry to apply to the OSPF dynamic route.

Crypto Map entries are sets of configuration parameters for encrypting packets passing through the VPN Tunnel. If a Crypto Map configuration does not exist

suiting the needs of this virtual interface, select the **Create** icon to define a new Crypto Map configuration or the **Edit** icon to modify an existing configuration.

8. Select **OK** to save the changes to the OSPF route security configuration. Select **Reset** to revert to the last saved configuration.

Dynamic Routing

To define a dynamic routing configuration:

1. Select the **Dynamic Routing** tab.

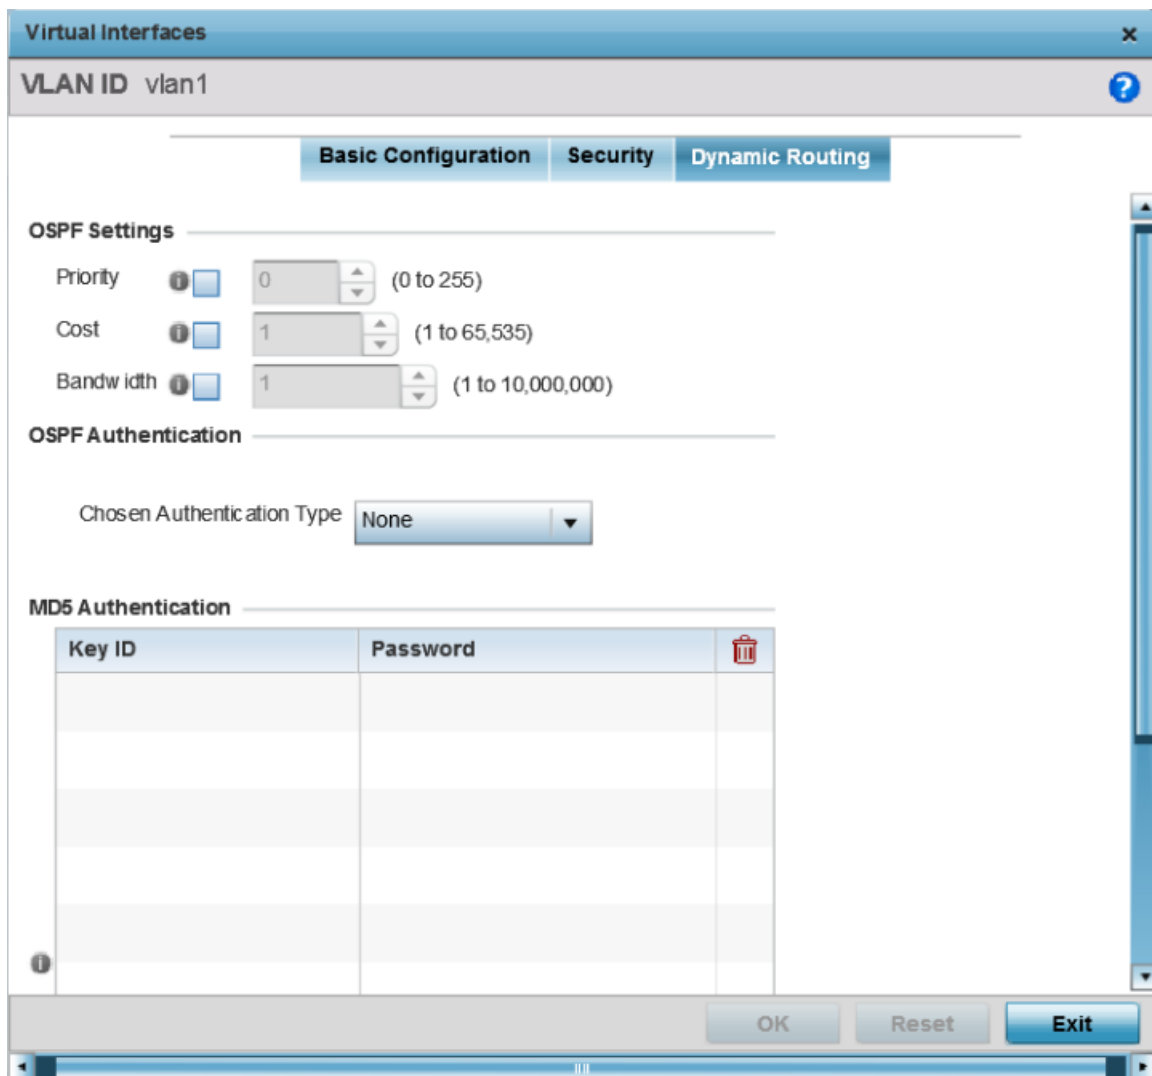


Figure 67: Profiles OSPF Virtual Interface Dynamic Routing Screen

2. Set the following **OSPF Settings**:

Priority	Select this option to enable or disable OSPF priority settings. Use the spinner to configure a value from 0 - 255. This option sets the priority of this interface becoming the Designated Router (DR) for the network. DRs provide routing updates to the network by maintaining a complete topology table of the network and sends the updates to the other routers in the network using multicast. Setting a high value increases the chance of this interface becoming a DR. Setting this value to zero prevents this interface from being elected a DR.
Cost	Select this option to enable or disable OSPF cost settings. Use the spinner to configure a cost value from 1 - 65535. Use this option to set the OSPF cost of this interface. OSPF cost is the overhead required to send a packet over this interface.
Bandwidth	Set the OSPF bandwidth from 1 - 10,000,000 KBps.

- Set the following **OSPF Authentication** settings for the dynamic route:

Chosen Authentication Type	Select the authentication type used to validate credentials within the OSPF dynamic route. Options include <i>simple-password</i> , <i>message-digest</i> , <i>null</i> and <i>None</i> .
Authentication Key	Enter and confirm the authentication key required by connecting nodes using the OSPF dynamic route.

- Select the **+ Add Row** button (at the bottom of the **MD5 Authentication** table) to add the **Key ID** and **Password** used for an MD5 validation of authenticator credentials.

Use the spinner control to set the OSPF message digest authentication key ID. The available range is from 1 - 255. The password is the OSPF key either displayed as series or asterisks or in plain text (by selecting Show).

- Select **OK** to save the changes to the configuration. Select **Reset** to revert to the last saved configuration

Forwarding Database Configuration

An Forwarding Database forwards or filter packets on behalf of the managing controller, service platform or access point. The bridge reads the packet's destination MAC address and decides to either forward the packet or drop (filter) it. If it's determined the destination MAC is on a different network segment, it forwards the packet to the segment. If the destination MAC is on the same network segment, the packet is dropped (filtered). As nodes transmit packets through the bridge, the bridge updates its forwarding database with known MAC addresses and their locations on the network. This information is then used to decide to filter or forward the packet.

To define a forwarding database configuration:

- Select the **Configuration → Devices → System Profile** tab from the Web UI.

- Expand the **Network** menu and select **Forwarding Database**.

Aging Time

Bridge Aging Time (0,10-1000000 seconds)

Static Forwarding Table

MAC Address	VLAN Id	Interface Name	
02-03-04-05-06-07	1	FI123	
0A-0B-0C-0D-0E-0F	4	FI345	

Figure 68: Network - Forwarding Database screen

- Define the **Bridge Aging Time** from 0, 10-1,000,000 seconds.
The aging time defines the length of time an entry will remain in the bridge's forwarding table before it is deleted due to lack of activity. If an entry replenishments a destination, generating continuous traffic, this timeout value will never be invoked. However, if the destination becomes idle, the timeout value represents the length of time that must be exceeded before an entry is deleted from the forwarding table. The default setting is 300 seconds.
- Use the **+Add Row** button to create a new row within the **Static Forwarding Table**.
- Set or override a destination **MAC Address**.
The bridge reads the packet's destination MAC address and decides to forward the packet or drop (filter) it. If it's determined the destination MAC is on a different network, it forwards the packet to the segment. If the destination MAC is on the same network segment, the packet is dropped (filtered).
- Define the target **VLAN ID** if the destination MAC is on a different network segment.
- Provide an **Interface Name** used as the target destination interface for the target MAC address.
- Select **OK** to save the changes. Select **Reset** to revert to the last saved configuration.

Bridge VLAN Configuration

A VLAN is separately administrated virtual network within the same physical managed network. VLANs are broadcast domains defined to allow control of broadcast, multicast, unicast, and unknown unicast within a Layer 2 device.

For example, say several computers are used in conference room X and some in conference Y. The systems in conference room X can communicate with one another, but not with the systems in conference room Y. The creation of a VLAN enables the systems in conference rooms X and Y to communicate with one another even though they are on separate physical subnets. The systems in conference rooms X and Y are managed by the same single device, but ignore the systems that aren't using same VLAN ID.

Administrators often need to route traffic to interoperate between different VLANs. Bridging VLANs are only for non-routable traffic, like tagged VLAN frames destined to some other device which will untag it. When a data frame is received on a port, the VLAN bridge determines the associated VLAN based on the port of reception. Using forwarding database information, the Bridge VLAN forwards the data frame on the appropriate port(s). VLAN's are useful to set separate networks to isolate some computers from others, without actually having to have separate cabling and Ethernet switches. Controllers and service platforms can do this on their own, without the need to know what VLAN it's on (this is called port-based VLAN, since it's assigned by port). Another common use is to put specialized devices like VoIP Phones on a separate network for easier configuration, administration, security or service quality.

To define a bridge VLAN configuration:

1. Go to **Configuration** → **Devices** → **System Profile** .

The **Profile** screen displays. This screen lists access point profiles.

2. Select a profile from those listed on the screen. The selected profile's configuration menu displays.
3. Expand the **Network** node and select **Bridge VLAN**. The Bridge VLAN Main screen displays. This screen displays existing Bridge VLAN configurations.

VLAN	Description	Edge VLAN Mode	Trust ARP Responses	Trust DHCP Responses
12	lancelot	✓	✗	✗

Type to search in tables Row Count: 1

4. Review the following VLAN configuration parameters to determine whether an update is warranted:

VLAN	Lists the numerical identifier defined for the Bridge VLAN when initially created. The available range is from 1 - 4095. This value cannot be modified during the edit process.
Description	Lists a description of the VLAN assigned when it was created or modified. The description should be unique to the VLAN's specific configuration and help differentiate it from other VLANs with similar configurations.
Edge VLAN Mode	Defines whether the VLAN is currently in edge VLAN mode. A green checkmark defines the VLAN as extended. An edge VLAN is the VLAN where hosts are connected. For example, if VLAN 10 is defined with wireless clients, and VLAN 20 is where the default gateway resides, VLAN 10 should be marked as an edge VLAN and VLAN 20 shouldn't. When defining a VLAN as an edge VLAN, the firewall enforces additional checks on hosts in that VLAN. For example, a host cannot move from an edge VLAN to another VLAN and still keep firewall flows active.
Trust ARP Response	When ARP trust is enabled, a green checkmark displays. When disabled, a red "X" displays. Trusted ARP packets are used to update the IP-MAC Table to prevent IP spoof and arp-cache poisoning attacks.
Trust DHCP Responses	When DHCP trust is enabled, a green checkmark displays. When disabled, a red "X" displays. When enabled, DHCP packets from a DHCP server are considered trusted and permissible. DHCP packets are used to update the DHCP Snoop Table to prevent IP spoof attacks.

5. Select **Add** to define a new bridge VLAN configuration, **Edit** to modify an existing bridge VLAN configuration or **Delete** to remove a VLAN configuration.

Bridge VLAN General Configuration

To define a bridge VLAN general configuration:

1. Select **Add** to define a new Bridge VLAN configuration, **Edit** to modify an existing Bridge VLAN configuration or **Delete** to remove a VLAN configuration.

Bridge VLAN

VLAN 1

General | IGMP Snooping | MLD Snooping

Description

Per VLAN Firewall

URL Filter

URL Filter

Application Policy

Application Policy

Extended VLAN Tunnel

Bridging Mode

IP Outbound Tunnel ACL

IPv6 Outbound Tunnel ACL

MAC Outbound Tunnel ACL

Tunnel Over Level 2

Extended VLAN Tunnel Authentication

Mac Authentication

Captive Portal Enforcement

VLAN Tunnel Optimizations

Level 2 Tunnel Broadcast Optimization

Level 2 Forward Additional Packet Types

Tunnel Rate Limit

Mint Link Level | Rate | Max Burst Size | Background | Best-Effort | Video

OK | Reset | Exit

The **General** tab displays by default.

- If adding a new Bridge VLAN configuration, use the spinner control to define a **VLAN** ID between 1 - 4094. This value must be defined and saved before the General tab can become enabled and the remainder of the settings defined. VLAN IDs 0 and 4095 are reserved and unavailable.

3. Set the following general bridge VLAN parameters:

Description	If creating a new Bridge VLAN, provide a description (up to 64 characters) unique to the VLAN's specific configuration to help differentiate it from other VLANs with similar configurations.
Per VLAN Firewall	Enable this setting to provide firewall allow and deny conditions over the bridge VLAN. This setting is enabled by default.

4. Set or override the following **URL Filter** parameters. Web filters are used to control the access to resources on the Internet:

URL Filter	Use the drop-down menu to select a URL filter to use with this Bridge VLAN.
------------	---

5. Set or override the following **Application Policy** parameters. Use the drop-down to select the appropriate Application Policy to use with this Bridge VLAN configuration.
6. Set the following **Extended VLAN Tunnel** parameters:

Bridging Mode	Specify one of the following bridging modes for the VLAN. <i>Automatic</i> : Select automatic to let the controller, service platform or access point determine the best bridging mode for the VLAN. <i>Local</i> : Select Local to use local bridging mode for bridging traffic on the VLAN. <i>Tunnel</i> : Select Tunnel to use a shared tunnel for bridging traffic on the VLAN. <i>isolated-tunnel</i> : Select isolated-tunnel to use a dedicated tunnel for bridging VLAN traffic.
IP Outbound Tunnel ACL	Select an IP Outbound Tunnel ACL for outbound traffic from the drop-down menu. If an appropriate outbound IP ACL is not available, select the <i>Create</i> button to make a new one.
MAC Outbound Tunnel ACL	Select a MAC Outbound Tunnel ACL for outbound traffic from the drop-down menu. If an appropriate outbound MAC ACL is not available click the Create button to make a new one.
Tunnel Over Level 2	Select this option to allow VLAN traffic to be tunneled over level 2 links. This setting is disabled by default.



Note

Local and Automatic bridging modes do not work with ACLs. ACLs can only be used with tunnel or isolated-tunnel modes.

7. Set the following **Extended VLAN Tunnel Authentication** settings:

MAC Authentication	Select to enable source MAC authentication for extended VLAN and tunneled traffic (MiNT and L2TPv3) on this bridge VLAN. When enabled, it provides fast path authentications of clients, whose captive portal session has expired. This option is disabled by default.
Captive-Portal Authentication	Use the drop-down menu to specify authentication mode used for extended VLAN and tunneled traffic, on this Bridge VLAN. The options are: None – No Authentication mode used. This is the default setting. Authentication Failure – Configures MAC Authentication as the primary and Captive-Portal Authentication as the fall-back authentication mode. Always – Configures Captive-Portal Authentication as the only mode of Authentication
Edge VLAN Mode	Select this option to enable edge VLAN mode. When selected, the edge controller's IP address in the VLAN is not used, and is now designated to isolate devices and prevent connectivity. This feature is enabled by default.

8. Set the following **Layer 2 Firewall** parameters:

Trust ARP Response	Select this option to use trusted ARP packets to update the DHCP Snoop Table to prevent IP spoof and arp-cache poisoning attacks. This feature is disabled by default.
Trust DHCP Responses	Select this option to use DHCP packets from a DHCP server as trusted and permissible within the managed network. DHCP packets are used to update the DHCP Snoop Table to prevent IP spoof attacks. This feature is disabled by default.
Edge VLAN Mode	Select this option to enable edge VLAN mode. When selected, the edge controller's IP address in the VLAN is not used, and is now designated to isolate devices and prevent connectivity. This feature is enabled by default.

9. Select the **OK** button to save the changes to the General tab. Select **Reset** to revert to the last saved configuration.

Bridge VLAN IGMP Snooping

IGMP is used for managing IP multicast group members. Controllers and service platforms listen to IGMP network traffic and forward IGMP multicast packets to radios on which the interested hosts are connected. On the wired side of the network, the controller or service platform floods all the wired interfaces. This feature reduces unnecessary flooding of multicast traffic in the network.

To define a profile's bridge VLAN IGMP settings:

1. Select the **IGMP Snooping** tab.
2. Define the following **General** parameters for the bridge VLAN configuration:

Enable IGMP Snooping	Select the check box to enable IGMP snooping. If disabled, snooping on a per VLAN basis is also disabled. This feature is enabled by default. If disabled, the settings under bridge configuration are overridden. For example, if IGMP snooping is disabled, but the bridge VLAN is enabled, the effective setting is disabled.
Forward Unknown Unicast Packets	Select the check box to enable to forward multicast packets from unregistered multicast groups. If disabled (the default setting), the unknown multicast forward feature is also disabled for individual VLANs.
Enable Fast Leave Processing	Select this option to remove a Layer 2 LAN interface from the IGMP snooping forwarding table entry without initially sending IGMP group-specific queries to the interface. When receiving a group specific IGMPv2 leave message, IGMP snooping removes the interface from the Layer 2 forwarding table entry for that multicast group, unless a multicast router was learned on the port. Fast-leave processing enhances bandwidth management for all hosts on the network.
Last Member Query Count	Specify the number of group specific queries sent before removing an IGMP snooping entry.

3. Within the **Multicast Router** section, select those interfaces used as multicast router interfaces. Multiple interfaces can be selected and overridden. Set the **pim-dvmrp** or **static Multicast Routing Learn Mode**. DVMRP builds a parent-child database using a constrained multicast model to build a forwarding tree rooted at the source of the multicast packets. Multicast packets are initially flooded down this source tree. If redundant paths are on the source tree, packets are not forwarded along those paths.
4. Set the following **IGMP Querier** parameters for the profile's bridge VLAN configuration:

Enable IGMP Snooping	IGMP snoop querier is used to keep host memberships alive. It's primarily used in a network where there's a multicast streaming server, hosts subscribed to the server and no IGMP querier present. An IGMP querier sends out periodic IGMP query packets. Interested hosts reply with an IGMP report packet. IGMP snooping is only conducted on wireless radios. IGMP multicast packets are flooded on wired ports. IGMP multicast packet are not flooded on the wired port. IGMP membership is also learnt on it and only if present, then it is forwarded on that port.
Source IP Address	Define an IP address applied as the source address in the IGMP query packet. This address is used as the default VLAN querier IP address.
IGMP Version	Use the spinner control to set the IGMP version compatibility to either version 1, 2 or 3. The default setting is 3.

Maximum Response Time	Specify the maximum time (from 1 - 25 seconds) before sending a responding report. When no reports are received from a radio, radio information is removed from the snooping table. For IGMP reports from wired ports, reports are only forwarded to the multicast router ports. The default setting is 10 seconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

5. Select the **OK** button to save the changes to the bridge VLAN IGMP Snooping tab. Select **Reset** to revert to the last saved configuration.

Bridge VLAN MLD Snooping

MLD (*Multicast Listener Discovery*) snooping enables a controller, service platform or access point to examine MLD packets and make forwarding decisions based on content. MLD is used by IPv6 devices to discover devices wanting to receive multicast packets destined for specific multicast addresses. MLD uses multicast listener queries and multicast listener reports to identify which multicast addresses have listeners and join multicast groups.

MLD snooping caps the flooding of IPv6 multicast traffic on controller, service platform or access point VLANs. When enabled, MLD messages are examined between hosts and multicast routers and to discern which hosts are receiving multicast group traffic. The controller, service platform or access point then forwards multicast traffic only to those interfaces connected to interested receivers instead of flooding traffic to all interfaces.

To set the MLD Snooping parameters:

1. Select the **MLD Snooping** tab.

The screenshot shows the 'Bridge VLAN' configuration window for 'VLAN 1'. The 'MLD Snooping' tab is selected. The configuration is organized into three sections: General, Multicast Router, and MLD Querier.

- General:**
 - Enable MLD Snooping:
 - Forward Unknown Multicast Packets:
- Multicast Router:**
 - Interface Names: A list box containing ge1, ge2, radio1, and radio2.
 - Multicast Router Learn Mode: pim-dvmrp
- MLD Querier:**
 - Enable MLD Querier:
 - MLD Version: 1 (1 to 2)
 - Maximum Response Time: 1 (1 to 25,000 milliseconds)
 - Other Querier Timer Expiry: 60 (60 to 300 seconds)

At the bottom of the window are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 69: Network Bridge VLAN screen, MLD Snooping tab

2. Define the following **General** MLD snooping parameters for the Bridge VLAN configuration:

Enable MLD Snooping	Enable MLD snooping to examine MLD packets and support content forwarding on this Bridge VLAN. Packets delivered are identified by a single multicast group address. Multicast packets are delivered using best-effort reliability, just like IPv6 unicast. MLD snooping is enabled by default.
Forward Unknown Packets	Use this option to either enable or disable IPv6 unknown multicast forwarding. This setting is enabled by default.

3. Define the following **Multicast Router** settings:

Interface Names	Select the GE or radio interfaces used for MLD snooping.
Multicast Router Learn Mode	Set the pim-dvmrp or static multicast routing learn mode. DVMRP builds a parent-child database using a constrained multicast model to build a forwarding tree rooted at the source of the multicast packets. Multicast packets are initially flooded down this source tree. If redundant paths are on the source tree, packets are not forwarded along those paths.

4. Set the following **MLD Querier** parameters for the profile's Bridge VLAN configuration:

Enable MLD Querier	Select this option to enable MLD querier on the controller, service platform or access point. When enabled, the device sends query messages to discover which network devices are members of a given multicast group. This setting is enabled by default.
MLD Version	Define whether MLD version 1 or 2 is utilized with the MLD querier. MLD version 1 is based on IGMP version 2 for IPv4. MLD version 2 is based on IGMP version 3 for IPv4 and is fully backward compatible. IPv6 multicast uses MLD version 2. The default MLD version is 2.
Maximum Response Time	Specify the maximum response time (from 1 - 25,000 milliseconds) before sending a responding report. Queriers use MLD reports to join and leave multicast groups and receive group traffic. The default setting is 1 milliseconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 60 seconds.

5. Select the **OK** button located at the bottom right of the screen to save the changes.
Select **Reset** to revert to the last saved configuration.

Cisco Discovery Protocol Configuration

CDP (Cisco Discovery Protocol) is a proprietary Data Link Layer protocol implemented in Cisco networking equipment. It's primarily used to obtain IP addresses of neighboring devices and discover their platform information. CDP is also used to obtain information about the interfaces the access point uses. CDP runs only over the data link layer enabling two systems that support different network-layer protocols to learn about each other.

To define the profile's CDP configuration:

1. Select the **Configuration** → **Devices** → **System Profile** tab from the Web UI.
The **Profile** screen displays. This screen lists the default and user-defined profiles.
2. Click **Add** to create a new profile. If modifying an existing profile, select the profile and click **Edit**.

To delete a profile, select it and click **Delete**.

The profile configuration menu displays.

3. Expand **Network** and select **Cisco Discovery Protocol**.

The CDP configuration screen displays.

Figure 70: Network - Cisco Discovery Protocol (CDP) screen

4. Enable/disable CDP and set the following settings:

Enable CDP	Select this option to enable CDP and allow for network address discovery of Cisco supported devices and operating system version. This setting is enabled by default.
Hold Time	Set a hold time (in seconds) for the transmission of CDP packets. Set a value from 10 - 1,800. The default setting is 1,800 seconds.
Timer	Use the spinner control to set the interval for CDP packet transmissions. The default setting is 60 seconds.

5. Select **OK** to save the CDP configuration changes.
Select **Reset** to revert to the last saved configuration.

Link Layer Discovery Protocol Configuration

The LLDP (*Link Layer Discovery Protocol*) provides a standard way for a controller or access point to advertise information about themselves to networked neighbors and store information they discover from their peers.

LLDP is neighbor discovery protocol that defines a method for network access devices using Ethernet connectivity to advertise information about them to peer devices on the same physical LAN and store information about the network. It allows a device to learn higher layer management and connection endpoint information from adjacent devices.

Using LLDP, an access point is able to advertise its own identification, capabilities and media-specific configuration information and learn the same information from connected peer devices.

LLDP information is sent in an Ethernet frame at a fixed interval. Each frame contains one m LLDP PDU (*Link Layer Discovery Protocol Data Unit*). A single LLDP PDU is transmitted in a single 802.3 Ethernet frame.

To set the LLDP configuration:

1. Select the **Configuration → Devices → System Profile** tab from the Web UI. The **Profile** screen displays. This screen lists the default and user-defined profiles.
2. Click **Add** to create a new profile. If modifying an existing profile, select the profile and click **Edit**. The profile configuration menu displays.
3. Expand the **Network** menu and select **Link Layer Discovery Protocol**. To delete e profile, select it and click **Delete**.

The LLDP configuration menu displays.

Figure 71: Network - Link Layer Discovery Protocol (LLDP) screen

4. Set the following LLDP parameters for the profile configuration:

Enable LLDP	Select this option to enable LLDP on the access point. LLDP is enabled by default. When enabled, an access point advertises its identity, capabilities and configuration information to connected peers and learns the same from them.
Hold Time	Use the spinner control to set the hold time (in seconds) for transmitted LLDP PDUs. Set a value from 10 - 1,800. The default hold time is 180 seconds.
Timer	Set the interval used to transmit LLDP PDUs. Define an interval from 5 - 900 seconds. The default setting is 60 seconds.

Inventory Management Discovery	Select this option to include LLDP-MED inventory management discovery TLV in LLDP PDUs. This setting is enabled by default.
Extended Power via MDI Discovery	Select this option to include LLDP-MED extended power via MDI discovery TLV in LLDP PDUs. This setting is disabled by default.

5. Select **OK** to save the LLDP configuration changes.
Select **Reset** to revert to the last saved configuration.

Miscellaneous Network Configuration

A profile can include a hostname within a DHCP lease for a requesting device. This helps an administrator track the leased DHCP IP address by hostname for the supported device profile. When numerous DHCP leases are assigned, an administrator can better track the leases when hostnames are used instead of devices.

To include hostnames in DHCP requests:

1. Select the **Configuration** → **Devices** → **System Profile** tab from the Web UI.
2. Expand the **Network** menu and select **Miscellaneous**.

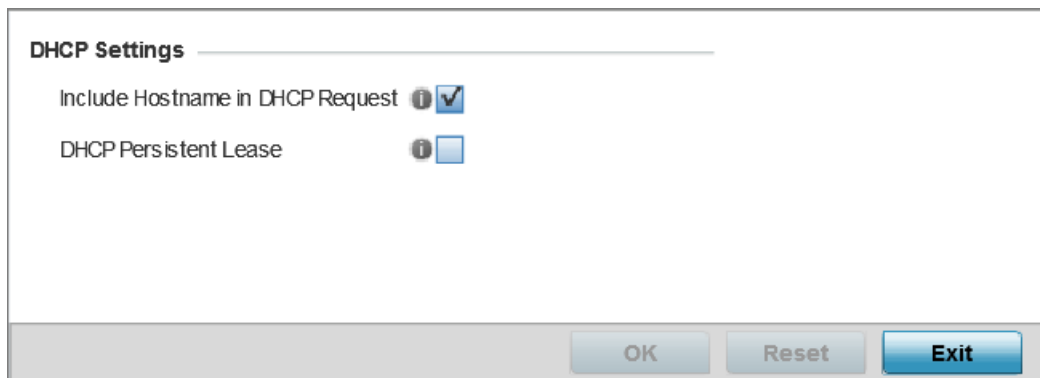


Figure 72: Network - Miscellaneous screen

3. Select the **Include Hostname in DHCP Request** option to include a hostname in a DHCP lease for a requesting device. This feature is enabled by default.
4. Select the **DHCP Persistent Lease** option to retain the lease that was last used by the access point if the access point's DHCP server resource were to become unavailable. This feature is enabled by default.
5. Select the **OK** button located at the bottom right of the screen to save the changes. Select **Reset** to revert to the last saved configuration.

Aliases Overview

With large deployments, the configuration of remote sites utilizes a set of shared attributes, of which a small set of attributes are unique for each location. For such deployments, maintaining separate configuration (WLANs, profiles, policies and ACLs) for each remote site is complex. Migrating any global change to a particular configuration item to all the remote sites is a complex and time consuming operation.

Also, this practice does not scale gracefully for quick growing deployments.

An alias enables an administrator to define a configuration item, such as a hostname, as an alias once and use the defined alias across different configuration items such as multiple ACLs.

Once a configuration item, such as an ACL, is utilized across remote locations, the alias used in the configuration item (ACL) is modified to meet local deployment requirement. Any other ACL or other configuration items using the modified alias also get modified, simplifying maintenance at the remote deployment.

Aliases have scope depending on where the Alias is defined. Alias are defined with the following scopes:

- Global aliases are defined from the **Configuration → Network → Alias** screen. Global aliases are available for use globally across all devices, profiles and RF Domains in the system.
- Profiles aliases are defined from **Configuration → Devices → System Profile → Network → Alias**. These aliases are available for use to a specific group of wireless controllers or access points. Alias values defined in this profile override alias values defined within global aliases.
- RF Domain aliases are defined from **Configuration → Devices → RF Domain → Alias** screen. These aliases are available for use for a site as a RF Domain is site specific. RF Domain alias values override alias values defined in a global alias or a profile alias configuration.
- Device aliases are defined from **Configuration → Devices → Device Overrides → Network → Alias** screen. Device alias are utilized by a single device only. Device alias values override alias values defined in a global alias, profiles alias or RF Domain alias configuration.

Using an alias, configuration changes made at a remote location override any updates at the management center. For example, if an Network Alias defines a network range as 192.168.10.0/24 for the entire network, and at a remote deployment location, the local network range is 172.16.10.0/24, the Network Alias can be overridden at the deployment location to suit the local requirement. For the remote deployment location, the Network Alias works with the 172.16.10.0/24 network. Existing ACLs using this Network Alias need not be modified and will work with the local network for the deployment location. This simplifies ACL definition and management while taking care of specific local deployment requirements.

Aliases can be classified as:

- Basic Alias
- Network Group Alias
- Network Service Alias

Network Basic Alias

A *basic alias* is a set of configurations consisting of *VLAN*, *Host*, *Network*, *Address Range*, and *String* alias configurations. A VLAN alias is a configuration for optimal VLAN re-use and management for local and remote deployments. A host alias configuration is for a particular host device's IP address. A network alias configuration is utilized for an

IP address on a particular network. An address range alias is a configuration for a range of IP addresses.

To set a network basic alias configuration:

1. Go to **Configuration** → **Devices** → **System Profile** .

The **Profile** screen displays. This screen lists access point profiles.

2. Select a profile from the list.

The selected profile's configuration menu displays.

3. Expand the **Network** menu and select **Alias**.

The **Basic Alias** screen displays.

The screenshot shows the 'Alias' configuration screen with the following data:

Vlan Alias		
Name	Vlan	
STPLL	1	

Host Alias		
Name	Host	
\$DNS_Main	192.168.13.2	

Address Range Alias			
Name	Start IP	End IP	
\$PRange_S	172.16.10.11	172.16.10.100	

Network Alias		
Name	Network	
\$NW_01	192.168.13.0/24	

Figure 73: Network - Basic Alias Screen

4. Select **+ Add Row**, in the **VLAN Alias** table to add a VLAN alias settings.

VLANs aliases can be used at different deployments. For example, if a named VLAN is defined as 10 for the central network, and the VLAN is set at 26 at a remote location, the VLAN can be overridden at the deployment location with an alias. At the remote deployment location, the network is functional with a VLAN ID of 26 but

utilizes the name defined at the centrally managed network. A new VLAN need not be created specifically for the remote deployment.

Name	If adding a new VLAN Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
VLAN	Use the spinner control to set a numeric VLAN from 1 - 4094.



Note

A VLAN alias is used to replace VLANs in the following locations:

- Bridge VLAN
- IP Firewall Rules
- L2TPv3
- Switchport
- Wireless LANs

5. Select **+ Add Row**, in the **Address Range Alias** table to add an address range alias settings.

This option creates an alias for a range of IP address that can be utilized at different deployments. For example, if an ACL defines a pool of network addresses as 192.168.10.10 through 192.168.10.100 for an entire network, and a remote location's network range is 172.16.13.20 through 172.16.13.110, the remote location's ACL can be overridden using an alias. At the remote location, the ACL works with the 172.16.13.20-110 address range. A new ACL need not be created specifically for the remote deployment location.

Name	If adding a new Address Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Start IP	Set a starting IP address used with a range of addresses utilized with the address range alias.
End IP	Set a ending IP address used with a range of addresses utilized with the address range alias.



Note

An address range alias can be used to replace an IP address range in IP firewall rules.

6. Select **+ Add Row**, in the **Host Alias** table to add a host alias settings:

This option creates aliases for hosts that can be utilized at different deployments. For example, if a central network DNS server is set a static IP address, and a remote location's local DNS server is defined, this host can be overridden at the remote location. At the remote location, the network is functional with a local DNS server, but uses the name set at the central network. A new host need not be created

at the remote location. This simplifies creating and managing hosts and allows an administrator to better manage specific local requirements.

Name	If adding a new Host Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Host	Set the IP address of the host machine.



Note

A host alias can be used to replace hostnames in the following locations:

- IP Firewall Rules
- DHCP

7. Select **+ Add Row**, in the **Network Alias** table to add a network alias settings:

This option create aliases for IP networks that can be utilized at different deployments. For example, if a central network ACL defines a network as 192.168.10.0/24, and a remote location's network range is 172.16.10.0/24, the ACL can be overridden at the remote location to suit their local (but remote) requirement. At the remote location, the ACL functions with the 172.16.10.0/24 network. A new ACL need not be created specifically for the remote deployment. This simplifies ACL definition and allows an administrator to better manage specific local requirements.

Name	If adding a new Network Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Network	Provide a network address in the form of host/mask.



Note

A network alias can be used to replace network declarations in the following locations:

- IP Firewall Rules
- DHCP

8. Select **+ Add Row**, in the **String Alias** table to add a string alias settings:

This option creates aliases for strings that can be utilized at different deployments. For example, if the main domain at a remote location is called loc1.domain.com and at another deployment location it is called loc2.domain.com, the alias can be overridden at the remote location to suit the local (but remote) requirement. At one

remote location, the alias functions with the loc1.domain.com domain and at the other with the loc2.domain.com domain.

Name	If adding a new String Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Value	Provide a string value to use in the alias.



Note

A string alias can be used to replace domain name strings in DHCP.

- Click **OK** when completed to update the basic alias rules.
Click **Reset** to revert the screen back to its last saved configuration.

Network Group Alias

A *network group alias* is a set of configurations consisting of host and network configurations. Network configurations are complete networks in the form of 192.168.10.0/24 or an IP address range in the form of 192.168.10.10-192.168.10.20. Host configurations are in the form of a single IP address, 192.168.10.23.

A network group alias can contain multiple definitions for a host, network, and IP address range. A maximum of eight (8) host entries, eight (8) network entries and eight (8) IP addresses range entries can be configured inside a network group alias. A maximum of 32 network group alias entries can be created.

A network group alias can be used in IP firewall rules to substitute hosts, subnets and IP address ranges.

To edit or delete a network alias configuration:

1. Select the **Network Group Alias** tab.

Basic Alias			Network Group Alias	Network Service Alias
Name	Host	Network		
\$test		1.2.3.0/24,2.3.4.0/24		

Type to search in tables Row Count: 1

Figure 74: Network Alias - Network Group Alias Screen

2. Review the following to determine if a new alias configuration is needed or an existing configuration warrants modification:

Name	Displays the administrator assigned name associated with the network group alias.
Host	Displays all the host aliases in the listed network group alias. Displays a blank column if no host alias is defined.
Network	Displays all network aliases in the listed network group alias. Displays a blank column if no network alias is defined.

Adding and Editing Network Group Alias

You can add a new network group alias configuration or edit an existing configuration.

1. Select **Add** to create a new alias, **Edit** to modify the attributes of an existing alias, or **Delete** to remove obsolete aliases.

Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

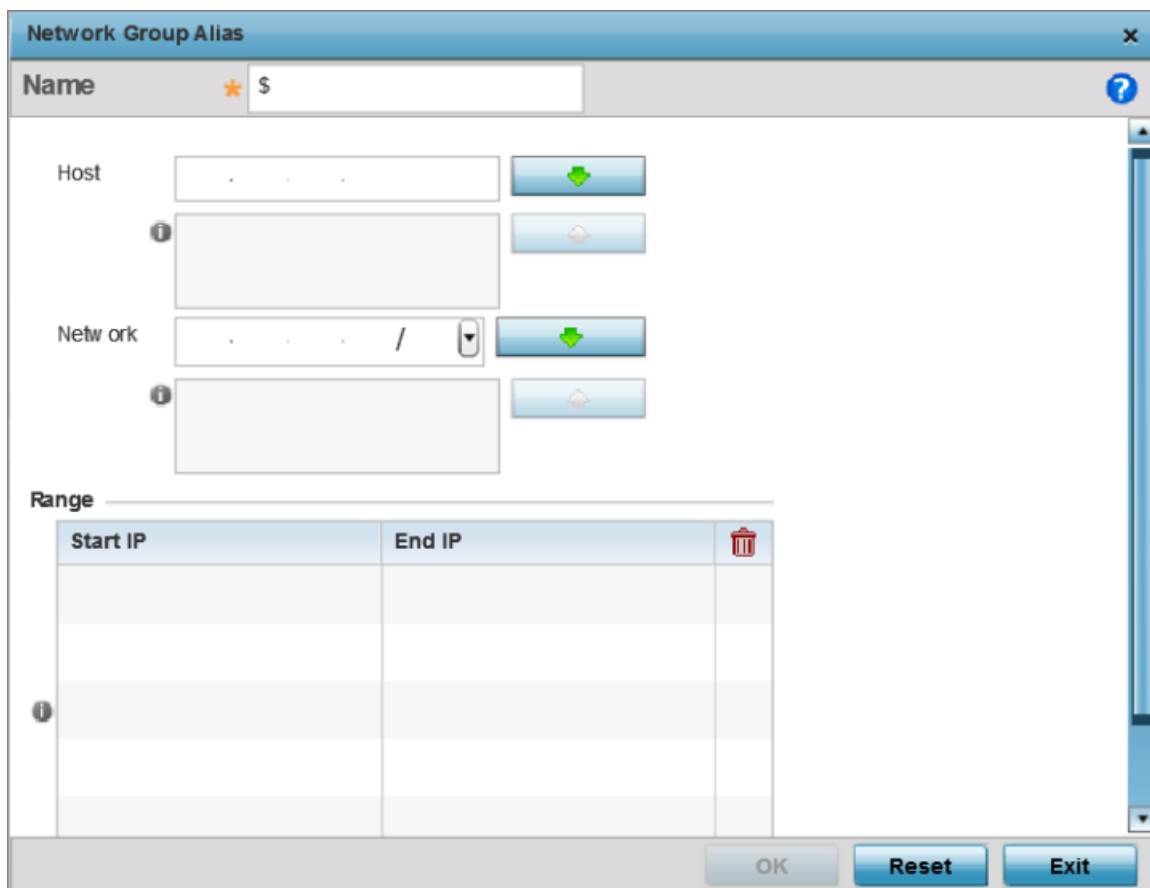


Figure 75: Network Alias - Network Group Alias Add Screen

2. If you are adding a new network alias rule, provide a *name* up to 32 characters. The network group alias name always starts with a dollar sign (\$).
3. Define the following network group alias parameters:

Host	Specify the Host IP address for up to eight IP addresses supporting network aliasing. Select the down arrow to add the IP address to the table.
Network	Specify the netmask for up to eight IP addresses supporting network aliasing. Subnets can improve network security and performance by organizing hosts into logical groups. Applying the subnet mask to an IP address separates the address into a host address and an extended network address. Select the down arrow to add the mask to the table.

4. Select **+ Add Row**, in the **Range** table to specify the **Start IP** address and **End IP** address for the alias range, or double-click on an existing alias range entry to edit it.

5. Select **OK** when completed to update the network group alias settings.
Select **Reset** to revert the screen to its last saved configuration.

Network Service Alias

A *network service alias* is a set of configurations that consist of protocol and port mappings. Both source and destination ports are configurable. For each protocol, up to two source port ranges and up to two destination port ranges can be configured. A maximum of four protocol entries can be configured per network service alias.

Use a service alias to associate more than one IP address to a network interface, providing multiple connections to a network from a single IP node.

A network service alias can be used to substitute protocols and ports in IP firewall rules.

To edit or delete a network service alias configuration:

Select the **Network Service Alias** tab.

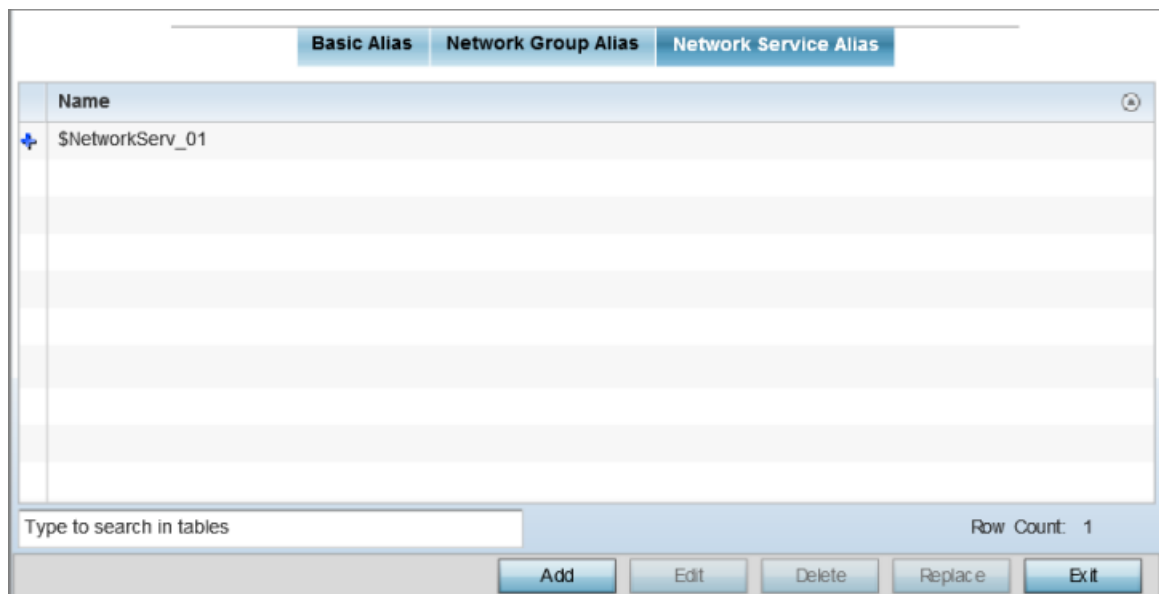


Figure 76: Network Alias - Network Service Alias Screen

Adding and Editing Network Service Alias

You can add a new network service alias configuration or edit an existing configuration.

1. Select **Add** to create a new network service alias.

Select an existing network service alias and click **Edit** to modify it. Select **Delete** to remove an existing network service alias from those available in the list.

Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

Protocol	Source Port(Low and High)	Destination Port(Low and High)
* EIGRP	88	Enter Range
		Enter Range

Figure 77: Network Alias - Network Service Alias Add screen

2. If you are adding a new Network Service Alias, give it a `Name` up to 32 characters to distinguish this alias configuration from others with similar attributes.



Note

The Network Service Alias name always starts with a dollar sign (\$).

3. Select **+ Add Row**, in the **Entry** table and specify the following parameters:

Protocol	Specify the protocol for which the alias is created. Use the drop down to select the protocol from eigrp, gre, icmp, igmp, ip, vrrp, igmp, ospf, tcp and udp . Select other if the protocol is not listed. When a protocol is selected, its protocol number is automatically selected.
Source Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the source ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) ranges can be specified.
Destination Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the destination ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.

4. Select **OK** when completed to update the network service alias rules.

Select **Reset** to revert the screen back to its last saved configuration.

IPv6 Neighbor Configuration

IPv6 neighbor discovery uses ICMP messages and solicited multicast addresses to find the link layer address of a neighbor on the same local network, verify the neighbor's reachability and track neighboring devices.

Upon receiving a neighbor solicitation message, the destination replies with *neighbor advertisement* (NA). The source address in the NA is the IPv6 address of the device sending the NA message. The destination address in the neighbor advertisement message is the IPv6 address of the device sending the neighbor solicitation. The data portion of the NA includes the link layer address of the node sending the neighbor advertisement.

Neighbor solicitation messages also verify the availability of a neighbor once its the link layer address is identified. When a node wants to verify the reachability of a neighbor, the destination address in a neighbor solicitation message is the unicast address of the neighbor.

A neighbor is interpreted as reachable when an acknowledgment is returned indicating packets have been received and processed. If packets are reaching the device, they're also reaching the next hop neighbor, providing a confirmation the next hop is reachable.

To set an IPv6 neighbor discovery configuration:

1. Go to **Configuration → Devices → System Profile** .

The **Profile** screen displays. This screen lists access point profiles.

2. Select a profile from the list.

The selected profile's configuration menu displays.

- Expand **Network** menu and select **IPv6 Neighbor**.

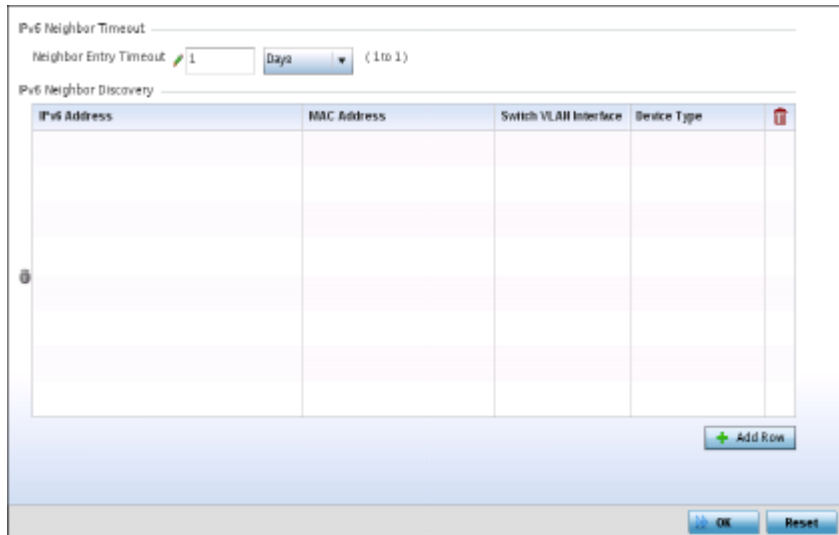


Figure 78: IPv6 Neighbor screen

- Set an **IPv6 Neighbor Entry Timeout** in either **Seconds** (15 - 86,400), **Minutes** (1 - 1,440), **Hours** (1 - 24) or **Days** (1). The default setting is 1 hour.
- Select **+ Add Row**, in the **IPv6 Neighbor Discovery** table to define the following:

IPv6 Address	Provide a static IPv6 IP address for neighbor discovery. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the Neighbor Discovery Protocol via ICMPv6 (<i>Internet Control Message Protocol version 6</i>) router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet Layer configuration parameters. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
MAC Address	Enter the hardware encoded MAC addresses of up to 256 IPv6 neighbor devices. A neighbor is interpreted as reachable when an acknowledgment is returned indicating packets have been received and processed. If packets are reaching the device, they're also reaching the next hop neighbor, providing a confirmation the next hop is reachable.
Switch VLAN Interface	Use the spinner control to set the virtual interface (from 1 - 4094) used for neighbor advertisements and solicitation messages.
Device Type	Specify the device type for this neighbor solicitation is for. Options include Host, Router and DHCP Server. The default setting is Host.



Note

A maximum of 256 neighbor entries can be defined.

- Select **OK** to save the changes.
Select **Reset** to revert to the last saved configuration.

Profile Security Configuration

An access point profile can have its own firewall policy, wireless client role policy, WEP shared key authentication and NAT policy applied.

Before defining a profile's security configuration, refer to the following deployment guidelines to ensure the profile configuration is optimally effective:

- Ensure the contents of the certificate revocation list are periodically audited to ensure revoked certificates remained quarantined or validated certificates are reinstated.
- NAT alone does not provide a firewall. If deploying NAT on a profile, add a firewall on the profile to block undesirable traffic from being routed. For outbound Internet access, a stateful firewall can be configured to deny all traffic. If port address translation is required, a stateful firewall should be configured to only permit the TCP or UDP ports being translated.

For more information, refer to the following:

- [Defining Profile VPN Settings](#) on page 244
- [Defining Profile Auto IPSec Tunnel Settings](#) on page 263
- [Defining Profile Security Settings](#) on page 265
- [Setting the Certificate Revocation List \(CRL\) Configuration](#) on page 266
- [Setting the RADIUS Trustpoint Configuration](#) on page 267
- [Setting the NAT Configuration](#) on page 268
- [Bridge NAT Configuration](#) on page 277
- [Defining Profile Application Visibility Settings](#) on page 280

Defining Profile VPN Settings

IPSec VPN provides a secure tunnel between two networked peer controllers or service platforms. Administrators can define which packets are sent within the tunnel, and how they're protected. When a tunnelled peer sees a sensitive packet, it creates a secure tunnel and sends the packet through the tunnel to its remote peer destination.

Tunnels are sets of SA (*security associations*) between two peers. SAs define the protocols and algorithms applied to sensitive packets and specify the keying mechanisms used by tunnelled peers. SAs are unidirectional and exist in both the inbound and outbound direction. SAs are established per the rules and conditions of defined security protocols (AH or ESP).

Use *crypto maps* to configure IPSec VPN SAs. Crypto maps combine the elements comprising IPSec SAs. Crypto maps also include transform sets. A *transform set* is a combination of security protocols, algorithms and other settings applied to IPSec protected traffic. One crypto map is utilized for each IPsec peer, however for remote VPN deployments one crypto map is used for all the remote IPsec peers.

IKE (*Internet Key Exchange*) protocol is a key management protocol standard used in conjunction with IPSec. IKE enhances IPSec by providing additional features, flexibility, and configuration simplicity for the IPSec standard. IKE automatically negotiates

IPSec SAs, and enables secure communications without time consuming manual preconfiguration.

To define a profile's VPN settings:

1. Select **Configuration** → **Devices** → **System Profile**.

A list of profiles displays in the right-hand UI.

2. Select a profile from the list.

The profile configuration menu displays.

3. Expand the **Security** menu and select **VPN**.

The VPN configuration's **IKE Policy** screen displays by default.

Name	DPD Keep Alive	IKE LifeTime	DPD Retries
ikev1-default	30s	1d 0h 0m 0s	5

Figure 79: Profile Security - VPN IKE Policy Screen

4. Select either **IKEv1** or **IKEv2** to enforce VPN peer key exchanges using either IKEv1 or IKEv2.

IKEv2 is recommended in most deployments. IKEv2 provides improvements from the original IKEv1 design – for example, improved cryptographic mechanisms, NAT and firewall traversal, and attack resistance.

The appearance of the **IKE Policy** screens differs depending on whether IKEv1 or IKEv2 mode is selected.

- Refer to the following to determine whether an IKE Policy requires creation, modification, or removal:

Name	The 32-character maximum name assigned to the IKE policy.
DPD Keep Alive	Lists each policy's IKE keep alive message interval defined for IKE VPN tunnel dead peer detection.
IKE LifeTime	Displays each policy's lifetime for an IKE SA. The lifetime defines how long a connection (encryption/authentication keys) should last, from successful key negotiation to expiration. Two peers need not exactly agree on the lifetime, though if they do not, there is some clutter for a superseded connection on the peer defining the lifetime as longer.
DPD Retries	Lists each policy's number maximum number of keep alive messages sent before a VPN tunnel connection is defined as dead by the peer. Note: This option only appears when IKEv1 is selected.

Adding Editing IKEv1 Policy

You can add a new IKEv1 Policy of edit and existing policy.

- Click **Add** to define a new IKEv1 Policy configuration, **Edit** to modify an existing configuration, or **Delete** to remove an existing configuration.

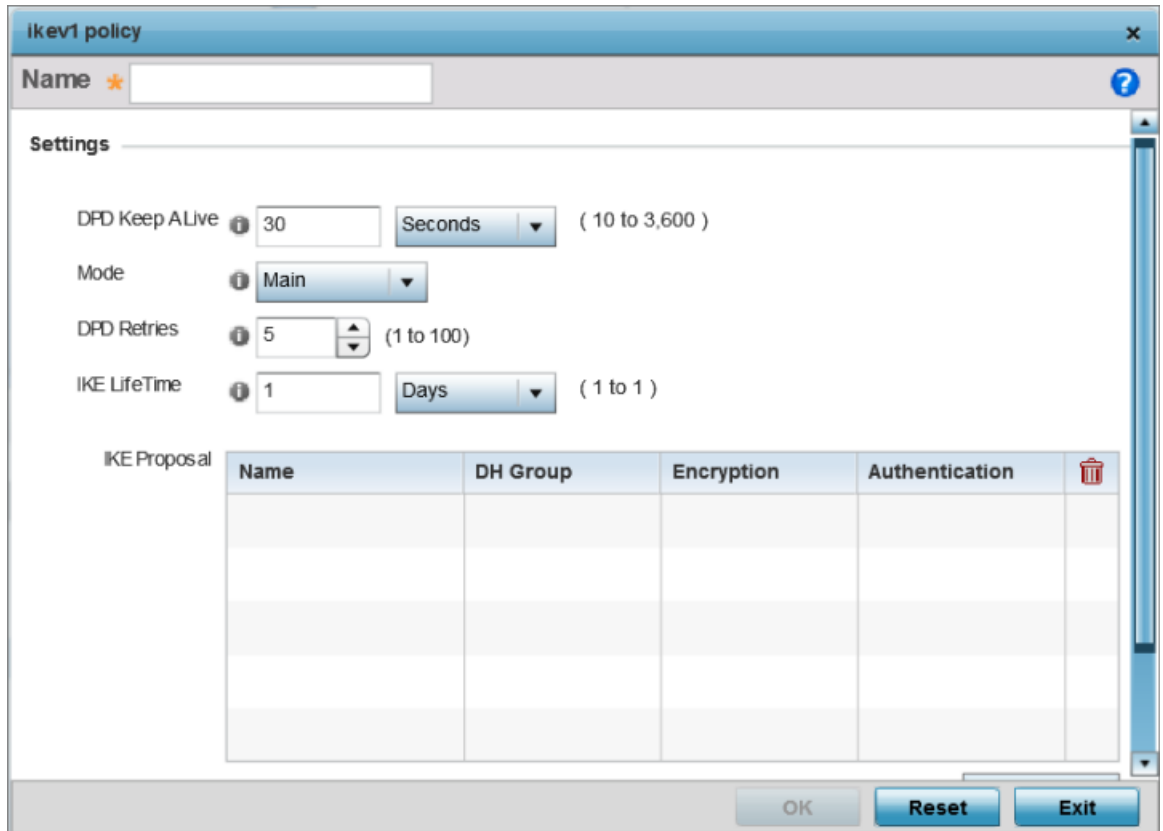


Figure 80: Profile Security - IKE Policy - Add/Edit Screen

2. If you are creating a new IKEv1 policy, assign it a 32-character maximum **Name** to help differentiate this IKE configuration from others with similar parameters.
3. Configure the following IKEv1 settings:

DPD Keep Alive	Configure the IKE keep alive message interval used for dead peer detection on the remote end of the IPsec VPN tunnel. Set this value in either seconds (10 - 3,600) , minutes (1 - 60) , or hours (1) . The default setting is 30 seconds. This setting is required for both IKEv1 and IKEv2.
Mode	If you are using IKEv1, define the IKE mode as either Main or Aggressive . IPSEC has two modes in IKEv1 for key exchanges. Aggressive mode requires 3 messages be exchanged between the IPSEC peers to set up the SA, Main requires 6 messages. The default setting is Main.
DPD Retries	Set the maximum number of keep alive messages sent before a VPN tunnel connection is defined as dead. The available range is from 1 - 100. The default setting is 5.
IKE LifeTime	Set the lifetime defining how long a connection (encryption/authentication keys) should last from successful key negotiation to expiration. Set this value in either seconds (600 - 86,400), minutes (10 - 1,440), hours (1 - 24), or days (1). This setting is required for both IKEv1 and IKEv2.

4. Click **+Add Row**, in the **IKE Proposal** table to define the network address of a target peer and its security settings.

Name	If you are creating a new IKE policy, assign the target peer (tunnel destination) a 32-character maximum name to distinguish it from others with a similar configuration.
DH Group	Define a DH (<i>Diffie-Hellman</i>) identifier used by the VPN peers to derive a shared secret password without having to transmit. DH groups determine the strength of the key used in key exchanges. The higher the group number, the stronger and more secure the key. Options include 2, 5 and 14. The default setting is 5.
Encryption	Select an encryption method used by the tunnelled peers to securely interoperate. Options include 3DES , AES , AES-192 , and AES-256 . The default setting is AES-256.
Authentication	Select an authentication hash algorithm used by the peers to exchange credential information. Options include SHA , SHA256 , and MD5 . The default setting is SHA.

5. Click **OK** to save the changes made in the **IKE Policy** screen.

Click **Reset** to revert to the last saved configuration. Click the **Delete Row** icon as needed to remove a peer configuration.

- Click **+Add Row** in the **IKE Proposal** table to define the network address of a target peer and its security settings.

Name	If you are creating a new IKE policy, assign the target peer (tunnel destination) a 32-character maximum name to distinguish it from others with a similar configuration.
DH group	Define a DH identifier used by the VPN peers to derive a shared secret password without having to transmit. DH groups determine the strength of the key used in key exchanges. The higher the group number, the stronger and more secure the key. Options include 2, 5 and 14. The default setting is 5.
Encryption	Select an encryption method used by the tunnelled peers to securely interoperate. Options include 3DES , AES , AES-192 and AES-256 . The default setting is AES-256.
Authentication	Select an authentication hash algorithm used by the peers to exchange credential information. Options include SHA , SHA256 and MD5 . The default setting is SHA.

- Click **OK** to save the changes made in the IKE Policy screen.

Click **Reset** to revert to the last saved configuration. Click the **Delete Row** icon as needed to remove a peer configuration.

Adding Editing IKEv2 Policy

You can add a new IKEv2 Policy of edit and existing policy.

- Select **Add** to define a new IKEv2 Policy configuration, **Edit** to modify an existing configuration or **Delete** to remove an existing configuration.
- If you are creating a new IKEv2 policy, assign it a 32-character maximum **Name** to help differentiate this IKE configuration from others with similar parameters.
- Configure the following IKEv2 settings:

Name	If creating a new IKE policy, assign it a 32 character maximum name to help differentiate this IKE configuration from others with similar parameters.
DPD Keep Alive	Configure the IKE keep alive message interval used for dead peer detection on the remote end of the IPSec VPN tunnel. Set this value in either <i>Seconds</i> (10 - 3,600), <i>Minutes</i> (1 - 60) or <i>Hours</i> (1). The default setting is 30 seconds. This setting is required for both IKEv1 and IKEV2.
IKE LifeTime	Set the lifetime defining how long a connection (encryption/ authentication keys) should last from successful key negotiation to expiration. Set this value in either <i>Seconds</i> (600 - 86,400), <i>Minutes</i> (10 - 1,440), <i>Hours</i> (1 - 24) or <i>Days</i> (1). This setting is required for both IKEv1 and IKEV2.

4. Click **+Add Row**, in the **IKE Proposal** table to define the network address of a target peer and its security settings.

Name	If creating a new IKE policy, assign the target peer (tunnel destination) a 32 character maximum name to distinguish it from others with a similar configuration.
DH Group	Use the drop-down menu to define a DH (<i>Diffie-Hellman</i>) identifier used by the VPN peers to derive a shared secret password without having to transmit. DH groups determine the <i>strength</i> of the key used in key exchanges. The higher the group number, the stronger and more secure the key. Options include 2, 5 and 14. The default setting is 5.
Encryption	Select an encryption method used by the tunneled peers to securely interoperate. Options include <i>3DES</i> , <i>AES</i> , <i>AES-192</i> and <i>AES-256</i> . The default setting is AES-256.
Authentication	Select an authentication hash algorithm used by the peers to exchange credential information. Options include <i>SHA</i> and <i>MD5</i> . The default setting is SHA.

5. Select **OK** to save the changes made within the IKE Policy screen.

Select **Reset** to revert to the last saved configuration. Select the **Delete Row** icon as needed to remove a peer configuration.

Peer Configuration

To add a new peer configuration or edit an existing peer configuration.

1. Select the **Peer Configuration** tab to assign additional network address and IKE settings to the intended VPN tunnel peer destination.

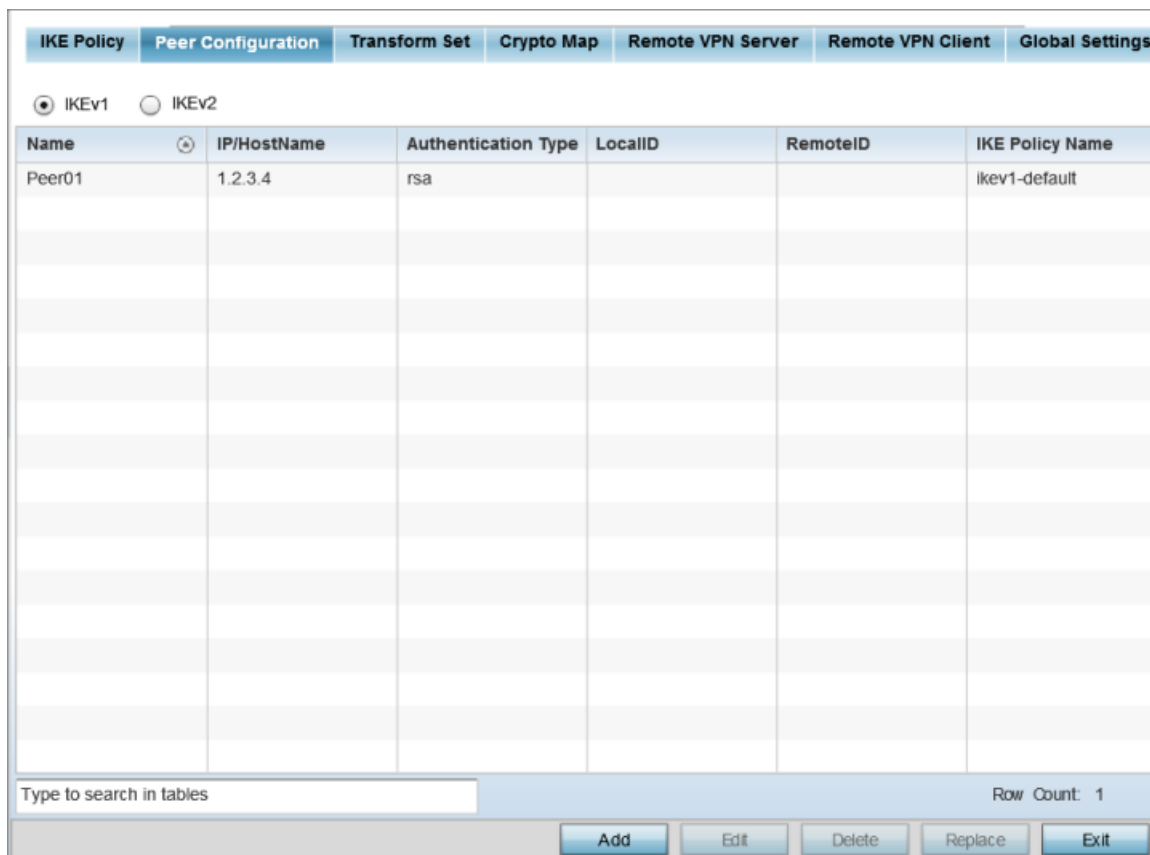


Figure 81: Profile Security - VPN Peer Destination Screen (IKEv1 Example)

2. Select either **IKEv1** or **IKEv2** to enforce VPN key exchanges using either IKEv1 or IKEv2.
3. Refer to the following to determine whether a new VPN peer configuration requires creation, an existing configuration requires modification, or a configuration requires removal.

Name	Lists the 32-character maximum name assigned to each listed peer configuration at the time of its creation.
Hostname/IP	The IP address (or host address FQDN) of the IPSec VPN peer targeted for secure tunnel connection and data transfer.
Authentication Type	Whether the peer configuration has been defined to use PSK (<i>pre-shared key</i>) or RSA (<i>Rivest, Shamir, and Adleman</i>). RSA is an algorithm for public key cryptography. It is the first algorithm known to be suitable for both signing and encryption. If you are using IKEv2, this screen displays both local and remote authentication, because both ends of the VPN connection require authentication.

Local id	The local identifier used within this peer configuration for an IKE exchange with the target VPN IPsec peer.
Remote id	The means by which the target remote peer is to be identified (for example, string or FQDN) within the VPN tunnel.
IKE Policy Name	The IKEv1 or IKE v2 policy used with each listed peer configuration.

Inserting title

To add or edit an IKEv1 or IKEv2 peer configuration.

1. Select either **IKEv1** or **IKEv2** to enforce VPN key exchanges using either IKEv1 or IKEv2.
2. Click **Add** to define a new peer configuration, **Edit** to modify an existing configuration, or **Delete** to remove an existing peer configuration.

The parameters that can be defined for the peer configuration vary depending on whether IKEv1 or IKEv2 was selected.

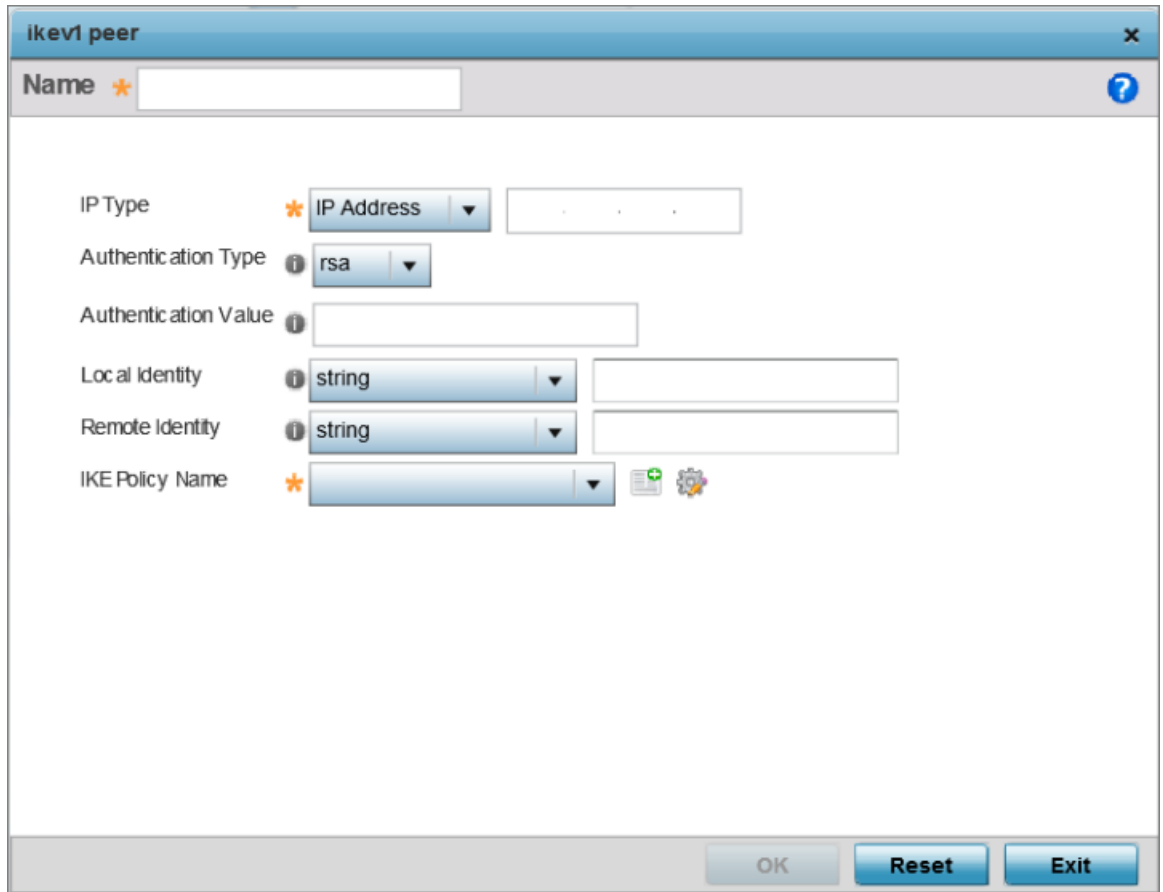


Figure 82: Profile Security - VPN IKE Policy - Add IKE Peer Screen

Name	If you are creating a new peer configuration (remote gateway) for VPN tunnel connection, assign it a 32-character maximum name to distinguish it from other with similar attributes.
IP Type	Enter either the IP address or the FQDN hostname of the IPsec VPN peer used in the tunnel setup. A hostname cannot exceed 64 characters.
Authentication Type	Select the authentication type used by the VPN peer. The options are: PSK or rsa . RSA is an algorithm for public key cryptography. It is the first algorithm known to be suitable for signing and encryption. If using IKEv2, this screen displays both local and remote authentication options, because both ends of the VPN connection require authentication. RSA is the default value for both local and remote authentication, regardless of whether IKEv1 or IKEv2 is used.
Authentication Value	Define the authentication string (shared secret) shared by both ends of the VPN tunnel connection. The string must be between 8 - 21 characters long. If using IKEv2, both a local and remote string must be specified for handshake validation at both ends (local and remote) of the VPN connection.

Local Identity	Select the local identifier used with this peer configuration for an IKE exchange with the target VPN IPsec peer. Options include IP Address, Distinguished Name, FQDN, email, string, autogen-uniqueid . The default setting is string.
Remote Identity	Select the remote identifier used with this peer configuration for an IKE exchange with the target VPN IPsec peer. Options include IP Address, Distinguished Name, FQDN, email, and string . The default setting is string.
IKE Policy Name	Select the IKEv1 or IKE v2 policy name (and settings) to apply to this peer configuration. If you need to create a new policy, click the Create icon.

3. Click **OK** to save the changes made in the peer configuration screen.
Click **Reset** to revert to the last saved configuration.

Transform Set Configuration

A *transform set* is a combination of security protocols, algorithms and other settings applied to IPsec protected traffic. One crypto map is utilized for each IPsec peer, however for remote VPN deployments one crypto map is used for all the remote IPsec peers.

1. Select the **Transform Set** tab.
Create or modify transform set configurations to specify how traffic is protected.

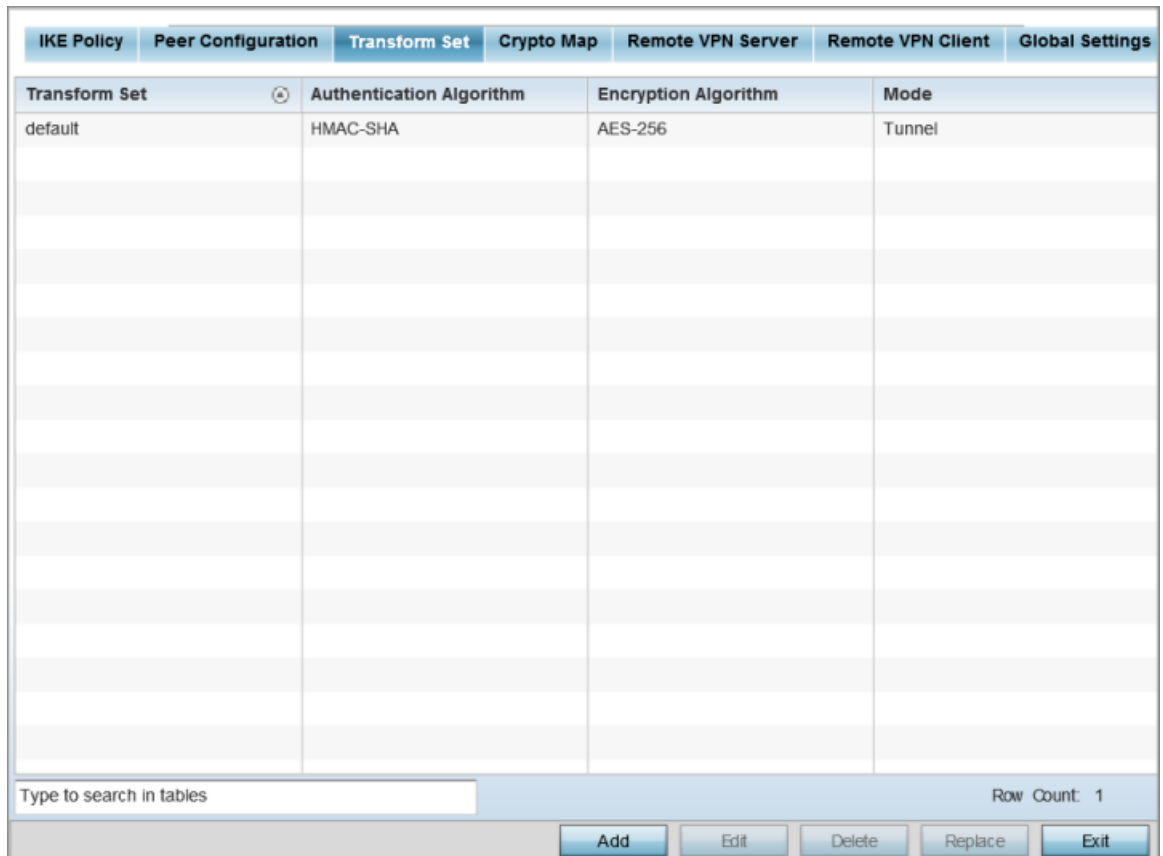


Figure 83: Profile Security - VPN Transform Set Screen

2. Review the following attributes of existing Transform Set configurations:

Name	The 32-character maximum name assigned to each listed transform set upon creation. A transform set is a combination of security protocols, algorithms, and other settings applied to IPSec protected traffic.
Authentication Algorithm	Lists each transform sets's authentication scheme used to validate identity credentials. The authentication scheme is either HMAC-SHA or HMAC-MD5 .
Encryption Algorithm	Displays each transform set's encryption method for protecting transmitted traffic.
Mode	Displays either Tunnel or Transport as the IPSec tunnel type used with the transform set. Tunnel is used for site-to-site VPN and Transport should be used for remote VPN deployments.

3.

4.

Adding Editing Transform Set

You can add a new transform set or edit an existing transform set configuration.

1. Click **Add** to define a new transform set configuration, **Edit** to modify an existing configuration, or **Delete** to remove an existing transform set.

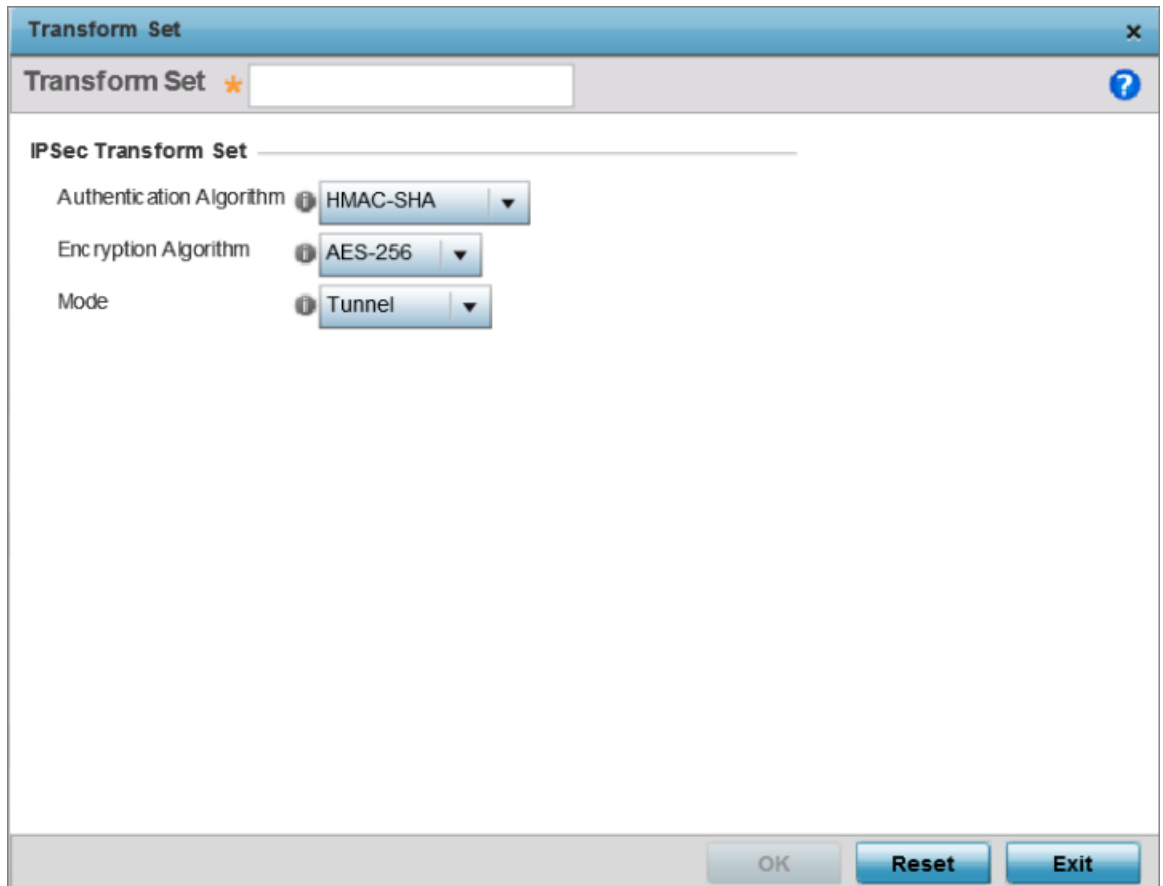


Figure 84: Profile Security - VPN Transform Set Create/Modify Screen

2. Define the following settings for the new or modified transform set configuration:

Name	If you are creating a new transform set, define a 32-character maximum name to differentiate this configuration from others with similar attributes.
Authentication Algorithm	Set the transform sets's authentication scheme used to validate identity credentials. Use the drop-down menu to select either HMAC-SHA , HMAC-MD5 , sha256-hmac or aes-xcbc-mac . The default setting is HMAC-SHA.
Encryption Algorithm	Set the transform set encryption method for protecting transmitted traffic. Options include DES , 3DES , AES , AES-192 , and AES-256 . The default setting is AES-256.
Mode	Select either Tunnel or Transport as the IPSec tunnel type used with the transform set. The Tunnel option is used for site-to-site VPN and Transport is used for remote VPN deployments. The default setting is Tunnel.

3. Click **OK** to save the changes made in the **Transform Set** screen.
Click **Reset** to revert to the last saved configuration.

Addinting Editing Crypto Map

You can add a new crypto map or edit an existing crypto map.

1. If requiring a new crypto map configuration, select the **Add** button. If updating the configuration of an existing crypto map, select it from amongst those available and select the **Edit** button.
2. If adding a new crypto map, assign it a name up to 32 characters as a unique identifier. Select the **Continue** button to proceed to the **VPN Crypto Map** screen.

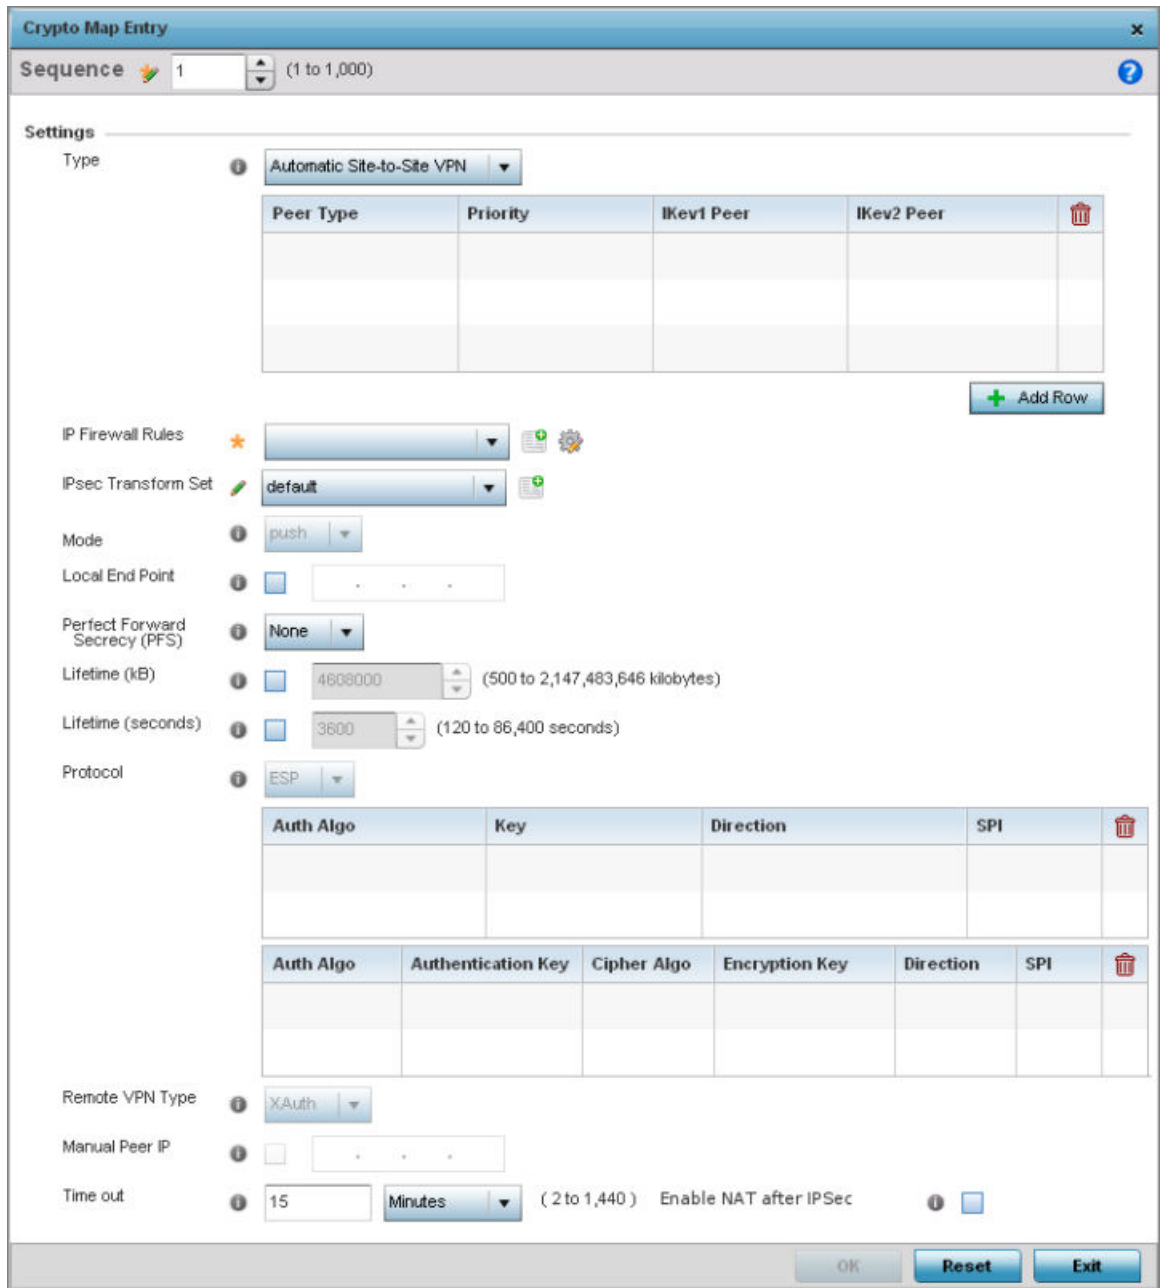


Figure 86: Profile Security - VPN Crypto Map Entry Screen

3. Define the following parameters to set the crypto map configuration:

Sequence	Each crypto map configuration uses a list of entries based on a sequence number. Specifying multiple sequence numbers within the same crypto map extends connection flexibility to multiple peers on the same interface, based on this selected sequence number (from 1 - 1,000).
Type	Define the site-to-site-manual, site-to-site-auto or remote VPN configuration defined for each listed crypto map configuration.
IP Firewall Rules	Use the drop-down menu to select the ACL used to protect IPSec VPN traffic. New access/deny rules can be defined for the crypto map by selecting the Create icon, or an existing set of firewall rules can be modified by selecting the Edit icon.
IPSec Transform Set	Select the transform set (encryption and hash algorithms) to apply to this crypto map configuration.
Mode	Use the drop-down menu to define which mode (pull or push) is used to assign a virtual IP. This setting is relevant for IKEv1 only, since IKEv2 always uses the configuration payload in pull mode. The default setting is push.
Local End Point	Select this option to define an IP address as a local tunnel end-point address. This setting represents an alternative to an interface IP address.
Perfect Forward Secrecy (PFS)	PFS is key-establishment protocol, used to secure VPN communications. If one encryption key is compromised, only data encrypted by that specific key is compromised. For PFS to exist, the key used to protect data transmissions must not be used to derive any additional keys. Options include None, 2, 5 and 14. The default setting is None.
Lifetime (KB)	Select this option to define a connection volume lifetime (in kilobytes) for the duration of an IPSec VPN security association. Once the set volume is exceeded, the association is timed out. Use the spinner control to set the volume from 500 - 2,147,483,646 kilobytes.
Lifetime (seconds)	Select this option to define a lifetime (in seconds) for the duration of an IPSec VPN security association. Once the set value is exceeded, the association is timed out. The available range is from 120 - 86,400 seconds. The default setting is 120 seconds.
Protocol	Select the security protocol used with the VPN IPSec tunnel connection. SAs are unidirectional, existing in each direction and established per security protocol. Options include ESP and AH. The default setting is ESP.
Remote VPN Type	Define the remote VPN type as either None or XAuth. XAuth (extended authentication) provides additional authentication validation by permitting an edge device to request extended authentication information from an IPSec host. This forces the host to respond with additional authentication credentials. The edge device respond with a failed or passed message. The default setting is XAuth.

Manual Peer IP	Select this option to define the IP address of an additional encryption/ decryption peer.
Time Out	Select this option to set the IPSec SA time out value. Use the textbox and the drop-down list to configure the time out duration.
Enable NAT after IPSec	Select this option to enable NAT after IPSec. Enable this if there are NATted networks behind VPN tunnels.

4. Select **OK** to save the updates made to the **Crypto Map Entry** screen.
 Selecting **Reset** reverts the screen to its last saved setting.

Remote VPN Server Configuration

To configure the remote VPN server settings:

1. Select **Remote VPN Server**.

Use this screen to define the server resources used to secure (authenticate) a remote VPN connection with a target peer.

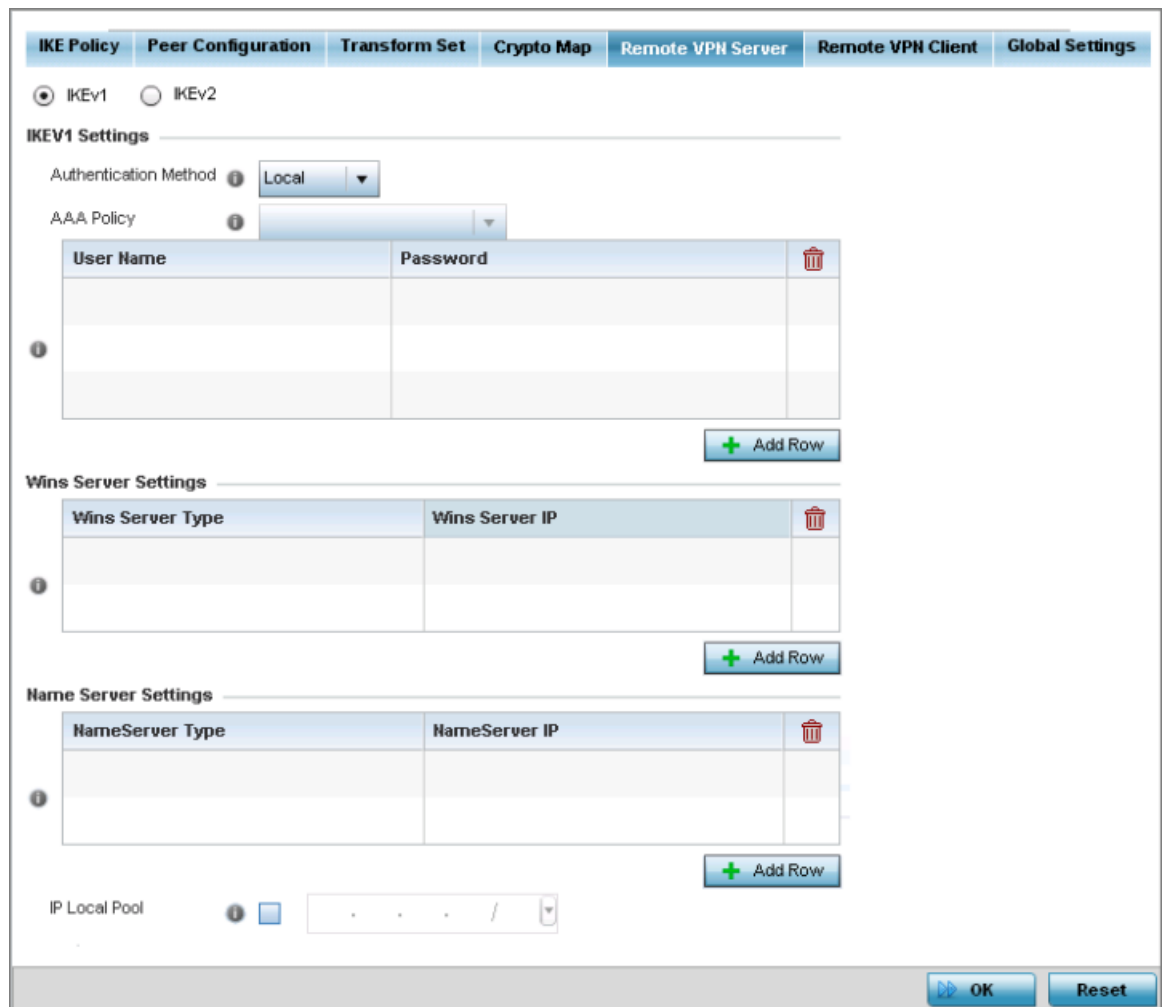


Figure 87: Profile Security - Remote VPN Server tab (IKEv2 example)

2. Select either the **IKEv1** or **IKEv2** radio button to enforce peer key exchanges over the remote VPN server using either IKEv1 or IKEv2.

IKEv2 provides improvements from the original IKEv1 design (improved cryptographic mechanisms, NAT and firewall traversal, attack resistance etc.) and is recommended in most deployments. The appearance of the screen differs depending on the selected IKE mode.

3. Set the following **IKEv1** or **IKe v2 Settings**:

Authentication Method	Use the drop-down menu to specify the authentication method used to validate the credentials of the remote VPN client. Options include Local (on board RADIUS resource if supported) and RADIUS (designated external RADIUS resource). If selecting Local, select the + Add Row button and specify a <code>User Name</code> and <code>Password</code> for authenticating remote VPN client connections with the local RADIUS resource. If selecting RADIUS, specify an AAA policy providing RADIUS server details.
AAA Policy	Select the AAA policy used with the remote VPN client. AAA policies define RADIUS authentication and accounting parameters. The access point can optionally use AAA server resources (when using RADIUS as the authentication method) to provide user database information and user authentication data.

4. Refer to the **Username Password Settings** table and specify the username and password for validating RADIUS authentication.
5. Refer to the **Wins Server Settings** table and specify primary and secondary server resources for validating RADIUS authentication requests on behalf of a remote VPN client. These external WINS server resources are available to validate RADIUS resource requests.
6. Refer to the **Name Server Settings** table and specify primary and secondary server resources for validating RADIUS authentication requests on behalf of a remote VPN client. These external name server resources are available to validate RADIUS resource requests.
7. Select the **IP Local Pool** option to define an IP address and mask for a virtual IP pool used to IP addresses to remote VPN clients.
8. If using IKEv2 specify following additional settings (required for IKEv2 only):

DHCP Server Type	Specify whether the Dynamic Host Configuration Protocol (DHCP) server is specified as an IP address, Hostname (FQDN) or None (a different classification will be defined). DHCP allows hosts on an IP network to request and be assigned IP addresses as well as discover information about the network where they reside.
DHCP Server	Depending on the DHCP server type selected, enter either the numerical IP address, hostname or other (if None is selected as the server type).
IP Local Pool	Select this option to define an IP address and mask for a virtual IP pool used to IP addresses to remote VPN clients.
Relay Agent IP Address	Select this option to define DHCP relay agent IP address.

9. Select **OK** to save the updates made to the **Remote VPN Server** screen.
Selecting **Reset** reverts the screen to its last saved configuration.

Remote VPN Client Configuration

To configure the remote VPN client settings:

1. Select the **Remote VPN Client** tab.

The **Remote VPN Client** screen provides options for configuring the remote VPN client.

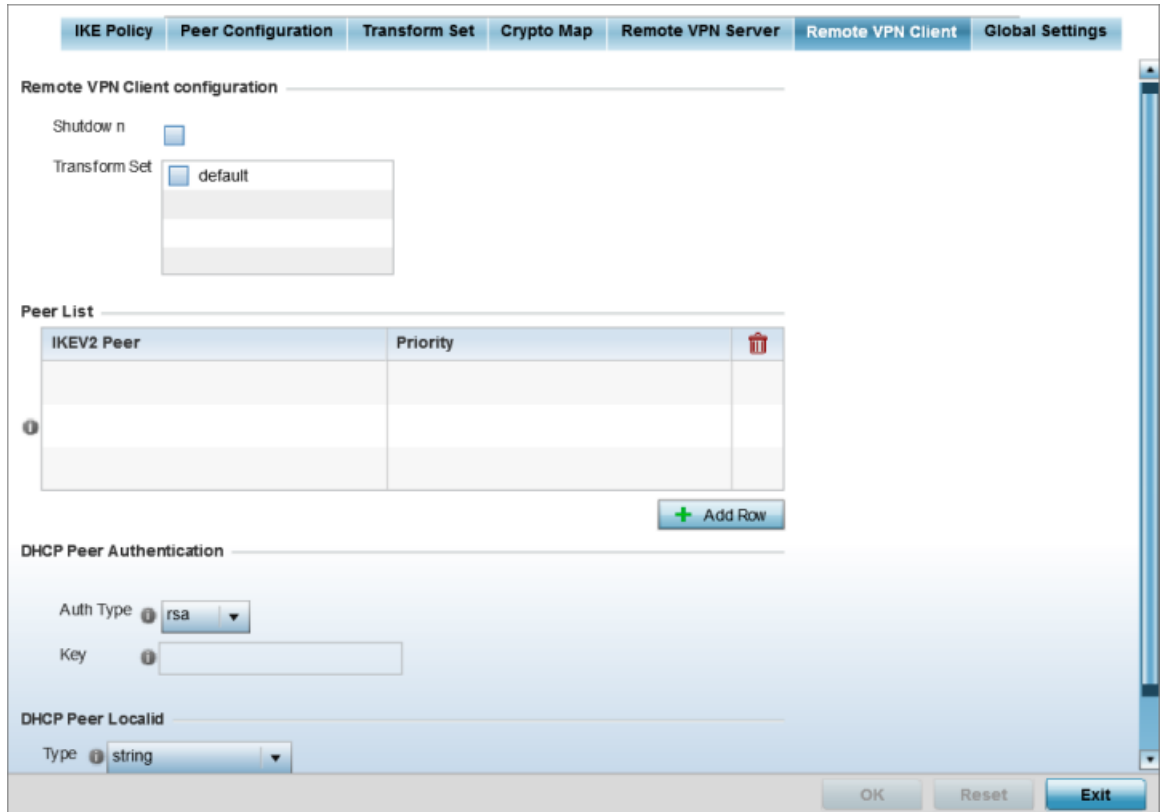


Figure 88: Profile Security - Remote VPN Client tab

2. Refer to the following fields to define **Remote VPN Client Configuration** settings:

Shutdown	Select this option to disable the remote VPN client. The default is disabled.
Transform Set	Configure the transform set used to specify how traffic is protected within the crypto ACL defining the traffic that needs to be protected. Select the appropriate traffic set from the drop-down menu or click the icon next to the drop-down menu to create a new transform set.

3. Refer to the following fields to define the Remote VPN Client **Peer list**:

IKEV2 Peer	Use the drop-down menu to select the remote IKE v2 peer. Use the icon next to the drop-down to create a new peer.
Priority	Use the spinner to set the priority in which a remote peer is connected. The lower the number the higher the priority.

4. Set the following **DHCP Peer Authentication** settings:

Auth Type	Use the drop-down menu to specify the DHCP peer authentication type. Options include PSK and RSA. The default setting is RSA.
Key	Provide a 8 - 21 character shared key password for DHCP peer authentication.

5. Set the following **DHCP Peer Localid** settings:

Type	Select the DHCP peer local ID type. Options include string and autogenuniqueid. The default setting is string.
Value	Set the DHCP peer local ID. The ID cannot exceed 128 characters.

6. Select **OK** to save the updates made to the Remote VPN Client screen.

Selecting **Reset** reverts the screen to its last saved configuration.

Global Settings Configuration

To configure the VPN global settings:

1. Select the **Global Settings** tab.

The **Global Settings** screen provides options for DPD (*Dead Peer Detection*). DPD represents the actions taken upon the detection of a dead peer within the IPsec VPN tunnel connection.

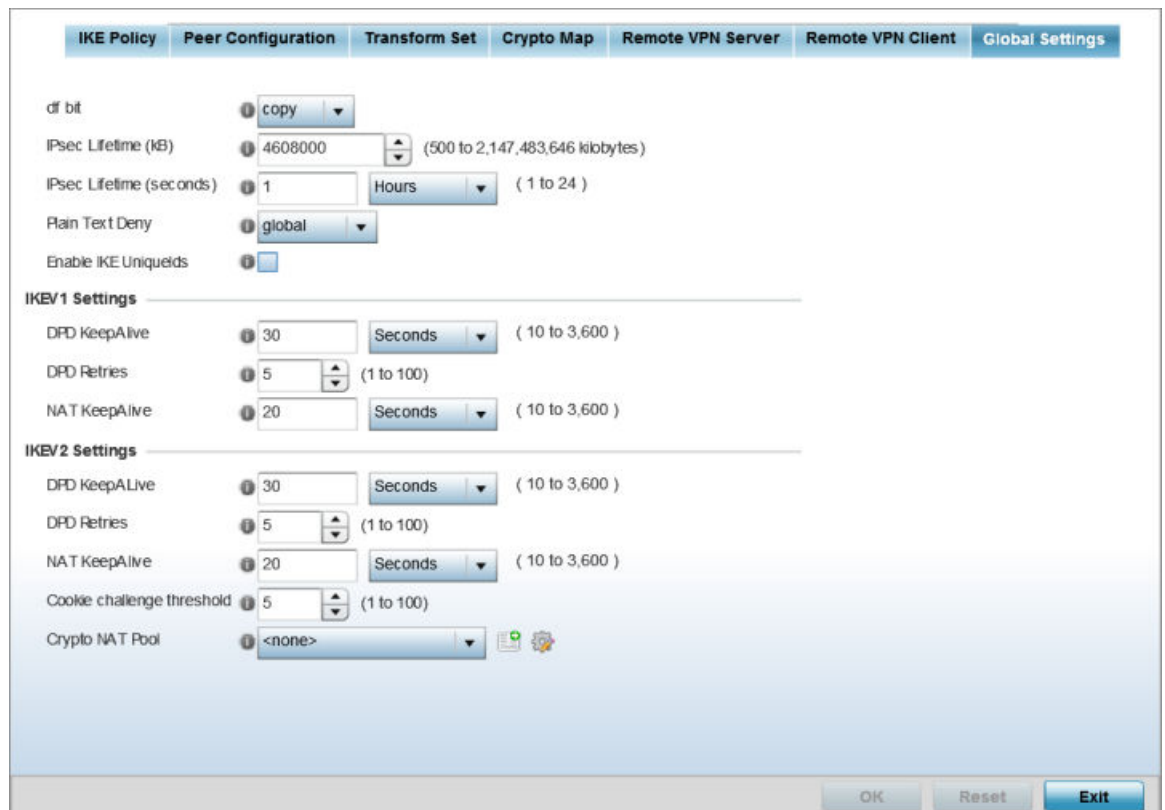


Figure 89: Profile Security - Global VPN Settings tab

2. Refer to the following fields to define IPsec security, lifetime and authentication settings:

df bit	Select the DF bit handling technique used for the ESP encapsulating header. Options include clear , set and copy . The default setting is copy.
IPsec Lifetime (kb)	Set a connection volume lifetime (in kilobytes) for the duration of an IPsec VPN security association. Once the set volume is exceeded, the association is timed out. Use the spinner control to set the volume from 500 - 2,147,483,646 kilobytes. The default settings is 4,608,000 kilobytes.
IPsec Lifetime (seconds)	Set a lifetime (in seconds) for the duration of an IPsec VPN security association. Once the set value is exceeded, the association is timed out. Options include Seconds (120 - 86,400), Minutes (2 - 1,440), Hours (1 - 24) or Days (1). The default setting is 3,600 seconds.
Plain Text Deny	Select global or interface to set the scope of the ACL. The default setting is global, expanding the rules of the ACL beyond just the interface.
Enable IKE Uniquelds	Select this option to initiate a unique ID check. This is disabled by default.

3. Define the following **IKEv1/IKEv2 DPD** settings:

DPD Keep Alive	Define the interval (or frequency) of IKE keep alive messages for dead peer detection. Options include Seconds (10 - 3,600), Minutes (1 - 60) and Hours (1). The default setting is 30 seconds.
DPD Retries	Use the spinner control to define the number of keep alive messages sent to an IPsec VPN client before the tunnel connection is defined as dead. The available range is from 1 - 100. The default number of messages is 5.
NAT Keep Alive	Define the interval (or frequency) of NAT keep alive messages for dead peer detection. Options include Seconds (10 - 3,600), Minutes (1 - 60) and Hours (1). The default setting is 20 seconds.
Cookie Challenge Threshold	Use the spinner control to define the threshold (1 - 100) that, when exceeded, enables the cookie challenge mechanism.
Crypto NAT Pool	Use the drop-down menu to select the NAT pool for internal source NAT for IPsec tunnels.

4. Select **OK** to save the updates made to the Global Settings screen.

Selecting **Reset** reverts the screen to its last saved configuration.

Defining Profile Auto IPsec Tunnel Settings

IPsec tunnels are established to secure traffic, data and management traffic, from access points to remote wireless controllers. Secure tunnels must be established

between access points and the wireless controller with minimum configuration pushed through DHCP option settings.



Note

WiNG 7.1 release is not supported on AP505i and AP510i model access points. This feature will be supported in future releases,

To define or override a profile's Auto IPSec tunnel configuration:

1. Select **Configuration > Devices > System Profile** from the web UI.
2. Expand the **Security** menu and select **Auto IPSec Tunnel**.

Figure 90: Profile Security - Auto IPSec Tunnel Screen

3. Refer to the following table to configure the Auto IPSec Tunnel settings:

Group ID	Configure the ID string used for IKE authentication. String length can be between 1 and 64 characters.
Authentication Type	Set the IPSec Authentication Type. Options include PSK (Pre Shared Key) or RSA .
Authentication Key	Set the common key for authentication between the remote tunnel peer. Key length is between 8 and 21 characters
IKE Version	Configure the IKE version to use. The available options are ikev1-main , ikev1-aggr and ikev2 .
Enable NAT after IPSec	Select this option to enable NAT after IPSec. Enable this if there are NATted networks behind VPN tunnels.

Use Unique ID	In scenarios where different access points behind different NAT boxes and routers have the same IP address, it is not possible to create a tunnel between the wireless controller and the access point because the wireless controller does not identify the access point uniquely. When this option is selected, each access point behind a same NAT box or router will have an unique ID which is used to create the VPN tunnel.
Re-Authentication	Select this option to re-authenticate the key on a IKE rekey. This setting is disabled by default.
IKE Life Time	Set a lifetime in either seconds (600 - 86,400), minutes (10 - 1,440), hours (1 - 24), or days (1) for IKE security association duration. The default setting is 8600 seconds.

- Click **OK** to save the changes made in the **Auto IPSec Tunnel** screen.
Click **Reset** to revert to the last saved configuration.

Defining Profile Security Settings

A profile can make use of existing firewall, wireless client role, and WIPS policies and apply them to the profile's configuration. This affords each profile a truly unique combination of data protection policies for best meeting the data protection requirements of the profile it supports. However, as deployment requirements arise, an individual device may need some or all of its general security configuration overridden from the profile's settings.

To configure a profile's security settings and overrides:

- Select **Configuration** → **Devices** → **System Profile** from the web UI.
- Expand the **Security** menu and select **Settings**.

The screenshot shows the 'Profile Security - Settings' screen. It is organized into two main sections: 'General' and 'URL Filter'.
 In the 'General' section:
 - 'Firewall Policy' is a dropdown menu set to 'default'.
 - 'WEP Shared Key Authentication' is a checkbox that is currently unchecked.
 - 'Client Identity Group' is a dropdown menu set to 'default'.
 - 'CMP Policy' is a dropdown menu that is currently empty.
 In the 'URL Filter' section:
 - 'Content Filtering Policy' is a dropdown menu that is currently empty.
 At the bottom right of the screen, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 91: Profile Security - Settings screen

3. Select a firewall policy from the **Firewall Policy** drop-down menu. All devices using this profile must meet the requirements of the firewall policy to access the network. A firewall is a mechanism enforcing access control, and is considered a first line of defense in protecting proprietary information within the network. The means by which this is accomplished varies, but in principle, a firewall can be thought of as mechanisms both blocking and permitting data traffic within the network. If an existing Firewall policy does not meet your requirements, select the Create icon to create a new firewall policy that can be applied to this profile. An existing policy can also be selected and edited as needed using the Edit icon.
4. Select the **WEP Shared Key Authentication** option to require profile supported devices to use a WEP key to access the network using this profile. The access point, other proprietary routers, and our clients use the key algorithm to convert an ASCII string to the same hexadecimal number. Clients without our adapters need to use WEP keys manually configured as hexadecimal numbers. This option is disabled by default.
5. Client Identity is a set of unique fingerprints used to identify a class of devices. This information is used to configure permissions and access rules for devices classes in the network. A client identity group is a collection of client identities that identify devices and applies specific permissions and restrictions on these devices. From the drop-down menu select the **Client Identity Group** to use with this device profile. For more information, see [Device Fingerprinting](#) on page 867.
6. Use the CMP Policy drop-down menu to apply a CMP policy. CMP (*Certificate Management Protocol*) is an Internet protocol to obtain and manage digital certificates in a PKI (*Public Key Infrastructure*) network. A CA (*Certificate Authority*) issues the certificates using the defined CMP.
7. Use the **URL Filter** drop-down menu to select or override the URL Filter configuration applied to this virtual interface.
URL filtering is used to restrict access to resources on the internet.
8. Click **OK** to save the changes or overrides.
Click **Reset** to revert to the last saved configuration.

Setting the Certificate Revocation List (CRL) Configuration

A CRL (*certificate revocation list*) is a list of revoked certificates that are no longer valid. A certificate can be revoked if the CA (*certificate authority*) has improperly issued a certificate, or if a private key is compromised. The most common reason for revocation is that the user is no longer in sole possession of the private key.

To define a certificate revocation configuration or override:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

- Expand the **Security** menu and select **Certificate Revocation**.

Trustpoint Name	URL	Hours	

+ Add Row

OK Reset Exit

Figure 92: Profile Security - Certificate Revocation List (CRL) Update Interval Screen

- Click **+ Add Row**, in the **Certificate Revocation List (CRL) Update Interval** table to quarantine certificates from use in the network.

Additionally, a certificate can be placed on hold for a user defined period. If, for instance, a private key was found and nobody had access to it, its status could be reinstated.

- In the **Trustpoint Name** field, provide the name of the trustpoint in question. The name cannot exceed 32 characters.
 - In the **URL** field, enter the third-party resource ensuring the trustpoint's legitimacy.
 - Use the spinner control to specify an interval (in hours) after which a device copies a CRL file from an external server and associates it with a trustpoint.
- Click **OK** to save the changes or overrides to the **Certificate Revocation** screen. Click **Reset** to revert to the last saved configuration.

Setting the RADIUS Trustpoint Configuration

A RADIUS certificate links identity information with a public key enclosed in the certificate. A CA (*certificate authority*) is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate.

To define a RADIUS Trustpoint configuration, utilize an existing stored trustpoint or launch the certificate manager to create a new one:

- Select **Configuration** → **Devices** → **System Profiles** from the web UI. The Profile screen displays. This screen displays a list of profiles.

2. Select a profile from those listed.
The selected profile's configuration menu displays.
3. Expand the **Security** menu and select **Trustpoints**.

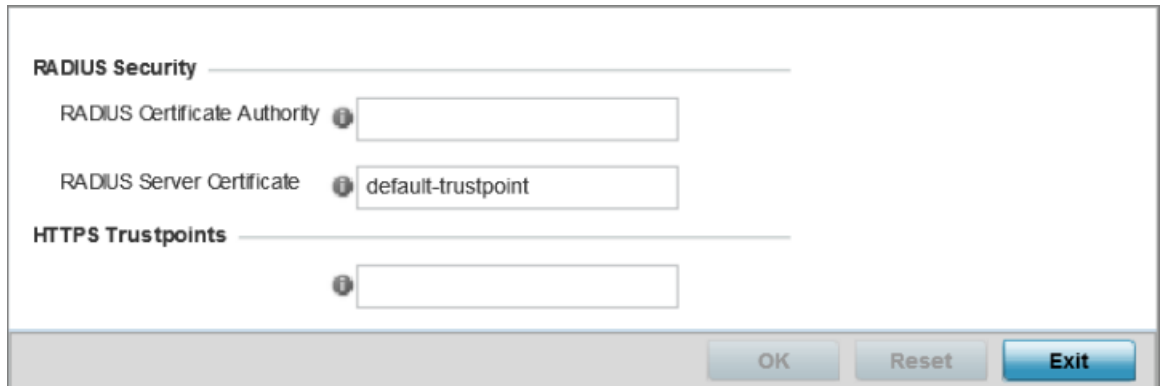


Figure 93: Security - RADIUS Trustpoint screen

4. Set the following **RADIUS Security** certificate settings:

RADIUS Certificate Authority	Either use the default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate can be leveraged. To leverage an existing certificate, select the Launch Manager button.
RADIUS Server Certificate	Either use the default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate/trustpoint can be used. To leverage an existing trustpoint, select the Launch Manager button.

5. Set the following **HTTPS Trustpoints** certificate settings:

HTTPS Trustpoint	Either use the default-trustpoint or click Stored to enable a drop-down menu where an existing certificate/trustpoint can be used. To use an existing certificate for this device, click Launch Manager . For more information, see Certificate Management on page 1011.
------------------	---

6. Click **OK** to save the changes made in the **RADIUS Trustpoints** screen.
Click **Reset** to revert to the last saved configuration.

Setting the NAT Configuration

Network Address Translation (NAT) is a technique to modify network address information within IP packet headers in transit. This enables mapping one IP address to another to protect wireless controller, service platform or access point managed network address credentials. With typical deployments, NAT is used as an IP masquerading technique to hide private IP addresses behind a single, public facing, IP address.

Additionally, NAT is a process of modifying network address information in IP packet headers while in transit across a traffic routing device for the purpose of remapping one IP address to another. In most deployments NAT is used in conjunction with IP masquerading which hides RFC1918 private IP addresses behind a single public IP address.

NAT can provide a profile outbound internet access to wired and wireless hosts connected to a controller, service platform or access point. Many-to-one NAT is the most common NAT technique for outbound internet access. Many-to-one NAT allows a controller, service platform or access point to translate one or more internal private IP addresses to a single, public facing, IP address assigned to a 10/100/1000 Ethernet port or 3G card.

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.
2. Expand the **Security** menu and select **NAT**.

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The **NAT Pool** screen displays by default. The **NAT Pool** screen lists the NAT policies that have been created thus far. Any of these policies can be selected and applied to a profile.

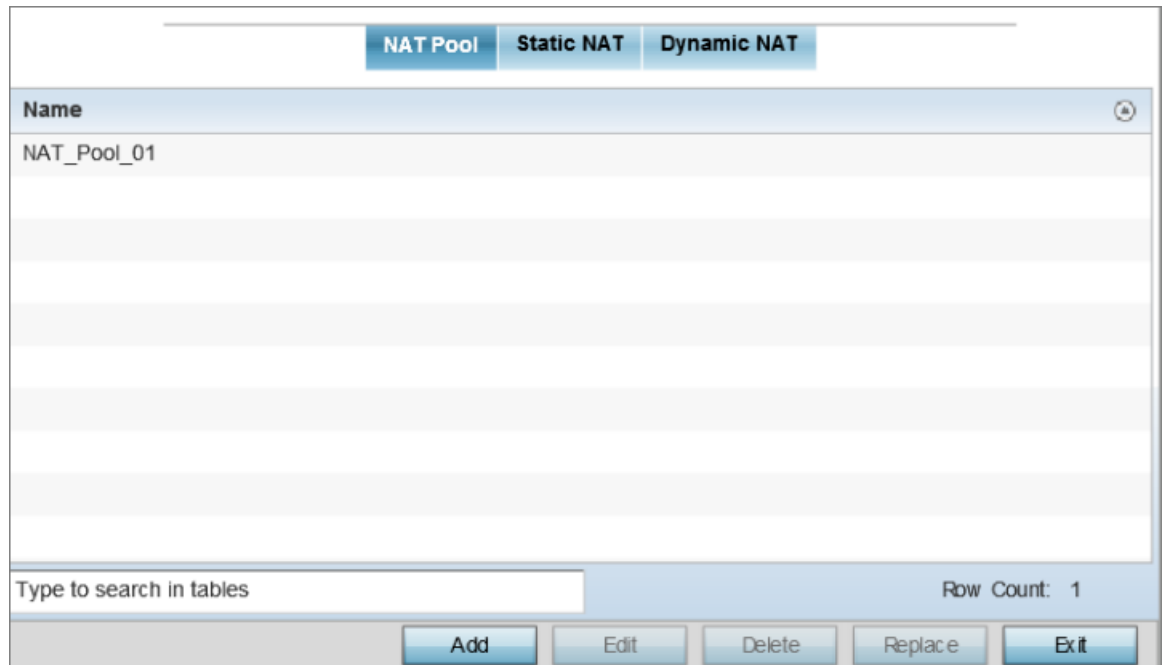


Figure 94: Profile Security - NAT Pool tab

3. Review the existing NAT Pool configurations.

Adding Editing NAT Pool Configuration

1. Click **+ Add Row**, in the **IP Address Range** table to append additional rows. Click **Edit** to modify or override the attributes of a existing policy, or click **Delete** to remove obsolete NAT policies from the list of those available to a profile.

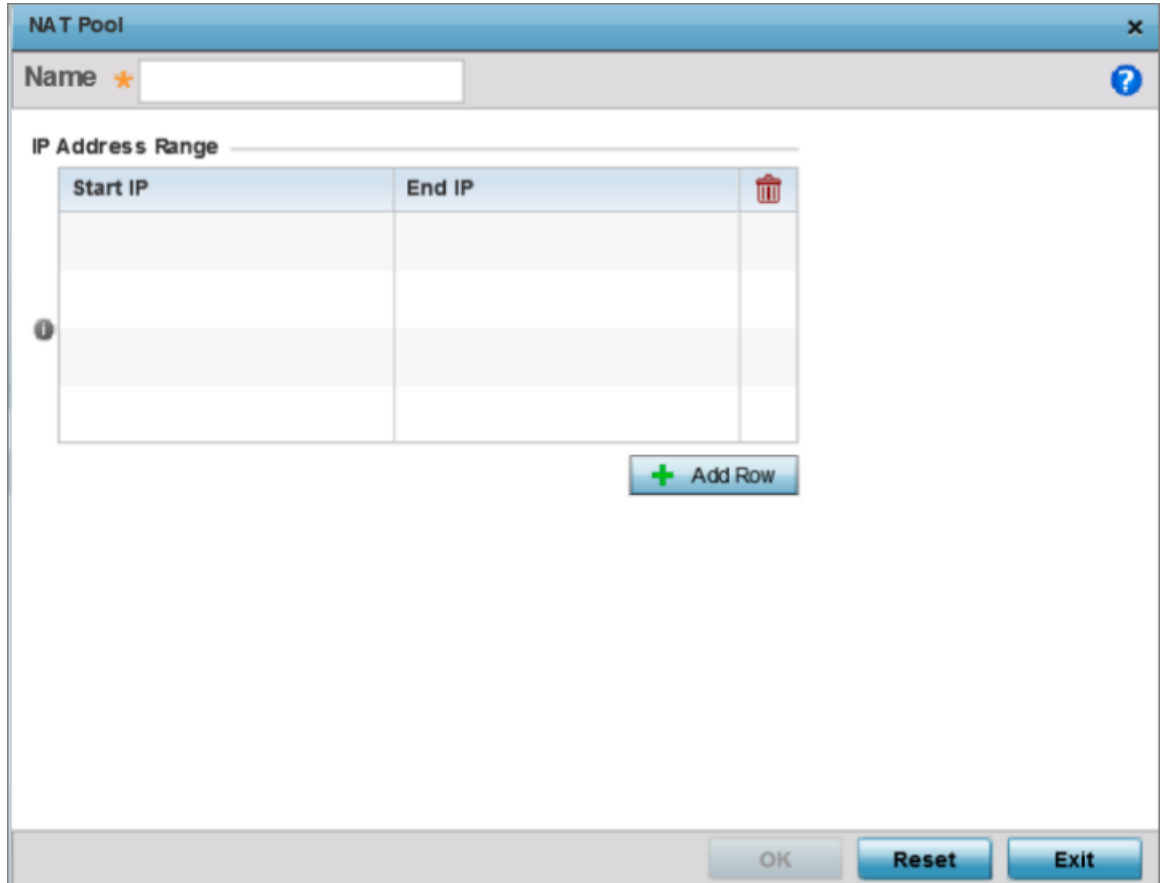


Figure 95: Profile Security - NAT Pool tab - NAT Pool field

2. If you are adding a new NAT policy, provide a **Name** to help distinguish it from others with similar configurations. The length cannot exceed 64 characters.
3. Click **+ Add Row**, in the **IP Address Range** table to append additional rows.

Start IP - End IP	Define a range of IP addresses that are hidden from the public internet. NAT modifies network address information in the defined IP range while in transit across a traffic routing device. NAT only provides IP address translation and does not provide a firewall. A branch deployment with NAT by itself will not block traffic from potentially being routed through a NAT device. Consequently, NAT should be deployed with a stateful firewall.
-------------------	--

4. Click **OK** to save the changes made to the profile's NAT pool configuration. Click **Reset** to revert to the last saved configuration.

Static NAT Source Configuration

Static NAT creates a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a

3. Define the following Source NAT parameters:

Source IP	Enter the address used at the (internal) end of the static NAT configuration. This address (once translated) will not be exposed to the outside world when the translation address is used to interact with the remote destination.
NAT IP	Enter the IP address of the matching packet to the specified value. The IP address modified can be either source or destination based on the direction specified.
Network	Select Inside or Outside NAT as the network direction. The default setting is Inside. Select <i>Inside</i> to create a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a perimeter interface with the internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual address of the server from users on insecure interfaces. Casual access by unauthorized users becomes much more difficult. Static NAT requires a dedicated address on the outside network for each host.


4. Click **OK** to save the changes made to the Static NAT Source configuration.

Click **Reset** to revert to the last saved configuration.

Static NAT Destination Configuration

NAT destination configurations define the way in which packets passing through the NAT on the way back to the LAN are searched against the records kept by the NAT engine. The destination IP address is changed back to the specific internal private class IP address to reach the LAN over the network.

3. Select **Add** to create a new NAT destination configuration, **Edit** to modify the attributes of an existing configuration or **Delete** to permanently remove a NAT destination.

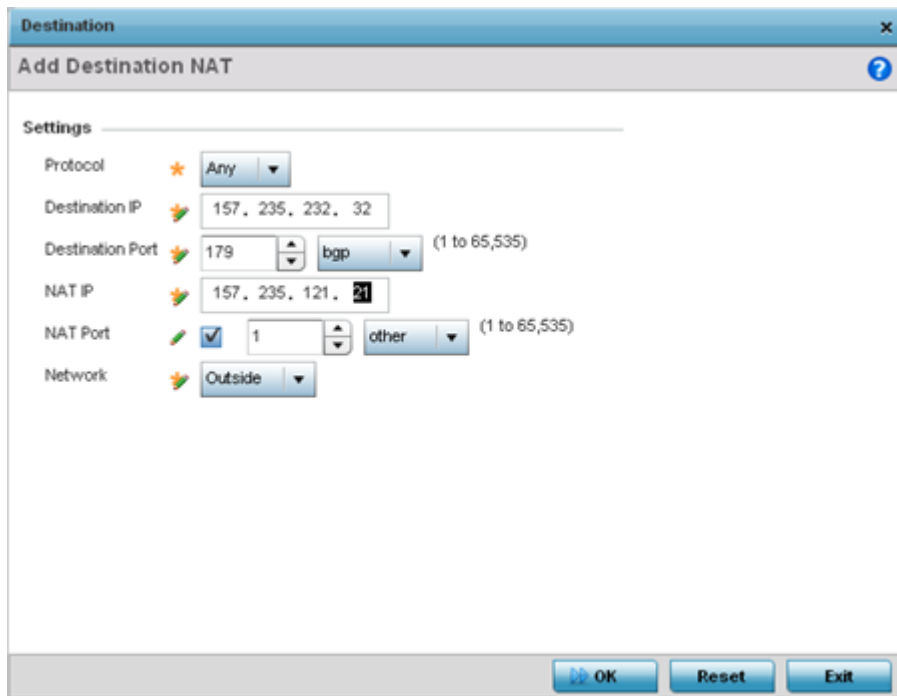

4. Set the following **Destination** configuration parameters:

Static NAT creates a permanent, one-to-one mapping between an address on an internal network and an external network. To share a Web server with the Internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual server address from users on insecure interfaces. Casual access by unauthorized users becomes much more difficult. Static NAT requires a dedicated address on the outside network for each host.

Protocol	Select the protocol for use with static translation. <i>TCP</i> , <i>UDP</i> and <i>Any</i> are available options. TCP is a transport layer protocol used by applications requiring guaranteed delivery. It's a sliding window protocol handling both timeouts and retransmissions. TCP establishes a full duplex virtual connection between two endpoints. Each endpoint is defined by an IP address and a TCP port number. The <i>User Datagram Protocol</i> (UDP) offers only a minimal transport service, non-guaranteed datagram delivery, and provides applications direct access to the datagram service of the IP layer. UDP is used by applications not requiring the level of service of TCP or are using communications services (multicast or broadcast delivery) not available from TCP. The default setting is Any.
Destination IP	Enter the local address used at the (source) end of the static NAT configuration. This address (once translated) is not be exposed to the outside world when the translation address is used to interact with the remote destination.
Destination Port	Use the spinner control to set the local port used at the (source) end of the static NAT configuration. The default port is 1.

NAT IP	Enter the IP address of the matching packet to the specified value. The IP address modified can be either <i>source</i> or <i>destination</i> based on the direction specified.
NAT Port	Set the port number of the matching packet to the specified value. This option is valid only if the direction specified is destination.
Network	Select <i>Inside</i> or <i>Outside</i> NAT as the network direction. Inside is the default setting.

- Click **OK** to save the changes made to the static NAT configuration.
- Select **Reset** to revert to the last saved configuration.

Dynamic NAT Configuration

Dynamic NAT configurations translate the IP address of packets going out from one interface to another interface based on configured conditions. Dynamic NAT requires packets be switched through a NAT router to generate translations in the translation table.

To add or edit dynamic NAT settings:

- Select the **Dynamic NAT** tab.

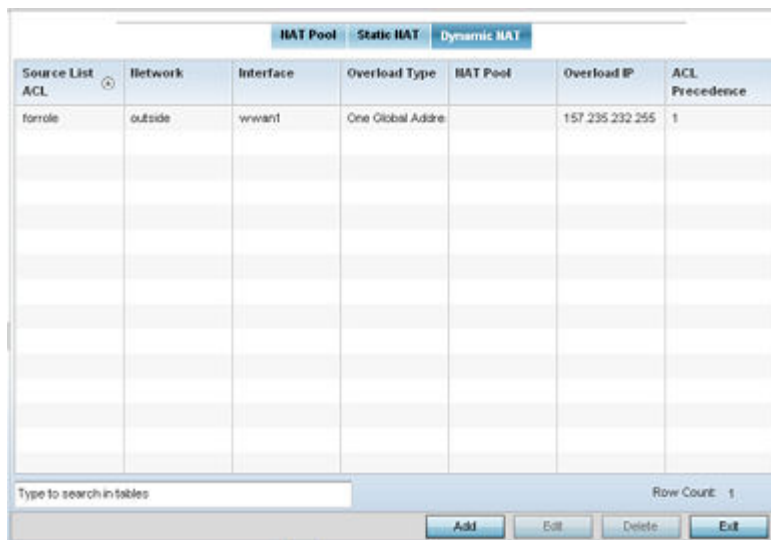


Figure 98: Profile Security - Dynamic NAT tab

- Refer to the following to determine whether a new dynamic NAT configuration needs to be created, or whether an existing one can be edited or deleted:

Source List ACL	Lists an ACL to define the packet selection criteria for the NAT configuration. NAT is applied only on packets which match a rule defined in the access-list. These addresses (once translated) are not exposed to the outside world when the translation address is used to interact with the remote destination.
Network	Displays Inside or Outside NAT as the network direction for the dynamic NAT configuration.


ACL Precedence	Lists the administrator-assigned priority set for the listed source list ACL. The lower the value listed, the higher the priority assigned to this ACL rule.
Interface	Lists the VLAN (from 1 - 4094) used as the communication medium between the source and destination points within the NAT configuration.
Overload Type	Displays the overload type used when several internal addresses are NATed to only one or a few external addresses. Options include NAT Pool , One Global Address and Interface IP Address . The default setting is Interface IP Address.
NAT Pool	Displays the name of an existing NAT pool used with the dynamic NAT configuration.
Overload IP	If One Global IP Address is selected as the Overload Type , define an IP address to use as a filter address for the IP ACL rule.

3. To modify an existing dynamic NAT configuration, select it and click **Edit**. To remove an existing configuration, select it and click **Delete**.

Adding and Editing Dynamic NAT

To add or edit a dynamic NAT configuration that can be applied to a profile:

1. Select **Add** to create a new Dynamic NAT configuration, **Edit** to modify an existing configuration or **Delete** to permanently remove a configuration.

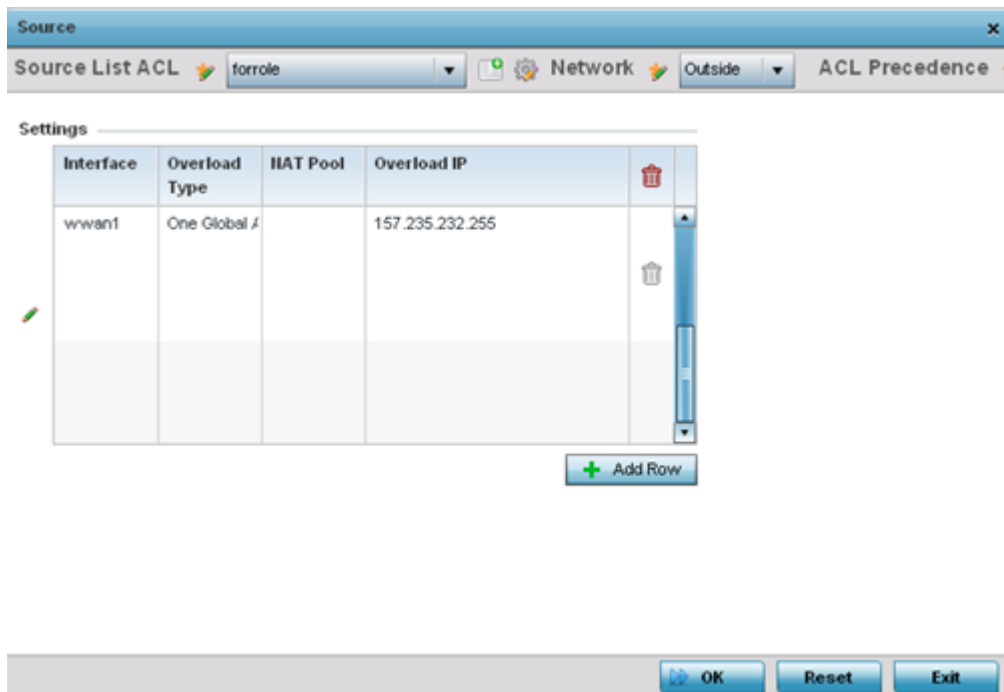

2. Set the following to define the Dynamic NAT configuration:

Source List ACL	Use the drop-down menu to select an ACL name to define the packet selection criteria for NAT. NAT is applied only on packets which match a rule defined in the access list. These addresses (once translated) are not exposed to the outside world when the translation address is used to interact with the remote destination.
Network	Select <i>Inside</i> or <i>Outside</i> NAT as the network direction for the dynamic NAT configuration. Inside is the default setting.
ACL Precedence	Set the priority (from 1 - 5000) for the source list ACL. The lower the value, the higher the priority assigned to these ACL rules.
Interface	Use the drop-down menu to select the VLAN (between 1 - 4094) used as the communication medium between the source and destination points within the NAT configuration. Ensure the VLAN selected represents the intended network traffic within the NAT supported configuration. VLAN1 is available by default.
Overload Type	Select the check box of Overload Type used with the listed IP ACL rule. Options include <i>NAT Pool</i> , <i>One Global Address</i> and <i>Interface IP Address</i> . Interface IP Address is the default setting.
NAT Pool	Provide the name of an existing NAT pool for use with the dynamic NAT configuration.
Overload IP	Enables the use of one global address for numerous local addresses.

3. Select **OK** to save the changes made to the dynamic NAT configuration. Select **Reset** to revert to the last saved configuration.

Bridge NAT Configuration

Use Bridge NAT to manage Internet traffic originating at a remote site. In addition to traditional NAT functionality, Bridge NAT provides a means of configuring NAT for bridged traffic through an access point. NAT rules are applied to bridged traffic through the access point, and matching packets are NATed to the WAN link instead of being bridged on their way to the router.

Using Bridge NAT, a tunneled VLAN (extended VLAN) is created between the NoC and a remote location. When a remote client needs to access the Internet, Internet traffic is routed to the NoC, and from there routed to the Internet. This increases the access time for the end user on the client.

To resolve latency issues, Bridge NAT identifies and segregates traffic heading towards the NoC and outwards towards the Internet. Traffic towards the NoC is allowed over the secure tunnel. Traffic towards the Internet is switched to a local WLAN link with access to the Internet.



Note

Bridge NAT supports single AP deployments only. This feature cannot be used in a branch deployment with multiple access points.

To define a Bridge NAT configuration that can be applied to a profile:

1. Select **Configuration** → **Devices** → **System Profile** from the web UI.

Adding and Editing Bridge NAT Configuration

1. Select **Add** to create a new Bridge VLAN configuration, **Edit** to modify an existing configuration or **Delete** to remove a configuration.

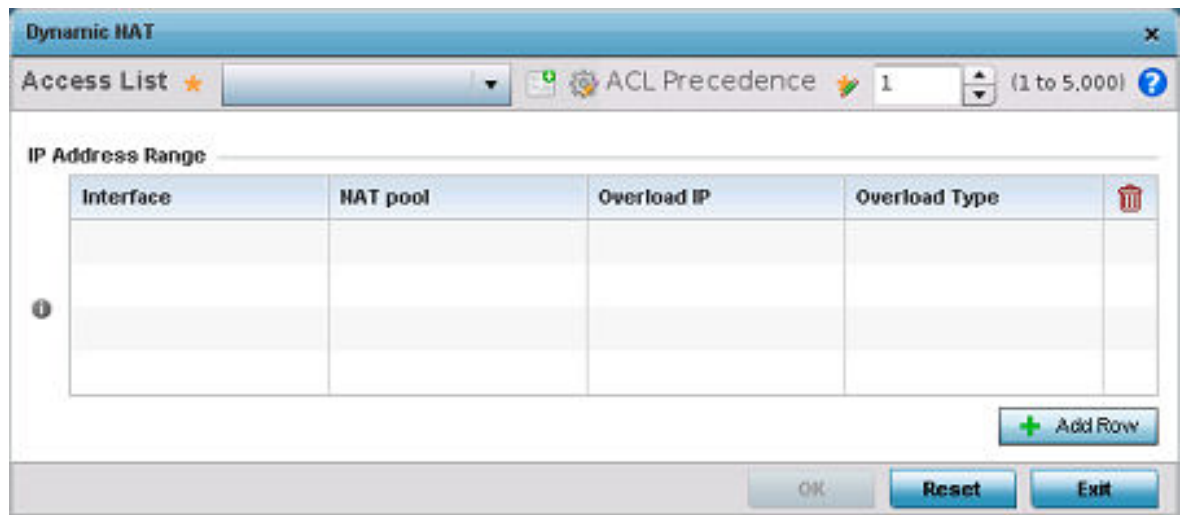


Figure 100: Profile Security - Dynamic NAT screen

2. Select the **ACL** whose IP rules are to be applied to this policy based forwarding rule. A new ACL can be defined by selecting the **Create** icon, or an existing set of IP ACL rules can be modified by selecting the **Edit** icon.
3. Use the **IP Address Range** table to configure IP addresses and address ranges that can used to access the Internet.

Interface	Lists the outgoing layer 3 interface on which traffic is re-directed. The interface can be an access point WWAN or PPPoE interface. Traffic can also be redirected to a designated VLAN.
NAT Pool	Displays the NAT pool used by this Bridge NAT entry. A value is only displayed only when Overload Type has been set to NAT Pool.
Overload IP	Lists the IP address used to represent a large number local addresses for this configuration.
Overload Type	Displays the override type for this policy based forwarding rule.

4. Select **+ Add Row** to set the **IP Address Range** settings for the Bridge NAT configuration.

Figure 101: Profile Security - Source Dynamic NAT screen - Add Row field

5. Select **OK** to save the changes made within the **Add Row** and **Dynamic NAT** screens. Select **Reset** to revert to the last saved configuration.

Defining Profile Application Visibility Settings

Deep packet inspection (DPI) is an advanced packet filtering technique functioning at the application layer. Use DPI to find, identify, classify, reroute or block packets containing specific data or codes that other packet filtering techniques (examining only packet headers) cannot detect.

Enable DPI to scan data packets passing through the WiNG managed network. The contents of each packet are scanned, occasionally logged and blocked or routed to their destination. Deep packet inspection helps an ISP block the spread of viruses, illegal downloads and prioritize data transmitted by bandwidth-heavy applications (video and VoIP applications) to help prevent network congestion.

DPI is an advanced packet analysis technique, which analyzes packet and packet content headers to determine the nature of network traffic. When DPI is enabled, packets of all flows are subjected to DPI to get accurate results. DPI identifies applications (such as, Netflix, Twitter, Facebook, etc.) and extracts metadata (such as, host name, server name, TCP-RTT, etc.) for further use by the WiNG firewall.



Note

The WiNG 7.1 release does not provide DPI support on AP505 and AP510 model access points. This feature will be supported in future releases.

To configure a profile's application visibility settings and overrides:

1. Go to **Configuration** → **Devices** → **System Profiles** .

- Expand the **Security** menu and select **Application Visibility (AVC)**.

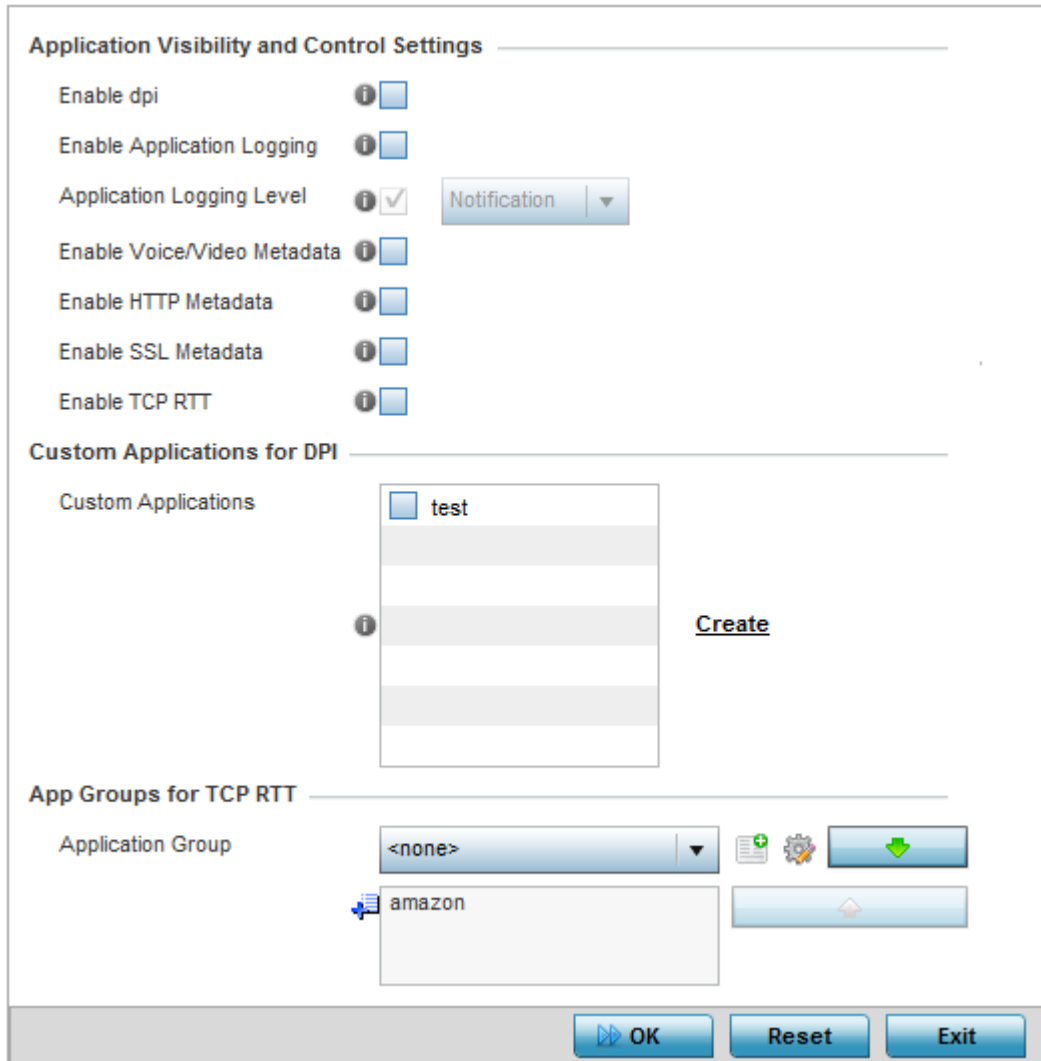


Figure 102: Profile Security - Application Visibility Screen

- Refer the following Application Visibility and Control settings:

<p>Enable dpi</p>	<p>Enable this setting to provide deep-packet inspection (application assurance) by inspecting every byte of each application header packet passing through the controller or service platform. When enabled, application data streams are inspected at a granular level to help prevent viruses and spyware from accessing the WiNG managed network.</p>
<p>Enable Applications Logging</p>	<p>Select this option to enable event logging for DPI application recognition. This setting is disabled by default.</p>

Applications Logging Level	If enabling DPI application recognition event logging, set the logging level. Severity levels include Emergency , Alert , Critical , Errors , Warning , Notice , Info , and Debug . The default logging level is Notification.
Enable Voice/Video Metadata	Select this option to enable the metadata extraction from voice and video classified flows. The default setting is disabled.
Enable HTTP Metadata	Select this option to enable extraction of metadata from HTTP application data flows. The default setting is disabled.
Enable SSL Metadata	Select this option to enable extraction of metadata from SSL application data flows. The default setting is disabled.
Enable TCP RTT	Select this option to enable extraction of RTT information from TCP flows. The default setting is disabled.

4. Review the **Custom Applications for DPI** field to select the custom applications available for this device profile.
5. Click **OK** to save the changes or overrides.
Click **Reset** to revert to the last saved configuration.

Virtual Router Redundancy Protocol

A default gateway is a critical resource for connectivity. However, it's prone to a single point of failure. Thus, redundancy for the default gateway is required by the access point. If WAN backhaul is available, and a router failure occurs, then an access point should act as a router and forward traffic on to its WAN link.

Define an external VRRP (*Virtual Router Redundancy Protocol*) configuration when router redundancy is required in a wireless network requiring high availability.

The election of a VRRP master is central to the configuration of VRRP. A VRRP master (once elected) performs the following functions:

- Responds to ARP requests
- Forwards packets with a destination link layer MAC address equal to the virtual router MAC address
- Rejects packets addressed to the IP address associated with the virtual router, if it is not the IP address owner
- Accepts packets addressed to the IP address associated with the virtual router, if it is the IP address owner or accept mode is true

Nodes that lose the election process enter a backup state where they monitor the master for any failures. In case of a failure, one of the backups becomes the master and assumes the management of the designated virtual IPs. A backup does not respond to an ARP request, and discards packets destined for a virtual IP resource.

Adding and Editing VRRP Configuration

You can add a new VRRP configuration or edit an existing configuration to match changing network requirement.

1. Click **Add** to create a new VRRP configuration.
Click **Edit** to modify or override the attributes of a existing VRRP configuration. If necessary, existing VRRP configurations can be selected and permanently removed by clicking **Delete**.

VRRP

Virtual Router ID (1 to 255)

Priority (1 to 254)

Virtual IP Addresses

IP Address	Clear
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear

Advertisement Interval Unit

Advertisement Interval (1 to 255) (250 to 999 millis)

Preempt

Preempt Delay (1 to 65,535 seconds)

Interface (1 to 4,094)

Protocol Extension

Sync Group

Network Monitoring

Local Interface wwan1

pppoe1

VLAN ID (1 to 4094)

Critical Resource

OK Reset Exit

Figure 104: Profiles - VRRP screen

2. If you are creating a new VRRP configuration, assign a **Virtual Router ID** from 1 - 255. In addition to functioning as numerical identifier, the ID identifies the virtual router for which a packet is reporting status.
3. Define the following VRRP **General** parameters:

Description	In addition to an ID assignment, a virtual router configuration can be assigned a textual description (up to 64 characters) to further distinguish it from others with a similar configuration.
Priority	Use the spinner control to set a VRRP priority setting from 1 - 254. The controller or service platform uses the defined setting as criteria in selection of a virtual router master. The higher the value, the greater the likelihood of this virtual router ID being selected as the master.
Virtual IP Addresses	Provide up to eight IP addresses representing the Ethernet switches, routers, or security appliances defined as virtual router resources.
Advertisement Interval Unit	Select either seconds , milliseconds or centiseconds as the unit used to define VRRP advertisements. After an option is selected, the spinner control becomes enabled for that Advertisement Interval option. The default interval unit is seconds. If you are changing the VRRP group version from 2 to 3, the advertisement interval must be in centiseconds. Use VRRP group version 2 when the advertisement interval is either in seconds or milliseconds.
Advertisement Interval	After selecting an <i>Advertisement Interval Unit</i> , use the spinner control to set the interval the VRRP master sends out advertisements on each of its configured VLANs. The default setting is 1 second.
Preempt	Select this option to ensure a high priority backup router is available to preempt a lower priority backup router resource. The default setting is enabled. When selected, the <i>Preempt Delay</i> option becomes enabled to set the actual delay interval for pre-emption. This setting determines if a node with a higher priority can take over all the Virtual IPs from the nodes with a lower priority.
Preempt Delay	If the <i>Preempt</i> option is selected, use the spinner control to set the delay interval (in seconds) for preemption.
Interface	Select this value to enable or disable VRRP operation and define the VLAN (1 - 4,094) interface where VRRP will be running. These are the interfaces monitored to detect a link failure.

4. Refer to the **Protocol Extension** field to define the following:


Sync Group	Select the option to assign a VRRP sync group to this VRRP ID's group of virtual IP addresses. This triggers VRRP fail over if an advertisement is not received from the virtual masters that are part of this VRRP sync group. This setting is disabled by default.
Network Monitoring: Local Interface	Select wwan1, pppoe1, and VLAN ID(s) as needed to extend VRRP monitoring to these local access point interfaces. Once selected, these interfaces can be assigned an increasing or decreasing level or priority for virtual routing in the VRRP group.

Network Monitoring: Critical Resource	Assign the priority level for the selected local interfaces. Backup virtual routers can increase or decrease their priority in case the critical resources connected to the master router fail, and then transition to the master state themselves. Additionally, the master virtual router can lower its priority if the critical resources connected to it fails, so the backup can transition to the master state. This value can only be set on the backup or master router resource, not both. Options include None , increment-priority and decrement priority .
Network Monitoring: Delta Priority	Use this setting to decrement the configured priority (by the set value) when the monitored interface is down. When critical resource monitoring is enabled, the value is incremented by the setting defined.

- Click **OK** to save your changes.
Click **Reset** to revert to the last saved configuration.

Version

- Select the **Version** tab to define the VRRP version scheme used with the configuration.

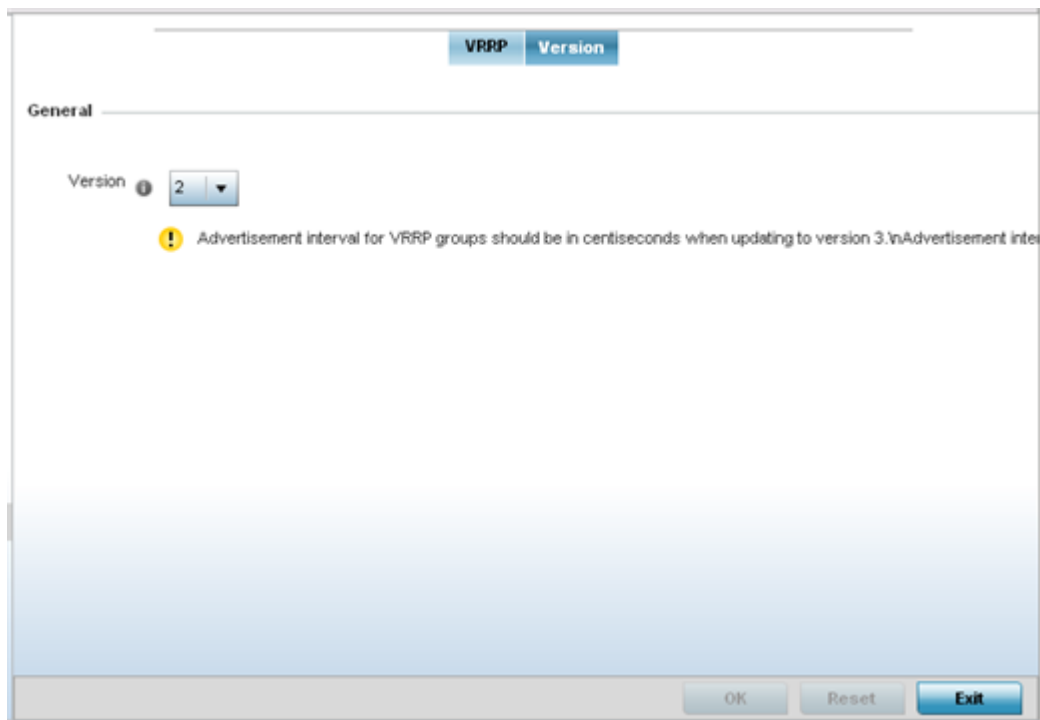

- Assess the VRRP version configuration.

VRRP version 3 (RFC 5798) and 2 (RFC 3768) are options for router redundancy. Version 3 supports sub-second (centisecond) VRRP failover and support services over virtual IP. For more information on VRRP protocol specifications (available publicly) refer to <http://www.ietf.org/rfc/rfc3768.txt> (version 2) and <http://www.ietf.org/rfc/rfc5798.txt> (version 3).

- From within VRRP tab, select **Add** to create a new VRRP configuration or **Edit** to modify the attributes of an existing VRRP configuration. If necessary, existing VRRP configurations can be selected and permanently removed by selecting Delete.

List of Critical Resources

Critical resources are device IP addresses or interface destinations on the network inter-operated as critical to the health of the network. The critical resource feature allows for the continuous monitoring of these addresses. A critical resource, if not available, can result in the network suffering performance degradation. A critical resource can be a gateway, a AAA server, a WAN interface, or any hardware or service on which the stability of the network depends. Critical resources are pinged regularly by the access point. If there is a connectivity issue, an event is generated stating a critical resource is unavailable. By default, no critical resource policy is enabled, and one needs to be created and implemented.

Critical resources can be monitored directly through the interfaces on which they are discovered. For example, a critical resource on the same subnet as the access point can be monitored by its IP address. However, a critical resource located on a VLAN must continue to be monitored on that VLAN.

Critical resources can be configured for access points and wireless controllers using their respective profiles.

To define critical resources:

- Select **Configuration** → **Devices** → **System Profile** → **Critical Resources** from the web UI.

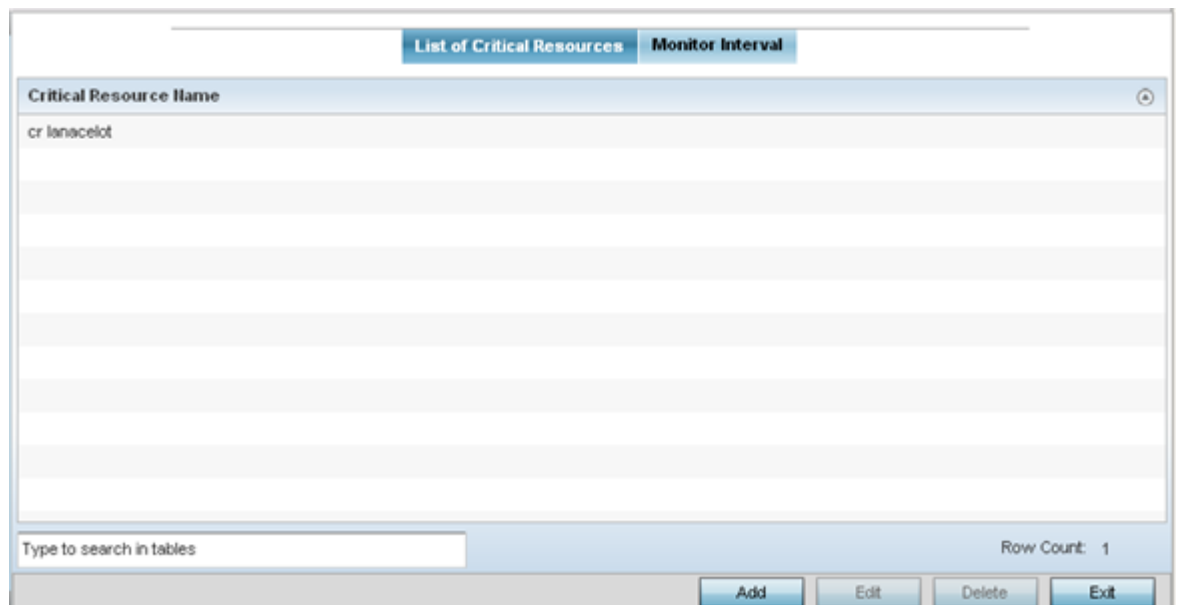


Figure 105: Critical Resources Screen - List of Critical Resources tab

- Review the existing critical resources.

The screen lists the destination IP addresses or interfaces (VLAN, WWAN, or PPPoE) used for critical resource connection. IP addresses can be monitored directly by the access point or controller. However, a VLAN, WWAN, or PPPoE must be monitored behind an interface.

Adding and Editing Critical Resources

- To set or override an existing critical resource configuration, click **Edit**.
Click **Add** to add a new critical resource and connection method.

Critical Resource Monitoring

Critical Resource Name *

Settings

Use Flows Sync Adoptees

Offline Resource Detection ▼

Monitor Criteria ▼

Monitor Via IP Interface ▼

Resources:

IP Address	Mode	Port	VLAN	
* <input type="text"/>				

Figure 106: Critical Resources Screen - Adding a Critical Resource

- If you are adding a new critical resource, in the **Critical Resource Name** field, provide a name up to 32 characters.
- Select **Use Flows** so that the critical resource will monitor using firewall flows for DHCP or DNS instead of ICMP or ARP packets.
This reduces the amount of traffic on the network. This setting is disabled by default.
- Select **Sync Adoptees** to sync adopted devices to state changes with a resource-state change message .
This setting is disabled by default.

5. Use the **Offline Resource Detection** drop-down menu to define how critical resource event messages are generated.

Options include **Any** and **All**. If you select **Any**, an event is generated when the state of any single critical resource changes. If you select **All**, an event is generated when the state of all monitored critical resources change.

6. Use the **Monitor Criteria** drop-down menu to select either **rf-domain-manager**, **cluster-master** or **All** as the resource for monitoring critical resources by one device and updating the rest of the devices in a group.

If you select **rf-domain-manager**, the current **rf-domain manager** performs resource monitoring, and the rest of the devices do not. The **RF-domain-manager** updates any state changes to the rest of the devices in the **RF Domain**.

With the **cluster-master** option, the cluster master performs resource monitoring and updates the cluster members with state changes.

With a controller-managed **RF Domain**, set **Monitoring Criteria** to **All** because the controller might not know the **VLAN** bridged locally by the devices in the **RF Domain** monitoring **DHCP**.

7. In the **Monitor Via** field, select the **IP** option to monitor a critical resource directly (within the same subnet) using the provided IP address as a network identifier.
8. In the **Monitor Via** field, select the **Interface** check box to monitor a critical resource using the critical resource's **VLAN**, **WWAN1** or **PPPoE1** interface.

If you select **VLAN**, use the spinner control to define the destination **VLAN ID** used as the interface for the critical resource.

9. In the **Resources** table, click **+ Add Row** and define the following parameters:

IP Address	Provide the IP address of the critical resource. This is the address used by the access point to ensure the critical resource is available. Up to four addresses can be defined.
Mode	Set the ping mode used when the availability of a critical resource is validated. The options are: <ul style="list-style-type: none"> arp-only – Use only the ARP (Address Resolution Protocol) for pinging the critical resource. ARP is used to resolve hardware addresses when only the network layer address is known. arp-and-ping – Use both ARP and ICMP (Internet Control Message Protocol) for pinging the critical resource and sending control messages (for example, <i>device not reachable</i> or <i>requested service not available</i>).
Port	Provide the port on which the critical resource is available. Use the spinner control to set the port number.
VLAN	Using the spinner control, define the VLAN on which the critical resource is available.

10. Click **OK** to save the critical resource configuration changes.

Click **Reset** to revert to the last saved configuration.

Monitor Interval

To override the critical resource monitoring interval configuration:

1. Select the **Monitor Interval** tab.

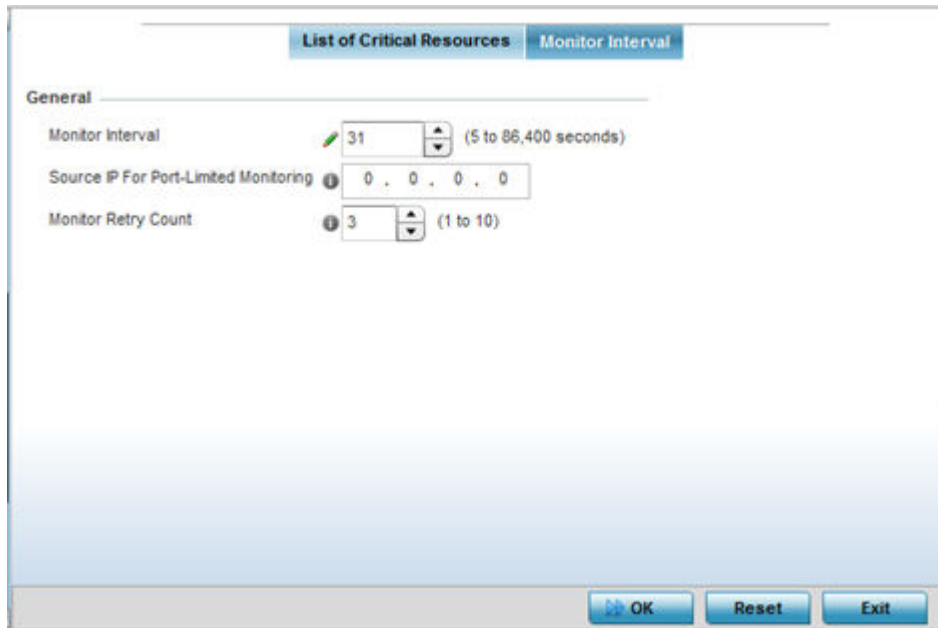


Figure 107: Critical Resources Screen - Monitor Interval Tab

2. Use **Monitor Interval** screen to set the duration, in seconds, between two successive pings to the critical resource.

Select a duration between 5 and 86,400 seconds. The default setting is 30 seconds.

3. Use **Source IP for Port-Limited Monitoring** to define the IP address used as the source address in ARP packets used to detect a critical resource on a layer 2 interface.

Generally, the source address 0.0.0.0 is used in the ARP packets used to detect critical resources. However, some devices do not support that IP address and drop the ARP packets. Use this field to provide an IP address specifically used for this purpose. The IP address used for Port-Limited Monitoring must be different from the IP address configured on the device.

4. Use **Monitor Retry Count** to set the number of retry connection attempts (1 - 10) permitted before this device connection is defined as down (offline).

The default setting is three connection attempts.

5. Click **OK** to save the and monitor interval changes.

Click **Reset** to revert to the last saved configuration.

Profile Services Configuration

A profile can contain specific guest access (captive portal) server configurations. These guest network access permissions can be defined uniquely as profile requirements dictate.

Before defining a profile's captive portal and DHCP configuration, refer to the following deployment guidelines to ensure the profile configuration is optimally effective:

- A profile plan should consider the number of wireless clients allowed on the profile's guest (captive portal) network and the services provided, or if the profile should support guest access at all.
- Profile configurations supporting a captive portal should include firewall policies to ensure logical separation is provided between guest and internal networks so internal networks and hosts are not reachable from guest devices.
- DHCP's lack of an authentication mechanism means a DHCP server supported profile cannot check if a client or user is authorized to use a given user class. This introduces a vulnerability when using user class options. Ensure a profile using DHCP resources is also provisioned with a strong user authorization and validation configuration.

To define a profile's services configuration:

1. Select **Configuration** → **Devices** → **System Profile** → **Services**.

2. Refer to the **Profile_Captive_Portal** field to select or set a guest access configuration (captive portal) for use with this profile.

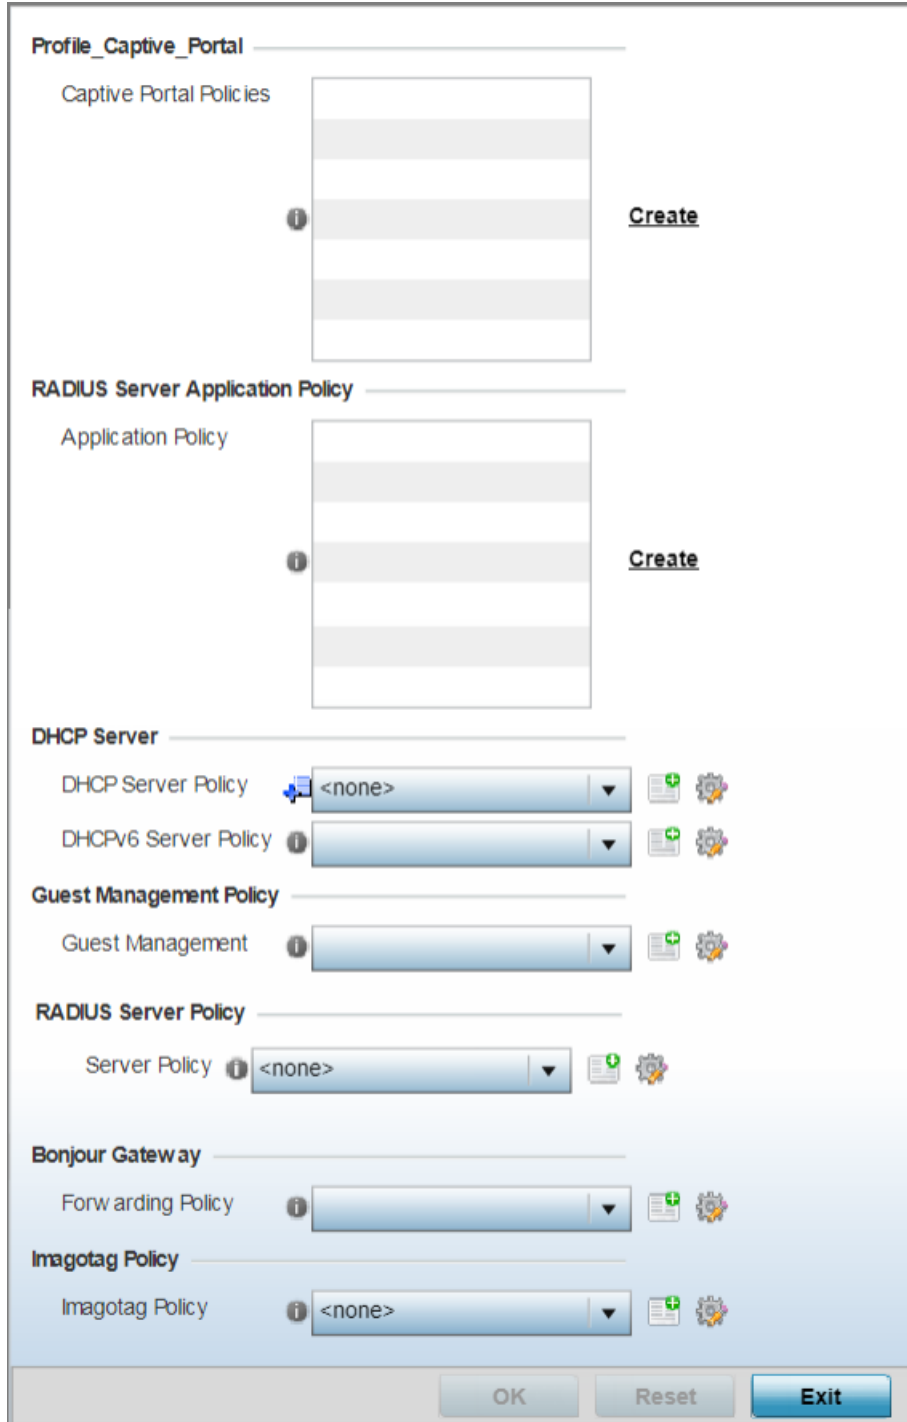


Figure 108: Profile Services - Services Screen

A captive portal is guest access policy for providing guests temporary and restrictive access to the access point managed network.

A captive portal provides secure authenticated access using a standard Web browser. Captive portals provides authenticated access by capturing and re-directing a wireless user's Web browser session to a captive portal login page where
 292 Access Point System Reference Guide for version 7.9.4.0
 into the captive portal, additional Agreement, Welcome and Fail pages provide the administrator with a number of options on screen flow and user appearance.

3. Select an existing captive portal policy, use the default captive portal policy or select the **Create** link to create a new captive portal configuration that can be applied to this profile.

For more information, see [Captive Portal Policy](#) on page 893.

4. Use the **RADIUS Server Application Policy** drop-down menu to select an application policy to authenticate users and authorize access to the network.

A RADIUS policy provides the centralized management of authentication data (usernames and passwords). When a client attempts to associate, the controller or service platform sends the authentication request to the RADIUS server. If an existing RADIUS server policy does not meet your requirements, click the Create link to create a new policy.

5. Use the **DHCP Server Policy** drop-down menu assign this profile a DHCP server policy. If an existing DHCP policy does not meet the profile's requirements, click the Create icon to create a new policy configuration that can be applied to this profile, or click the Edit icon to modify the parameters of an existing DHCP Server policy.

Dynamic Host Configuration Protocol (DHCP) allows hosts on an IP network to request and be assigned IP addresses as well as discover information about the network where they reside. Each subnet can be configured with its own address pool. Whenever a DHCP client requests an IP address, the DHCP server assigns an IP address from that subnet's address pool. When the onboard DHCP server allocates an address for a DHCP client, the client is assigned a lease, which expires after a predetermined interval. Before a lease expires, wireless clients (to which leases are assigned) are expected to renew them to continue to use the addresses. When the lease expires, the client is no longer permitted to use the leased IP address. The profile's DHCP server policy ensures all IP addresses are unique, and no IP address is assigned to a second client while the first client's assignment is valid (its lease has not expired).

6. Use the **DHCPv6 Server Policy** drop-down menu assign this profile a DHCPv6 server policy. If an existing DHCP policy for IPv6 does not meet the profile's requirements, click the Create icon to create a new policy configuration that can be applied to this profile, or click the Edit icon to modify the parameters of an existing DHCP Server policy.

DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. DHCP in IPv6 works in with IPv6 router discovery. With the proper RA flags, DHCPv6 works like DHCP for IPv4. The central difference is the way a device identifies itself if assigning addresses manually instead of selecting addresses dynamically from a pool.

7. Use the **RADIUS Server Policy** drop-down menu to select an existing RADIUS server policy to use as a user validation security mechanism with this profile.

A profile can have its own unique RADIUS server policy to authenticate users and authorize access to the network. A profile's RADIUS policy provides the centralized management of controller or service platform authentication data (usernames and passwords). When a client attempts to associate, an authentication request is sent to the RADIUS server.

8. Refer to the **Bonjour Gateway** field to select or set a Bonjour Gateway Forwarding Policy.

Bonjour is Apple's implementation of zero-configuration networking (Zeroconf). Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates devices such as printers, other computers and services that these computers offer over a local network.

Bonjour Forwarding Policy enables discovery of services on VLANs which are not visible to the device running the Bonjour Gateway. Bonjour forwarding enables forwarding of Bonjour advertisements across VLANs to enable the Bonjour Gateway device to build a list of services and the VLANs where these services are available.

9. Refer to the **Imagotag Policy** field to select or set a Imagotag Policy. Use the drop-down menu to select and apply an Imagotag Policy to the AP's profile. You can use the **Create** to create a new policy or **Edit** icon to edit an existing policy.

For more information on enabling support for SES-imagotag's ESL tags on AP-8432 APs with USB interfaces, see [Configure Imagotag Policy](#) on page 957.

10. Click **OK** to save the changes made to the profile's services configuration.

Click **Reset** to revert to the last saved configuration.

Management Settings

There are mechanisms to allow or deny management access to the network for separate interfaces and protocols: HTTP, HTTPS, Telnet, SSH, and SNMP.

These management access configurations can be applied strategically to profiles as resource permissions dictate for the profile. Additionally, overrides can be applied to customize a device's management configuration, if deployment requirements change and a device's configuration must be modified from its original device profile configuration.

Additionally, an administrator can define a profile with unique configuration file and device firmware upgrade support. You can override the management configurations of a profile at the device level. To override an access point profile's management settings:

To define or override a profile's management configuration:

1. Go to **Configuration** → **Devices** → **System Profile**.
2. Select an access point.

The selected access point's profile configuration menu displays.

3. Expand **Profile Overrides** → **Management**.



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The management **Settings** configuration screen displays.

Message Logging

Enable Message Logging i

Remote Logging Host	Port	🗑️

Facility to Send Log Messages i local7 ▼

Syslog Logging Level i Warning ▼

Console Logging Level i Warning ▼

Buffered Logging Level i Warning ▼

Time to Aggregate Repeated Messages i 0 Seconds ▼ (0 to 60)

Forward Logs to Controller i Error ▼

System Event Messages

Enable System Events i

Enable System Event Forwarding i

Events E-mail Notification

SMTP Server i Hostname ▼

Port of SMTP i (1 to 65,535)

Sender Email Address i

OK Reset Exit

Figure 109: Profile Overrides - Management - Settings Configuration Screen

4. In the **Message Logging** field, select the **Enable Message Logging** checkbox to enable message logging. When enabled, system events are logged to a log file or a syslog server.

Selecting this check box enables the rest of the parameters required to define the profile's logging configuration. This option is disabled by default.

5. In the **Remote Logging Host** table provide the following:

Remote Logging Host	Define numerical (non DNS) IP addresses for up to four external resources where logged system events can be sent by the access point. Select the trash icon as needed to remove an IP address from the list.
Port	Define the ports at which the external resources are reachable.

6. Configure the following **Message Logging** parameters:

Facility to Send Log Messages	Use the drop-down menu to specify the local server (if used) for access point event log transfers.
System Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Console Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Buffered Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Time to Aggregate Repeated Messages	Define the increment (or interval) system events are logged on behalf of the access point. The shorter the interval, the sooner the event is logged. Either define an interval in seconds (0 - 60) or minutes (0 -1). The default value is 0 seconds.
Forward Logs to Controller	Select this option to define a log level for forwarding event logs to the control. Log levels include Emergency, Alert, Critical, Error, Warning, Notice, Info and Debug. The default logging level is Error.

7. Refer to the **System Event Messages** field to define or override how system messages are logged and forwarded on behalf of the profile.
- Select **Enable System Events** to allow the profile to capture system events and append them to a log file.
It is important to log individual events to discern an overall pattern that may be negatively impacting performance. This setting is enabled by default.
 - Select **Enable System Event Forwarding** to enable the forwarding of system events.
This setting is enabled by default.

8. Refer to the **Events E-mail Notification** field to define or override how system event notification emails are sent.

SMTP Server	Specify either the hostname or IP address of the outgoing SMTP server where notification emails are originated.
Port of SMTP	If a non-standard SMTP port is used on the outgoing SMTP server, select this option and specify a port from 1 - 65,535 for the outgoing SMTP server to use.
Sender E-mail Address	Specify the email address from which notification email is originated. This is the <i>from</i> address on notification email.
Recipient's E-mail Address	Specify one or more email addresses to be the recipients of event email notifications.
Username for SMTP Server	Specify the username of the sender on the outgoing SMTP server. Many SMTP servers require users to authenticate with an username and password before sending email through the server.
Password for SMTP Server	Specify password associated with the username of the sender on the outgoing SMTP server. Many SMTP servers require users to authenticate with an username and password before sending email through the server.

9. In the **Persist Configuration Across Reloads** field, use the **Configure** drop-down menu to define whether the access point saves a configuration received from a Virtual Controller AP to flash memory.

The configuration would then be made available if the this access point reboots and the Virtual Controller AP is not reachable. Options include **Enabled**, **Disabled**, and **Secure**.

10. Refer to the **HTTP Analytics** field to define analytic compression settings and update intervals.

Compress	Select this option to use data compression to when sending updates to the controller.
Update Interval	Set the interval – in minutes, seconds, or hours – when the collected data is sent to the external analytics engine.

11. Click **OK** to save the management setting overrides.
Click **Reset** to revert to the last saved configuration.

Management Firmware

To configure the access point profile's firmware upgrade settings:

1. Select **Management** → **Firmware**.

The management **Firmware** upgrade setting configuration screen displays.

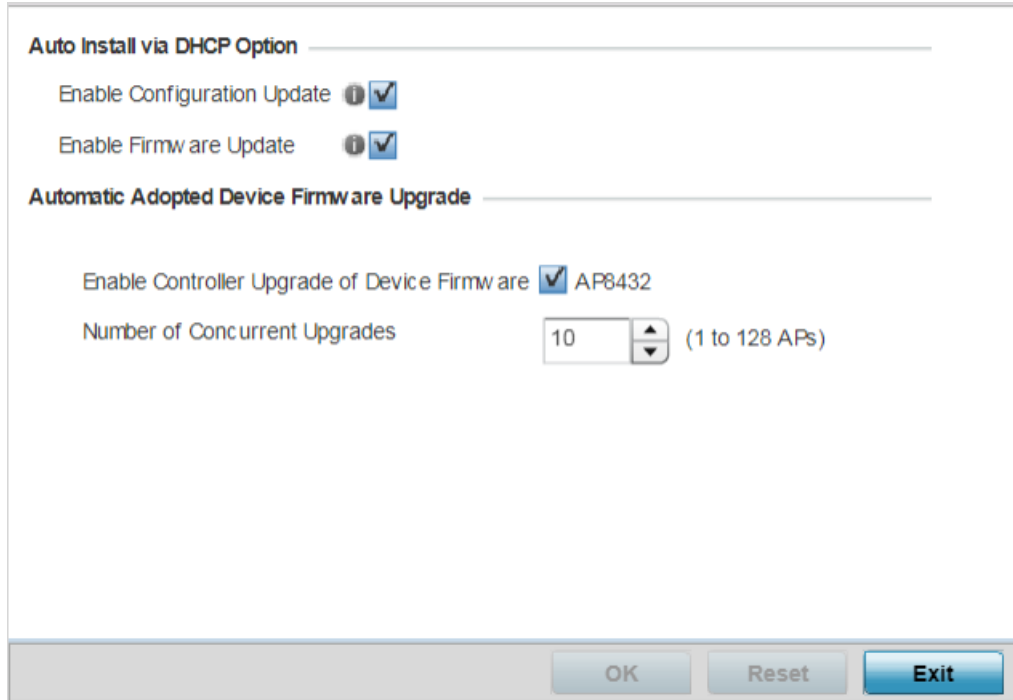


Figure 110: Management - Firmware Upgrade Configuration Screen

2. Refer to the **Auto Install via DHCP Option** field to configure automatic configuration file and firmware updates.

Enable Configuration Update	Select this option to enable automatic configuration file updates for the controller profile from a location external to the access point.
Enable Firmware Update	Select this option to enable automatic firmware updates for this profile from a user-defined remote location. This value is disabled by default.

3. In the **Automatic Adopted Device Firmware Upgrade** section, define an automatic firmware upgrade from a local file.

Enable Controller Update of Device Firmware	Select the access point model to upgrade using its associated Virtual Controller AP's most recent firmware file for that model. This parameter is enabled by default.
Number of Concurrent Upgrades	Use the spinner control to define the maximum number (1 - 128) of adopted APs that can receive a firmware upgrade at the same time. Keep in mind that during a firmware upgrade, the access point is offline and unable to perform its normal client support role until the upgrade process is complete. Note: This is applicable in case the access point is a virtual controller.

4. Click **OK** to save the management firmware overrides.
Click **Reset** to revert to the last saved configuration.

Management Heartbeat

To configure the access point profile's management heartbeat configuration:

1. Select **Management → Heartbeat**.
The management **Heartbeat** setting configuration screen displays.

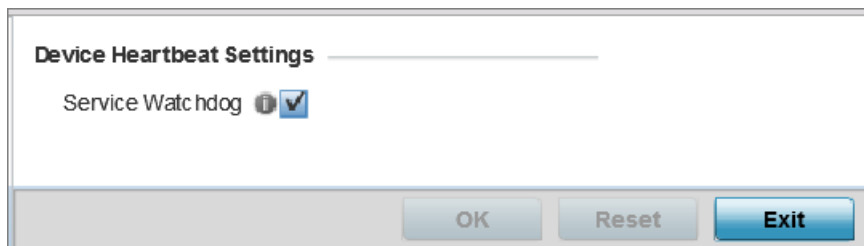


Figure 111: Management - Heartbeat Configuration Screen

2. Select the **Service Watchdog** option to implement heartbeat messages.
This ensures that associated devices are up and running and can interoperate effectively. The Service Watchdog is enabled by default.
3. Click **OK** to save the changes and overrides made to the profile's configuration.
Click **Reset** to revert to the last saved configuration.

Meshpoint Configuration

An access point can be configured to be a part of a meshed network. A mesh network is one where nodes in the network can communicate with each other where each node can maintain more than one path to its peers. Mesh networking enables users to access broadband applications anywhere, including moving vehicles, by providing robust, reliable, and redundant connectivity to all the members of the network. When one of the nodes in a mesh network becomes unavailable, the other nodes in the network can still communicate with each other directly or through intermediate nodes.

Mesh point is the name given to a device that is a part of a meshed network.

Adding and Editing Meshpoint Settings

You can add a new meshpoint configuration or edit an existing meshpoint configuration.

1. Click **Add** to create a new mesh point configuration, if an existing configuration does not meet your requirements.

Click **Edit** to modify or override the attributes of a existing mesh point configuration. If necessary, existing configurations can be selected and permanently removed by clicking **Delete**.

Mesh Point

MeshConnex Policy * [Dropdown] [+] [Gear] [?]

Settings | Auto Channel Selection

General

- Is Root: [i] [None] [v]
- Root Selection Method: [i] [None] [v]
- Set as Cost Root: [i]
- Monitor Critical Resources: [i]
- Monitor Primary Port Link: [i]
- Wired Peer Excluded: [i]
- Path Method: [i] [None] [v]

Root Path Preference

- Preferred Neighbor: [i] [00 - 00 - 00 - 00 - 00 - 00]
- Preferred Root: [i] [00 - 00 - 00 - 00 - 00 - 00]
- Preferred Interface: [i] [None] [v]

Path Method Hysteresis

- Minimum Threshold: [i] [0] [v] (-100 to 0 dB)
- Signal Strength Delta: [i] [1] [v] (1 to 100 dB)
- Sustained Time Period: [i] [1] [v] [Seconds] [v] (0 to 600)
- SNR Delta Range: [i] [1] [v] (1 to 100 dB)

[OK] [Reset] [Exit]

Figure 113: Mesh Point Settings Screen

2. Define the following **General** mesh point settings:

MeshConnex Policy	Provide a name for the Mesh Connex Policy. Use the Create icon to create a new Mesh Connex Policy. To edit an existing policy, select it from the dropdown and click the Edit icon. For more information on creating or editing a Mesh Connex Policy, see MeshConnex Policies on page 730.
Is Root	Select the root behavior of this access point. True means that this access point is a root node for this mesh network, and False means that it is not a root node. A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network.
Root Selection Method	Use the drop-down menu to determine whether this mesh point is the root or non-root mesh point. Select either None (the default setting) or auto-mint .
Set as Cost Root	Select this option to set the mesh point as the cost root for mesh point root selection. This setting is disabled by default.
Monitor Critical Resources	Select this option to enable critical resource monitoring for this mesh point.
Monitor Primary Port Link	Select to enable monitoring of primary port link is enabled for this mesh connex policy. If the primary port link is not present and if the device is a mesh root, it is automatically changed to a non-root device. When the primary port link becomes available again, the non-root device is changed back to a root device.
Wired Peer Exclude	Select this option to exclude wired peers when creating mesh links.
Path Method	Select the method used for path selection in a mesh network. Available options include: <ul style="list-style-type: none"> • None – No criteria are used in root path selection. • uniform – The path selection method is uniform (two paths are considered equivalent if the average value is the same for these paths). • mobile-snr-leaf – The access point is mounted on a vehicle or a mobile platform (WiNG models only). The path to the route is selected based on the SNR (<i>Signal To Noise Ratio</i>) with the neighbor device. • snr-leaf – The path with the best signal to noise ratio is always selected.
Minimum Threshold	Enter the minimum value for SNR above which a candidate for the next hop in a dynamic mesh network is considered. This field along with Signal Strength Delta and Sustained Time Period are used to dynamically select the next hop in a dynamic mesh network. The default setting is 0 dB.
Signal Strength Delta	Enter a delta value in dB. A candidate for selection as a next hop in a dynamic mesh network must have a SNR higher than the value configured here. This field along with the Minimum Threshold and Sustained Time Period are used to dynamically select the next hop in a dynamic mesh network. The default setting is 1 dB.

Sustained Time Period	Enter the time duration in seconds (0 - 600) or minutes (0 - 10). This indicates the duration that a signal must sustain the constraints specified in the Minimum Threshold and Signal Strength Delta path hysteresis values. These values are used to dynamically select the next hop in a dynamic mesh network. The default setting is 1 second.
SNR Delta Range	Select the root selection method hysteresis (from 1 - 100dB) SNR delta range a candidate must sustain. The default setting is 1 dB.



Note

An AP 7161 model access point can be deployed as a VMM (*vehicular mounted modem*) to provide wireless network access to a mobile vehicle such as a car or train. A VMM provides layer 2 mobility for connected devices. VMM does not provide layer 3 services, such as IP mobility.

3. Set the following **Root Path Preference** values:

Preferred Neighbor	Specify the MAC address of a preferred neighbor for this mesh point.
Preferred Root	Specify the MAC address of a preferred mesh root for this mesh point.
Preferred Interface	Select the preferred Interface for this mesh point. Select None to set no preferences. The other interface choices are 2.4 GHz, 5 GHz, or 6 GHz.

Adding and Editing ACS Dynamic Root Selection Configuration

1. Click the **Auto Channel Selection** tab to configure the parameters for the MeshConnex Auto Channel Selection policy.

The screenshot displays the 'Mesh Point' configuration window for 'MeshConnexPolicy_01'. The 'Auto Channel Selection' tab is active, and the 'Dynamic Root Selection' sub-tab is selected. The configuration is split into two sections: 'For 2.4 GHz' and 'For 5.0/4.9 GHz'. Each section contains the following parameters:

- Channel Width:** Set to 'Automatic'.
- Priority Meshpoint:** An unchecked checkbox with an empty text field.
- Off-channel Duration:** Set to 50 milliseconds (range: 20 to 250 milliseconds).
- Off-channel Scan Frequency:** Set to 6 Seconds (range: 1 to 60).
- Meshpoint Root:** A sub-section containing:
 - Sample Count:** Set to 5 (range: 1 to 10 samples).
 - Channel Hold Time:** Set to 30 Minutes (range: 0 to 1,440).

At the bottom of the window, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 114: Mesh Point Auto Channel Selection Screen - Dynamic Root Selection Tab

The **Dynamic Root Selection** screen displays by default. This screen provides configuration for the 2.4 GHz and 5.0/4.9 GHz frequencies.

2. Refer to the following for more information on the **Auto Channel Selection** → **Dynamic Root Selection** screen. These descriptions are common for configuring the 2.4 GHz and 5.0/4.9 GHz frequencies.

Channel Width	Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include: <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz. • 80 MHz - Sets the width between two adjacent channels as 80 MHz • 160 MHz - Sets the width between two adjacent channels as 160 MHz
Priority Meshpoint	Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.
Off-channel Duration	Set the duration (from 20 - 250 milliseconds) the scan dwells on each channel when performing an off channel scan. The default is 50 milliseconds.
Off-channel Scan Frequency	Set the duration (from 1- 60 seconds) between two consecutive off channel scans. The default is 6 seconds.
Meshpoint Root: Sample Count	Configure the number of scan samples (from 1- 10) for data collection before a mesh channel is selected. The default is 5.
Meshpoint Root: Channel Hold Time	Configure the duration (from 0 - 1440 minutes) to remain on a channel before channel conditions are reassessed for a possible channel change. Set this value to zero (0) to prevent an automatic channel selection from occurring. The default setting is 30 minutes.

3. Click **OK** to save the changes made to the mesh point configuration.
Click **Reset** to revert to the last saved configuration.

Adding and Editing ACS Path Method SNR Configuration

1. Select the **Path Method SNR** tab to configure SNR ratio values when selecting the path to the meshpoint root.

Mesh Point MeshConnex Policy MeshConnexPolicy_01

Settings Auto Channel Selection

Dynamic Root Selection Path Method SNR Path Method Root Path Metric

For 2.4 GHz

Channel Width Automatic

Priority Meshpoint <none>

SNR Delta 5 (1 to 100 dB)

Signal Threshold -65 (-100 to 0 dB)

Off-channel Duration 50 (20 to 250 milliseconds)

For 5.0/4.9 GHz

Channel Width Automatic

Priority Meshpoint <none>

SNR Delta 5 (1 to 100 dB)

Signal Threshold -65 (-100 to 0 dB)

Off-channel Duration 50 (20 to 250 milliseconds)

OK Reset Exit

Figure 115: Mesh Point Auto Channel Selection Screen - Path Method SNR Tab

2. Set the following parameters for **2.4 GHz**, **5.0/4.9 GHz**, and **6.0 GHz** radio frequencies:

Channel Width	<p>Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include:</p> <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz. • 80 MHz – Sets the width between two adjacent channels as 80 MHz • 160 MHz – Sets the width between two adjacent channels as 160 MHz
Priority Meshpoint	<p>Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.</p>
SNR Delta	<p>Set the SNR ratio delta (from 1 - 100 dB) for mesh path selections.</p> <p>When path selection occurs, the defined value is utilized for selecting the optimal path. A better candidate, on a different channel, must have a signal strength that exceeds this delta value when compared to the signal strength of the next hop in the mesh network. The default setting is 5 dB.</p>
SNR Threshold	<p>Set the SNR threshold for mesh path selections (from -100 to 0 dB).</p> <p>If the signal strength of the next mesh hop falls below this set value, a scan is triggered to select a better next hop. the default setting is -65 dB.</p>
Off-channel Duration	<p>Set the duration (from 20 - 250 milliseconds) the scan dwells on each channel when performing an off channel scan. The default is 50 milliseconds.</p>

3. Click **OK** to save the changes made to the mesh point configuration.

Click **Reset** to revert to the last saved configuration.

Adding and Editing ACS Path Method Root Path Metric Configuration

1. Select the **Path Method Root Path Metric** tab to calculate root path metrics.

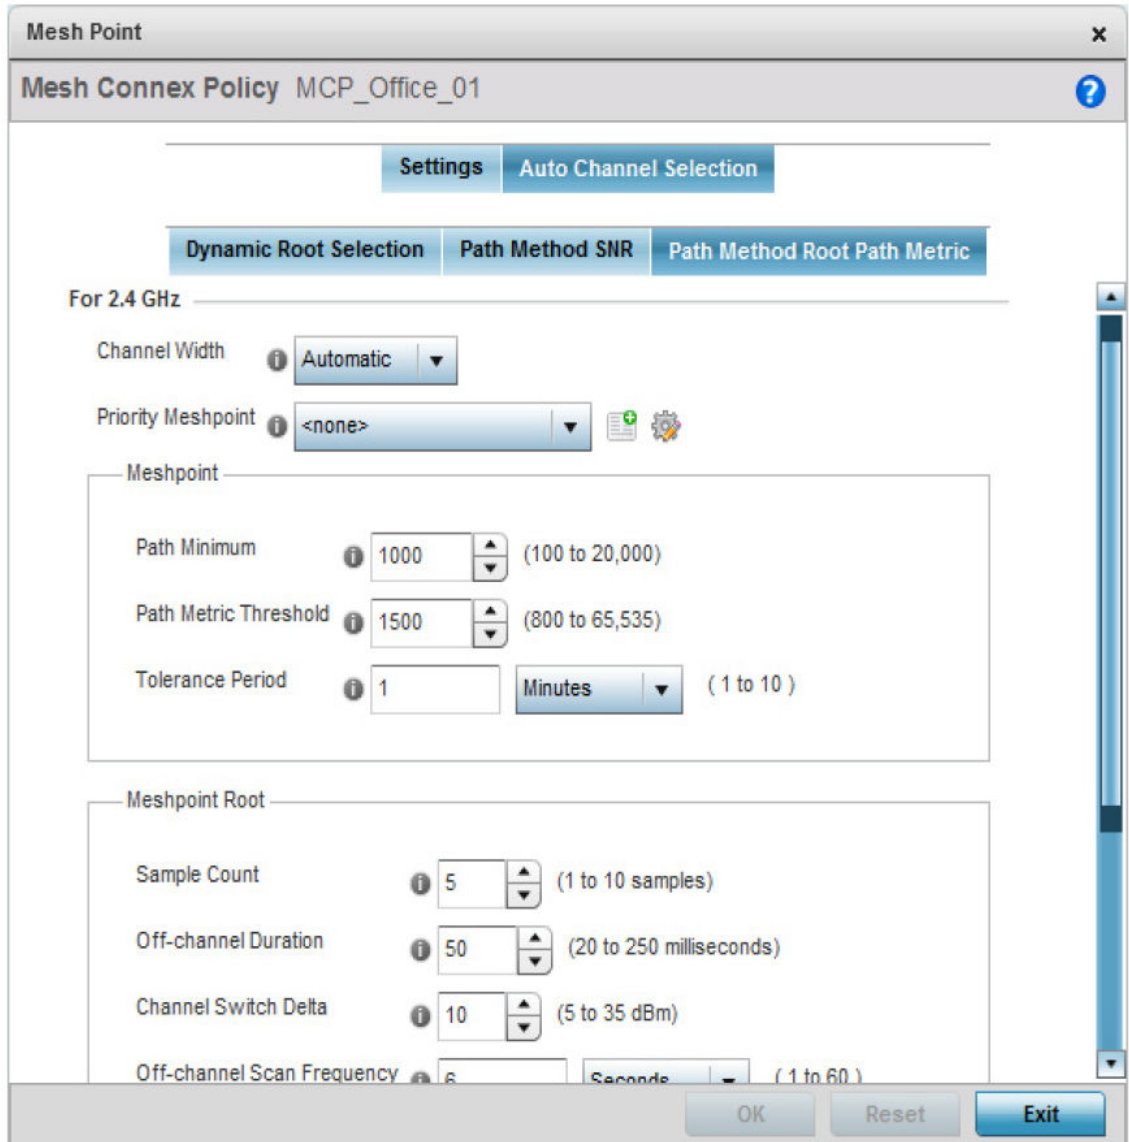


Figure 116: Mesh Point Auto Channel Selection Screen - Path Method Root Path Metric Tab

2. Set the following **Path Method Root Path Metric** parameters.

Following is a description of the parameters and related values. Not all options are available with all radio frequencies; menu options are contextual for each of the **2.4 GHz**, **5.0/4.9 GHz** and **6.0 GHz** frequencies.

Channel Width	Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include: <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz. • 80 MHz - Sets the width between two adjacent channels as 80 MHz • 160 MHz - Sets the width between two adjacent channels as 160 MHz
Priority Meshpoint	Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.
Meshpoint: Path Minimum	Set the minimum path metric (from 100 - 20,000) for establishing mesh connections. The default setting is 1000.
Meshpoint: Path Metric Threshold	Configure a minimum threshold (from 800 - 65535) for triggering an automatic channel selection for meshpoint selection. The default is 1500.
Meshpoint: Tolerance Period	Configure the duration to wait before triggering an automatic channel selection for the next hop. The default is 1 minute.
Meshpoint Root: Sample Count	Set the number of scans (from 1- 10) for data collection before a mesh point root is selected. The default is 5.
Meshpoint Root: Off-channel Duration	Configure the duration (from 20 - 250 milliseconds) that the scan dwells on each channel when performing an off-channel scan. The default is 50 milliseconds.
Meshpoint Root: Channel Switch Delta	Configure the delta (from 5 - 35 dBm) that triggers a meshpoint root automatic channel selection when exceeded. The default is 10 dBm.
Meshpoint Root: Off-channel Scan Frequency	Configure the duration (from 1 -60 seconds) between two consecutive off channel scans for meshpoint root. The default is 6 seconds.
Meshpoint Root: Channel Hold Time	Set the minimum duration (from 0 - 1440 minutes) to remain on a selected channel before channel conditions are reassessed for a possible channel change. Set this value to zero (0) to prevent an automatic channel selection from occurring. The default is 30 minutes.

3. Click **OK** to save the changes made to the mesh point configuration.

Click **Reset** to revert to the last saved configuration.

Environmental Sensor Configuration

An AP 8132 sensor module is a USB environmental sensor extension to an AP 8132 model access point. It provides a variety of sensing mechanisms, allowing the monitoring and reporting of the AP 8132's radio coverage area. The output of the sensor's detection mechanisms are viewable using either the Environmental Sensor screen.

To set or override an AP 8132 profile's environmental sensor configuration:

1. Select **Configuration** → **Devices** → **System Profile** → **Environmental Sensor**

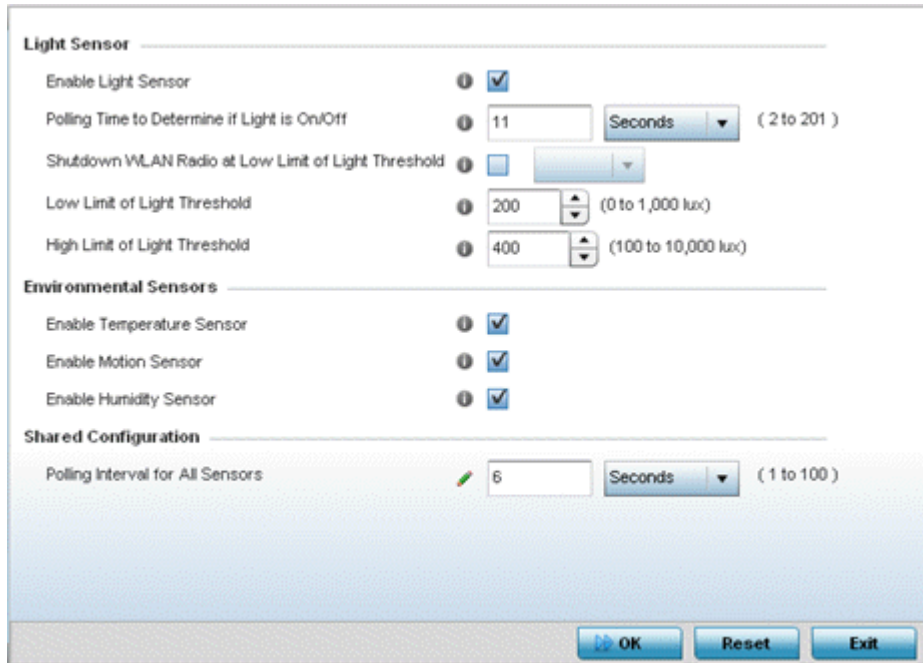


Figure 117: Profile - Environmental Sensor Screen

2. Set the following **Light Sensor** settings for the AP 8132's sensor module:

Enable Light Sensor	Select this option to enable the light sensor on the module. This setting is enabled by default. The light sensor reports whether the AP 8132's deployment location has its lights powered on or off.
Polling Time to Determine if Light is On/Off	Define an interval in <i>Seconds</i> (2 - 201) or <i>Minutes</i> (1 - 4) for the sensor module to poll its environment to assess light intensity to determine whether lighting is on or off. The default polling interval is 11 seconds. Light intensity is used to determine whether the access point's deployment location is currently populated with clients.
Shutdown WLAN Radio at Low Limit of Light Threshold	Select this option to power off the AP 8132's radio's fall below the set threshold. If enabled, select <i>All</i> (both AP 8132 radios), <i>radio-1</i> or <i>radio-2</i> .

Low Limit of Light Threshold	Set the low threshold limit (from 0 - 1,000 lux) to determine whether the lighting is off in the AP 8132's deployment location. The default is 100.
High Limit of Light Threshold	Set the upper threshold limit (from 100 - 10,000 lux) to determine whether the lighting is on in the AP 8132's deployment location. The default is 500.

3. Enable or disable the following AP 8132 **Environmental Sensors**:

Enable Temperature Sensor	Select this option to enable the module's temperature sensor. Results are reported back to the access point's Environment screens within the Statistics node. This setting is enabled by default.
Enable Motion Sensor	Select this option to enable the module's motion sensor. Results are reported back to the access point's Environment screens within the Statistics node. This setting is enabled by default.
Enable Humidity Sensor	Select this option to enable the module's humidity sensor. Results are reported back to the access point's Environment screens within the Statistics node. This setting is enabled by default.

4. Define or override the following **Shared Configuration** settings:

Polling Interval for All Sensors	Set an interval in either <i>Seconds</i> (1 - 100) or <i>Minutes</i> (1 - 2) for the time between environmental polling transmissions (both light and environment). The default setting is 5 seconds.
----------------------------------	---

5. Select **OK** to save the changes made to the environmental sensor screen. Select **Reset** to revert to the last saved configuration.

Advanced Profile Configuration

An access point profile's advanced configuration is comprised of defining connected client load balance settings, a MINT protocol configuration and miscellaneous settings (NAS ID, access point LEDs and RF Domain Manager).

Client Load Balancing Configuration

Set the ratios and calculation values used by access points to distribute client loads both among neighbor devices and the 2.4 and 5 GHz radio bands.

To define or override client load balance algorithms for access points:

1. Go to **Configuration → Devices → System Profiles**.
A list of default and user-created profiles is displayed.
2. Select a target profile from the displayed list.
The selected profile's configuration menu is displayed.

- Expand the **Advanced** menu and select **Client Load Balancing**.

Figure 118: Profile Overrides - Client Load Balancing Screen

- Use the **Group ID** field to define a group ID of up to 32 characters to differentiate this profile from others with similar configurations.
- Use the **SBC strategy** drop-down menu to determine how band steering is conducted.

Options include **Prefer 5GHz**, **Prefer 2.4 GHz** and **distribute-by-ratio**. The default value is **Prefer 5GHz**.

Band steering directs 5 GHz-capable clients to that band. When an access point hears a request from a client to associate on both the 2.4 GHz and 5 GHz bands, it knows the client is capable of operation in 5 GHz. Band steering steers the client by responding only to the 5 GHz association request and not the 2.4 GHz request. The client associates in the 5 GHz band only.

6. Set the following **Neighbor Selection Strategies**:

Using Probes from common clients	Select this option to select neighbors (peer devices) using probes from common clients. This option is enabled by default.
Using Notifications from roamed clients	Select this option to select neighbors (peer devices) using roam notifications from roamed clients. This option is enabled by default.
Using smart-rf neighbor detection	Select this option to select neighbors (peer devices) using the Smart RF neighbor detection algorithm. This option is enabled by default.

7. Enable **Balance Band Loads by Ratio**, in the **Band Load Balancing** field, to distribute an access point's client traffic load across both the 2.4 and 5 GHz radio bands.

8. Configure the following **Channel Load Balancing** settings:

Balance 2.4 GHz Channel Loads	Select this option to balance the access point's 2.4GHz radio load across the channels supported in the country of deployment. This can prevent congestion on the 2.4GHz radio if a channel is overutilized.
Balance 5 GHz Channel Loads	Select this option to balance the access point's 5GHz radio load across the channels supported in the country of deployment. This can prevent congestion on the 5GHz radio if a channel is overutilized.

9. Enable **Balance AP Loads**, in the **AP Load Balancing** field, to distribute client traffic evenly among neighbor access points.

AP loads are balanced by assigning a ratio to both the 2.4 and 5GHz bands.

Balancing radio load by band ratio allows an administrator to assign a greater weight to radio traffic on either the 2.4 or 5 GHz band.

10. Set the following **Band Control** values:

Max. Band Load Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 2.4 and 5GHz radio band load balances on this access point. The default setting is 10%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing 2.4 and 5 GHz load balances on this access point.
Band Ratio (2.4 GHz)	Set a loading ratio (between 0 - 10) the access point 2.4 GHz radio uses in respect to radio traffic load on the 2.4 GHz band. This allows an administrator to weight client traffic load if wishing to prioritize client traffic load on the 2.4 GHz radio band. The higher this value is set, the greater the weight assigned to radio traffic load on the 2.4 GHz radio band. The default setting is 1.
Band Ratio (5 GHz)	Set a loading ratio (between 0 - 10) the access point 5 GHz radio uses in respect to radio traffic load on the 5 GHz band. This allows an administrator to weight client traffic load if wishing to prioritize client traffic load on the 5 GHz radio band. The higher this value is set, the greater the weight assigned to radio traffic load on the 5 GHz radio band. The default setting is 1.

5 GHz load at which both bands enabled	Set a load percentage (between 0 - 100) that enables the other band (2.4 GHz) to share load with the current band.
2.4 GHz load at which both bands enabled	Set a load percentage (between 0 - 100) that enables the other band (5 GHz) to share load with the current band.

11. Define the following **Neighbor Selection** settings:

Minimal signal strength for common clients	Set the minimum signal strength require to learn about neighbors from clients that are common with the neighbor access point.
Minimum number of clients seen	Set the minimum number of common clients seen before the neighbor is learned.
Max confirmed neighbors	Set the maximum number of learned neighbors stored at this device.
Minimum signal strength for smart-rf neighbors	Set the minimum signal strength of neighbor devices that are learned through Smart RF before being recognized as neighbors.

12. Set the following **Advanced** parameters in the **Channel Load Balancing** section:

Max. 2.4 GHz Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 2.4 GHz load between APs load and load on this access point. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing load balances between access points.
Min. Value to Trigger 2.4 Ghz Channel Balancing	Define a threshold (between 1 - 100) the access point uses (when exceeded) to initiate access point load balancing in the 2.4GHz radio band. Set this value higher when wishing to keep radio traffic within the current access point. The default is 70%.
Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughput	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio throughput in the overall access point load calculation. Increase this value if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.
Max. 5 GHz Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 5 GHz load between APs load and load on this access point. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing load balances between access points.
Min. Value to Trigger 5 Ghz Channel Balancing	Define a threshold (between 1 - 100) the access point uses (when exceeded) to initiate access point load balancing in the 5GHz radio band. Set this value higher when wishing to keep radio traffic within the current access point. The default is 70%.

Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughput	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio throughput in the overall access point load calculation. Assign this value higher if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.

13. Define the following **AP Load Balancing** settings:

Min. Value to Trigger Load Balancing	Set the access point radio threshold value (from 0 - 100%) used to initiate load balancing across other access point radios. When this radio load exceeds the defined threshold, load balancing is initiated. The default is 70%.
Max. AP Load Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing access point radio load balances. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing access point radio load balances.
Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughput	Assign a weight (between 0 - 100) the access point uses to prioritize throughput in the access point load calculation. Increase this value if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.

14. Click **OK** to save the changes made to the profile's advanced client load balance configuration

Click **Reset** to revert to the last saved configuration.

Settings Configuration

MiNT provides the means to secure profile communications at the transport layer. Using MiNT, a device can be configured to only communicate with other authorized (MiNT enabled) devices. Keys can also be generated externally using any application (like openssl). These keys must be present on the device managing the domain for key signing to be integrated with the UI. A device needing to communicate with another first negotiates a security context with that device.

The security context contains the transient keys used for encryption and authentication. A secure network requires users to know about certificates and PKI. However, administrators do not need to define security parameters for Access Points to be adopted (secure WISPe being an exception, but that isn't a commonly used feature). Also, users can replace any device on the network or move devices around and they continue to work. Default security parameters for MiNT are such that these scenarios

continue to function as expected, with minimal user intervention required only when a new network is deployed

To define or override a profile's MiNT configuration:

1. Go to **Configuration** → **Devices** → **System Profiles**.
A list of default and user-created profiles is displayed.
2. Select a target profile from the displayed list.
The selected profile's configuration menu is displayed.
3. Expand **Advanced** tab and select **MiNT Protocol**.
The **Settings** tab displays by default.

The screenshot displays the 'Settings' tab of the 'Advanced Profile Overrides MiNT Screen'. The interface includes several sections with configuration options:

- Area Identifier:** Level 1 Area ID is set to '1' (ID) with a range of (1 to 16,777,215). The 'Alias' field is empty.
- Priority Adjustment:** Designated IS Priority Adjustment is set to '0' (range: -255 to 255). Control Priority is set to '1' (range: 1 to 255).
- Shortest Path First (SPF):** Latency of Routing Recalculation is set to '0' (range: 0 to 60 seconds).
- MINT Link Settings:**
 - MLCP IP:
 - MLCP IPv6:
 - MLCP VLAN:
 - Tunnel MiNT across extended VLAN:
- Tunnel Controller Load Balancing:** Tunnel Controller Load Balancing (Level1):
- Inter Tunnel Bridging:** Inter Tunnel Bridging (Level2):
- Tunnel Controller Group:** Tunnel Controller Name:

At the bottom of the screen, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 119: Advanced Profile Overrides MiNT Screen - Settings Tab

4. Refer to the **Area Identifier** field to define or override the Level 1 and Level 2 Area IDs used by the profile's MiNT configuration.

Level 1 Area ID	Select this option to enable a spinner control for setting the Level 1 Area ID from 1 - 16,777,215. The default value is disabled. Alternatively, provide an alias by selecting the Alias option and adding the alias name to this field.
-----------------	--

5. Define or override the following **Priority Adjustments** settings in respect to devices supported by the profile:

Designated IS Priority Adjustment	Use the spinner control to set a Designated IS Priority Adjustment setting from -255 - +255. This is the value added to the base level DIS priority to influence the Designated IS (DIS) election. A value of +1 or greater increases DISiness. The default setting is 0.
-----------------------------------	---

6. Select the **Latency of Routing Recalculation** option, in the **Shortest Path First (SPF)** field, to enable the spinner control used for defining or overriding a latency period (from 0 - 60 seconds).

The option is disabled by default.

7. Define or override the following **MiNT Link Settings** in respect to devices supported by the profile:

MLCP IP	Select this option to enable MLCP (<i>MiNT Link Creation Protocol</i>) by IP Address. MLCP is used to create a UDP/IP link from the device to a neighbor. The neighboring device can be another AP.
MLCP IPv6	Select this option to enable <i>MiNT Link Creation Protocol</i> (MLCP) by IPv6 Address. MLCP by IPv6 is used to create one UDP/IP link from the device to a neighbor. The neighboring device does not need to be a virtual controller; it can be an standalone access point.
MLCP VLAN	Select this option to enable MiNT MLCP by VLAN. MLCP is used to create one VLAN link from the device to a neighbor. The neighboring device can be another AP.
Tunnel MiNT across extended VLAN	Select this option to tunnel MiNT protocol packets across an extended VLAN. This setting is disabled by default.

8. Select **Tunnel Controller Load Balancing (Level 1)** to enable load balancing through a WLAN tunnel controller.

This setting is disabled by default.

9. Select **Inter Tunnel Bridging (Level 2)** to enable inter tunnel bridging.

This setting is disabled by default.

10. Enter a 64-character maximum **Tunnel Controller Name** for this tunneled-WLAN-controller interface.

11. Define the group name of clustered tunnel controllers in the **Preferred Tunnel Controller Name** field.

12. Click **OK** to save the changes made to the MiNT protocol configuration.

Click **Reset** to revert to the last saved configuration.

- Click **Add** to create a new link IP configuration or **Edit** to override an existing configuration.

Figure 121: Advanced Profile Overrides MiNT Screen - Add IP MiNT Link

- Set the following **Link IP** parameters for the MiNT network address configuration:

IP	Define or override the IP address used by peer access points for interoperation when supporting the MiNT protocol.
Port	To specify a custom port for MiNT links, select this option and use the spinner control to define or override the port number from 1 - 65,535.
Routing Level	Define or override a routing level of either 1 or 2.
Listening Link	Specify a listening link of either 0 or 1. UDP/IP links can be created by configuring a matching pair of links, one on each end point. However, that is error prone and does not scale. So UDP/IP links can also listen (in the TCP sense), and dynamically create connected UDP/IP links when contacted.
Forced Link	Select this option to specify the MiNT link as a forced link. This setting is disabled by default.
Link Cost	Define or override a link cost from 1 - 10,000. The default value is 100.

Hello Packet Interval	Set or override an interval in either seconds (1 - 120) or minutes (1 - 2) for the transmission of hello packets. The default interval is 15 seconds.
Adjacency Hold Time	Set or override a hold time interval in either seconds (2 - 600) or minutes (1 - 10) for the transmission of hello packets. The default interval is 46 seconds.
IPSec Secure	Select this option to use a secure link for IPSec traffic. This setting is disabled by default. When this option is enabled, both the header and the traffic payload are encrypted.
IPSec GW	Define either an IP address or hostname for the IPSec gateway.

- Click **OK** to save the changes made to the MiNT protocol network address configuration.
Click **Reset** to revert to the last saved configuration.

VLAN Configuration

- Select the **VLAN** tab to display the link IP VLAN information shared by the access points managed by the MiNT configuration.

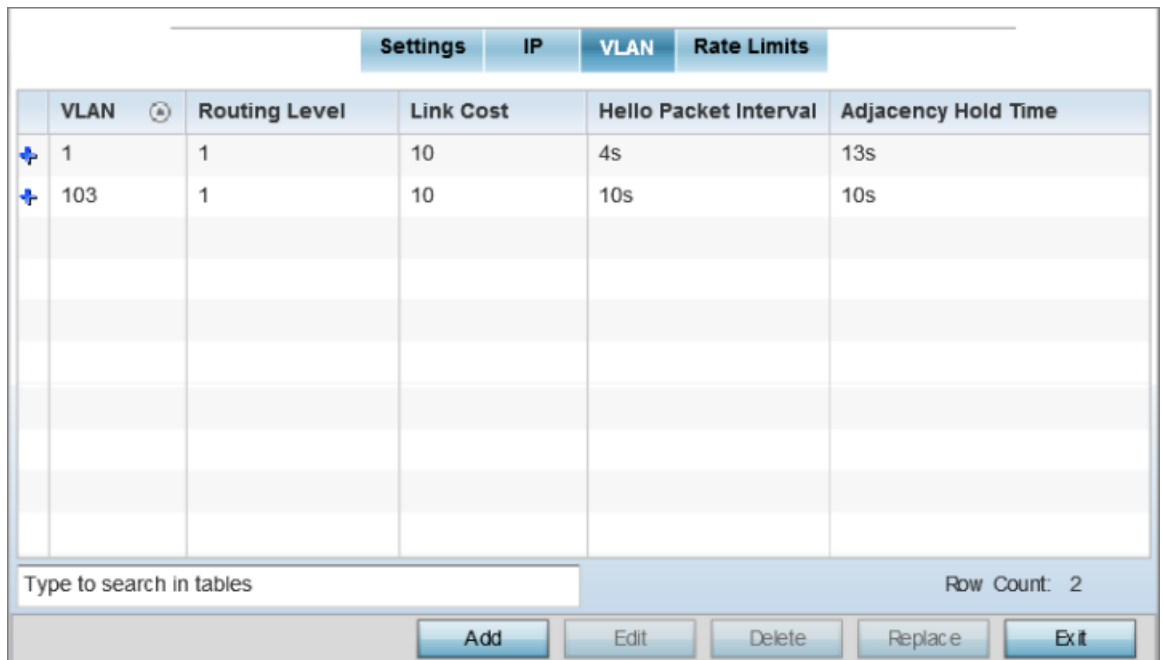


Figure 122: Advanced Profile Overrides MiNT Screen - VLAN Tab

- Review existing VLAN configuration.
The VLAN tab displays the VLAN, Routing Level, Link Cost, Hello Packet Interval, and Adjacency Hold Time managed devices use to communicate securely with each another.

- Click **Add** to create a new VLAN link configuration or **Edit** to override an existing configuration.



Note

If creating a mesh link between two access points in Standalone AP mode, you'll need to ensure a VLAN is available to provide the necessary MiNT link between the two Standalone APs.

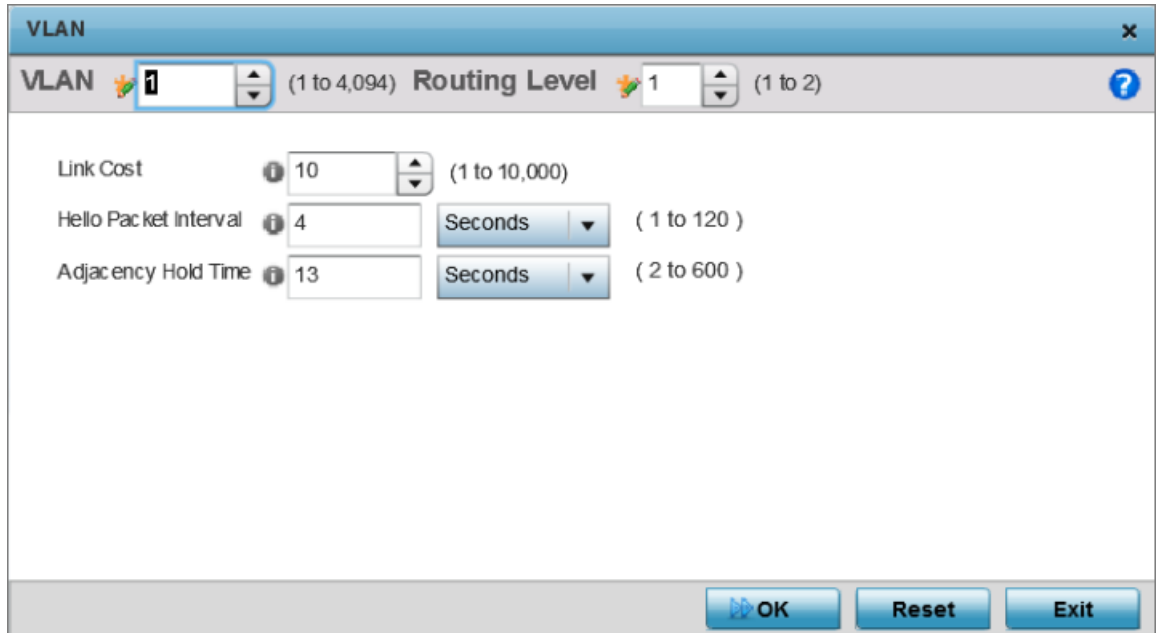


Figure 123: Advanced Profile Overrides MiNT Screen - Add/Edit VLAN

- Set the following VLAN parameters for the MiNT configuration:

VLAN	Define a VLAN ID from 1 - 4094 used by peer controllers for interoperation when supporting the MiNT protocol
Routing Level	Define or override a routing level of either 1 or 2.
Link Cost	Use the spinner control to define or override a link cost from 1 - 10,000. The default value is 10.
Hello Packet Interval	Set or override an interval in either seconds (1 - 120) or minutes (1 - 2) for the transmission of hello packets. The default interval is 4 seconds.
Adjacency Hold Time	Set or override a hold time interval in either seconds (2 - 600) or minutes (1 - 10) for the transmission of hello packets. The default interval is 13 seconds.

- Click **OK** to save the changes made to the MiNT protocol configuration.
Click **Reset** to revert to the last saved configuration.

Rate Limit Configuration

1. Select the **Rate Limits** tab.

Protocol	Level	Link Type	VLAN	IP	Port	Rate	Max Burst Size	Background	Best-Effort	Video	Voice

Type to search in tables Row Count: 0

Figure 124: Advanced Profile Overrides MiNT Screen - Rate Limits Tab

2. Review existing Rate Limit configuration details.

The Rate Limits tab displays the Protocol, Level, Link Type, VLAN, IP, Port, Rate, Max Burst Size, Background, Best-Effort, Video, and Voice rate limiting parameters for each of the configured devices.

Excessive traffic can cause performance issues on an extended VLAN. Excessive traffic can be caused by numerous sources including network loops, faulty devices, or malicious software such as a worm or virus that has infected one or more devices. Rate limiting reduces the maximum rate sent or received per wireless client. It prevents any single user from overwhelming the wireless network. It can also provide differential service for service providers. Uplink and downlink rate limits are usually configured on a RADIUS server using vendor specific attributes. Rate limits are extracted from the RADIUS server's response. When such attributes are not present, the settings defined on the controller, service platform, or access point are applied. An administrator can set separate QoS rate limit configurations for data types transmitted from the network (upstream) and data transmitted from a wireless clients back to associated radios (downstream). Existing rate limit configurations display along with their virtual connection protocols and data traffic QoS customizations.

- Click **Add** to create a new MiNT rate limiting configuration or **Edit** to override an existing configuration.

Figure 125: Advanced Profile Overrides MiNT Screen - Add/Edit Rate Limit

- Set the following Rate Limits to complete the MiNT configuration:

Level	Select level2 to apply rate limiting for all links on level 2.
Protocol	Select either mlcp or link as this configuration's rate limit protocol. <i>MiNT Link Creation Protocol</i> (MLCP) creates a UDP/IP link from the device to a neighbor. The neighboring device does not need to be a controller or service platform; it can be an access point with a path to the controller or service platform. Select link to rate limit using statically configured MiNT links.
Link Type	Select either vlan , to configure a rate limit configuration on a specific virtual LAN, or ip to set rate limits on a static IP address/port configuration.

VLAN	When Protocol is set to link and Link Type is set to VLAN , select a virtual LAN from 1 - 4094 to refine the rate limiting configuration to a specific VLAN.
IP	When Protocol is set to link and Link Type is set to VLAN , enter the IP address as the network target for rate limiting.
Port	When Protocol is set to link and Link Type is set to VLAN , set the virtual port (1 - 65,535) used for rate limiting traffic.
Rate	Define a rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5000 kbps.
Max Burst Size	Set the maximum burst size from 0 - 1024 kb. The smaller the burst, the less likely the upstream packet transmission will result in congestion for the WLAN's client destinations. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should add a 10% margin (minimally) to allow for traffic bursts. The default burst size is 320 kbytes.
Background	Configure the random early detection threshold (as a percentage) for low priority background traffic. Background packets are dropped and a log message generated if the rate exceeds the set value. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). The default setting is 50%.
Best-Effort	Configure the random early detection threshold (as a percentage) for low priority best effort traffic. Best-effort packets are dropped and a log message generated if the rate exceeds the set value. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis).The default setting is 50%.
Video	Configure the random early detection threshold (as a percentage) for high priority video traffic. Video packets are dropped and a log message generated if the rate exceeds the set value. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis).The default setting is 25%.
Voice	Configure the random early detection threshold (as a percentage) for high priority voice traffic. Voice packets are dropped and a log message generated if the rate exceeds the set value. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis).The default setting is 0%.

- Click **OK** to save the changes made to the MiNT protocol rate limit configuration.
Click **Reset** to revert to the last saved configuration.

Antenna-id Configuration (AP510e/AP560h Only)

This section describes the antenna-id configuration for the AP510 and AP560 model access point profiles. However, the antenna-id configuration is applicable only for the AP510e and AP560h APs.

AP510e Antenna-ID Configuration

The ExtremeMobility AP510e access point is a dual-radio access point, with eight, external Wi-Fi antennas grouped into: *group-1* (antenna ports 1 to 4) and *group-2* (antenna ports 5 to 8). To enable the AP510e radio, it is mandatory to configure the *antenna-id*. The antenna-id parameter specifies the antenna type used in the group-1 and/or group-2 antenna ports.

The AP510e antenna-id configuration depends on the software mode applied on the access point radios. The following table lists the antenna configurations required for the three different software modes supported on the AP510e model access point:

Table 6: AP510e: External Antenna Configurations

	Antenna Ports	
Software Mode	2.4/5G Antennas: 1, 2, 3, 4	5G Antennas: 5, 6, 7, 8
Mode 1 <ul style="list-style-type: none"> Radio 1: 2.4 GHz WLAN Radio 2: 5 GHz WLAN Note: This mode requires only <i>FOUR, dual-band</i> antennas connected to ANT sockets 1 to 4.	Dual-band 2.4 GHz/5 GHz	None
Mode 2 <ul style="list-style-type: none"> Radio 1: 2.4/5 GHz Sensor Radio 2: 5 GHz WLAN Note: This mode requires <i>FOUR, dual-band</i> antennas connected to ANT sockets 1 to 4, and <i>FOUR, 5G-band</i> antennas connected to ANT sockets 5 to 8.	Dual-band 2.4 GHz/5 GHz	None
Mode 3 <ul style="list-style-type: none"> Radio 1: 5 GHz WLAN Radio 2: 5 GHz WLAN Note: Requires <i>FOUR, 5G-band</i> antennas connected to ANT sockets 1 to 4, and <i>FOUR, 5G-band</i> antennas connected to ANT sockets 5 to 8.	5 GHz	5 GHz

AP560h Antenna-ID Configuration

The ExtremeMobility AP560h access point is a dual-radio access point, with eight, internal Wi-Fi antennas, supporting two internal antenna modes: *30 degree* and *70 degree*.

To configure the antenna-id for AP510/AP560 profile:

1. Go to **Configuration** → **Devices** → **System Profiles**.
A list of default and user-created profiles is displayed.
2. Select a target AP510 or AP560 profile from the displayed list.
The selected profile's configuration menu is displayed.
3. Expand the **Advanced** menu and select **Antenna**.

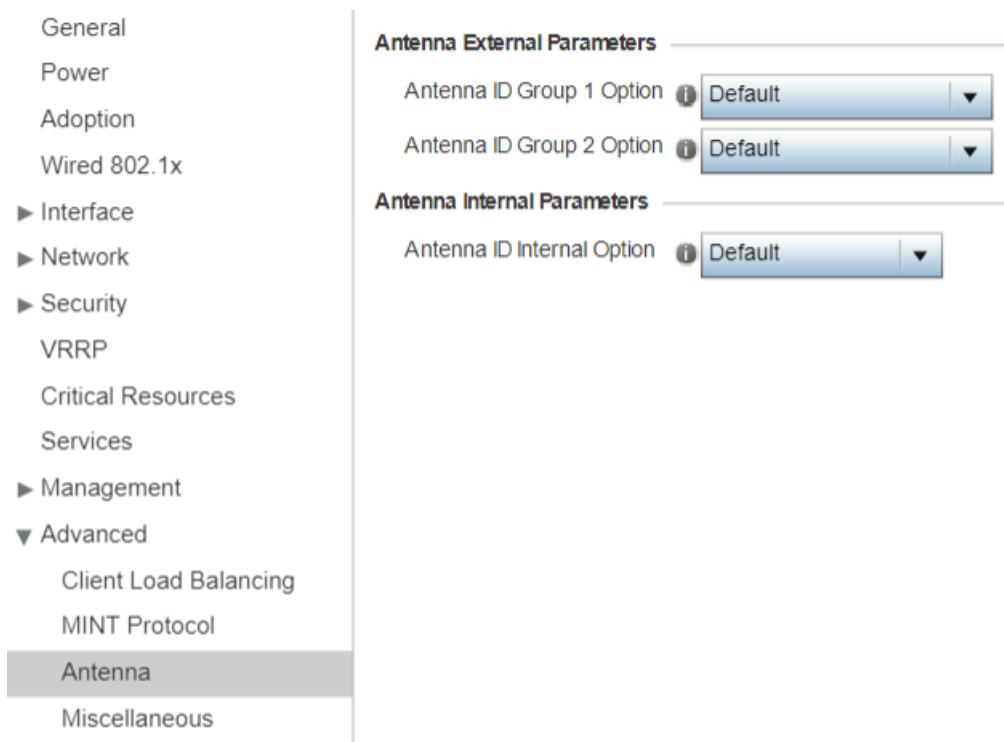


Figure 126: Advanced Profile Overrides - Antenna Screen

AP510e antenna-id configuration

4. In the **Antenna External Parameters** section, configure the following AP510e antenna-id settings:



Note

This configuration is needed only if the target device-type is AP510e.

Antenna ID Group 1 Option	<p>Use this drop-down menu to configure the antenna type used in the antenna ports 1 to 4 (group-1 antennas). The antenna types supported for 'group-1' and 'group-2' antenna ports are: ai-dq04360s, ml-2452-apa2-01, ml-2452-apa2-02, ml-2452-hpa5-036, ml-2452-hpag4a6-01, ml-2452-hpag5a8-01, ml-2452-pna5-01r, ml-2452-pna7-01r, ml-2452-pta4m4-036, ml-2452-sec6m4-036, ws-ai-dq05120.</p> <p>The default setting is 'Default', that is <i>no</i> antenna-type associated with the group-1 antenna ports.</p> <p>Note: Group-1 antenna configuration is required for all three software modes.</p> <p>Note: Refer to the table above for the supported software modes and the corresponding antenna configurations required.</p>
Antenna ID Group 2 Option	<p>Use this drop-down menu to configure the antenna type used in the antenna ports 5 to 8 (group-2 antennas). The antenna types supported for 'group-1' and 'group-2' antenna ports are: ai-dq04360s, ml-2452-apa2-01, ml-2452-apa2-02, ml-2452-hpa5-036, ml-2452-hpag4a6-01, ml-2452-hpag5a8-01, ml-2452-pna5-01r, ml-2452-pna7-01r, ml-2452-pta4m4-036, ml-2452-sec6m4-036, ws-ai-dq05120.</p> <p>The default setting is 'Default', that is <i>no</i> antenna-type associated with the group-2 antenna ports.</p> <p>Note: Group-2 antenna configuration is ONLY required for software modes 2 & 3.</p> <p>Note: Refer to the table above for the supported software modes and the corresponding antenna configurations required.</p>

AP560h antenna-id configuration

- In the **Antenna Internal Parameters** section, configure the following AP560h antenna-id settings:



Note

This option is visible only if the profile-type selected is for AP560. This configuration is needed only if the target device-type is AP560h

Antenna ID Internal Option	<p>Use this drop-down menu to configure the internal antenna mode. The options are:</p> <ul style="list-style-type: none"> Default - This is the default setting. In the default setting, <i>no</i> antenna-mode. internal-560h-30 - Sets the mode as 30 degree. internal-560h-70 - Sets the mode as 70 degree.
----------------------------	--

- Click **OK** to save the changes made to the profile's advanced antenna configuration. Click **Reset** to revert to the last saved configuration.

Miscellaneous Configuration

Refer to the advanced profile's Miscellaneous menu item to set or override a profile's NAS configuration. The profile database on the RADIUS server consists of user profiles for each connected *network access server* (NAS) port. Each profile is matched to a username representing a physical port.

Access point LED behavior and RF Domain management can also be defined from the **Miscellaneous** screen.

To define or override a profile's miscellaneous configuration attributes:

1. Go to **Configuration → Devices → System Profiles**.
A list of default and user-created profiles is displayed.
2. Select a target profile from the displayed list.
The selected profile's configuration menu is displayed.
3. Expand the **Advanced** menu and select **Miscellaneous**.

Device RADIUS Authentication Parameters

NAS-Identifier Attribute i

NAS-Port-Id Attribute i

LEDs (Light Emitting Diodes)

Turn on LEDs i Off (0)
 On (1)
 Flash Pattern (2)

MeshConnex Parameters

Root Path Monitor Interval i (1 to 65,535)

RADIUS Dynamic Authorization

Additional Port i (1 to 65,535) (Cisco ISE:1700)

Figure 127: Advanced Profile Overrides - Miscellaneous Screen

4. Set a **NAS-Identifier Attribute** up to 253 characters in length.
This is the RADIUS NAS-Identifier attribute that typically identifies where a RADIUS message originates.
5. Set a **NAS-Port-Id Attribute** up to 253 characters in length.
This is the RADIUS NAS port ID attribute which identifies the device port where a RADIUS message originates.

6. Select **Turn on LEDs** to enable an adopted access point's LEDs.
This feature is enabled by default.
7. Select **Flash Pattern(2)** to enable the access point to blink in a manner different from its operational LED behavior.
Enabling this option allows an administrator to validate that the access point has received its configuration from its managing controller during staging. In the staging process, the administrator adopts the access point to a staging controller to get an initial configuration before the access point is deployed at its intended location. Once the access point has received its initial configuration, its LED blinks in a unique pattern to indicate the initial configuration is complete.
8. Use the drop-down menu to configure the access point's **Meshpoint Behavior**.
This field configures the access point's mobility behavior. The default is **External (fixed)**, which means that the mesh point is fixed. The value **vehicle-mounted** means that the mesh point is mobile. This feature is available only on an AP 7161 model access point.
9. Select **Capable**, in the **RF Domain Manager** section, to designate this specific device as being the RF Domain manager for a particular RF Domain.
The default value is enabled.
10. Select **Priority**, in the **RF Domain Manager** section, to set a priority value for this specific profile managed device.
Once enabled, use the spinner control to set a device priority between 1 - 255. The higher the number you select, the higher the priority in the RF Domain manager election process.
11. Use **Root Path Monitor Interval** to configure the interval to monitor the path to the root node.
12. Set the **Additional Port** value, in the **RADIUS Dynamic Authorization** section, to enable a Cisco ISE (*Identity Services Engine*) (AAA) (*Authentication, Authorization and Accounting*) server to dynamically authenticate a client.
Set this value to 1700. The allowed port range is 1 to 65,535.

When a client device requests access to the network, the Cisco ISE RADIUS server presents the client with a URL where a device's compliance is checked for definition file validity (this form of file validity checking is called *posture*). The check verifies, for example, that the device's anti-virus or anti-spyware software is valid. If the device complies, it is allowed access to the network.
13. Click **OK** to save the changes made to the profile's advanced miscellaneous configuration.
Click **Reset** to revert to the last saved configuration.

Managing Virtual Controllers

Access points set to function as Standalone APs can be re-defined as Virtual Controllers as required, and Virtual Controllers can be reverted back to Standalone APs. Consider setting the access point to a Virtual Controller when more than one access points (of the same model) are deployed and require management from a centralized access

point. Up to 64 Dependent mode access points can be connected to, and managed by, a single Virtual Controller AP of the same model.



Note

If designating the access point as a Standalone AP, it is recommended that the access point's UI be used exclusively to define its device configuration, and not the CLI. The CLI provides the ability to define more than one profile, while the UI only provides one per access point model. Consequently, the two interfaces cannot be used collectively to manage profiles without an administrator encountering problems.



Note

The recommended way to administer a network populated by numerous access points is to configure them directly from the designated Virtual Controller AP. If an access point's configuration requires an exception from the Virtual Controller AP's assigned profile configuration the administrator should apply a Device Override to change just that access point's configuration.



Note

The WiNG 7.1.X AP505, AP510 and AP560 model access points can be deployed as virtual controllers. However, heterogeneous adoption is not supported.

To define a Standalone AP as a Virtual Controller AP:

1. Select **Configuration** → **Devices** → **Virtual Controller**.

System Name	Device	Set as Virtual Controller AP
ap8432-070235	74-67-F7-07-02-35	X

Type to search in tables Row Count: 1

Edit Replace

Figure 128: Virtual Controller Screen

2. This **Virtual Controller** screen lists all peer access points within this Virtual Controller's radio coverage area. Each listed access point is listed by its assigned System Name, MAC Address and Virtual Controller designation.

3. Either select an access point from those displayed and select **Edit**, or use the device browser in the lower left-hand side of the UI to select an access point.

Figure 129: Managing Virtual Controller - AP Designation Screen

4. Select the **Set as Virtual Controller AP** radio button to change the selected access point's designation from Standalone to Virtual Controller AP. Remember, only one Virtual Controller can manage (up to) 64 access points of the same model. Thus, an administrator should take care to change the designation of a Virtual Controller AP to Standalone AP to compensate for a new Virtual Controller AP designation.
5. Click **OK** to save the changes.
Click **Reset** to revert to the last saved configuration. Select **Delete** to remove obsolete rows as needed.

Device Overrides

Devices within the access point managed network can have an override configuration defined and applied. New devices can also have an override configuration defined and applied once.



Note

The best way to administer a network populated by numerous access points is to configure them directly from the designated Virtual Controller AP. If an access point's configuration requires an exception from the Virtual Controller AP's assigned profile configuration the administrator should apply a Device Override to change just that access point's configuration. For more information on access point's Virtual Controller AP assigned configuration profile, see [Configure Access Point Profile Settings](#) on page 83.

Refer to the following configuration overrides, applicable to devices within a access point managed network:

- [Basic Configuration](#) on page 332
- [Certificates Configuration](#) on page 335

- [Wired 802.1x Configuration](#) on page 354
- [RF Domain Overrides](#) on page 355
- [Device Profile Overrides](#) on page 358

Basic Configuration

Applying a basic configuration override to a device entails changing (overriding) the device's system name, deployment area, building floor and system clock.

When a device is initially deployed, it requires several basic configuration parameters be set and its deployment location defined. Additionally, the number of permitted licenses needs to be accessed to determine whether new devices can be adopted (if in Virtual Controller AP mode).

To override a managed device's basic configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays, with the **Basic** configuration screen selected by default.

Configuration

System Name

Latitude Coordinate (-90.0000 - 90.0000)

Longitude Coordinate (-180.0000 - 180.0000)

Location

Area

Floor

Profile

Profile Name

Device Overrides

Set Clock

Device Time 2018-08-17 06:11:55 UTC

New Time : AM PM

Setting the clock may logout the current session.

Figure 130: Device Overrides - Basic Configuration Screen

3. In the **Configuration** field, set the following settings for the selected device:

System Name	Provide the selected device a system name up to 64 characters in length. This is the device name that appears within the RF Domain or Profile the access point supports and is identified by.
Latitude Coordinate	Optionally provide the latitude coordinate where the device is located. The valid value for this field is in the range -90.0000 degrees to +90.0000 degrees. When provided, this enables the device to be mapped on the geolocation map.
Longitude Coordinate	Optionally provide the longitude coordinate where the device is located. The valid value for this field is in the range -180.0000 degrees to +180.0000 degrees. When provided, this enables the device to be mapped on the geolocation map.

4. In the **Location** field, set the following device deployment related information:

Area	Assign the access point an Area representative of the location the access point is physically deployed. The name cannot exceed 64 characters. Assigning an area is helpful when grouping access points in profiles, as access points in the same physical deployment location may need to share specific configuration parameters in respect to radio transmission and interference requirements specific to that location.
Floor	Assign the target access point a building Floor name representative of the location the access point was physically deployed. The name cannot exceed 64 characters. Assigning a building floor name is helpful when grouping devices in profiles, as devices on the same physical building floor may need to share specific configuration parameters in respect to radio transmission and interference requirements specific to that location.

5. In the **Profile** field, use the **Profile Name** drop-down menu to override the profile applied to the device.
6. Refer to the **Device Overrides** field to assess whether overrides have been applied to the device's configuration.

Use the **Clear Overrides** button to clear all device overrides and reset the configuration to its default values.

7. In the **Set Clock** field, update the system time if needed.
- Refer to the **Device Time** parameter to assess the device's current time.
If the device's time has not been set, the device time is displayed as unavailable. Select **Refresh** to update the device's system time.
 - Use the **New Time** parameter to set the *calendar day, hour* and *minute*. Use the **AM** and **PM** radio buttons to refine whether the updated time is for the *AM* or *PM* respectively. This time can be synchronized with the use of an external NTP resource.
 - Click **Update Clock** to commit the updated time to the device.
8. Click **OK** to save the basic configuration changes.
Click **Reset** to revert to the last saved configuration.

Certificates Configuration

A certificate links identity information with a public key enclosed in the certificate.

A CA (*certificate authority*) is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate. A browser must contain this CA certificate in its Trusted Root Library so it can trust certificates signed by the CA's private key.

Depending on the public key infrastructure, the digital certificate includes the owner's public key, the certificate expiration date, the owner's name and other public key owner information.

Each certificate is digitally signed by a trustpoint. The trustpoint signing the certificate can be a certificate authority, corporation or individual. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters, and an association with an enrolled identity certificate.

SSH keys are a pair of cryptographic keys used to authenticate users instead of, or in addition to, a username/password. One key is private and the other is public key. SSH (*Secure Shell*) public key authentication can be used by a client to access resources, if properly configured. A RSA key pair must be generated on the client. The public portion of the key pair resides with the licensed device, while the private portion remains on the client.

The certificate configuration used by an access point managed device can be changed (overridden) as changes in security credentials require modification in the management of the device.

To override a managed device's certificate configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays, with the **Basic** configuration screen selected by default.

3. Select **Certificates**.

The certificates configuration screen displays.

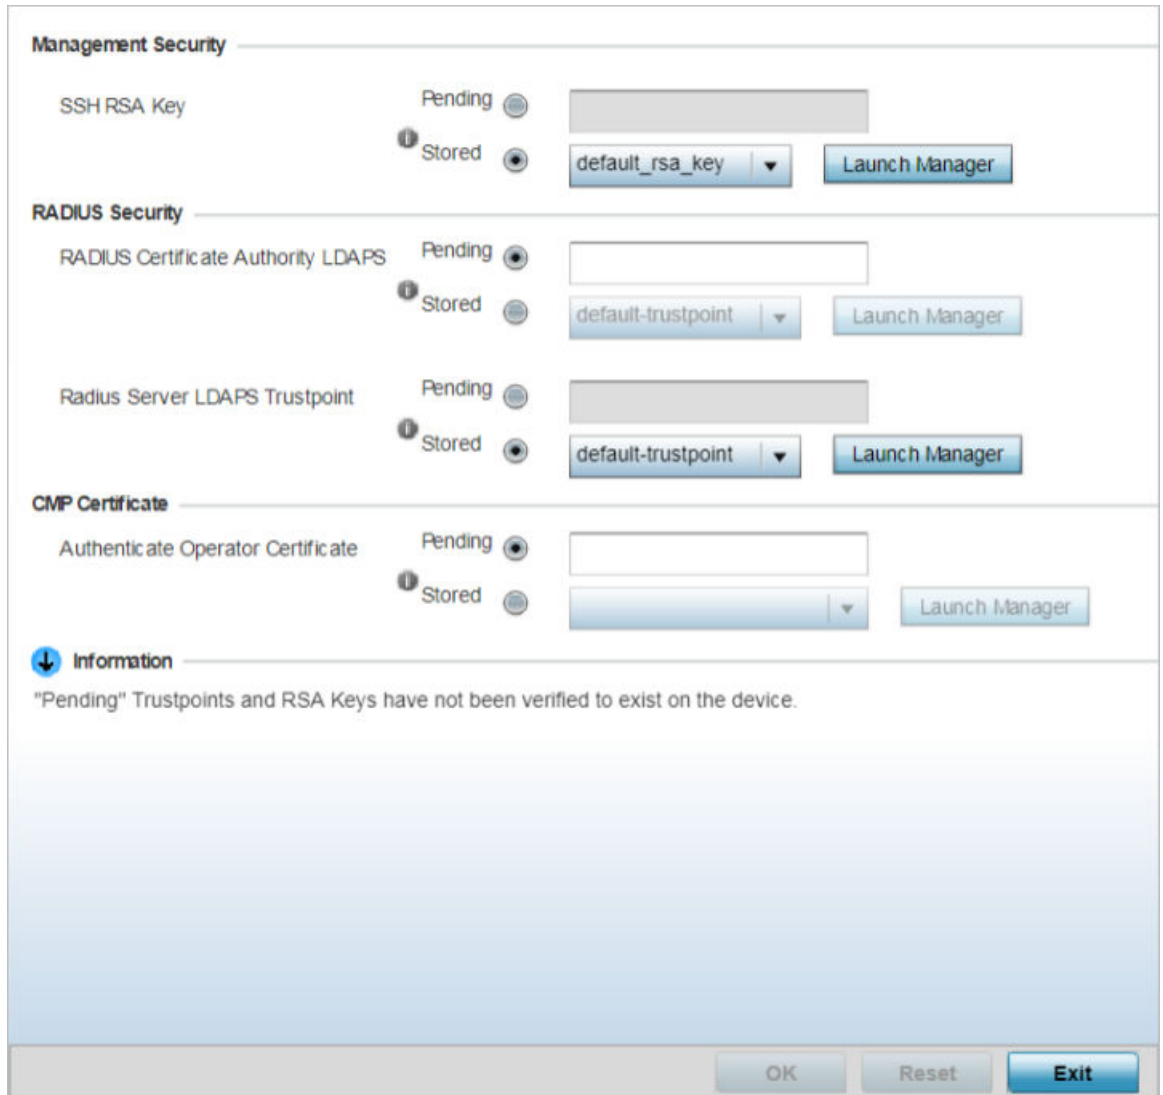


Figure 131: Device Overrides - Certificates Configuration Screen

4. In the **Management Security** field, set the following configurations:

HTTPS Trustpoint	Either use the default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate/trustpoint can be leveraged. To leverage an existing device certificate for use with this target device, select the Launch Manager button. For more information, see Manage Certificates on page 337.
SSH RSA Key	Either use the default_rsa_key or select the Stored radio button to enable a drop-down menu where an existing certificate can be leveraged. To leverage an existing key, select the Launch Manager button. For more information, see RSA Key Management on page 342.

- Set the **RADIUS Security** certificate configuration. Select the **Stored** radio button to enable a drop-down menu where an existing certificate/trustpoint can be leveraged. To leverage an existing device certificate for use with this target device, select the **Launch Manager** button.

Pending trustpoints and RSA keys are typically not verified as existing on a device.

RADIUS Certificate Authority	Either use the default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate can be leveraged. To leverage an existing certificate, select the Launch Manager button.
RADIUS Server Certificate	Either use the default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate/trustpoint can be used. To leverage an existing trustpoint, select the Launch Manager button.
RADIUS Certificate Authority LDAPS	Either use the LDAP server default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate can be leveraged. To leverage an existing certificate, select the Launch Manager button.
RADIUS Server LDAPS Trustpoints	Either use the LDAP server default-trustpoint or select the Stored radio button to enable a drop-down menu where an existing certificate/trustpoint can be used. To leverage an existing trustpoint, select the Launch Manager button.

- in the **CMP Certificate** field, use the **Authenticate Operator Certificate** to validate the operator's cross-certificate with the existing vendor certificate installed on the device.
Use the **Launch Manager** to view more information on the installed vendor certificates. For more information on managing vendor certificates, see [Crypto CMP Policy](#) on page 774.
- Select **OK** to save the changes made to the certificate configurations.
Selecting **Reset** reverts the screen to its last saved configuration.

For more information on the certification activities, refer to the following:

- [Manage Certificates](#) on page 337
- [RSA Key Management](#) on page 342
- [Certificate Creation](#) on page 348
- [Generating a Certificate Signing Request](#) on page 350

Manage Certificates

If you do not want to use an existing certificate or key with a selected device, an existing stored certificate can be leveraged from a different device. Device certificates can be imported and exported to a secure remote location for archive and retrieval as required for application to other devices.

To configure trustpoints for use with certificates:

1. Select **Launch Manager** from the **SSH RSA Key** section.

The **Certificate Management** screen displays, with the **Manage Certificates** tab selected by default. This screen displays all existing trustpoints.

The screenshot shows the 'Certificate Management' window with the 'Manage Certificates' tab active. On the left, there is a table titled 'All Certificates Details' with columns for 'Certificates Name', 'RSA Keys', and 'Valid'. The table contains one entry: 'default-trustpoint' with RSA Key 'CN=AP7131-00-23-68-11-E' and Validity '05:03:2012 05:18:09 UTC'. On the right, the 'Certificate Details' section shows the following information:

- Subject Name: CN=AP7131-00-23-68-11-E6-C4
- Alternate Subject Name: (empty)
- Issuer Name: CN=AP7131-00-23-68-11-E6-C4
- Serial Number: 070e
- RSA Key Used: default_rsa_key
- Is Self Signed:
- RSA Key Used:
- CRL Present:
- Is CA:

The 'Validity' section shows 'Valid From: 05:03:2012 05:18:09 UTC' and 'Valid Until: 05:01:2022 05:18:09 UTC'. The 'Certificate Authority (CA) Details' section shows 'Subject Name', 'Alternate Subject Name', and 'Issuer Name' fields, all of which are currently empty. At the bottom right, there are buttons for 'Import', 'Export', and 'Delete'.

Figure 132: Certificate Management - Manage Certificates Screen

2. Select a device from amongst those displayed to review its certificate information. Refer to **Certificate Details** field to review the certificate's properties, self-signed credentials, validity period and CA information.

- To optionally import a certificate, select the **Import** button from the **Certificate Management** screen.

The import trustpoint window displays.

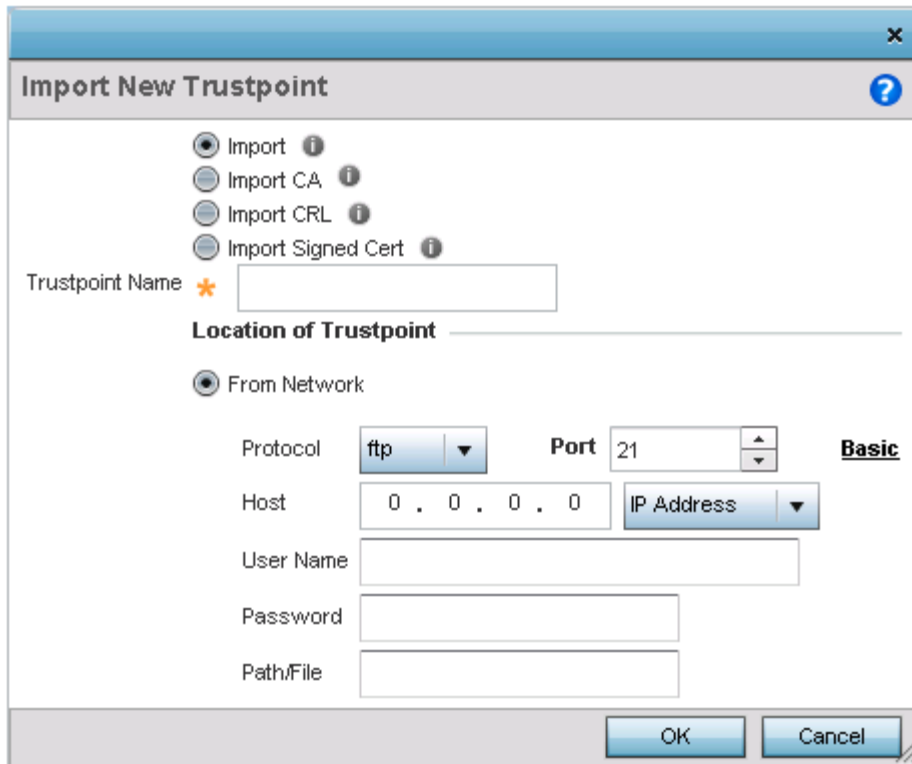


Figure 133: Import New Trustpoint Window

- Define the following configuration parameters required to import the trustpoint:

Import	<p>Select the type of Trustpoint to import. The following Trustpoints can be imported:</p> <ul style="list-style-type: none"> • Import – Select to import any trustpoint. • Import CA – Select to import a Certificate Authority (CA) certificate on to the access point. • Import CRL – Select to import a CRL (<i>Certificate Revocation List</i>), CRLs are used to identify and remove those installed certificates that have been revoked or are no longer valid. • Import Signed Cert – Select to import a self signed certificate.
Trustpoint Name	<p>Enter the 32 character maximum name assigned to the target trustpoint. The trustpoint signing the certificate can be a certificate authority, corporation or individual.</p>

A CA is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate.

If a certificate displays within the Certificate Management screen with a CRL, that CRL can be imported. A CRL (*certificate revocation list*) is a list of revoked certificates, or certificates no longer valid. A certificate can be revoked if the CA improperly issued a certificate, or if a private key is compromised. The most common reason for revocation is the user no longer being in sole possession of the private key.

Signed certificates (or root certificates) avoid the use of public or private CAs. A self-signed certificate is an identity certificate signed by its own creator, thus the certificate creator also signs off on its legitimacy. The lack of mistakes or corruption in the issuance of self signed certificates is central.

5. Define the following configuration to import the Trustpoint from a location on the network. To do so, select **From Network** and provide the following information.

URL	Provide the complete URL to the location of the trustpoint. This option is available by default. Click the Advanced link next to this field to display more fields to provide detailed trustpoint location information. This option is only available when the Basic link is clicked.
Protocol	If using Advanced settings, select the protocol used for importing the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1 • usb2 • usb3 • usb4
Port	If using Advanced settings, use the spinner control to set the port. This option is not valid for <i>cf, usb1, usb2, usb3</i> and <i>usb4</i> .
Host	If using Advanced settings, provide the hostname of the server used to import the trustpoint. Select IPv4 Address or IPv6 Address to provide the IP address of a host device appropriately. This option is not valid for <i>cf, usb1, usb2, usb3</i> and <i>usb4</i> .
Username/Password	These fields are enabled if using ftp or sftp protocols. Specify the username and the password for that username to access the remote servers using these protocols.
Path/File	If using Advanced settings, specify the path to the trustpoint. Enter the complete path to the file on the server.

6. Select the **Cut and Paste** option to paste the trustpoint information in text. When this option is selected, the text box next to it is enabled. Paste the trustpoint details into the text box. This option is only available when *Import CA, Import CRL* or *Import Signed Cert* is selected.
7. Select **OK** to import the defined trustpoint.
Select **Cancel** to revert the screen to its last saved configuration.

8. To optionally export a trustpoint to a remote location, select the **Export** button. Once a certificate has been generated on the authentication server, export the self-signed certificate.

A digital CA certificate is different from a self-signed certificate. The CA certificate contains the public and private key pairs. The self certificate only contains a public key. Export the self certificate for publication on a Web server or file server for certificate deployment or export it in to an Active Directory Group Policy for automatic root-certificate deployment.

Additionally export the key to a redundant RADIUS server so it can be imported without generating a second key. If there are more than one RADIUS authentication servers, export the certificate and do not generate a second key unless you want to deploy two root certificates.

The Export Trustpoint screen displays.

Figure 134: Export Trustpoint Window

9. Define the following configuration parameters to export a trustpoint:

Trustpoint Name	Enter the 32 character maximum name assigned to the target trustpoint. The trustpoint signing the certificate can be a certificate authority, corporation or individual.
URL	Provide the complete URL to the location of the trustpoint. If needed, select Advanced to expand the dialog to display network address information to the location of the target trustpoint. The number of additional fields that populate the screen is dependent on the selected protocol. This option is only available when the Basic link is clicked.

Protocol	Select the protocol used for exporting the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1 • usb2 • usb3 • usb4
Port	If using Advanced settings, use the spinner control to set the port. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Host	If using Advanced settings, provide the hostname of the server used to export the trustpoint. Select IPv4 Address or IPv6 Address to provide the IP address of a host device appropriately. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Username/Password	These fields are enabled if using ftp or sftp protocols,. Specify the username and the password for that username to access the remote servers using these protocols.
Path/File	If using Advanced settings, specify the path to the trustpoint. Enter the complete relative path to the file on the server.

10. Select **OK** to export the defined trustpoint.

Select **Cancel** to revert the screen to its last saved configuration.

To optionally delete a trustpoint, select the **Delete** button from within the Certificate Management screen. Provide the trustpoint name within the **Delete Trustpoint** screen and optionally select the **Delete RSA Key** option to remove the RSA key along with the trustpoint. Select **OK** to proceed with the deletion, or **Cancel** to revert to the Certificate Management screen.

RSA Key Management

Refer to the RSA Keys screen to review existing RSA key configurations applied to managed devices. If an existing key does not meet the needs of a pending certificate request, generate a new key or import or export an existing key to and from a remote location.

RSA (*Rivest, Shamir, and Adleman*) is an algorithm for public key cryptography. It is an algorithm that can be used for certificate signing and encryption. When a device trustpoint is created, the RSA key is the private key used with the trustpoint.

To review existing device RSA key configurations, generate additional keys or import/export keys to and from remote locations:

1. Click the **Launch Manager** button.

The **Certificate Management** screen displays, with the **Manage Certificates** tab selected by default. This screen displays all existing trustpoints.

2. Click **RSA Keys**.

The RSA Keys management screen displays.

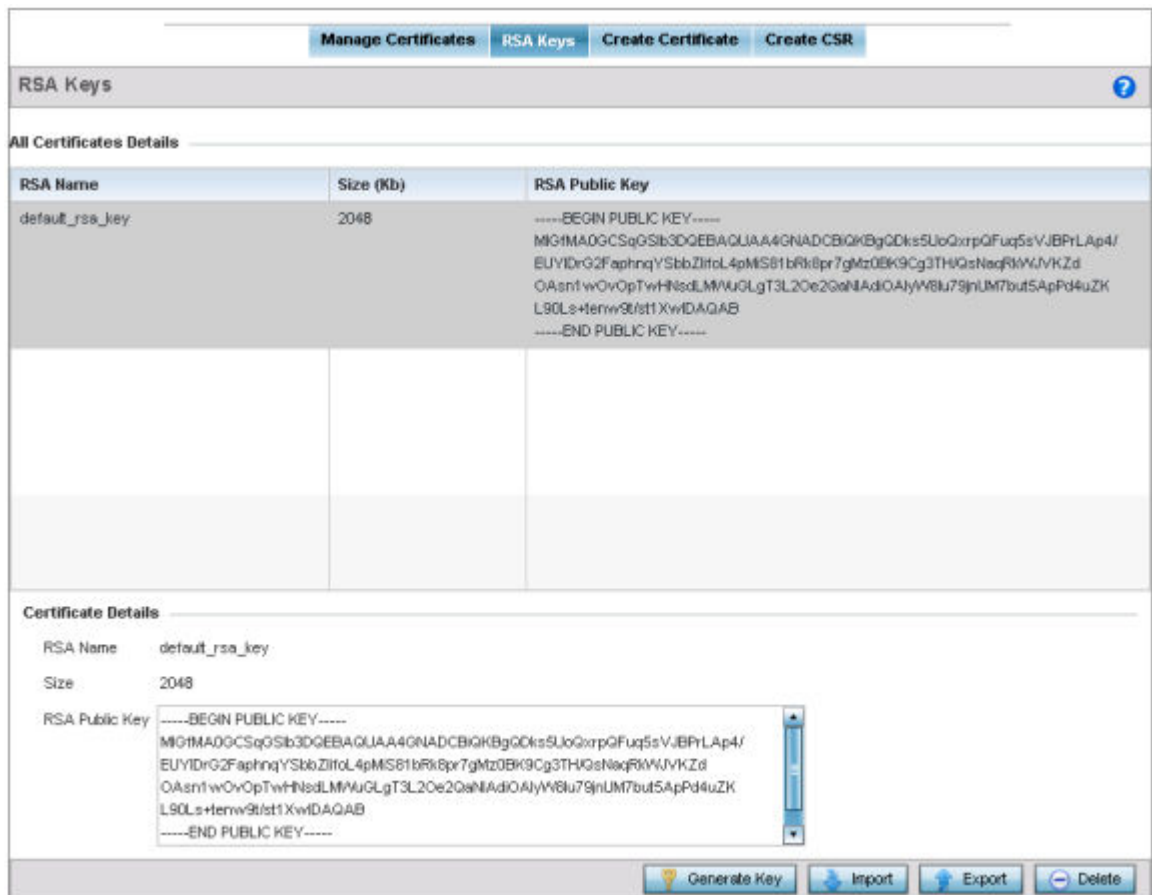


Figure 135: Certificate Management - RSA Keys Screen

3. Select a listed device to review its current RSA key configuration.

Each key can have its size and character syntax displayed. Once reviewed, optionally generate a new RSA key, import a key from a selected device, export a key to a remote location or delete a key from a selected device.

4. Select the **Generate Key** button to create a new key.
The generate RSA key window displays.

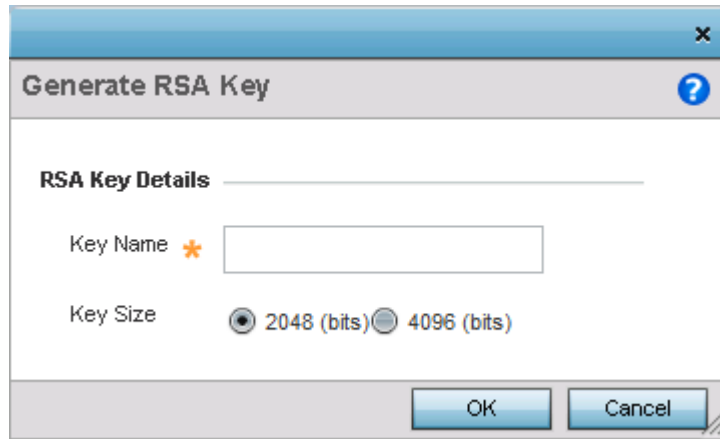


Figure 136: Generate RSA Key Window

5. Define the following configuration parameters required to generate a key:

Key Name	Enter the 32 character maximum name assigned to the RSA key.
Key Size	Use the spinner control to set the size of the key (from 2,048 or 4096 bits). It is recommended leaving this value at the default setting of 2048 to ensure optimum functionality.

6. Select **OK** to generate the RSA key.
Select **Cancel** to revert the screen to its last saved configuration.

- To optionally import a CA certificate, select the **Import** button from the RSA Keys screen.

The import RSA Key window displays.

Figure 137: Import New RSA Key Window

- Define the following configuration parameters required to import a RSA key:

Key Name	Enter the 32 character maximum name assigned to the RSA key.
Key PassPhrase	Define the key used by both the access point and the server (or repository) of the target RSA key. Select the Show option to expose the actual characters used in the passphrase. Leaving the Show option unselected displays the passphrase as a series of asterisks “*”.
URL	Provide the complete URL to the location of the RSA key. This option is only available when the Basic link is clicked.

Protocol	If using Advanced settings, select the protocol used for importing the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1 • usb2 • usb3 • usb4
Port	If selecting Advanced , use the spinner control to set the port. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Host	If selecting Advanced , provide the hostname of the server used to import the RSA key. Select IPv4 Address or IPv6 Address to provide the IP address of a host device appropriately. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Username/Password	These fields are enabled if using ftp or sftp protocols,. Specify the username and the password for that username to access the remote servers using these protocols.
Path/File	If selecting Advanced , specify the path to the RSA key. Enter the complete relative path to the key on the server.

9. Select **OK** to import the defined RSA key.

Select **Cancel** to revert the screen to its last saved configuration.

10. To optionally export a RSA key to a remote location, select the **Export** button from the RSA Keys screen.

Export the key to a RADIUS server so it can be imported without generating a second key. If there are more than one RADIUS authentication server, export the certificate and do not generate a second key unless you want to deploy two root certificates.

The export RSA Keys window displays.

Figure 138: Export RSA Keys Window

11. Define the following configuration parameters required to export a RSA key:

Key Name	Enter the 32 character maximum name assigned to the RSA key.
Key Passphrase	Define the key passphrase used by both the access point and the server. Select the Show option to expose the actual characters used in the passphrase. Leaving the Show option unselected displays the passphrase as a series of asterisks “*”.
URL	Provide the complete URL to the location of the key. This option is only available when the Basic link is clicked.

Protocol	If using Advanced settings, select the protocol used for importing the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1 • usb2 • usb3 • usb4
Port	If selecting Advanced , use the spinner control to set the port. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Host	If selecting Advanced , provide the hostname of the server used to import the RSA key. Select IPv4 Address or IPv6 Address to provide the IP address of a host device appropriately. This option is not valid for <i>cf</i> , <i>usb1</i> , <i>usb2</i> , <i>usb3</i> and <i>usb4</i> .
Username/Password	These fields are enabled if using ftp or sftp protocols,. Specify the username and the password for that username to access the remote servers using these protocols.
Path/File	If selecting Advanced , specify the path to the RSA key. Enter the complete relative path to the key on the server.

12. Select **OK** to export the defined RSA key.

Select **Cancel** to revert the screen to its last saved configuration.

To optionally delete a key, select the **Delete** button from within the **RSA Keys** screen. Provide the key name within the **Delete RSA Key** screen and select the **Delete Certificates** option to remove the certificate and the supported key. Select **OK** to proceed with the deletion, or **Cancel** to revert back to the **Certificate Management** screen.

Certificate Creation

The Certificate Management screen provides the facility for creating new self-signed certificates. Self-signed certificates (often referred to as root certificates) do not use public or private CAs. A self-signed certificate is a certificate signed by its own creator, with the certificate creator responsible for its legitimacy.

To create a self-signed certificate:

1. Click the **Launch Manager** button from the **SSH RSA Key** section.

The **Certificate Management** screen displays, with the **Manage Certificates** tab selected by default. This screen displays all existing trustpoints.

- Select the **Create Certificate** tab.
The **Create Certificate** screen displays.

The screenshot shows the 'Create Certificate' configuration window. At the top, there are four tabs: 'Manage Certificates', 'RSA Keys', 'Create Certificate', and 'Create CSR'. The 'Create Certificate' tab is selected. Below the tabs, the window title is 'Create Certificate' with a help icon. The main content area is titled 'Create New Self-Signed Certificate'. It contains several sections:

- Certificate Name:** A text input field with a red star icon.
- RSA Key:** Two radio buttons: 'Create New' (selected) and 'Use Existing'. Below this is a text input field with a red star icon and a spinner control set to '2048', with '(2,048 or 4,096 bits)' text to its right.
- Certificate Subject Name:** Two radio buttons: 'auto-generate' (selected) and 'user-configured'.
- Additional Credentials:** A section with input fields for 'Country (C)', 'State (ST)', 'City (L)', 'Organization (O)', 'Organizational Unit (OU)', and 'Common Name (CN)'. Below this is an 'Email Address' field.

 At the bottom right, there is a 'Generate Certificate' button.

Figure 139: Create Certificate Window

- Set the following **Create New Self-Signed Certificate** configuration parameters:

Certificate Name	Enter the 32 character maximum name assigned to identify the name of the trustpoint associated with the certificate. A trustpoint represents a CA/ identity pair containing the identity of the CA, CA-specific configuration parameters, and an association with an enrolled identity certificate.
Use Existing	Select this option to use an existing RSA key. Use the drop-down menu to select the existing key used by both the device and the server (or repository) of the target RSA key.
Create New	Select this option to create a new RSA key. Provide a 32 character name to identify the RSA key. Use the spinner control to set the size of the key (from 2,048 or 4,096 bits). It is recommended leaving this value at the default setting (2048) to ensure optimum functionality. For more information on creating a new RSA key, see RSA Key Management on page 342.

4. Set the following **Certificate Subject Name** parameters required for the creation of the certificate:

Certificate Subject Name	Select either the auto-generate radio button to automatically create the certificate's subject credentials or select user-configured to manually enter the credentials of the self signed certificate. Note: The default setting is autogenerate.
Country (C)	Define the Country of deployment for the certificate. The field can be modified by the user. This is a required field and must not exceed 2 characters.
State (ST)	Enter a State for the state or province name used in the certificate. This is a required field.
City (L)	Enter a City to represent the city name used in the certificate. This is a required field.
Organization (O)	Define an Organization for the organization used in the certificate. This is a required field.
Organizational Unit (OU)	Enter an Organizational Unit for the name of the organization unit used in the certificate. This is a required field.
Common Name (CN)	If there is a common name (IP address) for the organizational unit issuing the certificate, enter it here.

5. Set the following **Additional Credentials** required for the generation of the self-signed certificate:

Email Address	Provide an E-mail address used as the contact address for issues relating to this certificate request.
Domain Name	Enter a FQDN (<i>fully qualified domain name</i>) as an unambiguous domain name that specifies the node's position in the DNS tree hierarchy. To distinguish an FQDN from a regular domain name, a trailing period is added. For example, somehost.example.com. An FQDN differs from a regular domain name by its absoluteness, since a suffix is not added.
IP Address	Specify the IP address used as the destination for certificate requests.

6. Select the **Generate Certificate** button at the bottom of the screen to generate the certificate.

Generating a Certificate Signing Request

A CSR (*certificate signing request*) is an application from a requestor to a certificate authority to issue a digitally signed identity certificate. The CSR is composed of a block of encrypted text generated on the server the certificate will be used on. It contains information included in the certificate, including organization name, common name (domain name), locality and country.

A RSA key must be either created or applied to the certificate request before the certificate can be generated. A private key is not included in the CSR, but is used to

digitally sign the completed request. The certificate created with a particular CSR only worked with the private key generated with it. If the private key is lost, the certificate is no longer functional. The CSR can be accompanied by other identity credentials required by the certificate authority, and the certificate authority maintains the right to contact the applicant for additional information.

If the request is successful, the CA sends an identity certificate digitally signed with the private key of the CA.

To create a CSR:

1. Select the **Launch Manager** button from the **SSH RSA Key** section.

The **Certificate Management** screen displays, with the **Manage Certificates** tab selected by default. This screen displays all existing trustpoints.

2. Click the **Create CSR** tab.

The **Create CSR** screen displays.

The screenshot shows a web interface for 'Certificate Management'. At the top, there are four tabs: 'Manage Certificates', 'RSA Keys', 'Create Certificate', and 'Create CSR'. The 'Create CSR' tab is selected. Below the tabs, the main heading is 'Create CSR'. Underneath, there is a section titled 'Create New Certificate Signing Request (CSR)'. This section contains two radio button options: 'Create New' (selected) and 'Use Existing'. Below these options is a text input field for the RSA Key size, with a yellow asterisk to its left and the value '2048' to its right. The next section is 'Certificate Subject Name', which has two radio button options: 'auto-generate' (selected) and 'user-configured'. Below this are several text input fields for the following fields: 'Country (C)', 'State (ST)', 'City (L)', 'Organization (O)', 'Organizational Unit (OU)', and 'Common Name (CN)'. The final section is 'Additional Credentials', which includes three text input fields: 'Email Address', 'Domain Name', and 'IP Address'. The 'IP Address' field has three dots between the first and second characters. At the bottom right of the form, there is a button labeled 'Generate CSR'.

Figure 140: Create CSR Window

3. Set the following **Create New Certificate Signing Request (CSR)** configuration parameters:

Create New	Select this option to create a new RSA Key. Provide a 32 character name to identify the RSA key. Use the spinner control to set the size of the key (from 2,048 or 4,096 bits). It is recommended leaving this value at the default setting (2048) to ensure optimum functionality. For more information on creating a new RSA key, see RSA Key Management on page 342.
Use Existing	Select this option to use an existing RSA key. Use the drop-down menu to select the existing key used by both the device and the server (or repository) of the target RSA key.

4. Set the following **Certificate Subject Name** parameters required for the creation of the certificate:

Certificate Subject Name	Select either the auto-generate radio button to automatically create the certificate's subject credentials or select user-configured to manually enter the credentials of the self signed certificate. The default setting is autogenerate.
Country (C)	Define the Country used in the CSR. The field can be modified by the user. This is a required field and must not exceed 2 characters.
State (ST)	Enter a State for the state or province name used in the CSR. This is a required field.
City (L)	Enter a City to represent the city name used in the CSR. This is a required field.
Organization (O)	Define an Organization for the organization used in the CSR. This is a required field.
Organizational Unit (OU)	Enter an Organizational Unit for the name of the organization unit used in the CSR. This is a required field.
Common Name (CN)	If there is a Common Name (IP address) for the organizational unit issuing the certificate, enter it here.

5. Select the following **Additional Credentials** required for the generation of the CSR:

Email Address	Provide an E-mail address used as the contact address for issues relating to this CSR.
Domain Name	Enter a FQDN as an unambiguous domain name that specifies the node's position in the DNS tree hierarchy. To distinguish an FQDN from a regular domain name, a trailing period is added. For example, somehost.example.com. An FQDN differs from a regular domain name by its absoluteness, since a suffix is not added.
IP Address	Specify the IP address used as the destination for certificate requests.

6. Select the **Generate CSR** button at the bottom of the Create CSR screen to generate the CSR.

Wired 802.1x Configuration

802.1X provides administrators secure, identity based access control as another data protection option to utilize with a device profile.

802.1X is an IEEE standard for media-level (Layer 2) access control, offering the capability to permit or deny network connectivity based on the identity of the user or device.

To configure the Wired 802.1x settings:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays, with the **Basic** configuration screen selected by default.

3. Select **Wired 802.1x**.

The **Wired 802.1X Settings** configuration screen displays.

The screenshot shows the 'Wired 802.1X Settings' configuration window. It contains the following elements:

- Dot1x Authentication Control:** A checkbox that is currently unchecked.
- Dot1x AAA Policy:** A dropdown menu.
- Dot1x Guest VLAN Control:** A checkbox that is currently unchecked.
- Dot1x Hold Time:** A text input field containing the number '1', followed by a 'Minutes' dropdown menu and a range indicator '(0 to 10)'.
- MAC Authentication AAA Policy:** A dropdown menu.

At the bottom of the window, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 141: Device Overrides - Wired 802.1X Settings Screen

4. Set the following Wired 802.1x Settings:

Dot1x Authentication Control	Select this option to globally enable 802.1x authentication for the access point. This setting is disabled by default.
Dot1x AAA Policy	Use the drop-down menu to select an AAA policy to associate with the wired 802.1x traffic. If a suitable AAA policy does not exist, click the Create icon to create a new policy or the Edit icon to modify an existing policy.
Dot1x Guest VLAN Control	Select this option to globally enable 802.1x guest VLANs for the selected device. This setting is disabled by default.
Dot1x Hold Time	Set a hold time value (after the last hello packet) in either Seconds (0 - 600) or Minutes (0 - 10). When exceeded, the controller's 802.1X enabled port and its destination end-point connection is defined as lost and the connection must be re-established.
MAC Authentication AAA Policy	Use the drop-down menu to select an AAA authentication policy for MAC address authentication. If a suitable MAC AAA policy does not exist, click the Create icon to create a new policy or the Edit icon to modify an existing policy.

5. Select **OK** to save the changes to the 802.1x override configuration.

Select **Reset** to revert to the last saved configuration.

RF Domain Overrides

Use RF Domain Overrides to define settings overriding a target device's original RF Domain configuration. An RF Domain allows an administrator to assign configuration data to multiple access points (of the same model) deployed in a common coverage area (floor, building or site). In such instances, there are many configuration attributes these devices share as their general client support roles are quite similar. However, device configurations may need periodic refinement from their original RF Domain administered design. Unlike a RFS series controller, an access point supports a single RF domain. An access point RF Domain cannot be used on a different model access point. For example, an AP 6532 RF Domain override can only be applied to another AP 6532 model access point.

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays, with the **Basic** configuration screen selected by default.

3. Select **RF Domain Overrides**.

The RF Domain configuration overrides screen displays.

Basic Configuration

Location i

Contact i

Time Zone i (GMT) Etc/UTC ▼

Country Code i

Smart Scan

Enable Dynamic Channel i

2.4 GHz Channels i 1,2,3,4,... Select ▼

5 GHz Channels i 21,25,34,36,... Select ▼

License

Licenses i ▼ +

+

Client Name Configuration

MAC Address	Name	

+ Add Row

Sensor Policy

Sensor Policy i ▼ + ⚙️

ExtremeLocation Appliance Configuration

Server Id	IP	Port

▶ OK Reset Exit

Figure 142: Access Point - Device Overrides - RF Domain Overrides



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove a device's override, go to the *Basic Configuration* screen's *Device Overrides* field, and then select the Clear Overrides button.

4. Refer to the **Basic Configuration** field to review the basic settings defined for the target device's RF Domain configuration, and optionally assign/remove overrides to and from specific parameters.

Location	Set the deployment location for the access point as part of its RF Domain configuration
Contact	Set the administrative contact for the access point. This should reflect the administrator responsible for the access point's configuration and wireless network.
Time Zone	Use the drop-down menu to select the geographic time zone supporting its deployment location
Country Code	Use the drop-down menu to select the country code supporting its deployment location

5. Refer to the **SMART Scan** field to review the settings defined for SMART RF. Optionally assign/remove overrides to and from specific parameters.

Enable Dynamic Channel	Select this option to enable dynamic channel scan.
2.4 GHz Channels	Use the Select drop-down menu to select channels to scan in the 2.4 GHz band. Selected channels are highlighted with a grey background. Unselected channels are highlighted with a white background. Multiple channels can be selected at the same time
5.0 GHz Channels	Use the Select drop-down menu to select channels to scan in the 5.0 GHz band. Selected channels are highlighted with a grey background. Unselected channels are highlighted with a white background. Multiple channels can be selected at the same time

6. Use the **Licenses** drop-down menu to obtain and leverage feature licenses from RF Domain member devices.
7. Refer to the **Client Name Configuration** table to view the clients connected to RF Domain member access points adopted by networked controllers or service platforms. Use the table to associate administrator assigned client names to specific connected client MAC addresses for improved client management.

Enter the client's factory coded MAC address in the **MAC Address** field. Assign a name to the RF Domain member access point's connected client to assist in its easy recognition in the **Name** field.

8. Use the **Sensor Policy** drop-down menu to either select a sensor policy for sending RSSI information to a dedicated ExtremeLocationing system for device locationing calculations. Different policies can be created with either a default set of scanned channels or with custom channels, widths and weighted scan priorities. Specific channels can also be isolated and locked for specific channel scans.



Note

If a dedicated sensor is utilized with WIPS for rogue detection, any sensor policy selected from the *Sensor Policy* drop-down menu is discarded and not utilized by the sensor. To avoid this situation, use ADSP channel settings exclusively to configure the sensor and not the WiNG interface.

Select the **Create** icon to create a new sensor policy to apply to this RF Domain or select the **Edit** icon to update the configuration of an existing policy before applying it to the RF Domain. For more information, see [Sensor Policy](#) on page 757.

9. Within a **ExtremeLocation Appliance Configuration**, sensors scan for RSSI data on an administrator defined interval and send to a dedicated ExtremeLocationing Server resource, as opposed to an ADSP server. Select the **+ Add Row** button to populate the screen with up to three rows for Locationing server credentials.

Server Id	Use the spinner control to assign a numeric ID for up to three ExtremeLocation servers designated to receive RSSI scan data from a WiNG dedicated server. The server with the lowest defined ID is the first reached. The default ID is 1.
IP Address/Hostname	Provide the numeric (non DNS) IP address or hostname of up to three ExtremeLocation server resources for receiving RSSI scan data. A hostname cannot exceed 64 characters or contain an underscore.
Port	Use the spinner control to specify the port of the ExtremeLocation sensor server resource receiving RSSI scan data from a dedicated sensor. The default port is 443.

10. In the **Tenant Id** field, enter the ExtremeLocation tenant's account number. Use this field to configure your ExtremeLocation Tenant account number. ExtremeLocation Tenants, at the time of registration, are communicated (via email) an account number uniquely identifying the Tenant. Configure this account number in the RF Domain context. When configured, RF Domain AP reports, pushed to the ExtremeLocation server, include the Tenant's account number along with the reporting AP's MAC address.
11. Select the **Enable NSight Sensor** checkbox to enable the NSight module.
12. Click **OK** to save the changes to the sensor configuration.
Click **Reset** to revert to the last saved configuration.

Device Profile Overrides

A profile enables an administrator to assign a common set of configuration parameters and policies to another access point of the same model. Profiles can be used to assign shared or unique network, wireless and security parameters to access points across a large, multi segment, site. The configuration parameters within a profile are based on the hardware model the profile was created to support. The central benefit of a profile

is its ability to update devices collectively without having to modify individual device configurations.

However, device profile configurations may need periodic refinement from their original administered design. Or, a device profile could require modification from a profile configuration shared amongst numerous devices deployed within a particular site. Configurations applied at the device level override the configurations applied on the profile used by the device.

Refer to the following to complete the override of the access point's entire profile configuration:

- [Profile Overrides - General](#) on page 359
- [Profile Overrides - Radio Power](#) on page 361
- [Profile Overrides - Adoption](#) on page 362
- [Profile Overrides - Interface](#) on page 365
- [Profile Overrides - Network](#) on page 440
- [Profile Overrides - Security](#) on page 524
- [Profile Overrides - VRRP](#) on page 557
- [Profile Overrides - List of Critical Resources](#) on page 562
- [Override Services Configuration](#) on page 566
- [Profile Overrides - Management Settings](#) on page 571
- [Profile Overrides - Meshpoint](#) on page 576
- [Profile Overrides - Advanced Client Load Balancing](#) on page 586

Profile Overrides - General

To apply overrides to the profile's general configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides**.

The **General** configuration screen displays by default.

The screenshot shows the 'General Profile Screen' with the following sections:

- Network Time Protocol (NTP)**: A table with columns: Server IP, Key Number, Key, Preferred, Autokey, Version, Minimum Polling Interval, Maximum Polling Interval, and a delete icon. Below the table is a '+ Add Row' button.
- RF Domain Manager**:
 - Capable: (with an information icon)
 - Priority: (with an information icon) and a spinner control set to '1' (range 1 to 255).
- Buttons at the bottom: OK, Reset, and Exit.

Figure 143: General Profile Screen

4. In the **Network Time Protocol (NTP)** table, click **+ Add Row** and define NTP server resources. These servers are used to obtain system time. Up to three NTP servers can be configured. Set the following parameters to define the NTP configuration:

Server IP	Set the IP address of each server added as a potential NTP resource.
Key Number	Select the number of the associated authentication peer key for the NTP resource.
Key	Enter a 64 character maximum key used when the autokey setting is set to false (disabled). Select the Show option to expose the actual character string comprising the key.
Preferred	Select this option to designate this NTP resource as a preferred NTP resource. This setting is disabled by default.
AutoKey	Select the check box to enable an autokey configuration for the NTP resource. The default setting is disabled.
Version	Use the spinner control to specify the version number used by this NTP server resource. The default setting is 0.
Minimum Polling Interval	Use the drop-down menu to select the minimum polling interval. Once set, the NTP resource is polled no sooner than the defined interval. Options include 64, 128, 256, 512 or 1024 seconds. The default setting is 64 seconds.
Maximum Polling Interval	Use the drop-down menu to select the maximum polling interval. Once set, the NTP resource is polled no later than the defined interval. Options include 64, 128, 256, 512 or 1024 seconds. The default setting is 1024 seconds.

5. Use the **RF Domain Manager** field to configure how this access point behaves in standalone mode. Set the following parameters:

Capable	Select to enable this access point to act as a RF Domain Manager in a particular RF Domain. Note: This option is enabled by default.
Priority	Select to prioritize this access point in becoming a RF Domain Manager in its; particular RF Domain. The higher the value, the more likely the device becomes the RF Domain Manager for the domain. Note: This option is disabled by disabled.

6. Select **OK** to save the general profile configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Radio Power

Use the **Power** screen to set one of two power modes (3af or Auto) for the access point profile. When Automatic is selected, the access point safely operates within available power. Once the power configuration is determined, the access point configures its operating power characteristics based on its model and power configuration.

An access point uses a *complex programmable logic device* (CPLD) to manage power. The CPLD determines proper supply sequencing, the maximum power available and other status information. One of the primary functions of the CPLD is to determine the maximum power budget. When an access point is powered on (or performing a cold reset), the CPLD determines the maximum power provided by the POE device and the budget available to the access point. The CPLD also determines the access point hardware SKU (model) and the number of radios.

If the access point's POE resource cannot provide sufficient power to run the access point (with all intended interfaces enabled), some of the following interfaces could be disabled or modified:

- The access point's transmit and receive algorithms could be negatively impacted
- The access point's transmit power could be reduced due to insufficient power
- The access point's WAN port configuration could be changed (either enabled or disabled)

To define an access point's power configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** and select **Power**.

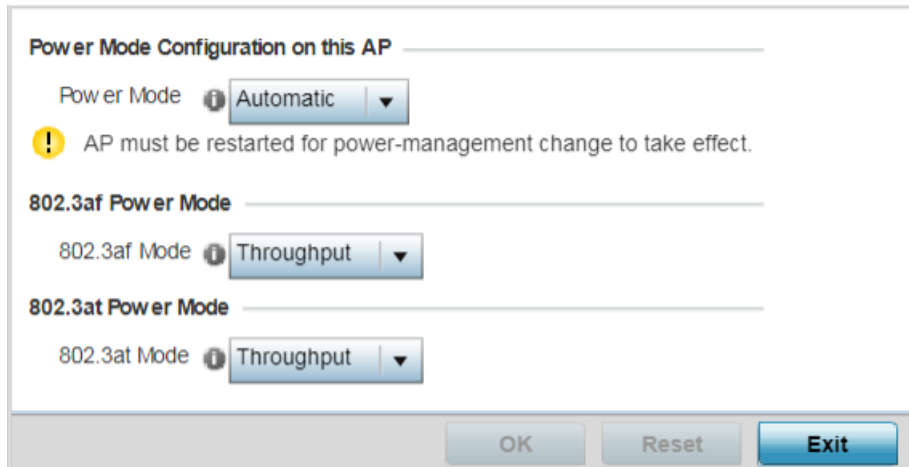


Figure 144: Device Configuration - System Profile - Power Screen

- Use the **Power Mode** drop-down menu to set the **Power Mode Configuration on this AP**.

When an access point is powered on for the first time, it determines the power budget available. Using the **Automatic** setting, the access point automatically determines the best power configuration based on the available power budget. Automatic is the default setting.

If **802.3af** is selected, the access point assumes 12.95 watts are available. If the mode is changed, the access point requires a reset to implement the change.

- Set the access point radio's **802.3af Power Mode** and the radio's **802.3at Power Mode**.

Use the drop-down menu for each power mode to define a mode of either **Range** or **Throughput**.

Select **Throughput** to transmit packets at the radio's highest defined basic rate (based on the radio's current basic rate settings). This option is optimal in environments where the transmission range is secondary to broadcast/multicast transmission performance.

Select **Range** when range is preferred over performance for broadcast/multicast (group) traffic. The data rates used for range are the lowest defined basic rates. Throughput is the default setting for both 802.3af and 802.3at.

- Select **OK** to save the changes made to the access point power configuration. Select **Reset** to revert to the last saved configuration.

Profile Overrides - Adoption

To apply overrides to the profile's adoption related configuration:

- Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** and select **Adoption**.

The adoption screen displays. Specify the adoption related overrides to be applied on the selected access point. These changes override the configurations specified on the profile used by the access point..

The screenshot shows the 'Profile Overrides - Adoption Screen' with the following sections and controls:

- Controller Group:** A text input field for 'Preferred Group' with an information icon.
- Auto-Provisioning Policy:** A dropdown menu for 'Auto-Provisioning Policy' with an information icon, a plus icon, and a gear icon. Below it is a checked checkbox for 'Learn and Save Network Configuration'.
- Controller Hello Interval:** Two spinners: 'Hello Interval' (value 1, range 1 to 120) and 'Adjacency Hold Time' (value 2, range 2 to 600).
- Controller Adoption Settings:** A spinner for 'Offline Duration' (value 10, range 5 to 43,200).
- Controller VLAN:** A spinner for 'VLAN' (value 1, range 1 to 4,094).
- Controller Hostnames:** A table with 8 columns: Host, Pool, Routing Level, IPsec Secure, IPsec GW, Force, Remote VPN Client, and a delete icon. The table is currently empty. An 'Add Row' button is at the bottom right of the table area.

At the bottom of the screen are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 145: Profile Overrides - Adoption Screen

4. Define the **Preferred Group** used as optimal group of controllers for the access point's adoption. The name of the preferred group cannot exceed 64 characters. The preferred group is the controller group the access point would prefer to connect upon adoption.

5. Set the following **Auto-Provisioning Policy** settings for access point adoptions:

Auto-Provisioning Policy	Select an auto provisioning policy from the drop-down menu. To create a new auto provisioning policy, select the Create icon or modify an existing one by selecting the Edit icon.
Learn and Save Network Configuration	Select this option to enable allow the controller tor service platform to maintain a local configuration records of devices requesting adoption and provisioning. This feature is enabled by default.

6. Configure the following **Controller Hello Interval** settings:

Hello Interval	Specify the hello interval in seconds. The hello interval is the interval between two consecutive hello keep alive messages exchanged between the access point and the adopting wireless controller. These messages serve as a connection validation mechanism to ensure the availability of the adopting wireless controller. Use the spinner to set a value from 1 - 120 seconds.
Adjacency Hold Time	Specify the adjacency hold time value in seconds. This value sets the time after which the preferred controller group is considered down and unavailable to provide services. Use the spinner to set a value from 2 - 600 seconds. This option is enabled once the hello interval option is selected.

7. Set the **Offline Duration** time from 5 to 43,200 minutes.

This is the duration for which an adopted access point remains unreachable before being declared as offline by the adopting controller.

8. Select the **VLAN** option to define a VLAN the access point’s associating Virtual Controller AP is reachable on. VLANs 0 and 4,095 are reserved and cannot be used. This setting is disabled by default.

9. Enter **Controller Hostnames** as needed to define resources for adoption. Click **+Add Row** to add controllers. Set the following parameters:

Allow Adoption of Devices	Select either access points or Controllers (or both) to refine whether this controller or service platform can adopt just networked access points or peer controller devices as well.
Allow Adoption of this Controller	Select this option to enable this controller or service platform to be capable of adoption by other controllers or service platforms. This setting is disabled by default and must be selected to allow peer adoptions.
Preferred Group	If Allow Adoption of this Controller is selected, provide the controller group preferred as the adopting entity for this controller or service platform. If utilizing this feature, ensure the appropriate group is provided within the Controller Group field.
Hello Interval	Select this option to define the hello packet exchange interval (from 1 - 120 seconds) between the controller or service platform and an adoption requesting access point.
Adjacency Hold Time	Select this option to set a hold time interval (from 2 - 600 seconds) for the transmission of hello packets.

10. Select **+ Add Row** as needed to populate the table with IP addresses or hostnames of adoption resources.

11. Select **OK** to save the changes made to the general profile configuration. Select **Reset** to revert to the last saved configuration.

Profile Overrides - Interface

An access point requires its Virtual Interface be configured for layer 3 (IP) access or layer 3 service on a VLAN. A virtual interface defines which IP address is associated with each connected VLAN ID. An interface configuration can have overrides applied to customize the configuration to a unique deployment objective.

Refer to the following sections:

- [Profile Overrides - Ethernet Ports](#) on page 365
- [Profile Overrides - Virtual Interface](#) on page 381
- [Profile Overrides - Port Channels](#) on page 398
- [Profile Overrides - Radios](#) on page 408
- [Profile Overrides - PPPoE](#) on page 432
- [Profile Overrides - Bluetooth](#) on page 436

Profile Overrides - Ethernet Ports

To view an access point's Ethernet port configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Interface** and select **Ethernet Ports**.

The selected access point's physical port reporting runtime data and statistics is displayed.

Name	Type	Description	Admin Status	Mode	Native VLAN	Tag Native VLAN	Allowed VLANs	Overrides
ge1	Ethernet		✔ Enabled	Access	200			Clear
ge2	Ethernet		✔ Enabled	Access	1			

Type to search in tables Row Count: 2

Figure 146: Profile Overrides - Interface - Ethernet Ports Screen

4. Refer to the following to assess port status, mode and VLAN configuration:

Name	Displays the physical port name reporting runtime data and statistics. Supported ports vary depending on model.
Type	Displays the physical port type.
Description	Displays an administrator defined description for each listed port.
Admin Status	Displays an administrator defined description for each listed port.
Mode	The profile's switching mode: either Access or Trunk (as defined on the Ethernet Port Basic Configuration screen). If Access is selected, the port accepts packets only from the native VLAN. Frames are forwarded untagged with no 802.1Q header. All frames received on the port are expected as untagged and mapped to the native VLAN. If Trunk is selected, the port allows packets from a list of VLANs added to the trunk. The port supports multiple 802.1Q tagged VLANs and one native VLAN which can be tagged or untagged.
Native VLAN	The VLAN ID (1 - 4094) for the native VLAN. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN over which untagged traffic is directed when using a port in Trunk mode.

Tag Native VLAN	<p>A green check mark means the native VLAN is tagged. A red "X" means the native VLAN is untagged.</p> <p>When a frame is tagged, the 12-bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12-bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. A native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame.</p>
Allowed VLANs	<p>The VLANs allowed to send packets over the listed port. Allowed VLANs are listed only when the port is in Trunk mode.</p>
Overrides	<p>Select the Clear icon to clear existing overrides applied on the selected device.</p>

Profile Overrides - Basic Configuration (AP Only)

To edit or apply overrides to an Ethernet port configuration:

1. Select the port and click **Edit**.

The selected Ethernet port's **Basic Configuration** screen displays by default.

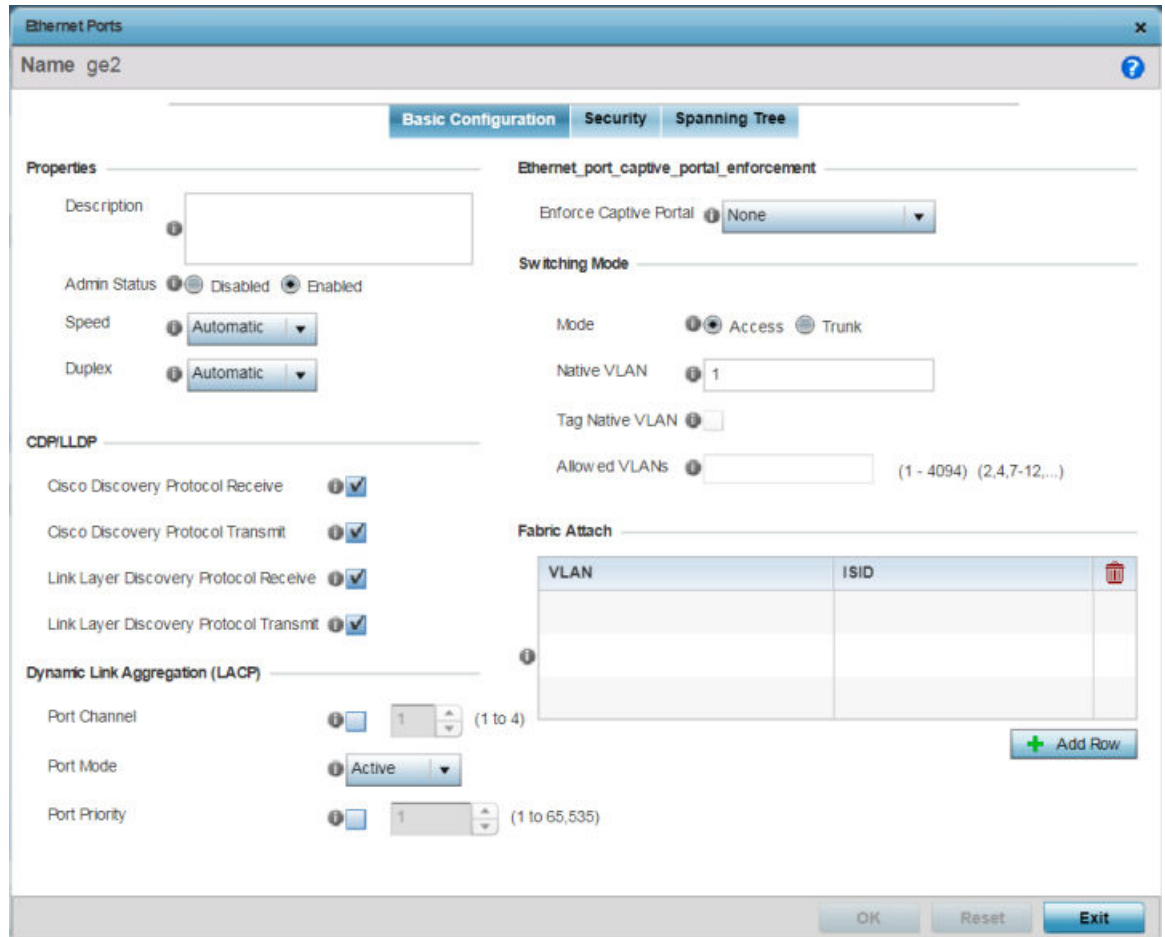


Figure 147: Profile Overrides - Interface - Ethernet Ports Screen

2. Set or override the following properties:

Description	Enter a brief description for the port (64 characters maximum). The description should reflect the port's intended function to differentiate it from others with similar configurations, or it simply can be the name of the physical port.
Admin Status	Select Enabled to define this port as active to the profile it supports. Select Disabled to disable this physical port in the profile. It can be activated at any time when needed. Admin status is enabled by default.

Speed	<p>Select the speed at which the port can receive and transmit data, to establish a 10, 100, or 1000 Mbps data transfer rate for the selected half-duplex or full-duplex transmission.</p> <p>These options are not available if Automatic is selected.</p> <p>Select Automatic to enable the port to automatically exchange information about data transmission speed and duplex capabilities. Auto negotiation is helpful when in an environment where different devices are connected and disconnected on a regular basis. Automatic is the default setting.</p>
Duplex	<p>Select either Half, Full, or Automatic as the duplex option.</p> <p>Select Half duplex to send data over the port, then immediately receive data from the same direction in which the data was transmitted. Like a full-duplex transmission, a half-duplex transmission can carry data in both directions, just not at the same time.</p> <p>Select Full duplex to transmit data to and from the port at the same time. Using full duplex, the port can send data while receiving data as well.</p> <p>Select Automatic to enable to the controller or service platform to dynamically duplex as port performance needs dictate. Automatic is the default setting.</p>

3. Enable or disable the following **CDP/LLDP** parameters used to configure CDP (*Cisco Discovery Protocol*) and LLDP (*Link Layer Discovery Protocol*) for this profile's Ethernet port configuration:

Cisco Discovery Protocol Receive	Select this option to allow the Cisco discovery protocol for receiving data on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors.
Cisco Discovery Protocol Transmit	Select this option to allow the Cisco discovery protocol for transmitting data on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors.
Link Layer Discovery Protocol Receive	Select this option to allow the Link Layer discovery protocol to be received on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors. This option is enabled by default.
Link Layer Discovery Protocol Transmit	Select this option to allow the Link Layer discovery protocol to be transmitted on this port. If enabled, the port sends out periodic interface updates to a multicast address to advertise its presence to neighbors.

4. In the **Dynamic Link Aggregation (LACP)** area, set the following parameters to enable link aggregation on the selected GE port:

Port Channel	<p>Select to configure the selected port as a member of a LAG (<i>link aggregation group</i>). Link aggregation is supported only on the following platforms:</p> <p>LACP enables combining and managing multiple physical connections like Ethernet ports as a single logical channel as defined in the IEEE 802.1ax standard. LACP provides redundancy and increase in throughput for connections between two peers. It also provides automatic recovery in cases where one or more of the physical links - making up the aggregation - fail. Similarly, LACP also provides a theoretical boost in speed compared to an individual physical link.</p> <p>Note: if enabling LACP, disable or physically disconnect interfaces that do not use spanning tree to prevent loop formation until LACP is fully configured on both the local and remote devices.</p>
Port Mode	<p>Set the port mode as Active or Passive. If setting the port as a LAG member, specify whether the port is an active or passive member within the group.</p> <p>An active member initiates and participates in LACP negotiations. It is the active port that always transmits LACPDU irrespective of the remote device's port mode.</p> <p>The passive port only responds to LACPDU received from its corresponding active port.</p> <p>At least one port within a LAG, on either of the two negotiating peers, should be in the active mode. LACP negotiations are not initiated if all LAG member ports are passive. Further, the peer-to-peer LACP negotiations are always initiated by the peer with the lower system-priority value.</p>
Port Priority	<p>Select this option and set the selected Ethernet Port's priority value, within the LAG, from 1-65535.</p> <p>The selected port's actual priority within the LAG is determined by the port-priority value specified here along with the port's number. Higher the value, lower is the priority. Use this option to manipulate a port's priority. For example, in a LAG having five physical ports, four active and one standby, manually increasing the standby port's priority ensures that if one of the active port fails, the standby port is included in the LAG during re-negotiation.</p>

5. Use the **Enforce Captive Portal** drop-down menu to define whether or not captive-portal authentication is enforced on the selected port:

None	Select to prevent captive-portal access permission rules to be enforced.
Authentication Failure	Select to apply captive-portal access permission rules only when user authentication fails.
Always	Select to enforce captive-portal access permissions at all times.

6. Override the following **Switching Mode** parameters:

Mode	Set the VLAN switching mode over the port. The options are: Access - select to enable the port accept packets only from the native VLAN. Frames are forwarded untagged with no 802.1Q header. All frames received on the port are expected as untagged and mapped to the native VLAN. This is the default setting. Trunk - select to enable the port allow packets from a list of VLANs you add to the trunk. The port supports multiple 802.1Q tagged VLANs and one native VLAN which can be tagged or untagged.
Native VLAN	Define a VLAN ID (1 - 4094) for the native VLAN. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN over which untagged traffic is directed when using a port in Trunk mode. The default VLAN is 1.
Tag Native VLAN	Select this option to tag the native VLAN. Controller and service platforms support the IEEE 802.1Q specification for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, the 12 -bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12 bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This feature is disabled by default.
Allowed VLANs	Selecting Trunk as the mode enables the Allowed VLANs parameter. Add VLANs that exclusively send packets over the listed port.

7. Click **+ Add Row** and set or override the **Fabric Attach** parameters. This option enables WiNG devices (access points and controllers) as FA (*Fabric Attach*) clients.

**Note**

To enable FA Client feature, the Ethernet port's switching mode should be set to trunk.

VLAN	Set the VLAN from 1 - 4094.
ISID	<p>User the spinner control to specify the ISID from 1 - 16777214. This is the ISID (<i>Individual Service Identifier</i>) associated with the VLAN interface specified above.</p> <p>Configuring a VLAN to ISID assignment, enables FA client operation on the selected Ethernet port.</p> <p>The FA Client requests acceptance of the VLAN to ISID mapping from the FAS within the FC (<i>Fabric Connect</i>) network. Once acceptance is achieved, the FC edge switch applies the ISID to the VLAN traffic from the device (AP or controller), and uses this ISID inside the Fabric.</p> <p>Note: A maximum of 94 pairs of I-SID to VLAN mappings can be configured per Ethernet port.</p>

FA-enabled switches, in the FC network, send out LLDP messages with TLV extensions of Organization-specific TLV with OUI, to discover FA clients and advertise capabilities.

The FA-enabled client associates with the FAS (*FA Server*), and obtains provisioning information (management VLAN interface details, and whether the interface is tagged or not) that allows the client to be configured with parameters that allow traffic to flow through the Fabric to the WLAN controller. Use this option to configure the ISID to VLAN mapping that the FA Client uses to negotiate with the FAS.

You can configure FA Client capability on a device's profile as well as device contexts.

8. Click **OK** to save the changes and overrides made to the Ethernet port's Spanning Tree configuration.

Click **Reset** to revert to the last saved configuration.

Override Security Configuration

To override **Ethernet Port** security settings:

1. Select the **Security** tab.

The security screen displays.

The screenshot shows the 'Ethernet Ports' configuration window for interface 'ge2'. The 'Security' tab is active. The configuration is organized into several sections:

- Access Control:**
 - IPv4 Inbound Firewall Rules: <none>
 - Inbound MAC Firewall Rules: <none>
 - IPv6 Inbound Firewall Rules: <none>
- Trust:**
 - Trust ARP Responses:
 - Trust DHCP Responses:
 - ARP header Mismatch Validation:
 - Trust 802.1p COS values:
 - Trust IP DSCP:
- IPv6 Settings:**
 - Trust ND Requests:
 - Trust DHCPv6 Responses:
 - ND Header Mismatch Validation:
 - RA Guard:
- 802.1X Settings:**
 - Host Mode: single-host
 - Guest VLAN: 1 (1 to 4,094)
 - Port Control: force-authorized
 - Re Authenticate:
 - Max Reauthenticate Count: 2 (1 to 10)
 - Quiet Period: 60 (1 to 65,535)
 - Reauthenticate Period: 3600 (1 to 65,535)
 - Port MAC Authentication:
- 802.1X supplicant (client) feature:**
 - Enable:
 - Method: <none>
 - Username: <empty>
 - Password: <empty> (Show checkbox)
 - Trustpoint: <empty>

Buttons at the bottom: OK, Reset, Exit.

Figure 148: Profile Overrides - Interface - Ethernet Ports - Security

2. Refer to the **Access Control** field. As part of the Ethernet port's security configuration, Inbound IP and MAC address firewall rules are required.

MAC Inbound Firewall Rules	Use the drop-down menu to select the MAC inbound firewall rules to apply to this profile's Ethernet port configuration. The firewall inspects MAC traffic flows and detects attacks typically not visible to traditional wired firewall appliances.
IPv4 Inbound Firewall Rules	Use the drop-down menu to select the IPv4 specific firewall rules to apply to this profile's Ethernet port configuration. IPv4 is a connectionless protocol for packet switched networking. IPv4 operates as a best effort delivery method, as it does not guarantee delivery, and does not ensure proper sequencing or duplicate delivery (unlike (TCP). IPv4 hosts can use link local addressing to provide local connectivity.
IPv6 Inbound Firewall Rules	Use the drop-down menu to select the IPv6 specific firewall rules to apply to this profile's Ethernet port configuration. IPv6 is the latest revision of the Internet Protocol designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.

3. Refer to the **Trust** field to define or override the following:

Trust ARP Responses	Select this option to enable ARP trust on this port. ARP packets received on this port are considered trusted, and the information from these packets is used to identify rogue devices within the network. This option is disabled by default.
Trust DHCP Responses	Select this option to enable DHCP trust on this port. If enabled, only DHCP responses are trusted and forwarded on this port, and a DHCP server can be connected only to a DHCP trusted port. This option is enabled by default.
ARP header Mismatch Validation	Select this option to enable a mismatch check for the source MAC in both the ARP and Ethernet header. This option is disabled by default.
Trust 802.1p COS values	Select this option to enable 802.1p COS values on this port. This option is enabled by default.
Trust IP DSCP	Select this option to enable IP DSCP values on this port. This option is enabled by default.



Note

Some vendor solutions with VRRP enabled send ARP packets with Ethernet SMAC as a physical MAC and inner ARP SMAC as VRRP MAC. If this configuration is enabled, a packet is allowed, even when a conflict exists.

4. Set the following **IPv6 Settings**:

Trust ND Requests	Select this option to enable the trust of neighbor discovery requests required on an IPv6 network on this Ethernet port. This option is disabled by default.
Trust DHCPv6 Responses	Select this option to trust all DHCPv6 responses on this Ethernet port. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. This option is enabled by default.
ND Header Mismatch Validation	Select this option to enable a mismatch check for the source MAC within the ND header and Link Layer Option. This option is disabled by default.
RA Guard	Select this option to enable router advertisements or ICMPv6 redirects from this Ethernet port. This option is enabled by default.

5. Set the following **802.1X Settings**:

Host Mode	Set the port mode for 802.1X authentication. The options are: <ul style="list-style-type: none"> • single-host - Select to bridge traffic from a single authenticated host. • multi-host - Select to bridge traffic from any host to this port. The default setting is single-host.
Guest VLAN	Specify a guest VLAN for this port from 1 - 4094. This is the VLAN traffic is bridged on if this port is unauthorized and the guest VLAN is globally enabled.
Port Control	Set the way in which the port bridges traffic. The options are: <ul style="list-style-type: none"> • Automatic – The port is set to the state as received from the authentication server. • force-authorized – Any traffic on the port is considered authenticated and is bridged as configured. This the default setting. • force-unauthorized – Any traffic on the port is considered unauthenticated and is not bridged.
Reauthenticate	Select this option to enable or disable reauthentication. Reauthentication is primarily used to refresh the current state of the selected port. When enabled the device is forced to reauthenticate. When this happens, the port is still considered authenticated. If reauthentication fails, the port is considered unauthorized and devices using the port are denied access.
Max Reauthenticate Count	Set the number of reauthentication attempts (1-10) when a port tries to reauthenticate and fails. Once this count exceeds, the port is considered unauthorized. The default setting is 2.
Quiet Period	Set the duration in seconds where no attempt is made to reauthenticate a controlled port. Set a value from 0 - 65535 seconds. The default setting is 60 seconds.

Reauthenticate Period	Set the duration after which a controlled port is forced to reauthenticate. Set a value from 0 - 65535 seconds. The default setting is 3600 seconds.
Port MAC Authentication	Enables MAC address authentication on the selected port. When enabled, a port's MAC address is authenticated, as only one MAC address is supported per wired port. When successfully authenticated, packets from the source are processed. Packets from all other sources are dropped. Port MAC authentication is supported on WiNG devices. Port MAC authentication may be enabled on ports in conjunction with Wired 802.1x settings for a MAC Authentication AAA policy. This option is disabled by default.

6. Set the following **802.1X supplicant (client) feature**:

Enable	<p>Select to enable 802.1X port-based authentication of 802.1X-capable supplicant (client) on the selected wired port.</p> <p>The IEEE 802.1X port-based authentication protocol restricts unauthorized LAN access by enforcing supplicant authentication at the port. When a supplicant associates with a IEEE 802.1X enabled wired port, normal traffic across the port is suspended until the supplicant is successfully authenticated. Once the supplicant is successfully authenticated, the port status changes to authorized and normal traffic flow resumes. During the suspended state, only EAP over LAN traffic is allowed across the wired port.</p> <p>Note: This feature is disabled by default.</p>
Method	<p>Select the mode of authentication:</p> <ul style="list-style-type: none"> • username - Authenticates supplicants using credentials (username/password) they provide. Selecting this option enables the Username and Password fields. • trustpoint - Authenticates supplicants using EAP-TLS mode of authentication. Selecting this option enables the Trustpoint field.
Username	<p>Select this checkbox and specify the supplicant's username.</p> <p>Note: This is required only if the Method of authentication is set to Username.</p>

Password	Sets the password associated with the supplicant username specified above. Note: This is required only if the Method of authentication is set to Username .
Trustpoint	Select this checkbox and specify the trustpoint name. In EAP-TLS authentication, the supplicant and RADIUS server authenticate each other using trustpoint certificates. A trustpoint represents a CA/identity pair containing the identity of the CA, CA specific configuration parameters, and an association with an enrolled identity certificate. Note: Ensure that the trustpoint certificate is installed on the supplicant and the RADIUS server.

7. Click **OK** to save the changes and overrides made to the Ethernet port's security configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Spanning Tree Configuration (AP Only)

To override the spanning tree configuration:

1. Select the **Spanning Tree** tab.

The selected Ethernet Port's Spanning Tree screen displays.

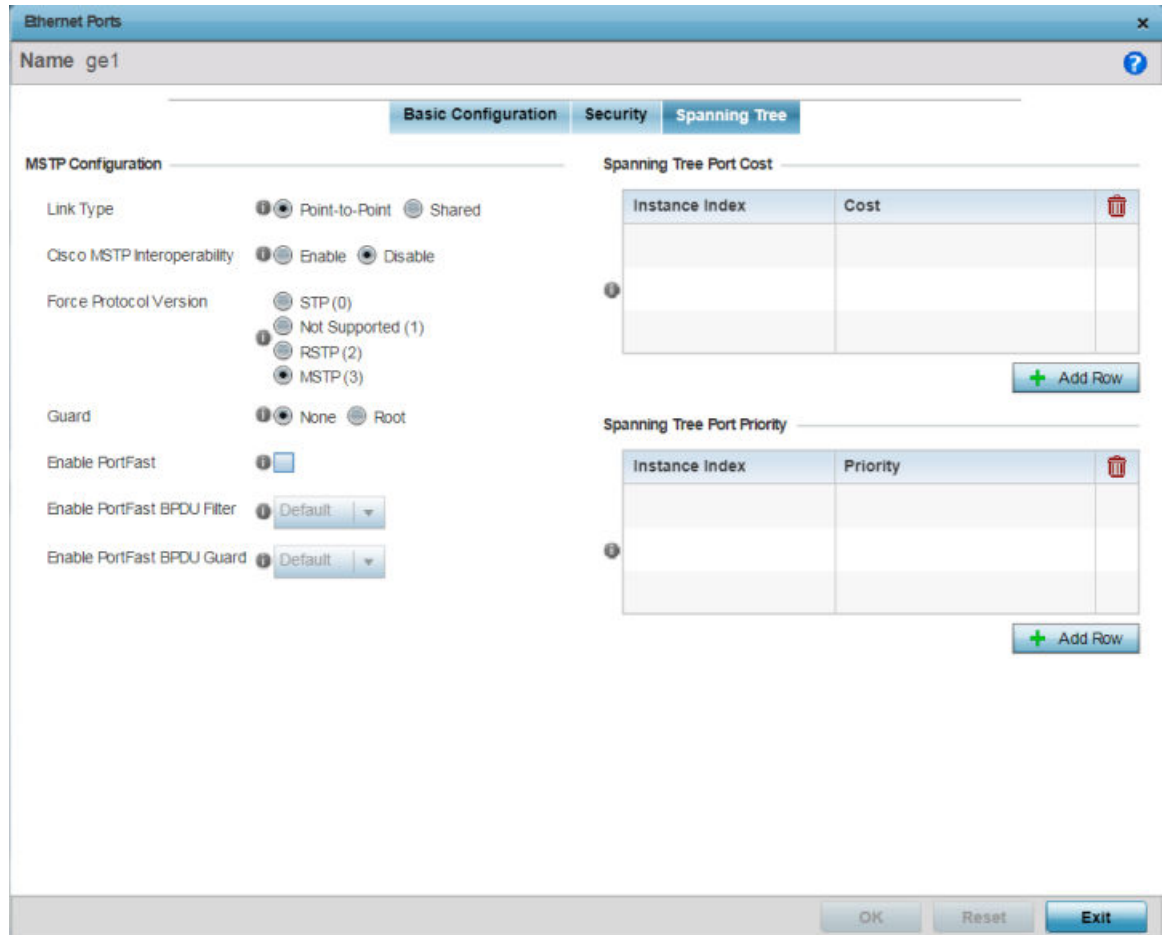


Figure 149: Profile Overrides - Interface - Ethernet Ports - Spanning Tree

2. Set the following **MSTP Configuration** settings:

Link Type	<p>Set the link type for this port:</p> <ul style="list-style-type: none"> • Point-to-Point - Select to treat the port as connected to a point-to-point link • Shared - Select to treat the port as shared between multiple devices <p>An example of a <i>Point-to-Point</i> connection is a port that is connected to an access point.</p>
Cisco MSTP Interoperability	<p>Use to Enable or Disable interoperability with Cisco's version of MSTP over the port. Cisco's version of MSTP is incompatible with standard MSTP.</p>

Force Protocol Version	<p>Set the Spanning Tree Protocol to enforce. The options are:</p> <ul style="list-style-type: none"> • STP - Enforces the standard Spanning Tree Protocol. <p>STP (<i>Spanning Tree Protocol</i>) (IEEE 802.1D standard) configures a meshed network for robustness by eliminating loops within the network and calculating and storing alternate paths to provide fault tolerance.</p> <p>As the port comes up and STP calculation takes place, the port is set to Blocked state. In this state, no traffic can pass through the port. Since STP calculations take up to a minute to complete, the port is not operational thereby effecting the network behind the port. When the STP calculation is complete, the port's state is changed to Forwarding and traffic is allowed.</p> <ul style="list-style-type: none"> • RSTP - Enforces Rapid Spanning Tree Protocol. <p>RSTP (<i>Rapid Spanning Tree Protocol</i>) (IEEE 802.1w standard) is an evolution over the standard STP. The primary aim is to reduce the time taken to respond to topology changes while being backward compatible with STP. PortFast enables quickly changing the state of a port from Blocked to Forwarding to enable the port to allow traffic while the STP calculation happens.</p> <ul style="list-style-type: none"> • MSTP - Enforces Multiple Spanning Tree Protocol. This is the default setting. <p>MSTP (<i>Multiple Spanning Tree Protocol</i>) provides an extension to RSTP to optimize the usefulness of VLANs. MSTOP allows for a separate spanning tree for each VLAN group, and blocks all but one of the possible alternate paths within each spanning tree topology.</p> <p>If there is only one VLAN in the access point managed network, a single spanning tree works fine. However, if the network contains more than one VLAN, the network topology defined by single STP would work, but it is possible to make better use of the alternate paths available by using an alternate spanning tree for different VLANs or groups of VLANs.</p> <p>An MSTP supported deployment uses multiple MST regions with multiple MSTIs (<i>MST instances</i>). Multiple regions and other STP bridges are interconnected using one single <i>common spanning tree</i> (CST). MSTP includes all of its spanning tree information in a single <i>Bridge Protocol Data Unit</i> (BPDU) format. BPDUs are used to exchange information bridge IDs and root path costs. Not only does this reduce the number of BPDUs required to communicate spanning tree information for each VLAN, but it also ensures backward compatibility with RSTP.</p> <p>MSTP encodes additional region information after the standard RSTP BPDU as well as a number of MSTI messages. Each MSTI message conveys spanning tree information for each instance. Each instance can be</p>
------------------------	--

	<p>assigned a number of configured VLANs. The frames assigned to these VLANs operate in this spanning tree instance whenever they are inside the MST region. To avoid conveying their entire VLAN to spanning tree mapping in each BPDU, the access point encodes an MD5 digest of their VLAN to an instance table in the MSTP BPDU. This digest is used by other MSTP supported devices to determine if the neighboring device is in the same MST region as itself.</p> <ul style="list-style-type: none"> • Not Supported - Select to disable spanning tree protocol for this interface.
Guard	<p>Select Root radio to enable root guard – a mechanism to prevent election of roots other than those designated as roots in a network. When this port receives a better (superior) BPDU, the port state becomes Blocked. It retains this state till the port no longer receives the better (superior) BPDU and then the state is changed to Forwarding. Select Root to enable this feature. Select None to disable this feature.</p>

3. Set the following **PortFast** configuration:

Enable PortFast	<p>PortFast reduces the time taken for a port to complete STP. PortFast must only be enabled on ports on the wireless controller which are directly connected to a server/workstation and not to another hub or controller. PortFast can be left unconfigured on the access point. Select this option to enable drop-down menus for both the Enable PortFast BPDU Filter and Enable PortFast BPDU Guard options. This setting is disabled by default.</p>
Enable PortFast BPDU Filter	<p>MSTP BPDUs are messages exchanged when controllers gather information about the network topology during STP scan. When enabled, PortFast enabled ports do not transmit or receive BPDU messages. Default sets the PortFast BPDU Filter value to the bridge's BPDU filter value. Select Enable to invoke a BPDU filter for this PortFast enabled port channel. Set Disable to disable this feature.</p>
Enable PortFast BPDU Guard	<p>When set to Enable, PortFast enabled ports are forced to shut down when they receive BPDU messages. When set to Default sets the PortFast BPDU Guard value to the bridge's BPDU guard value. Set Disable to disable this feature.</p>

4. Refer to the **Spanning Tree Port Cost** table.

Define or override an **Instance Index** using the spinner control, and set its corresponding cost in the **Cost** column.

This is the cost for a packet to traverse the current network segment. The cost of a path is the sum of all costs of traversal from the source to the destination. The default rule for the cost of a network segment is, the faster the media, the lower the cost.

Select **+ Add Row** as needed to include additional indexes.

5. Refer to the **Spanning Tree Port Priority** table.
Define or override an **Instance Index** using the spinner control, and set its corresponding priority in the **Priority** column.

This is the priority for this port becoming a designated root. The default rule is, the lower this value, the higher the chance that the port is assigned as a designated root.

Select **+ Add Row** as needed to include additional indexes.
6. Click **OK** to save the changes and overrides made to the Ethernet port's Spanning Tree configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Virtual Interface

A virtual interface is required for layer 3 (IP) access to a controller or service platform or provide to layer 3 service on a VLAN. The virtual interface defines which IP address is associated with each VLAN ID the controller or service platform is connected to. A virtual interface is created for the default VLAN (VLAN 1) to enable remote administration. A virtual interface is also used to map VLANs to IP address ranges. This mapping determines the destination for routing.

To review an access point's existing VLAN configurations

1. Go to **Configuration → Devices → Device Overrides**.
The **Device Overrides** screen displays. This screen lists devices within the managed network.
2. Select an access point.
The selected access point's configuration menu displays.

VLAN	The numerical VLAN ID associated with each listed interface.
IP Address	Whether DHCP was used to obtain the primary IP address used by the virtual interface configuration.

After reviewing the configurations of existing virtual interfaces, determine whether a new interface needs to be created, an existing virtual interface needs to be edited (overridden), or an existing virtual interface needs to be deleted.

Profile Overrides - Basic - General Configuration (AP Only)

To add a new VLAN configuration or apply overrides to an existing VLAN configuration:

1. Click **Add**, or select the VLAN interface and click **Edit**.

The VLAN interface configuration screen displays, with the **Basic Configuration** → **General** screen selected by default.

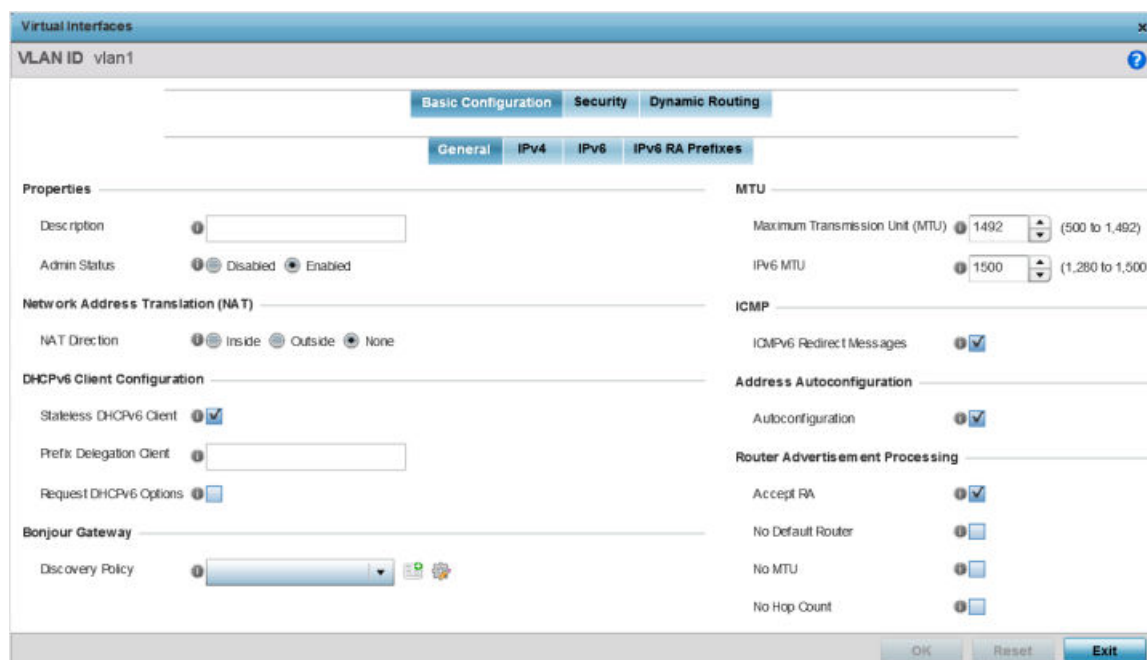


Figure 151: Profile Overrides - Interfaces - VLAN - Basic Configuration - General Screen

2. If you are creating a new virtual interface, use the **VLAN ID** spinner control to define a numeric VLAN ID from 1 - 4094.
3. Define or override the following parameters in the **Properties** field:

Description	Provide or edit a description (up to 64 characters) for the virtual interface that helps differentiate it from others with similar configurations.
Admin Status	Select Disabled or Enabled to define this interface’s current status within the network. When set to <i>Enabled</i> , the virtual interface is operational and available. The default value is disabled.

4. Define or override the **Network Address Translation (NAT)** direction.

Select one of the following options:

Inside	Select when the inside network is transmitting data over the network its intended destination. On the way out, the source IP address is changed in the header and replaced by the (public) IP address.
Outside	Select to allow packets passing through the NAT, on the way back to the managed LAN, to be searched against the records kept by the NAT engine. There the destination IP address is changed back to the specific internal private class IP address in order to reach the LAN over the switch managed network.
None	Select in case no NAT activity takes place. This is the default setting.

5. Set the following **DHCPv6 Client Configuration**.

Stateless DHCPv6 Client	Select to request information from the DHCPv6 server using stateless DHCPv6. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. This setting is disabled by default.
Prefix Delegation Client	Specify a 32-character maximum request prefix for prefix delegation from a DHCPv6 server over this virtual interface. Devices use prefixes to distinguish destinations that reside on-link from those reachable using a router.
Request DHCPv6 Options	Select to request DHCPv6 options on this virtual interface. DHCPv6 options provide configuration information for a node that must be booted using the network rather than locally. This setting is disabled by default.

6. In the **Bonjour Gateway** field, use the **Discovery Policy** drop-down menu to apply a Bonjour Gateway Discovery policy on the selected VLAN. Click the **Create** icon to define a new Bonjour Gateway policy configuration, or click the **Edit** icon to modify an existing Bonjour Gateway policy configuration.

Bonjour is Apple's implementation of zeroconfiguration networking (Zeroconf). Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates devices such as printers, other computers, and services that these computers offer over a local network.

Bonjour provides a general method to discover services on a LAN (*local area network*). It allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour works within a single broadcast domain. However, with special DNS configuration, it can be extended to find services across broadcast domains.

7. Define the following **MTU** settings for the virtual interface:

Maximum Transmission Unit (MTU)	Set the PPPoE client MTU (<i>maximum transmission unit</i>) from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
IPv6 MTU	Set an IPv6 MTU for this virtual interface from 1,280 - 1,500. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. The default is 1,500.

8. In the **ICMP** field, define whether ICMPv6 redirect messages are sent. Redirect requests data packets be sent on an alternative route.

This setting is enabled by default.

9. In the **Address Autoconfiguration** field, define whether to configure IPv6 addresses on this virtual interface based on the prefixes received in router advertisement messages. Router advertisements contain prefixes used for link determination, address configuration and maximum hop limits.

This setting is enabled by default.

10. Set the following **Router Advertisement Processing** settings for the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

Accept RA	Enable this option to allow router advertisements over this virtual interface. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters. This setting is enabled by default.
No Default Router	Select this option to consider routers unavailable on this interface for default router selection. This setting is disabled by default.
No MTU	Select this option to not use the existing MTU setting for router advertisements on this virtual interface. If the value is set to zero, no MTU options are sent. This setting is disabled by default.
No Hop Count	Select this option to not use the hop count advertisement setting for router advertisements on this virtual interface. This setting is disabled by default.

11. Click **OK** to save the changes.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Basic - IPv4 Configuration (AP Only)

To set the selected VLAN interface's IPv4 setting.

1. Select the **Basic Configuration** → **IPv4** tab.

The IPv4 configuration screen displays.

Virtual Interfaces
VLAN ID vlan1

Basic Configuration | **Security**

General | **IPv4** | **IPv6** | **IPv6 RA Prefixes**

IPv4 Addresses

Enable Zero Configuration None Primary Secondary

Primary IP Address Use DHCP to Obtain IP

Use DHCP to obtain Gateway/DNS Servers (Allowed on 1 virtual interface)

Secondary Addresses /

DHCP Relay

Respond to DHCP Relay Packets

DHCP Relay

IP Address	
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear
0 . 0 . 0 . 0	Clear

OK **Reset** **Exit**

Figure 152: Profile Overrides - Interfaces - VLAN - Basic Configuration - IPv4 Screen

2. Set the following network information in the **IPv4 Addresses** field:

Enable Zero Configuration	Zero configuration can be a means of providing a primary or secondary IP addresses for the virtual interface. Zero configuration (or zero config) is a wireless connection utility included with Microsoft Windows XP and later as a service dynamically selecting a network to connect based on a user's preferences and various default settings. Zero config can be used instead of a wireless network utility from the manufacturer of a computer's wireless networking device. This value is set to None by default.
Primary IP Address	Define the IP address for the VLAN associated virtual interface.
Use DHCP to Obtain IP	Select to allow DHCP to provide the IP address for the virtual interface. Selecting this option disables the Primary IP Address field.
Use DHCP to Obtain Gateway/DNS Servers	Select to allow DHCP to obtain a default gateway address and DNS resource for one virtual interface. This setting is disabled by default and only available when the Use DHCP to Obtain IP option is selected.
Secondary Addresses	Use this parameter to define additional IP addresses to associate with VLAN IDs. The address provided in this field is used if the primary IP address is unreachable.

3. Click **OK** to save the changes to the IPv4 configuration.

Click **Exit** to close the screen without saving any updates.

Profile Overrides - Basic - IPv6 Configuration (AP Only)

To set the selected VLAN interface's IPv6 setting.

1. Select the **Basic Configuration → IPv6** tab.

The IPv6 configuration screen displays.

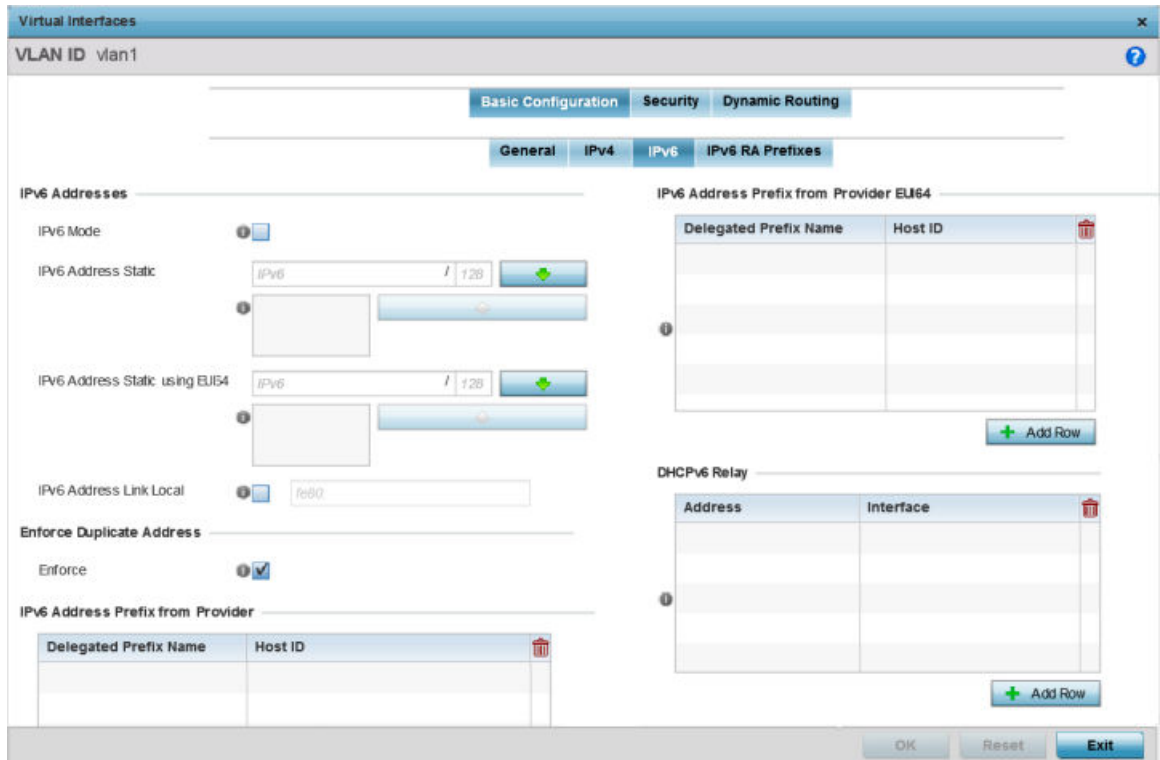


Figure 153: Profile Overrides - Interfaces - VLAN - Basic Configuration - IPv6 Screen

2. Refer to the **IPv6 Addresses** field to define how IP6 addresses are created and utilized:

IPv6 Mode	Select this option to enable IPv6 support on this virtual interface. IPv6 is disabled by default.
IPv6 Address Static	Define up to 15 global IPv6 IP addresses that can be created statically. IPv6 addresses are represented as eight groups of four hexadecimal digits separated by colons.
IPv6 Address Static using EUI64	Optionally, set up to 15 global IPv6 IP addresses (in the EUI-64 format) that can be created statically. The IPv6 EUI-64 format address is obtained through a 48-bit MAC address. The MAC is initially separated into two 24-bit parts, with one being an OUI (<i>Organizationally Unique Identifier</i>) and the other being client specific. A 16-bit 0xFFFE is then inserted between the two 24-bit parts for the 64-bit EUI address. IEEE has chosen FFFE as a reserved value which can only appear in EUI-64 generated from an EUI-48 MAC address.
IPv6 Address Link Local	Provide the IPv6 local link address. IPv6 requires a link local address assigned to every interface the IPv6 protocol is enabled, even when one or more routable addresses are assigned.

3. Enable the **Enforce Duplicate Address** option to enforce duplicate address protection when any wired port is connected and in a forwarding state.

This option is enabled by default.

4. In the **IPv6 Address Prefix from Provider** table, select **+ Add Row** to create IPv6 format prefix shortcuts as supplied by an ISP.

A new screen is launched. Define the new delegated prefix name and host ID here.

The screenshot shows a dialog box titled "Add Row" with a close button (x) in the top right corner. The main title is "IPv6 Address Prefix from Provider". Below the title, there are two input fields: "Delegated Prefix Name" with a red asterisk icon to its left, and "Host ID" with a red asterisk icon to its left. The "Host ID" field contains the text "IPv6" followed by a slash and the number "128". To the right of the "Host ID" field is a green button with a downward-pointing arrow. Below the "Host ID" field is a large empty text area with a red asterisk icon to its left. At the bottom of the dialog box, there are two buttons: "OK" and "Exit".

Figure 154: VLAN Interface - Basic Configuration - IPv6 Screen - IPv6 Address Prefix from Provider Field

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 address prefix from your provider.
Host ID	Define the subnet ID, host ID, and prefix length.

5. Click **OK** to save the changes to the IPv6 configuration.
Click **Exit** to close the screen without saving any updates.
6. In the **IPv6 Address Prefix from Provider EUI64** table, click **+ Add Row** to set an (abbreviated) IP address prefix in EUI64 format.
A new screen is launched. Define the new delegated prefix name and host ID can be defined in EUI64 format.

Figure 155: VLAN Interface - Basic Configuration - IPv6 Screen - IPv6 Address Prefix from Provider EU164 Field

Designated Prefix Name	Enter a 32-character maximum name for the IPv6 prefix from your provider in EUI format. Using EUI64, a host can automatically assign itself a unique 64-bit IPv6 interface identifier without manual configuration or DHCP.
Host ID	Define the subnet ID and prefix length.

- Click **OK** to save the changes to the new IPv6 prefix from provider in EUI64 format. Click **Exit** to close the screen without saving any updates.
- In the **DHCPv6 Relay** table, select **+Add Row** to set a new DHCPv6 relay address and interface VLAN ID can be set.
A new screen is launched. Define the new DHCPv6 relay address and interface VLAN ID here.

Figure 156: VLAN Interface - Basic Configuration - IPv6 Screen - DHCPv6 Relay Field

The DHCPv6 relay enhances an extended DHCP relay agent by providing support in IPv6. DHCP relays exchange messages between a DHCPv6 server and client. A client and relay agent exist on the same link. When a DHCP request is received from the client, the relay agent creates a relay forward message and sends it to a specified server address. If no addresses are specified, the relay agent forwards the message to all DHCP server relay multicast addresses. The server creates a relay reply and sends it back to the relay agent. The relay agent then sends back the response to the client.

Address	Enter an address for the DHCPv6 relay. These DHCPv6 relays receive messages from DHCPv6 clients and forward them to DHCPv6 servers. The DHCPv6 server sends responses back to the relay, and the relay then sends these responses to the client on the local network.
Interface	Select to enable a spinner control to define a VLAN ID from 1 - 4,094 used as the virtual interface for the DHCPv6 relay. The interface designation is only required for link local and multicast addresses. A local link address is a locally derived address designed for addressing on a single link for automatic address configuration, neighbor discovery or when no routing resources are available.

- Click **OK** to save the changes to the DHCPv6 relay configuration.
Click **Exit** to close the screen without saving any updates.

Profile Overrides - Basic - IPv6 RA Prefixes Configuration (AP Only)

To set the selected VLAN interface's IPv6 RA Prefix setting.

1. Select the **Basic Configuration** → **IPv6 RA Prefixes** tab.

The IPv6 RA Prefixes configuration screen displays.

Virtual Interfaces

VLAN ID vlan1

Basic Configuration Security Dynamic Routing

General IPv4 IPv6 IPv6 RA Prefixes

Router Advertisement Policy

Router Advertisement Policy

IPv6 RA Prefixes

Prefix Type	Prefix or Id	Site Prefix	Valid Lifetime Type	Valid Lifetime Sec	Valid Lifetime Date	Valid Lifetime Time	Preferred Lifetime Type	Preferred Lifetime Sec	Preferred Lifetime Date	Autoc onfig	Preferred Lifetime Time	On Link	

+ Add Row

OK Reset Exit

Figure 157: Profile Overrides - Interfaces - VLAN - Basic Configuration - IPv6 RA Prefixes Screen

2. Use the **Router Advertisement Policy** drop-down menu to select and apply a policy to the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

3. Review existing IPv6 advertisement policy configurations. If necessary, select **+ Add Row** to define additional IPv6 RA prefixes.

The add IPv6 RA Prefixes screen displays

Add Row

IPv6 RA Prefixes

Prefix Type:

Prefix or ID:

Site Prefix:

Valid Lifetime Type:

Valid Lifetime Sec:

Valid Lifetime Date:

Valid Lifetime Time: : AM PM

Preferred Lifetime Type:

Preferred Lifetime Sec:

Preferred Lifetime Date:

Preferred Lifetime Time: : AM PM

Autoc onfig:

On Link:

OK Exit

Figure 158: VLAN Interface - Basic Configuration - Add IPv6 RA Prefixes Screen

Define the following **IPv6 RA Prefix** settings:

Prefix Type	Set the prefix delegation type used with this configuration. Options include Prefix , and prefix-from-provider . The default setting is Prefix . A prefix allows an administrator to associate a user defined name to an IPv6 prefix. A provider assigned prefix is made available from an ISP (<i>Internet Service Provider</i>) to automate the process of providing and informing the prefixes used.
Prefix or ID	Set the actual prefix or ID used with the IPv6 router advertisement.
Site Prefix	The site prefix is added into a router advertisement prefix. The site address prefix signifies the address is only on the local link.

Valid Lifetime Type	Set the lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Valid Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is <i>External (fixed)</i> .
Valid Lifetime Sec	If the lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Valid Lifetime Date	If the lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Valid Lifetime Time	If the lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Preferred Lifetime Type	Set the administrator preferred lifetime for the prefix's validity. Options include External (fixed), decrementing , and infinite . If set to External (fixed), only the Preferred Lifetime Sec setting is enabled to define the exact time interval for prefix validity. If set to decrementing , use the lifetime date and time settings to refine the prefix expiry period. If set to infinite , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is <i>External (fixed)</i> .
Preferred Lifetime Sec	If the administrator preferred lifetime type is set to External (fixed), set the Seconds, Minutes, Hours, or Days values used to measure the prefix's expiration. 30 days, 0 hours, 0 minutes, and 0 seconds is the default lifetime.
Preferred Lifetime Date	If the administrator preferred lifetime type is set to External (fixed), set the date in MM/DD/YYYY format for the expiration of the prefix.
Preferred Lifetime Time	If the administrator preferred lifetime type is set to decrementing , set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM and PM radio buttons to set the appropriate hour.
Autoconfig	Autoconfiguration includes generating a link-local address, global addresses via stateless address autoconfiguration and duplicate address detection to verify the uniqueness of the addresses on a link. This setting is enabled by default.
On Link	Select this option to keep the IPv6 RA prefix on the local link. The default setting is enabled.

- Click **OK** to save the changes to the IPv6 RA prefix configuration.

Click **Reset** to revert to the last saved configuration. Or, click **Exit** to close the screen without saving any updates.

Profile Overrides - Security Configuration (AP Only)

To define new security settings or apply overrides to existing settings on a VLAN interface:

1. Select the **Security** tab.

The VLAN interface security screen displays.

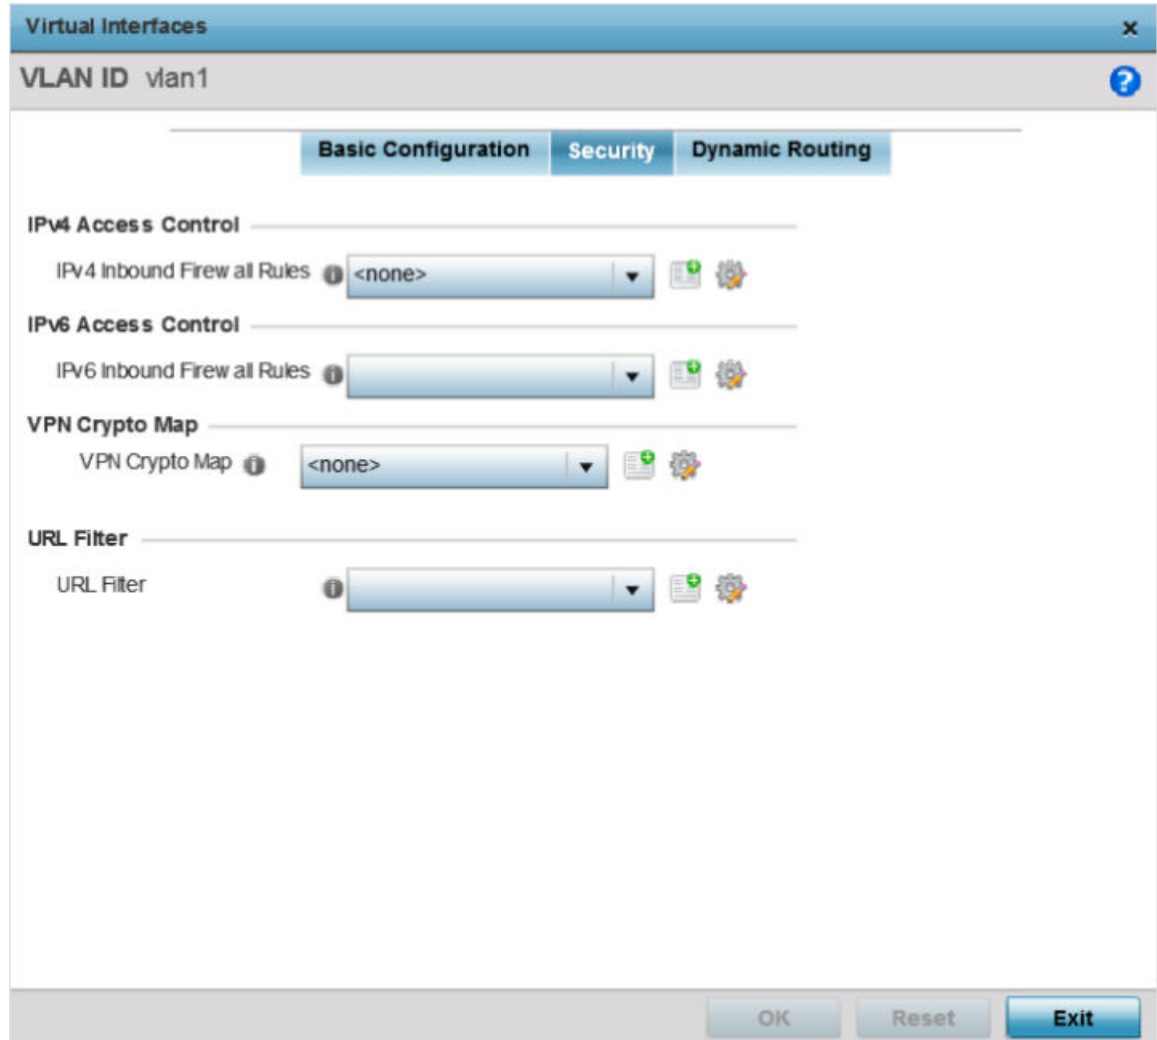


Figure 159: Profile Overrides - Interface - VLAN Interface - Security Screen

2. Review the existing firewalls applied on the selected VLAN interface. If needed add new firewalls or modify existing security settings.

3. Use the **IPv4 Inbound Firewall Rules** drop-down menu to select the IPv4 specific inbound firewall rules to apply to this profile's virtual interface configuration.
Click the **Create** icon to define a new IPv4 firewall rule configuration, or click the **Edit** icon to modify an existing configuration.

IPv4 is a connectionless protocol for packet switched networking. IPv4 operates as a best effort delivery method, since it does not guarantee delivery, and does not ensure proper sequencing or duplicate delivery (unlike (TCP). For more information on creating IPv4 firewall rules, see [Setting an IPv4 or IPv6 Firewall Policy](#) on page 841.

IPv4 and IPv6 are different enough to warrant separate protocols. IPv6 devices can alternatively use stateless address autoconfiguration. IPv4 hosts can use link local addressing to provide local connectivity.

4. Use the **IPv6 Inbound Firewall Rules** drop-down menu to select the IPv6 specific inbound firewall rules to apply to this profile's virtual interface configuration.
Click the **Create** icon to define a new IPv6 firewall rule configuration, or click the **Edit** icon to modify an existing configuration.

IPv6 is the latest revision of the Internet Protocol (IP) replacing IPv4. IPv6 provides enhanced identification and location information for systems routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. For more information on creating IPv6 firewall rules, see [Setting an IPv4 or IPv6 Firewall Policy](#) on page 841.

5. Use the **VPN Crypto Map** drop-down menu to select or override the Crypto Map configuration applied to this virtual interface.

The VPN Crypto Map entry defines the type of VPN connection and its parameters. For more information see [Defining Profile VPN Settings](#) on page 244.

6. Use the **URL Filter** drop-down menu to select or override the **URL Filter** configuration applied to this virtual interface.

URL filtering is used to restrict access to undesirable resources on the internet.

7. Click **OK** to save the VLAN interface security configuration changes.

Click **Reset** to revert to the last saved configuration, or click **Exit** to close the screen without saving any updates.

Profile Overrides - Dynamic Routing Configuration (AP Only)

To define new dynamic routing settings or apply overrides to existing settings on a VLAN interface:

1. To define new security settings or apply overrides to existing settings on a VLAN interface:

The VLAN interface dynamic routing screen displays.

Virtual Interfaces x

VLAN ID vlan1 ?

Basic Configuration **Security** **Dynamic Routing**

OSPF Settings

Priority ⓘ 0 (0 to 255)

Cost ⓘ 1 (1 to 65,535)

Bandwidth ⓘ 1 (1 to 10,000,000)

OSPF Authentication

Chosen Authentication Type: None

MD5 Authentication

Key ID	Password	

+ Add Row

OK Reset Exit

Figure 160: Profile Overrides - Interface - VLAN Interface - Dynamic Routing Screen

2. Define or override the following parameters in the **OSPF Settings** field:

Priority	Select this option to enable or disable OSPF priority settings. Use the spinner to configure a value from 0 - 255. This option sets the priority of this interface becoming the Designated Router (DR) for the network. DRs provide routing updates to the network by maintaining a complete topology table of the network and sends the updates to the other routers in the network using multicast. Setting a high value increases the chance of this interface becoming a DR. Setting this value to zero prevents this interface from being elected a DR.
Cost	Select this option to enable or disable OSPF cost settings. Use the spinner to configure a cost value from 1 - 65535. Use this option to set the OSPF cost of this interface. OSPF cost is the overhead required to send a packet over this interface.
Bandwidth	Set the OSPF bandwidth from 1 - 10,000,000 Kbps.

3. In the **OSPF Authentication** field, use the **Chosen Authentication Type** drop-down list to select the authentication type used to validate credentials within the OSPF dynamic route.

The available options are **None**, **null**, **simple-password**, and **message-digest**.

4. In the **MD5 Authentication** table, select **+ Add Row** and add the following MD5 authenticator credentials.

Key ID	Set the unique MD5 Authentication key ID. The available key ID range is 1 - 255.
Password	Set the OSPF password. This value is displayed as "asterisk" (*).

Use the spinner control to set the OSPF message digest authentication key ID. The available range is from 1 - 255. The password is the OSPF key either displayed as series or asterisks or in plain text (by selecting **Show**).

5. Click **OK** to save the VLAN interface dynamic routing configuration changes.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Port Channels

The access point's profile can be applied to customize the port channel configurations as part of its interface configuration.



Note

WiNG 7.1 does not provide port-channel configuration on AP505 and AP510 model access points.

To review an access point's existing VLAN configurations

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Interface** and select **Port Channels**.
The existing port channel configurations are displayed.

Name	Type	Description	Admin Status
port-channel1	Port Channel	Local Portchannel01	Enabled

Type to search in tables Row Count: 1

Add
Edit
Delete
Replace
Exit

Figure 161: Profile Overrides - Interface - Port Channels - Main Screen

- Review existing port channel configurations and their status to determine whether a parameter requires an override.

Name	The port channel's numerical identifier assigned when it was created. The numerical name cannot be modified as part of the edit process.
Type	Whether the type is port channel.
Description	A short description (64 characters maximum) describing the port channel or differentiating it from others with similar configurations.
Admin Status	A green check mark means the listed port channel is active and currently enabled with the profile. A red "X" means the port channel is currently disabled and not available for use. The interface status can be modified with the port channel configuration as required.

Profile Overrides - Basic Configuration (AP Only)

To add a new port channel configuration or apply overrides to an existing configuration:

1. Click **Add** to add a new configuration, or select an existing port channel and click **Edit**.

The port channel **Basic Configuration** screen displays by default.

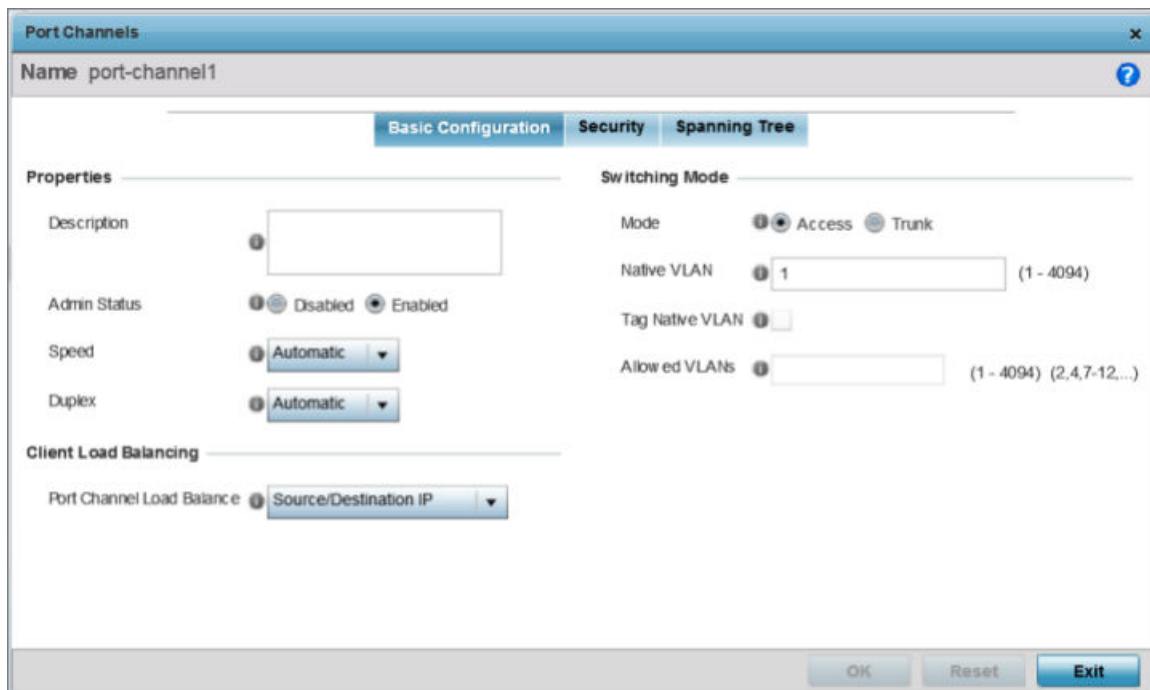


Figure 162: Port Channel Interface - Basic Configuration Screen

2. Set or override the following port channel **Properties**:

Description	Enter a brief description for the port channel (64 characters maximum). The description should reflect the port channel's intended function.
Admin Status	Select Enabled to define this port channel as active to the profile it supports. Select Disabled to disable this port channel configuration in the profile. It can be activated at any future time when needed. The default setting is <i>Enabled</i> .

Speed	Select the speed at which the port channel can receive and transmit data. Select either 10 Mbps , 100 Mbps , or 1000 Mbps to establish a 10, 100, or 1000 Mbps data transfer rate for the selected half duplex or full duplex transmission. Select <i>Automatic</i> to allow the port channel to automatically exchange information about data transmission speeds and duplex capabilities. Auto negotiation is helpful in an environment where different devices are connected and disconnected on a regular basis. The default setting is <i>Automatic</i> .
Duplex	Select Half , Full , or Automatic . Select <i>Half</i> duplex to send data over the port channel, then immediately receive data from the same direction in which the data was transmitted. Like a full-duplex transmission, a half-duplex transmission can carry data in both directions, just not at the same time. Select <i>Full</i> duplex to transmit data to and from the port channel at the same time. Using full duplex, the port channel can send data while receiving data as well. Select <i>Automatic</i> to enable the controller or service platform to dynamically duplex as port channel performance needs dictate. The default setting is <i>Automatic</i> .

- In the **Client Load Balancing** field, use the **Port Channel Load Balance** drop-down menu to define whether port channel load balancing is conducted using a **Source/Destination IP** or a **Source/Destination MAC**.

The default setting is *Source/Destination IP*.

- Set or override the following **Switching Mode** parameters to apply to the port channel configuration:

Mode	Select either Access or Trunk to set the VLAN switching mode over the port channel. If <i>Access</i> is selected, the port channel accepts packets only from the native VLAN. Frames are forwarded untagged with no 802.1Q header. All frames received on the port are expected as untagged and are mapped to the native VLAN. If the mode is set to <i>Trunk</i> , the port channel allows packets from a list of VLANs you add to the trunk. A port channel configured as Trunk supports multiple 802.1Q tagged VLANs and one Native VLAN which can be tagged or untagged. The default setting is <i>Access</i> .
Native VLAN	Use the spinner control to define a numerical Native VLAN ID from 1 - 4094. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN untagged traffic will be directed over when using trunk mode. The default value is 1.

Tag Native VLAN	<p>Select this option to tag the native VLAN. Controllers and service platforms support the IEEE 802.1Q specification for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs to. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, a 12-bit frame VLAN ID is added to the 802.1Q header, so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12-bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This setting is disabled by default.</p> <p>Note: This option is enabled when the switching mode is set as Trunk.</p>
Allowed VLANs	<p>Add VLANs that exclusively send packets over the port channel.</p> <p>Note: This option is enabled when the switching mode is set as Trunk.</p>

- Click **OK** to save port channel basic configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Security Configuration (AP Only)

To override port channel security configurations:

1. Select the **Security** tab.

The port channel security configuration screen displays.

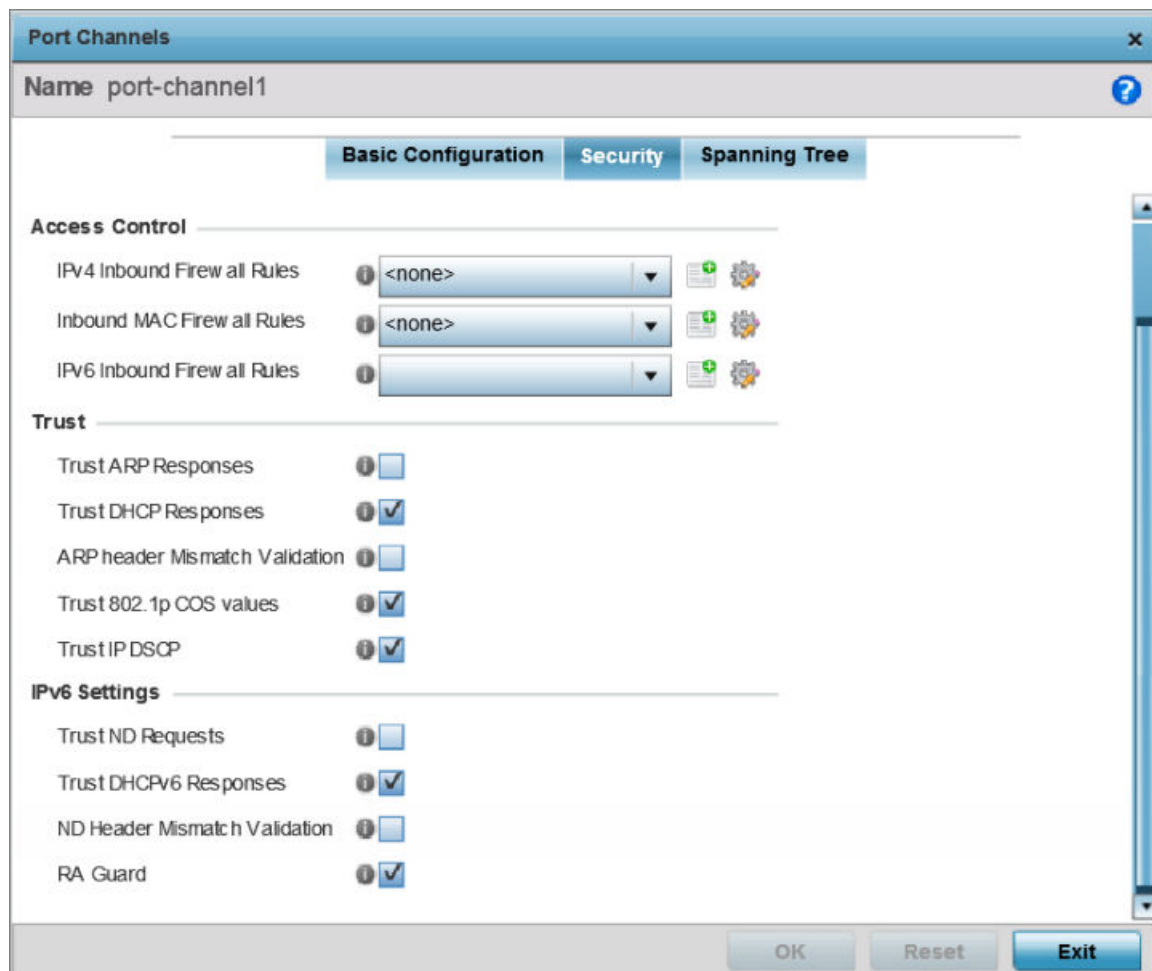


Figure 163: Port channel - Security Configuration Screen

2. Use the **IPv4 Inbound Firewall Rules** drop-down menu to select the IPv4 specific firewall rules to apply to this profile's port channel configuration.

IPv4 is a connectionless protocol for packet switched networking. IPv4 operates as a best effort delivery method, as it does not guarantee delivery, and does not ensure proper sequencing or duplicate delivery (unlike (TCP)). IPv4 hosts can use link local addressing to provide local connectivity.

3. Use the **IPv6 Inbound Firewall Rules** drop-down menu to select the IPv6 specific firewall rules to apply to this profile's port channel configuration.

IPv6 is the latest revision of the Internet Protocol (IP) designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.

4. If there is no firewall rule that meets the data protection needs of the target port channel configuration, click the **Create** icon to define a new rule configuration, or click the **Edit** icon to modify an existing firewall rule configuration.
5. Refer to the **Trust** field to define or override the following:

Trust ARP Responses	Select to enable ARP trust on this port. ARP packets received on this port are considered trusted, and the information from these packets is used to identify rogue devices within the network. This option is disabled by default.
Trust DHCP Responses	Select to enable DHCP trust on this port. If enabled, only DHCP responses are trusted and forwarded on this port, and a DHCP server can be connected only to a DHCP trusted port. This option is enabled by default.
ARP Header Mismatch Validation	Select to enable a mismatch check for the source MAC in both the ARP and Ethernet header. This option is enabled by default.
Trust 802.1p COS values	Select to enable 802.1p COS values on this port. This option is enabled by default.
Trust IP DSCP	Select this option to enable IP DSCP values on this port. This option is enabled by default.

6. Set the following **IPv6 Settings**:

Trust ND Requests	Select to enable the trust of neighbor discovery requests required on an IPv6 network. This setting is disabled by default.
Trust DHCPv6 Responses	Select to enable the trust all DHCPv6 responses. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. This setting is enabled by default.
ND Header Mismatch Validation	Select to enable a mismatch check for the source MAC within the ND header and Link Layer Option. This option is disabled by default.
RA Guard	Select this option to enable router advertisements or ICMPv6 redirects from this Ethernet port. This option is disabled by default.

7. Click **OK** to save the changes and overrides to the security configuration.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Spanning Tree Configuration (AP Only)

To override port channel spanning tree configurations:

1. Select the **Spanning Tree** tab.

The port channel spanning tree configuration screen displays.

Port Channels x

Name port-channel1 ?

Basic Configuration | **Security** | **Spanning Tree**

PortFast

Enable PortFast

Enable PortFast BPDU Filter

Enable PortFast BPDU Guard

MSTP Configuration

Link Type Point-to-Point Shared

Cisco MSTP Interoperability Enable Disable

Force Protocol Version STP (0)
 Not Supported (1)
 RSTP (2)
 MSTP (3)

Guard None Root

Spanning Tree Port Cost

Instance Index	Cost	

Spanning Tree Port Priority

Instance Index	Priority	

Figure 164: Port Channel - Spanning Tree Configuration Screen

2. Define or override the following **PortFast** parameters for the port channel's MSTP configuration:

Enable PortFast	Select to enable drop-down menus for the Enable PortFast BPDU Filter and Enable PortFast BPDU Guard options. This option is disabled by default. PortFast reduces the time required for a port to complete a MSTP state change from Blocked to Forward. PortFast must only be enabled on ports on the wireless controller directly connected to a server/workstation and not another hub or controller. PortFast can be left unconfigured on an access point.
Enable PortFast BPDU Filter	Enable PortFast to invoke a BPDU filter for this portfast enabled port channel. Enabling the BPDU filter feature ensures this port channel does not transmit or receive any BPDUs. The options are: <ul style="list-style-type: none"> • Default — This is the default setting. This option makes the bridge BPDU filter value to take effect. • Enable — Enables BPDU filtering. • Disable — Disables BPDU filtering.
Enable PortFast BPDU Guard	Enable PortFast to invoke a BPDU guard for this portfast enabled port channel. Enabling the BPDU guard feature means this port will shutdown on receiving a BPDU. Hence no BPDUs are processed. The options are: <ul style="list-style-type: none"> • Default — This is the default setting. This option makes the bridge BPDU guard value to take effect. • Enable — Enables shutting down of port. • Disable — Disables shutting down of port.

3. Set or override the following **MSTP Configuration** parameters for the port channel:

Link Type	Select one of the following link type options: <ul style="list-style-type: none"> • Point-to-Point - Select to configure the port as connected to a point-to-point link. This is the default setting. • Shared - Select to configure the port as having a shared connection. <p>Note: A port connected to a hub is on a Shared link. Whereas, a port connected to a controller or service platform is a Point-to-Point link.</p>
Cisco MSTP Interoperability	Select to Enable or Disable interoperability with Cisco's version of MSTP over the port. Cisco's version of MSTP is incompatible with standard MSTP. This default setting is <i>Disable</i> .

Force Protocol Version	Set the protocol version to either STP (0) , Not Supported (1) , RSTP (2) , or MSTP (3) . The default setting is <i>MSTP(3)</i> .
Guard	Determines whether the port channel enforces root bridge placement. Setting the guard to Root ensures the port is a designated port. Typically, each guard root port is a designated port, unless two or more ports (within the root bridge) are connected together. If the bridge receives superior (BPDUs) on a guard root-enabled port, the guard root moves the port to a root-inconsistent STP state. This state is equivalent to a listening state. No data is forwarded across the port. Thus, the guard root enforces the root bridge position.

4. Refer to the **Spanning Tree Port Cost** table.

Define or override an **Instance Index** using the spinner control, and set its corresponding cost in the **Cost** column. The default path cost depends on the user defined port speed. The cost helps determine the role of the port channel in the MSTP network.

The designated cost is the cost for a packet to travel from this port to the root in the MSTP configuration. The slower the media, higher the cost.

Table 7: Spanning Tree Port Cost

Speed	Default Path Cost
<=100,000 bits/sec	200000000
<=1,000,000 bits/sec	20000000
<=10,000,000 bits/sec	2000000
<=100,000,000 bits/sec	200000
<=1,000,000,000 bits/sec	20000
<=10,000,000,000 bits/sec	2000
<=100,000,000,000 bits/sec	200
<=1,000,000,000,000 bits/sec	20
>1,000,000,000,000 bits/sec	2

Click **+ Add Row** to include additional indexes.

5. Refer to the **Spanning Tree Port Priority** table.

Define or override an **Instance Index** using the spinner control, then set the **Priority**. The lower the priority, the greater likelihood of the port becoming a designated port.

Select **+ Add Row** as needed to include additional indexes.

6. Click **OK** to save the changes and overrides made to the Ethernet port's Spanning Tree configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Radios

An access point can have its radio profile configuration overridden after its radios have successfully associated to the network.

To review an access point's existing radio configurations

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Interface** and select **Radios**.

The selected access points radio configurations are displayed.



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

Name	Type	Description	Admin Status	RF Mode	Channel	Transmit Power
radio1	Radio	radio1	Enabled	2.4 GHz WLAN	smart	smart
radio2	Radio	radio2	Enabled	5 GHz WLAN	smart	smart

Figure 165: Profile Overrides - Interface - Radios - Main Screen

4. Review the following radio configuration data to determine whether a radio configuration needs to be modified to better support the network:

Name	Displays whether the reporting radio is radio 1, radio 2 or radio 3.
Type	Displays whether the radio has been designated as a typical WLAN radio or if the radio has been designated as a sensor.
Description	A brief description provided by the administrator when the radio's configuration was added or modified.
Admin Status	A green check mark means the radio is enabled for client or sensor support. A red "X" means the radio is currently disabled.
RF Mode	Displays whether each listed radio is operating in the 802.11a/n or 802.11b/g/n radio band. If the radio is a dedicated sensor, it will be listed as a sensor to define the radio as not providing typical WLAN support. If the radio is a client bridge, it provides a typical bridging function and does not provide WLAN support. The radio band is set in the Radio Settings tab.
Channel	Lists the channel setting for the radio. Smart is the default setting. Smart indicates the access point is set for dynamic Smart RF support. If set to <i>Smart</i> , the access point scans non-overlapping channels listening for beacons from other access points. After the channels are scanned, it selects the channel with the fewest access points. In the case of multiple access points on the same channel, it selects the channel with the lowest average power level.
Transmit Power	Lists the transmit power for each radio. The column displays smart if Smart-RF is used to set the transmit power for this radio.
Overrides	Click Clear to clear overrides made to this radio interface. This field is blank if there are no overrides for this radio.

Profile Overrides - Radio Settings

To override a radio's basic settings:

1. Select the desired radio from the displayed list and click **Edit**.
The **Radio Settings** tab displays by default.

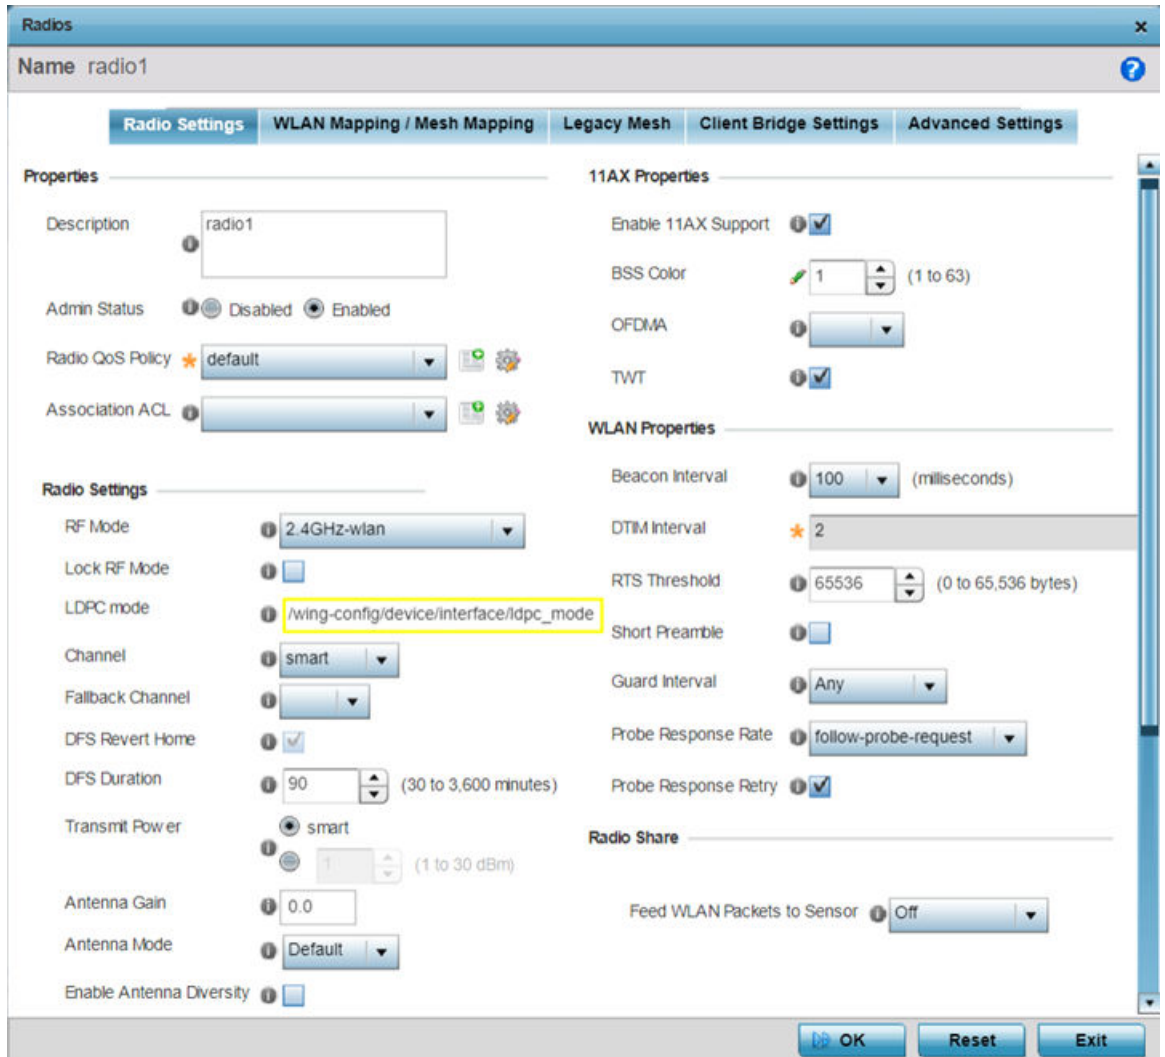


Figure 166: Radio Interface - Radio Settings Screen

2. Define or override the following radio configuration **Properties**:

Description	Provide or edit a description (1 - 64 characters in length) for the radio that helps differentiate it from others with similar configurations.
Admin Status	Select Enabled or Disabled to define this radio's current status within the network. When enabled, the access point is operational and available for client support within the network. The radio is enabled by default and must be shut down manually.

Radio QoS Policy	Use the drop-down menu to specify an existing QoS policy to apply to the access point radio in respect to its intended radio traffic. If no existing policy is suitable for this radio's intended operation, select the Create icon to define a new QoS policy.
Association ACL	Specify an existing Association ACL policy to apply to the radio. An Association ACL is a policy-based ACL (<i>Access Control List</i>) that either prevents or allows wireless clients from connecting to an access point radio. An ACL is a sequential collection of permit and deny conditions that apply to packets. When a packet is received on an interface, the fields in the packet are compared to applied ACLs to verify the packet has the required permissions needed to be forwarded. If a packet does not meet any of the ACL criteria, the packet is dropped. Select the Create icon to define a new Association ACL.

3. Define or override the following **Radio Settings** for the selected access point radio:

RF Mode	<p>The radio can be configured to provide WLAN service for 2.4 GHz, 5 GHz, and 6 GHz enabled clients. You can also set the radio to provide sensor support, scan-ahead support, or function as a client bridge.</p> <p>Set the mode to either <i>2.4 GHz WLAN</i>, <i>5 GHz WLAN</i>, or <i>6 GHz</i> depending on the radio's intended client support requirement.</p> <p>Set the mode to <i>Sensor</i> if using the radio for rogue device detection. To set a radio as a detector, disable Sensor support on the other access point radio.</p> <p>Set the mode to <i>scan-ahead</i> in DFS aware countries to allow a mesh points secondary radio to scan for an alternative channel for backhaul transmission in the event of a radar event on the principal radio. The secondary radio is continually monitoring the alternate channel, which means the principal radio can switch channels and transmit data immediately without waiting for the channel availability check.</p> <p>Set the mode to <i>bridge</i> to configure the radio as a client bridge. A client bridge enables the access point to connect to a third party access point and bridge frames to it.</p> <p>The client-bridge is supported only on the following access point models: AP3000, AP3000X, AP5010, AP6522, AP6562, AP7522, AP7532, AP7612, AP7632 and AP7662.</p> <p>Note: For AP510 model access point, you can provide 5 GHz WLAN support on both radio 1 and radio 2.</p> <p>Note: rf-mode <i>scan-ahead</i> and <i>bridge</i> are not supported on the AP 505i and AP510i model access points.</p> <p>Note: For information on the possible modes of operations for AP505 and AP510 radios, see ap510i and ap505i.</p>
Lock RF Mode	<p>Select this option to lock Smart RF calibration functions for this radio. The default setting is disabled.</p>
Channel	<p>Select the channel of operation for the radio. Only a trained installation professional should define the radio channel. Select Smart for the radio to scan non-overlapping channels to listen for beacons from other access points. After channels are scanned, the radio selects the channel with the fewest access points. In case of multiple access points on the same channel, it selects the channel with the lowest average power level. The default value is Smart.</p> <p>Channels with a "w" appended to them are unique to the 40 MHz band.</p>

DFS Revert Home	<p>Select this option to enable a radio to return to its original channel. DFS (<i>Dynamic Frequency Selection</i>) prevents a radio from operating in a channel where radar signals are present. When radar signals are detected in a channel, the radio changes its channel of operation to another channel. The radio cannot use the channel it has moved from for the next 30 minutes. When DFS Revert Home is selected, the radio can return back to its original channel of operation when the 30-minute period is over. When not selected, the radio cannot return back to its original channel of operation ever after the mandatory 30-minute evacuation period is over.</p> <p>Note: This option is enabled only if the RF Mode is set to 5GH-wlan.</p>
DFS Duration	<p>Set the DFS duration between 30 and 3,600 minutes. This is the duration for which the radio stays in the new channel. The default value is 90 minutes.</p>
Transmit Power	<p>Set the transmit power of the selected access point radio. If the access point has two radios, each radio should be configured with a unique transmit power in respect to its intended client support function.</p> <p>Select smart to let Smart RF determine the transmit power. Or else, select the other option and manually enter the radio's transmit power.</p> <p>The default setting is smart.</p> <p>Note: This option is enabled only if the RF Mode is set to 2.5GHZ-wlan or 5GH-wlan.</p>
Antenna Gain	<p>Set the antenna between 0.00 - 15.00 dBm. The access point's PMACF (<i>Power Management Antenna Configuration File</i>) automatically configures the access point's radio transmit power based on the antenna type, its antenna gain (provided here) and the deployed country's regulatory domain restrictions. Once provided, the access point calculates the power range. Antenna gain relates the intensity of an antenna in a given direction to the intensity that would be produced ideally by an antenna that radiates equally in all directions (isotropically), and has no losses. Although the gain of an antenna is directly related to its directivity, its gain is a measure that takes into account the efficiency of the antenna as well as its directional capabilities. Only a professional installer should set the antenna gain. The default value is 0.00.</p>

Antenna Mode	Set the number of transmit and receive antennas on the access point. 1x1 is used for transmissions over just the single "A" antenna, 1x3 is used for transmissions over the "A" antenna and all three antennas for receiving. 2x2 is used for transmissions and receipts over two antennas for dual antenna models. The default setting is dynamic, based on the access point model and its transmit power settings.
Enable Antenna Diversity	Select this option for the radio to dynamically change the number of transmit chains. This option is enabled by default.
Adaptivity Recovery	Select this option to switch channels when an access point's radio is in adaptivity mode. In adaptivity mode, an access point monitors interference on its set channel and stops functioning when the radio's defined interference tolerance level is exceeded. When the defined adaptivity timeout is exceeded, the radio resumes functionality on a different channel. This option is enabled by default.
Adaptivity Timeout	Set the adaptivity timeout from 30 to 3,600 minutes. The default setting is 90 minutes.
Wireless Client Power	Select this option to enable a spinner control for client radio power transmissions in dBm. The available range is 0 - 20 dBm. This option is disabled by default.
Dynamic Chain Selection	Select this option to allow the access point radio to dynamically change the number of transmit chains. The radio uses a single chain/antenna for frames at non 802.11n data rates. This setting is disabled by default.

Data Rate	<p>Once the radio band is provided, the Rate drop-down menu populates with rate options depending on the 2.4 or 5.0 GHz band selected.</p> <p>Note: The Data Rates drop-down menu is disabled for radios running as sensors.</p> <p>If 2.4 GHz is selected as the radio band, select separate 802.11b, 802.11g and 802.11n rates and define how they are used in combination. If 5 or 6 GHz is selected as the radio band, select separate 802.11a and 802.11n rates define how they are used together. When using 802.11n (in either the 2.4, 5.0, or 6 GHz band), Set a MCS (modulation and coding scheme) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of 8 data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).</p> <p>If you are dedicating the radio to either 2.4, 5 or 6 Ghz support, a Custom Rates option is available to set a modulation and coding scheme (MCS) with respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of rates, bonded channels, multiple spatial streams, different guard intervals and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates). If Basic is selected within the 802.11n Rates field, the MCS0-7 option is auto selected as a supported rate and that option is grayed out. If Basic is not selected, any combination of MCS0-7, MCS8-15 and MCS16-23 can be supported, including a case where MCS0-7 and MCS16-23 are selected and not MCS8-15. The MCS0-7 and MCS8-15 options are available to each support access point.</p> <p>Note: For information on supported data rates, click here.</p>
Radio Placement	<p>Specify whether the radio is located Indoor or Outdoor. The placement should depend on the country of operation selected and its regulatory domain requirements for radio emissions. The default setting is Indoors.</p>

Max Clients	<p>Set the maximum permissible client connections for this radio. Set a value from 0 - 256. The default value is 256.</p> <p>Note: Most access point models can support up to 256 clients per access point radio.</p> <p>Note: The AP505i and AP510i can support a maximum of 250 clients per radio.</p>
Rate Selection Methods	<p>Specify the algorithm to use for rate selection. Select Standard to use the standard rate selection algorithm. Select Opportunistic to use the Opportunistic rate selection algorithm.</p>

4. Set or override the following **WLAN Properties** for the selected access point radio:

Beacon Interval	<p>Set the interval between radio beacons in milliseconds (either 50, 100 or 200). A beacon is a packet broadcast by adopted radios to keep the network synchronized. Included in a beacon is the WLAN service area, radio address, broadcast destination addresses, a time stamp, and indicators about traffic and delivery (such as a DTIM). Increase the DTIM/ beacon settings (lengthening the time) to let nodes sleep longer and preserve battery life. Decrease these settings (shortening the time) to support streaming-multicast audio and video applications that are jittersensitive. The default value is 100 milliseconds.</p>
DTIM Interval	<p>Set a DTIM Interval to specify a period for DTIM (<i>Delivery Traffic Indication Messages</i>). A DTIM is periodically included in a beacon frame transmitted from adopted radios. The DTIM indicates broadcast and multicast frames (buffered at the access point) are soon to arrive. These are simple data frames that require no acknowledgment, so nodes sometimes miss them. Increase the DTIM/ beacon settings (lengthening the time) to let nodes sleep longer and preserve their battery life. Decrease these settings (shortening the time) to support streaming multicast audio and video applications that are jitter-sensitive.</p>

RTS Threshold	<p>Specify a RTS (<i>Request To Send</i>) threshold (from 1 - 65,536 bytes) for use by the WLAN's adopted access point radios. RTS is a transmitting station's signal that requests a CTS (<i>Clear To Send</i>) response from a receiving client. This RTS/CTS procedure clears the air where clients are contending for transmission time. Benefits include fewer data collisions and better communication with nodes that are hard to find (or hidden) because of other active nodes in the transmission path. The default value is 65,536 bytes.</p> <p>Control RTS/CTS by setting an RTS threshold. This setting initiates an RTS/ CTS exchange for data frames larger than the threshold, and sends (without RTS/CTS) any data frames smaller than the threshold.</p> <p>Consider the tradeoffs when setting an appropriate RTS threshold for the WLAN's access point radios. A lower RTS threshold causes more frequent RTS/CTS exchanges. This consumes more bandwidth because of additional latency (RTS/CTS exchanges) before transmissions can commence. A disadvantage is the reduction in data-frame throughput. An advantage is quicker system recovery from electromagnetic interference and data collisions. Environments with more wireless traffic and contention for transmission make the best use of a lower RTS threshold.</p> <p>A higher RTS threshold minimizes RTS/CTS exchanges, consuming less bandwidth for data transmissions. A disadvantage is less help to nodes that encounter interference and collisions. An advantage is faster data-frame throughput. Environments with less wireless traffic and contention for transmission make the best use of a higher RTS threshold.</p>
Short Preamble	<p>If you are using an 802.11bg radio, select this option for the radio to transmit using a short preamble. Short preambles improve throughput. However, some devices (SpectraLink phones) require long preambles. This option is disabled by default.</p>
Guard Interval	<p>Specify a Long or Any guard interval. The guard interval is the space between characters being transmitted. The guard interval eliminates ISI (<i>inter-symbol interference</i>). ISI occurs when echoes or reflections from one character interfere with another character. Adding time between transmissions allows echo's and reflections to settle before the next character is transmitted. A shorter guard interval results in shorter character times which reduces overhead and increases data rates by up to 10%. The default value is <i>Any</i>.</p>
Probe Response Rate	<p>Specify the data rate used for the transmission of probe responses. Options include highest-basic, lowest-basic, and follow-probe-request. The default value is follow-probe-request.</p>
Probe Response Retry	<p>Select this option to retry probe responses if they are not acknowledged by the target wireless client. This option is enabled by default.</p>

- Use the **Feed WLAN Packets to Sensor** drop-down menu to allow the radio to send WLAN packets to the sensor radio.

Options include **Off**, **InLine**, and **Promiscuous**. The default setting is Off.

Profile Overrides - Wlan/Mesh Mapping

You can assign each WLAN its own BSSID. If using a single-radio access point, there are 8 BSSIDs available. If using a dual-radio access point there are 8 BSSIDs for the 802.11b/g/n radio and 8 BSSIDs for the 802.11a/n radio.



Note

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This option will be supported in future releases.

To override a radio's WLAN/Mesh assignment:

- Select the **WLAN Mapping / Mesh Mapping** tab.

The WLAN / Mesh Mapping screen displays.

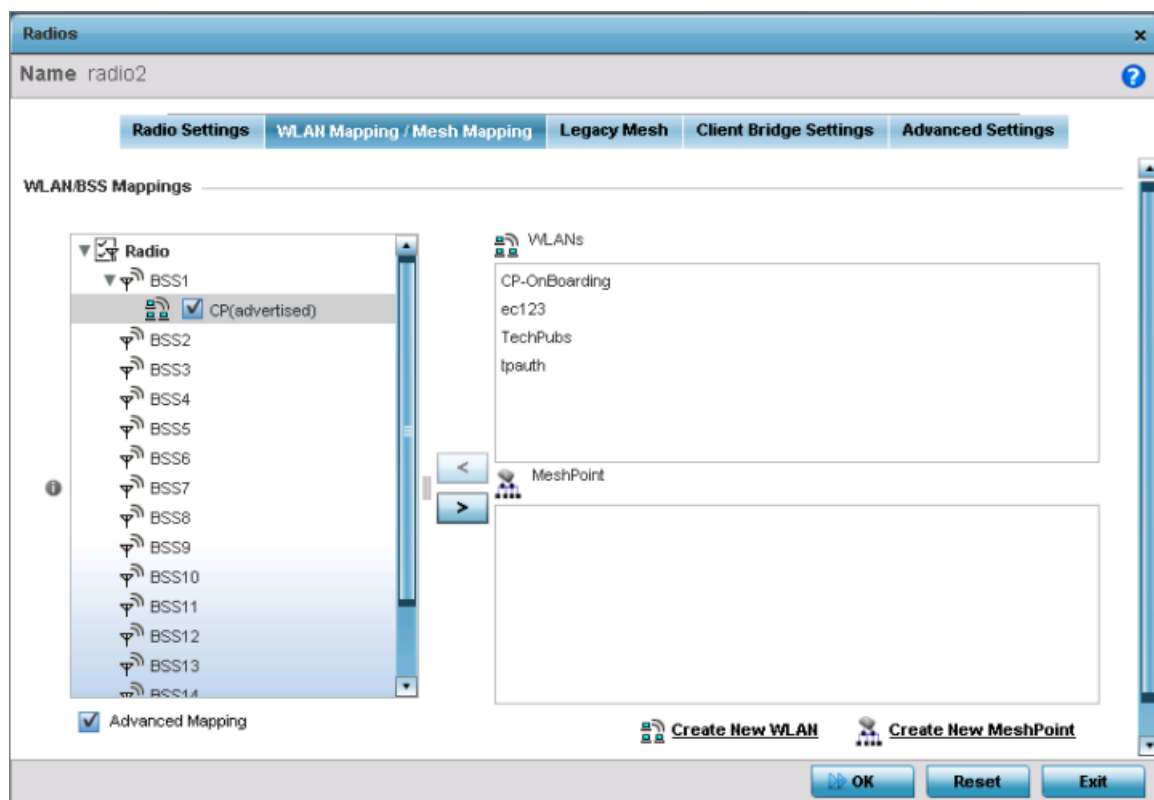


Figure 167: Profile Overrides - Radio Interface - WLAN Mapping / Mesh Mapping Screen

2. Refer to the **WLAN/BSS Mappings** field to set or override WLAN BSSID assignments for an existing access point deployment.

Use the '<' or '>' buttons to assign WLANs and mesh points to the available BSSIDs.

Administrators can assign each WLAN its own BSSID. If using a single-radio access point, there are 8 BSSIDs available. If using a dual-radio access point there are 8 BSSIDs for the 802.11b/g/n radio and 8 BSSIDs for the 802.11a/n radio. Each supported access point model can support up to 8 BSS IDs.

3. Select **Advanced Mapping** to populate the **Radio** field with BSS IDs.
4. Click **OK** to save the changes and overrides to the WLAN mapping.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Legacy Mesh

Each radio profile can have a unique mesh mode and link configuration. This provides a customizable set of connections to other mesh supported radios within the same radio coverage area.



Note

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This feature will be supported in future releases.

To override a radio's Legacy Mesh configuration:

1. Select the **Legacy Mesh** tab.

The **Legacy Mesh** screen displays. Use this screen to define or override how mesh connections are established and the number of links available among access points within the Mesh network.

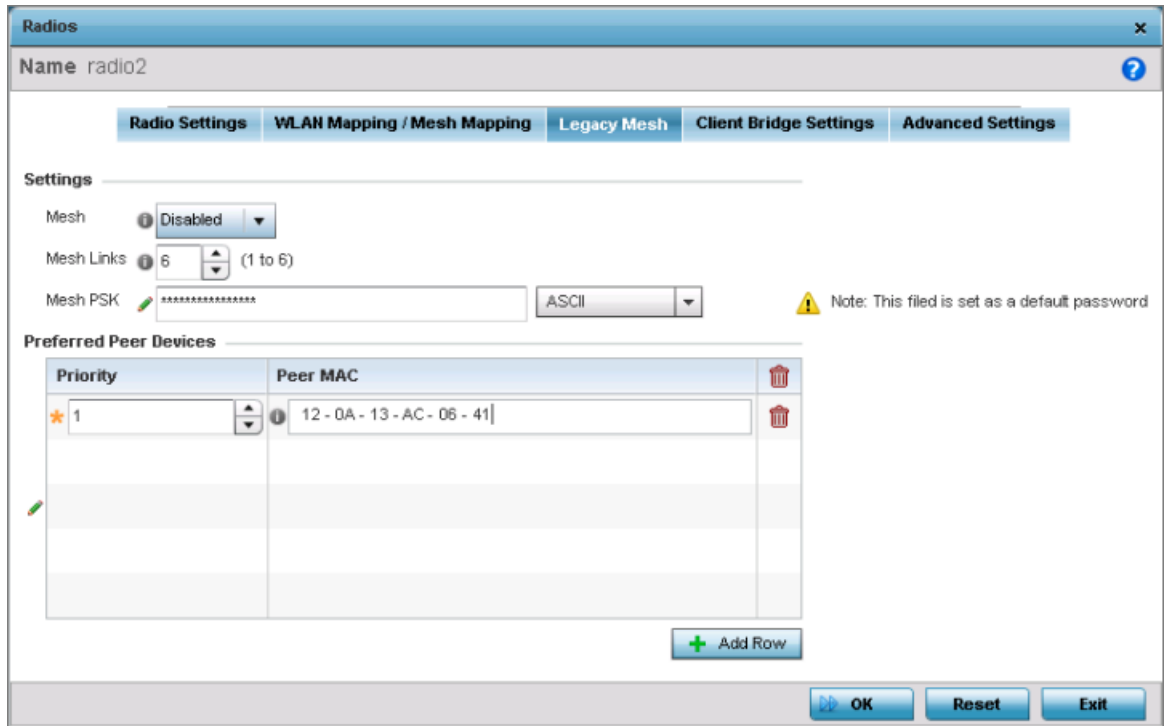


Figure 168: Radio Interface - Legacy Mesh Configuration Screen

2. Define the following mesh legacy **Settings**:

Mesh	Set the mesh mode for this radio – either Client , Portal , or Disabled . Select <i>Client</i> to scan for mesh portals, or nodes that have connection to portals, and connect through them. The <i>Portal</i> operation begins beaconing immediately and accepts connections from other mesh supported nodes. In general, the portal is connected to the wired network. The default value is <i>Disabled</i> .
Mesh Links	Specify the number of mesh links (1 -6) an access point radio will attempt to create. The default setting is 3 links.
Mesh PSK	Use the field to define the shared key for mesh. From the drop-down, select the type of the key. Click Show to display the characters used in the key.

3. In the **Preferred Peer Devices** table, click **+ Add Row** and define the following MAC addresses to preferred mesh connection mappings:

Priority	Use this spinner control to set a priority (1 -6) for connection preference.
Peer MAC	For each priority value, define the MAC address of the associated peer device. Use this option to are define MAC addresses representing peer devices for the radio to connect to in mesh mode.

4. Click **OK** to save the Mesh configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Client Bridge

An access point's radio can be configured to form a bridge between its wireless/wired clients and an infrastructure WLAN. The bridge radio authenticates and associates with an infrastructure WLAN access point. After successful association, the access point switches frames between its bridge radio and wired/wireless client(s) connected either to its GE port(s) or to the other radio, thereby providing the clients access to the infrastructure WLAN resources.



Note

WiNG 7.1 release does not support Client Bridge configuration on AP505i and AP510i model access points. This feature will be supported in future releases.

To override a radio's client bridge settings:

1. Select the **Client Bridge Settings** tab.



Note

Before configuring the client-bridge parameters, set the radio's **rf-mode** to **bridge**.

An access point's radio can be configured to form a bridge between its wireless/wired clients and an infrastructure WLAN. The bridge radio authenticates and associates with an infrastructure WLAN Access Point. After successful association, the Access Point switches frames between its bridge radio and wired/wireless client(s) connected either to its GE port(s) or to the other radio, thereby providing the clients access to the infrastructure WLAN resources.

This feature is supported only on the AP3000, AP3000X, AP6522, AP6562, AP7522, AP7532, AP7562, AP7602, AP7622.

The selected radio's client bridge configuration screen displays.

The screenshot shows the configuration interface for a radio named 'radio2'. The 'Client Bridge Settings' tab is selected. The configuration is organized into several sections:

- General:** Includes fields for SSID, WLAN (set to 1), Max Clients (set to 64), Connect through Bridges (checkbox), Channel Or el Time (set to 150), Authentication (set to None), and Encryption (set to None).
- EAP Parameters:** Includes Type (PEAP-MS-CHAPv2), Username, Password, Pre-shared Key (1234567890abcdefghijklmnopqrstuvwxyz), Handshake Basic Rate (set to highest), Trustpoint CA, Trustpoint Client, and Trustpoint Expiry (set to continue).
- Channel Lists:** Shows two bands, Band A and Band B. Band A has channels 1, 36, 40, and 44. Band B has channels 1, 2, and 3.
- Keepalive Parameters:** This section is currently empty.

At the bottom of the screen, there are buttons for 'OK', 'Reset', and 'Exit'.

Figure 169: Radio Interface - Client Bridge Configuration Screen

2. Define the following **General** settings:

SSID	Set the infrastructure WLAN's SSID, with which the client-bridge access point associates.
VLAN	Set the VLAN to which the bridged clients' sessions are mapped after successful association with the infrastructure WLAN. Once mapped, the client bridge communicates with permitted hosts over the infrastructure WLAN. Specify the VLAN from 1 to 4095.
Max Clients	Set the maximum number of client-bridge access points that can associate with the infrastructure WLAN. Specify a value from 1 to 64. The default value is 64.
Connect through Bridges	Select this option to enable the client-bridge access point radio to associate with the infrastructure WLAN through another client-bridge radio thereby forming a chain. This is referred to as daisy chaining of client-bridge radios. This option is disabled by default.
Channel Dwell Time	Set the channel-dwell time from 50 to 2000 milliseconds. This is the time the client-bridge radio dwells on each channel (configured in the list of channels) when scanning for an infrastructure WLAN. The default is 150 milliseconds.
Authentication	Set the mode of authentication with the infrastructure WLAN. The authentication mode specified here should be the same as that configured on the infrastructure WLAN. The options are None and EAP . If you select EAP , specify the EAP authentication parameters. The default setting is <i>None</i> . For information on WLAN authentication, see Configure WLAN Security on page 627.
Encryption	Set the packet encryption mode. The encryption mode specified here should be the same as that configured on the infrastructure WLAN. The options are None , CCMP , and TKIP . The default setting is <i>None</i> . For information on WLAN encryption, see Configure WLAN Security on page 627.

3. Refer to the **EAP Parameters** field and define the following EAP authentication parameters:

Type	Select the EAP authentication method used by the supplicant. The options are TLS and PEAP-MS-CHAPv2 . The default EAP type is PEAP-MS-CHAPv2 .
Username	Set the 32-character maximum user name for an EAP authentication credential exchange.
Password	Set the 32-character maximum password for the specified EAP user name.
Pre-shared Key	Set the PSK (<i>pre-shared key</i>) used with EAP. Note that the authenticating algorithm and PSK should be the same as on the infrastructure WLAN.

Handshake Basic Rate	Set the basic rate of exchange of handshake packets between the client-bridge and infrastructure WLAN Access Points. The options are highest and normal . The default value is highest .
Trustpoint CA	Set the <i>Trustpoint CA</i> name (this is the trustpoint installed on the RADIUS server host). This parameter is applicable to both EAP-TLS and PEAP-MS-CHAPv2 authentication modes. In case of both EAP-TLS and PEAP-MS-CHAPv2 authentication, provide the RADIUS server TP name to enable RADIUS server certificate validation at the client end. This parameter is not mandatory for enabling TP-based authentication of CB (<i>Client-Bridge</i>) AP.
Trustpoint Client	Set the <i>Trustpoint Client</i> name (this is the TP installed on the CB AP). This parameter is applicable only for EAP-TLS authentication mode. When configured, this client certificate is sent across a TLS tunnel and matched for authentication at the RADIUS server host. This configuration is mandatory for enabling TP-based authentication of CB AP.
Trustpoint Expiry	Use the drop-down menu to specify whether the wireless client-bridge is to be continued or discontinued in case of certificate expiry. In EAP-TLS authentication, a CA-signed certificate is used to authenticate the CB AP and RADIUS server host to establish the wireless CB. Use this option to specify whether the wireless CB is to be continued or terminated on expiration of this certificate. continue – Enables continuation of the CB even after the certificate (CA/client) has expired. When selected, this option enables automatic CA certificate deployment as and when new CA certificates are available. This is the default setting. discontinue – Terminates the CB once the certificate (CA/client) has expired. Note: Configure this parameter only if the CB AP and the RADIUS server host are using a crypto CMP policy for automatic certificate renewal. For more information, see Crypto CMP Policy on page 774.

4. Refer to the **Channel Lists** field and define the list of channels the client-bridge radio scans when scanning for an infrastructure WLAN.

Band A	Define a list of channels for scanning across all the channels in the 5.0 GHz radio band.
Band BG	Define a list of channels for scanning across all the channels in the 2.4 GHz radio band.

5. Refer to the **Keepalive Parameters** field and define the following configurations:

Keepalive Type	Set the keepalive frame type exchanged between the client-bridge and infrastructure access points. This is the type of packets exchanged between the client-bridge and infrastructure access points, at specified intervals, to keep the client-bridge link up and active. The options are null-data and WNMP packets. The default value is null-data .
Keepalive Interval	Set the keepalive interval from 0 to 86,400 seconds. This is the interval between two successive keepalive frames exchanged between the client-bridge and infrastructure Access Points. The default value is 300 seconds.
Inactivity Timeout	Set the inactivity timeout for each bridge MAC address from 0 to 864,000 seconds. This is the time for which the client-bridge access point waits before deleting a wired/wireless client's MAC address from which a frame has not been received for more than the time specified here. For example, if the inactivity time is set at 120 seconds, and if no frames are received from a client (MAC address) for 120 seconds, it is deleted. The default value is 600 seconds.

6. Refer to the **Radio Link Behaviour** field and define the following configurations:

Shutdown Other Radio when Link Goes Down	Select this option to enable shutting down of the non-client bridge radio (this is the radio to which wireless clients associate) when the link between the client-bridge and infrastructure access points is lost. When enabled, wireless clients associated with the non-client bridge radio are pushed to search for and associate with other access points having backhaul connectivity. This option is disabled by default. If you enable this option, specify the time for which the non-client bridge radio is shut down. Use the spinner to specify a time from 1 - 1,800 seconds.
Refresh VLAN Interface when Link Comes Up	Select this option to enable the SVI to refresh on re-establishing client bridge link to the infrastructure access point. If you are using a DHCP assigned IP address, this option also causes a DHCP renew. This option is enabled by default.

7. Refer to the **Roam Criteria** field and define the following configurations:

Seconds for Missed Beacons	Set this interval from 0 to 60 seconds. This is the time for which the client-bridge access point waits, after missing a beacon from the associated infrastructure WLAN access point, before roaming to another infrastructure access point. For example, if Seconds for Missed Beacon is set to 30 seconds, and if more than 30 seconds have passed since the last beacon received from the infrastructure access point, the client-bridge access point resumes scanning for another infrastructure access point. The default value is 20 seconds.
Minimum Signal Strength	Set the minimum signal-strength threshold for signals received from the infrastructure access point. Specify a value from -128 to -40 dBm. If the RSSI value of signals received from the infrastructure access point falls below the value specified here, the client-bridge access point resumes scanning for another infrastructure access point. The default is -75 dBm.

8. Click **OK** to save the changes and overrides to the client bridge settings screen.

Click **Reset** to revert to the last saved configuration.

Profile Overrides Advanced Settings

To override a radio's advanced settings:

1. Select the **Advanced Settings** tab.

The selected radio interface's advanced settings screen displays:

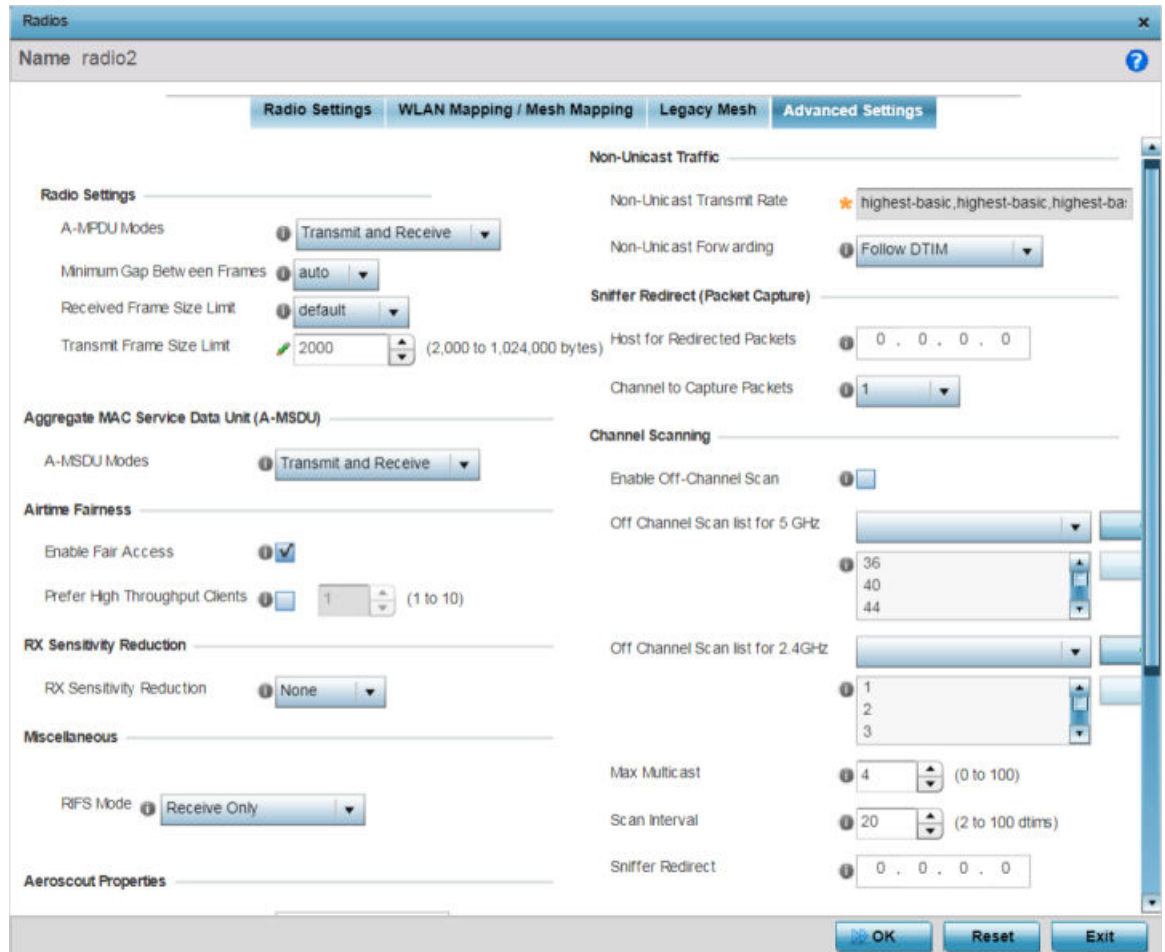


Figure 170: Access Point - Radio Interface - Advanced Settings Screen

2. In the **Radio Settings** field, define or override how MAC service frames are aggregated by the access point radio.

A-MPDU Modes	Specify the A-MPDU mode. Options include Transmit Only , Receive Only , Transmit and Receive , and None . The default value is <i>Transmit and Receive</i> . Using the default value, long frames can be both sent and received (up to 64 KB). When this option is enabled, define a transmit limit, a receive limit, or both.
Minimum Gap Between Frames	Use the drop-down menu to define, in microseconds, the minimum gap between consecutive A-MPDU frames. The options include: <ul style="list-style-type: none"> • 0 – Configures the minimum gap as 0 microseconds • 1 – Configures the minimum gap as 1 microseconds • 2 – Configures the minimum gap as 2 microseconds • 4 – Configures the minimum gap as 4 microseconds • 8 – Configures the minimum gap as 8 microseconds • 16 – Configures the minimum gap as 16 microseconds • auto – Auto configures the minimum gap depending on the platform and radio type (default setting)

Received Frame Size Limit	<p>If the A-MPDU mode is set to <i>Receive Only</i> or <i>Transmit and Receive</i>, use this option to define an advertised maximum limit for received A-MPDU aggregated frame size. The options include:</p> <ul style="list-style-type: none"> • 8191 - Advertises the maximum received frame size limit as 8191 bytes. • 16383 - Advertises the maximum received frame size limit as 16383 bytes. • 32767 - Advertises the maximum received frame size limit as 32767 bytes. • 65535 - Advertises the maximum received frame size limit as 65535 bytes. • 128000 - Advertises the maximum received frame size limit as 128000 bytes. • 256000 - Advertises the maximum received frame size limit as 256000 bytes. • 512000 - Advertises the maximum received frame size limit as 512000 bytes. • 1024000 - Advertises the maximum received frame size limit as 1024000 bytes. • default - This option auto configures the maximum received frame size based on the platform and radio type. This is the default setting.
Transmit Frame Size Limit	<p>If the A-MPDU mode is set to <i>Transmit Only</i> or <i>Transmit and Receive</i>, use the spinner control to set limit on transmitted A-MPDU aggregated frame size.</p> <p>The range depends on the AP type and the radio selected.</p> <p>For 802.11ac capable APs, the range is as follows:</p> <ul style="list-style-type: none"> • 2000 - 65,535 bytes - For radio 1, the range is 2000 - 65,535 bytes. The default value is 65,535 bytes. <p>Note: The WiNG <i>AP7662</i> and <i>AP7632</i> access points are an exception to the above rule. For the <i>AP7662</i> and <i>AP7632</i> access point models, the radio 1 range is <i>2000 - 1,024,000 bytes</i>. And the default value is 1,024,000 bytes.</p> <ul style="list-style-type: none"> • 2000 - 1,024,000 bytes - For radio 2, the range is 2000 - 1,024,000 bytes. The default value is 1,024,000 bytes. <p>Note: The WiNG 802.11ac capable APs are: <i>AP7522</i>, <i>AP7532</i>, <i>AP7562</i>, <i>AP7602</i>, <i>AP7612</i>, <i>AP7632</i>, <i>AP7662</i>, <i>AP8432</i>, and <i>AP8533</i>.</p> <p>For non 802.11ac capable APs the range is as follows:</p> <ul style="list-style-type: none"> • 2000 - 65,535 bytes - For both radio 1 and radio 2 the range is 2000 - 65,535 bytes. The default value is 65,535 bytes.

- In the **Aggregate MAC Service Data Unit (A-MSDU)** field, use the **A-MSDU Modes** drop-down menu to set or override the supported A-MSDU mode.
Available modes are **Receive Only** and **Transmit and Receive**. Use *Transmit and Receive* to send and receive frames up to 4 KB. The buffer limit is not configurable. Transmit and Receive is the default value.
- Use the **Airtime Fairness** fields to configure wireless access to devices based on their usage.

Enable Fair Access	Select to enable fair access to all peer devices.
Prefer High Throughput Clients	Select to prefer clients with higher throughput (802.11n clients) over clients with slower throughput (802.11 a/b/g) clients. Use the spinner control to set a weight for the higher throughput clients.

- Use the **Rx Sensitivity Reduction** drop-down menu to set the selected radio's receive sensitivity reduction threshold level.
This threshold determines the RSSI (in dBm) at which the radio acknowledges the SOP (*Start of Packet*) frames received from the client, and begins to demodulate and decode the packets.

In highly dense environments, or single-channel networks, having two or more radios sharing a channel, CCI (*co-channel interference*) adversely impacts network performance. By setting this threshold, you can control the radio's receive sensitivity to interference and noise, thereby reducing the impact of CCI. You are basically configuring the AP to not decode packets that have a signal strength below the specified threshold level.

The available *rx-sensitivity-reduction* threshold levels are: **High**, **Low**, **Medium** and **None**. Set the threshold level as *High*, to force your radio to ignore all traffic having a signal strength below the high threshold level value. This results in fewer traffic interruptions due to collision and Wi-Fi interference. Note, the default setting is *None*.

The following table provides the *rx-sensitivity-reduction threshold level* to *RSSI* mapping for the 2.4 GHz and 5 GHz bands:

802.11 Bands	High Threshold	Medium Threshold	Low Threshold
2.4 GHz	-79 dBm	-82 dBm	-85 dBm
5 GHz	-76 dBm	-78 dBm	-80 dBm



Note

This feature is supported only on the following access points: AP-7522, AP 7532, AP-7562, AP-8432, AP-8533

6. In the **Miscellaneous** field, use the RIFS (*Reduced Interframe Spacing*) drop-down menu to override interframe spacing settings.

RIFS Mode	<p>Interframe spacing is an interval between two consecutive Ethernet frames to enable a brief recovery between packets and allow target devices to prepare for the reception of the next packet.</p> <p>Use this option to specify the interframe spacing settings:</p> <ul style="list-style-type: none"> • Receive Only - Select to apply interframe spacing only to packets received by this access point. • Transmit Only - Select to apply interframe spacing only to packets transmitted by this access point. • Transmit and Receive - Select to apply interframe spacing to packets both transmitted and received by this access point. • None - Select to disable interframe spacing. Consider selecting this value for high priority traffic to reduce packet delay.
-----------	---

7. Set or override the following **Aerোসcout Properties** for the selected access point radio.

Forward	Select this option to enable forwarding of Aerোসcout packets.
MAC to be forwarded	Enter the MAC address that is incorporated in the Aerোসcout packets that are forwarded.

8. Set or override the following **Ekahau Properties** for the selected access point radio.

Forwarding Host	Specify the IP address of the host to which Ekahau packets are forwarded.
Forwarding Port	Set the Ekahau forwarding port number.
MAC to be forwarded	Enter the MAC address that is incorporated in the Ekahau packets that are forwarded.

9. Set or override the following **Non-Unicast Traffic** values for the profile's supported access point radio and its connected wireless clients:

Non-Unicast Transmit Rate	Use the Select drop-down menu to launch a sub-screen to define the data rate for broadcast and multicast frame transmissions. If you are not using the same rate for each BSSID, seven different rates are available – each with a separate menu.
Non-Unicast Forwarding	Define whether client broadcast and multicast packets should always follow DTIM, or only follow DTIM when using Power Save Aware mode. The default setting is <i>Follow DTIM</i> .

10. Refer to the **Sniffer Redirect (Packet Capture)** field to define or override the radio's captured packet configuration.

Host for Redirected Packets	If packets are redirected from a controller or service platform's connected access point radio, specify the IP address of a resource (additional host system) used to capture the redirected packets. This address is the numerical (non DNS) address of the host used to capture the redirected packets.
Channel to Capture Packets	Specify the channel used to capture redirected packets. The default value is channel 1.

11. Refer to the **Channel Scanning** field to define or override the radio's captured packet configuration.

Enable Off-Channel Scan	Select to enable scan across all channels using this radio. Channel scans use access point resources and can be time consuming, so only enable when your sure the radio can afford the bandwidth be directed toward the channel scan and does not negatively impact client support. This option is disabled by default.
Off Channel Scan list for 5GHz	Select the list of channels for off-channel scans using the access point's 5GHz radio. Restricting off-channel scans to specific channels frees bandwidth otherwise utilized for scanning across all the channels in the 5GHz radio band.
Off Channel Scan list for 2.4GHz	Select the list of channels for off-channel scans using the access point's 2.4GHz radio. Restricting off-channel scans to specific channels frees bandwidth otherwise utilized for scanning across all the channels in the 2.4GHz radio band.
Max Multicast	Set the maximum number (from 0 - 100) of multicast/broadcast messages used to perform off-channel scanning. The default setting is 4.
Scan Interval	Set the interval (from 2 - 100 dtims) between off-channel scans. The default setting is 20 dtims.
Sniffer Redirect	Specify the IP address of the host to which captured off-channel scan packets are redirected.

12. Click **OK** to save the changes and overrides to the **Advanced Settings** screen.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - PPPoE

PPP over Ethernet (PPPoE) is a data-link protocol for dialup connections. PPPoE allows the access point to use a broadband modem (DSL, cable modem, etc.) for access to high-speed data and broadband networks. Most DSL providers support (or deploy) the PPPoE protocol. PPPoE uses standard encryption, authentication, and compression methods as specified by the PPPoE protocol. PPPoE enables WiNG-supported controllers and access points to establish a point-to-point connection to an ISP over existing Ethernet interface.

To provide this point-to-point connection, each PPPoE session learns the Ethernet address of a remote PPPoE client, and establishes a session. PPPoE uses both a discover and session phase to identify a client and establish a point-to-point

connection. By using such a connection, a Wireless WAN failover is available to maintain seamless network access if the access point's Wired WAN should fail.

**Note**

Devices with PPPoE enabled continue to support VPN, NAT, PBR, and 3G failover on the PPPoE interface. Multiple PPPoE sessions are supported using a single user account user account if RADIUS is configured to allow simultaneous access.

When PPPoE client operation is enabled, it discovers an available server and establishes a PPPoE link for traffic flow. When a wired WAN connection failure is detected, traffic flows through the WWAN interface in fail-over mode (if the WWAN network is configured and available). When the PPPoE link becomes accessible again, traffic is redirected back through the access point's wired WAN link.

When the access point initiates a PPPoE session, it first performs a discovery to identify the Ethernet MAC address of the PPPoE client and establish a PPPoE session ID. In discovery, the PPPoE client discovers a server to host the PPPoE connection.

To override an access point's PPPoE point-to-point interface configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Interface** and select **PPPoE**.

The existing PPPoE interface configuration is displayed.

The screenshot displays the PPPoE Interface Configuration screen, organized into several sections:

- Basic Settings:**
 - Enable PPPoE: Disabled Enabled
 - Service:
 - DSL Modem Network (VLAN): (1 to 4,094)
 - Client IP Address:
- Authentication:**
 - Username:
 - Password:
 - Authentication Type:
- Connection:**
 - Maximum Transmission Unit (MTU): (500 to 1,492)
 - Client Idle Timeout: (1 to 1,093)
 - Keep Alive:
- Network Address Translation (NAT):**
 - NAT Direction: Inside Outside None
- Security Settings:**
 - IP Inbound Firewall Rules:
 - VPN Crypto Map:
- Default Route Priority:**
 - PPPoE Default Route Priority: (1 to 8,000)

At the bottom of the screen are buttons for **OK**, **Reset**, and **Exit**.

Figure 171: Profile Overrides - PPPoE Interface Configuration Screen

4. Use the **Basic Settings** field to enable PPPoE and define a PPPoE client.

Service	Enter the 128-character maximum PPPoE client service name provided by the service provider.
DSL Modem Network (VLAN)	Set the PPPoE VLAN (client local network) connected to the DSL modem. This is the local network connected to the DSL modem. The available range is 1 - 4,094. The default value is 1.
Client IP Address	Provide the numerical (non hostname) IP address of the PPPoE client.

5. Define the following **Authentication** parameters for PPPoE client interoperation:

Username	Provide the 64 character maximum username used for authentication support by the PPPoE client.
Password	Provide the 64 character maximum password used for authentication by the PPPoE client. Click Show to display the characters that make up the password.
Authentication Type	Specify the authentication type used by the PPPoE client, and whose credentials must be shared by its peer access point. Supported authentication options include None , PAP , CHAP , MSCHAP , and MSCHAP-v2 .

6. Define the following **Connection** settings for the PPPoE point-to-point connection with the PPPoE client:

Maximum Transmission Unit (MTU)	Set the PPPoE client MTU (<i>maximum transmission unit</i>) from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
Client Idle Timeout	Set a timeout in either Seconds (1 - 65,535), Minutes (1 - 1,093) or Hours (1-18). The access point uses the defined timeout so it does not sit idle waiting for input from the PPPoE client and server that may never come. The default setting is 10 minutes.
Keep Alive	Select this option to ensure that the point-to-point connection to the PPPoE client is continuously maintained and not timed out. This setting is disabled by default.

7. Set the **Network Address Translation (NAT)** direction for the PPPoE configuration.

NAT converts an IP address in one network to a different IP address or set of IP addresses in another network. The access point router maps its local (**Inside**) network addresses to WAN (**Outside**) IP addresses, and translates the WAN IP addresses on incoming packets to local IP addresses. NAT is useful because it allows the authentication of incoming and outgoing requests, and minimizes the number of WAN IP addresses needed when a range of local IP addresses is mapped to each WAN IP address. The default setting is **None** (neither inside nor outside).

8. Define the following **Security Settings** for the PPPoE configuration:

Inbound IP Firewall Rules	Select a firewall (set of IP access connection rules) to apply to the PPPoE client connection. If there is no firewall rule that meets the data protection needs of the PPPoE client connection, select the Create icon to define a new rule configuration or the Edit icon to modify an existing rule. For more information, see Wireless Firewall on page 826.
---------------------------	--

9. Set the **Default Route Priority** for the default route learned using PPPoE.

Select from 1 - 8,000. The default setting is 2,000.

10. Click **OK** to save the changes and overrides made to the **PPPoE** screen.

Click **Reset** to revert to the last saved configuration. Saved configurations are persistent across reloads.

Profile Overrides - Bluetooth

The AP7602, AP7612, AP7632, AP7662, AP8432 and AP8533 model access points utilize a built in Bluetooth chip for specific Bluetooth functional behaviors in a WiNG managed network.

These platforms can use their Bluetooth classic enabled radio to sense other Bluetooth enabled devices and report device data (MAC address, RSSI and device calls) to an ADSP server for intrusion detection. If the device presence varies in an unexpected manner, ADSP can raise an alarm.

AP-8432 and AP-8533 model access points support Bluetooth beaconing to emit either iBeacon or Eddystone- URL beacons. The access point's Bluetooth radio sends non-connectable, undirected LE (*low-energy*) advertisement packets on a periodic basis. These advertisement packets are short, and they are sent on Bluetooth advertising channels that conform to already-established iBeacon and Eddystone-URL standards. Portions of the advertising packet are still customizable, however.



Note

WiNG 7.1 release does not support Bluetooth on AP505i and AP510i model access points. This feature will be supported in future releases.

To override the access point's Bluetooth interface configuration:

1. Go to **Configuration → Devices → Device Overrides** .

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Interface** and select **Bluetooth**.

The access point's bluetooth interface configuration is displayed.

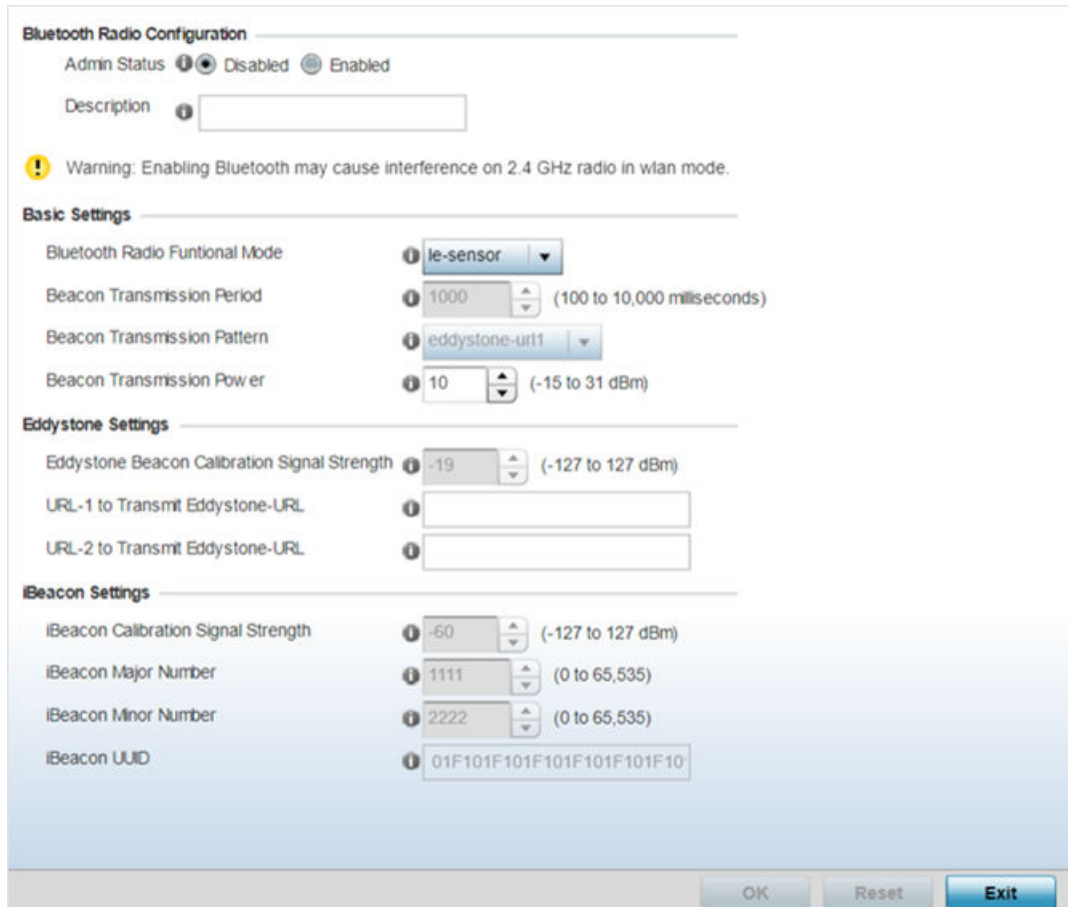


Figure 172: Profile Overrides - Interface - Bluetooth Configuration Screen

- Set the following **Bluetooth Radio Configuration** parameters:

Admin Status	Select Enabled or Disabled to enable/disable Bluetooth support capabilities for AP-8432 or AP-8533 model access point radio transmissions. The default value is <i>Disabled</i> .
Description	Define a 64 character maximum description for the access point's Bluetooth radio to differentiate this radio interface from other Bluetooth supported radio's that might be members of the same RF Domain.

5. Set the following **Basic Settings**:

Bluetooth Radio Functional Mode	<p>Use this drop-down menu to set the access point's Bluetooth radio functional mode to one of the following options:</p> <ul style="list-style-type: none"> • bt-sensor - bt-sensors are Bluetooth classic sensors providing robust wireless connections for legacy devices. Typically these connections are not ideally suited for the newer Bluetooth low energy technology supported devices. This the default setting. • le-beacon - le-beacons are newer Bluetooth low energy beacons ideal for applications requiring intermittent or periodic transfers of small amounts of data. le-beacons are not designed as replacements for classic beacon sensors. <p>Note: Setting the Bluetooth Radio Functional mode to 'le-beacon' enables the 'Beacon Transmission Period' and 'Beacon Transmission Pattern' options.</p> <ul style="list-style-type: none"> • le-tracking - Sets the functional mode to LE (<i>low energy</i>) tracking. • le-sensor - Sets the functional mode to LE sensor. <p>Note: If enabling the <i>Bluetooth Radio Functional Mode</i> as <i>le-beacon</i>, configure the 'Beacon Transmission Period' and 'Beacon Transmission Pattern' values.</p>
Beacon Transmission Period	<p>Use this spinner control to set the Bluetooth radio's beacon transmission period from 50 - 10,000 milliseconds. As the defined period increases, so does the CPU processing time and the number packets incrementally transmitted (typically one per minute). The default setting is 1,000 milliseconds.</p> <p>Note: This parameter is enabled when the functional mode is set to 'le-beacon'.</p>
Beacon Transmission Pattern	<p>Use this drop-down menu to set the beacon's transmission pattern. The options are:</p> <ul style="list-style-type: none"> • eddytone_url1 and eddytone_url2 - An eddytone-URL frame broadcasts a URL using a compressed encoding scheme to better fit within a limited advertisement packet. Once decoded, the URL can be used by a client for internet access. • ibeacon - iBeacon was created by Apple for use in iOS devices (beginning with iOS version 7.0). Apple has made three data fields available to iOS applications: a UUID for device identification, a Major value for device class, and a Minor value for more refined information like product category.

	<p>Note: This parameter is enabled when the functional mode is set to 'le-beacon'.</p>
--	---

6. If setting the **Beacon Transmission Pattern** to **eddystone_ur11** or **eddystone_ur12**, define the following **Eddystone Settings** settings:

Eddystone Beacon Calibration Signal Strength	Set the Eddystone Beacon measured calibration signal strength, from -127 dBm to 127 dBm, at 0 meters. Mobile devices can approximate their distance to beacons based on received signal strength. However, distance readings can fluctuate since they depend on several external factors. The closer you are to a beacon, the more accurate the reported distance. This setting is the projected calibration signal strength at 0 meters. The default setting is -19 dBm.
URL-1 to Transmit Eddystone-URL	Enter a 64-character maximum Eddystone-URL1. The URL must be 17 characters or less once auto-encoding is applied. URL encoding is used when placing text in a query string to avoid confusion with the URL itself. It is typically used when a browser sends data to a web server.
URL-2 to Transmit Eddystone-URL	Enter a 64-character maximum Eddystone-URL2. The URL must be 17 characters or less once auto-encoding is applied. URL encoding is used when placing text in a query string to avoid confusion with the URL itself. It is typically used when a browser sends data to a web server.

7. If setting the **Beacon Transmission Pattern** to **ibeacon**, define the following **iBeacon Settings** :

Beacon Calibration Signal Strength	Set the iBeacon measured calibration signal strength, from -127 dBm to 127 dBm, at 1 meter. Mobile devices can approximate their distance to beacons based on received signal strength. However, distance readings can fluctuate since they depend on several external factors. The closer you are to a beacon, the more accurate the reported distance. This setting is the projected calibration signal strength at 1 meter. The default setting is -60 dBm.
iBeacon Major Number	Set the iBeacon major value from 0 - 65, 535. Major values identify and distinguish groups. For example, each beacon on a specific floor in a building could be assigned a unique major value. The default value is 1,111.

iBeacon Minor Number	Set the iBeacon minor value from 0 - 65, 535. Minor values identify and distinguish individual beacons. Minor values help identify individual beacons within a group of beacons assigned a major value. The default setting is 2,222.
iBeacon UUID	Define a 32 hex character maximum UUID (<i>Universally Unique Identifier</i>). The UUID classification contains 32 hexadecimal digits, split into 5 groups, separated by dashes – for example, f2468da6-5fa8-2e84-1134-bc5b71e0893e. The UUID distinguishes iBeacons in the network from all other beacons in networks outside of your direct administration.

8. Select **OK** to save the changes to the Bluetooth configuration. Saved configurations are persistent across reloads.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - Network

Setting an access point profile's network configuration is a large task comprised of numerous administration activities. Each of the activities described below can have an override applied to the original profile configuration. Applying an override removes the device from the profile configuration that may be shared by other devices and requires careful administration to ensure this one device still supports the deployment requirements within the managed network.

A profile's network configuration process consists of the following:

- [Profile Overrides - DNS](#) on page 441
- [Profile Overrides - ARP](#) on page 442
- [Profile Overrides - L2TPv3 General Settings](#) on page 444
- [Profile Overrides - GRE](#) on page 455
- [Profile Overrides - IGMP Snooping](#) on page 459
- [Profile Overrides - MLD Snooping](#) on page 461
- [Profile Overrides - Quality of Service \(QoS\)](#) on page 463
- [Profile Overrides - Spanning Tree](#) on page 469
- [Profile Overrides - IPv4 Routing](#) on page 472
- [Profile Overrides - OSPF Settings](#) on page 477
- [Profile Overrides - Forwarding Database](#) on page 498
- [Profile Overrides - Bridge VLAN](#) on page 500
- [Profile Overrides - CDP](#) on page 508
- [Profile Overrides - LLDP](#) on page 509
- [Profile Overrides - Miscellaneous](#) on page 510
- [Aliases Overview](#) on page 232
- [Profile Overrides - IPv6 Neighbors](#) on page 523

Profile Overrides - DNS

DNS (*Domain Name System*) is a hierarchical naming system for resources connected to the Internet or a private network. Primarily, DNS resources translate domain names into IP addresses. If one DNS server doesn't know how to translate a particular domain name, it asks another one until the correct IP address is returned. DNS enables access to resources using human friendly notations. DNS converts human friendly domain names into notations used by different networking equipment for locating resources.

As a resource is accessed (using human-friendly hostnames), it's possible to access the resource even if the underlying machine friendly notation name changes. Without DNS, in the simplest terms, you would need to remember a series of numbers (123.123.123.123) instead of an easy to remember domain name (for example, *www.domainname.com*).

To override an access point's DNS configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network. Select a device.

2. Expand **Profile Overrides** → **Network** and select **DNS**.

The selected device's DNS configuration screen displays.

Domain Name System (DNS)

Domain Name

Enable Domain Lookup

DNS Server Forwarding

DNS Servers

Name Servers	IP Address	
	0 . 0 . 0 . 0	Clear
	0 . 0 . 0 . 0	Clear
	0 . 0 . 0 . 0	Clear

DNS Servers IPv6

IPv6 DNS Name Server

IPv6 DNS Server Forwarding

OK Reset Exit

Figure 173: Profile Overrides - Network DNS Configuration Screen

3. In the **Domain Name System (DNS)** field set the following configurations:

Domain Name	Provide the default Domain Name used to resolve DNS names. The name cannot exceed 64 characters.
Enable Domain Lookup	Select the check box to enable DNS. When enabled, human friendly domain names are converted into numerical IP destination addresses. The radio button is selected by default.
DNS Server Forwarding	Select this option to enable the forwarding DNS queries to external DNS servers if a DNS query cannot be processed by local DNS resources. This feature is disabled by default.

4. In the **DNS Servers** field, provide the IP addresses of up to three **Name Server** resources available to the access point.

5. In the **DNS Servers IPv6** field, set the following configurations:

IPv6 DNS Name Server	Provide the default domain name used to resolve IPv6 DNS names. When an IPv6 host is configured with the address of a DNS server, the host sends DNS name queries to the server for resolution. A maximum of three entries are permitted.
IPv6 DNS Server Forward	Select the check box to enable IPv6 DNS domain names to be converted into numerical IP destination addresses. The setting is disabled by default.

6. Click **OK** to save the DNS configuration changes.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - ARP

ARP (*Address Resolution Protocol*) is a protocol for mapping an IP address to a hardware MAC address recognized on the network. ARP provides protocol rules for making this correlation and providing address conversion in both directions.

When an incoming packet destined for a host arrives, ARP is used to find a physical host or MAC address that matches the IP address. ARP looks in its ARP cache and, if it finds the address, provides it so the packet can be converted to the right packet length and format and sent to its destination. If no entry is found for the IP address, ARP broadcasts a request packet in a special format on the LAN to see if a device knows it has that IP address associated with it. A device that recognizes the IP address as its own returns a reply indicating it. ARP updates the ARP cache for future reference and then sends the packet to the MAC address that replied.

To override the access point profile's ARP configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

- Expand **Network** and select **ARP**.

The selected device's ARP configuration screen displays.

Switch VLAN Interface	IP Address	MAC Address	Device Type	
1	1.2.3.4	10-20-30-40-50-60	Router	🗑️
				🗑️

+ Add Row

OK Reset Exit

Figure 174: Profile Overrides - Network - ARP Configuration Screen

- Select **+ Add Row** from the lower right-hand side of the screen to populate the ARP table with rows used to define ARP network address information.
- Set the following the ARP parameters:

Switch VLAN Interface	Use the spinner control to select a virtual interface for an address requiring resolution with the controller, service platform or access point.
IP Address	Define the IP address used to fetch a MAC Address recognized on the wireless network.
MAC Address	Displays the target MAC address subject to resolution. This is the MAC used for mapping an IP address to a MAC address recognized on the network.
Device Type	Specify the device type the ARP entry supports. Host is the default setting.

- Select **OK** to save the ARP configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - L2TPv3 General Settings

L2TP V3 is an IETF standard used for transporting different types of layer 2 frames in an IP network (and profile). L2TP V3 defines control and encapsulation protocols for tunneling layer 2 frames between two IP nodes.

Use L2TP V3 to create tunnels for transporting layer 2 frames. L2TP V3 enables controllers, service platforms and access points to create tunnels for transporting Ethernet frames to and from bridge VLANs and physical ports. L2TP V3 tunnels can be defined between WiNG managed devices and other vendor devices supporting the L2TP V3 protocol.

Multiple pseudowires can be created within an L2TP V3 tunnel. access points support an Ethernet VLAN pseudowire type exclusively.



Note

A pseudowire is an emulation of a layer 2 point-to-point connection over a PSN (*packet-switching network*). A pseudowire was developed out of the necessity to encapsulate and tunnel layer 2 protocols across a layer 3 network.

Ethernet VLAN pseudowires transport Ethernet frames to and from a specified VLAN. One or more L2TP V3 tunnels can be defined between tunnel end points. Each tunnel can have one or more L2TP V3 sessions. Each tunnel session corresponds to one pseudowire. An L2TP V3 control connection (a L2TP V3 tunnel) needs to be established between the tunneling entities before creating a session.

For optimal pseudowire operation, both the L2TP V3 session originator and responder need to know the pseudowire type and identifier. These two parameters are communicated during L2TP V3 session establishment. An L2TP V3 session created within an L2TP V3 connection also specifies multiplexing parameters for identifying a pseudowire type and ID.

The working status of a pseudowire is reflected by the state of the L2TP V3 session. If a L2TP V3 session is down, the pseudowire associated with it must be shut down. The L2TP V3 control connection keep-alive mechanism can serve as a monitoring mechanism for the pseudowires associated with a control connection.



Note

If connecting an Ethernet port to another Ethernet port, the pseudowire type must be *Ethernet port*, if connecting an Ethernet VLAN to another Ethernet VLAN, the pseudowire type must be *Ethernet VLAN*.



Note

WiNG 7.1 release does not support L2TPv3 tunneling on AAP505i and AP510i model access points. This feature will be supported in future releases.

To override the profile's L2TPv3 general configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select a target device by double-clicking on the device name.
The selected device's configuration menu displays.
3. Expand the **Network** node and select **L2TPv3**.
The L2TPv3 general configuration screen displays.

Figure 175: L2TPv3 - General Configuration Screen

4. Set the following **General Settings** for an L2TPv3 profile configuration:

Host Name	Define a 64 character maximum hostname to specify the name of the host that's sent tunnel messages. Tunnel establishment involves exchanging 3 message types (SCCRQ, SCCRP and SCCN) with the peer. Tunnel IDs and capabilities are exchanged during the tunnel establishment with the host.
Router ID	Set either the numeric IP address or the integer used as an identifier for tunnel AVP messages. AVP messages assist in the identification of a tunneled peer.
UDP Listen Port	Select this option to set the port used for listening to incoming traffic. Select a port from 1,024 - 65,535. The default port is 1701.
Tunnel Bridging	Select this option to enable or disable bridge packets between two tunnel end points. This setting is disabled by default.

5. Set the following **Logging Settings** for a L2TPv3 profile configuration:

Enable Logging	Select this option to enable the logging of Ethernet frame events to and from bridge VLANs and physical ports on a defined IP address, host or router ID. This setting is disabled by default.
IP Address	Optionally use a peer tunnel ID address to capture and log L2TPv3 events.
Hostname	If not using an IP address for event logging, optionally use a peer tunnel hostname to capture and log L2TPv3 events.
Router ID	If not using an IP address or a hostname for event logging, use a router ID to capture and log L2TPv3 events.

6. Click **OK** to save the L2TPv3 general configuration changes.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - L2TPv3 Tunnel

To override a profile's L2TPv3 tunnel configuration at the device level:

1. Select the **L2TPv3 Tunnel** tab.

The L2TPv3 main screen displays. This screen lists existing L2TPv3 tunnel configurations.

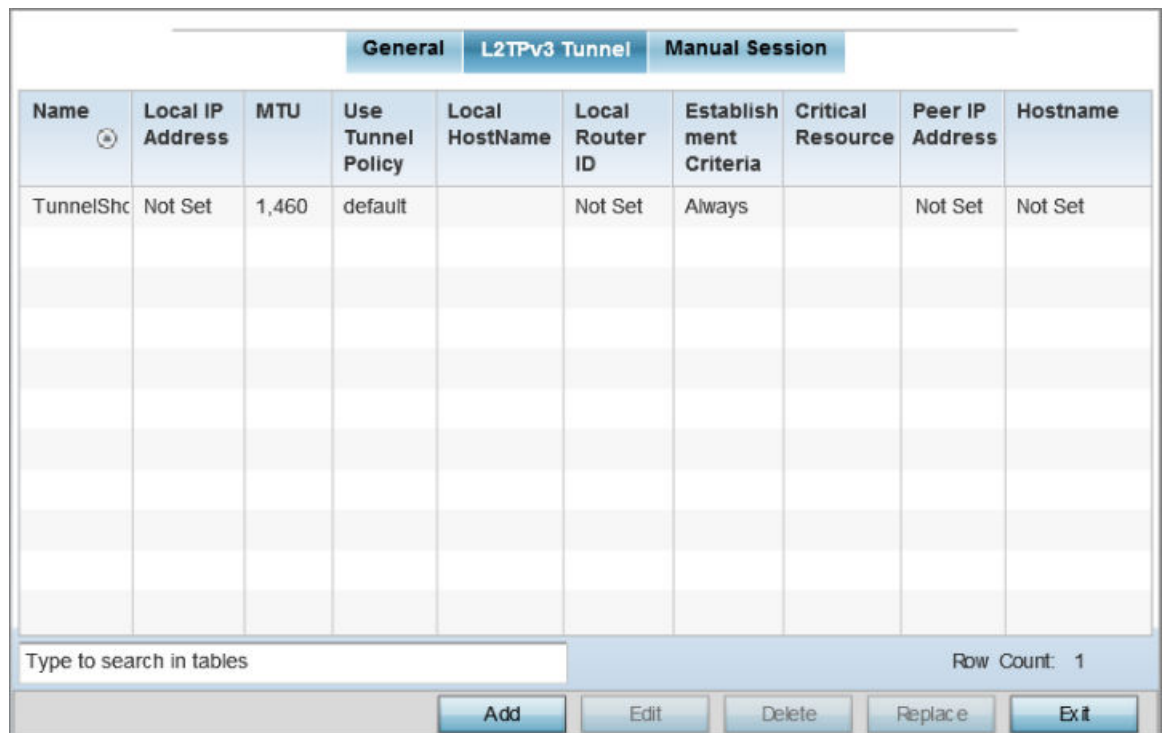


Figure 176: L2TPv3 Tunnel Main Screen

2. Review the following **L2TPv3 Tunnel** configuration data:

Name	Displays the name of each listed L2TPv3 tunnel assigned upon creation.
Local IP Address	Lists the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address.
MTU	Displays the MTU size for each listed tunnel. The MTU is the size (in bytes) of the largest protocol data unit that the layer can pass between tunnel peers.
Use Tunnel Policy	Lists the L2TPv3 tunnel policy assigned to each listed tunnel.
Local Hostname	Lists the tunnel specific hostname used by each listed tunnel. This is the hostname advertised in tunnel establishment messages.
Local Router ID	Specifies the router ID sent in the tunnel establishment messages.
Establishment Criteria	Specifies tunnel criteria between two peers.
Critical Resource	Specifies the critical resource that should exist for a tunnel between two peers to be created and maintained. Critical resources are device IP addresses or interface destinations interpreted as critical to the health of the network. The critical resource feature allows for the continuous monitoring of these defined addresses. A critical resource, if not available, can result in the network suffering performance degradation.
Peer IP Address	Lists the IP address of the remote peer.
Host Name	Lists the tunnel specific hostname used by the remote peer.

Session Configuration

You can add a new L2TPv3 tunnel configuration or edit an existing configuration.

1. Click **Add** to create a new L2TPv3 tunnel. If creating a new tunnel configuration, assign it a 31 character maximum `Name`.

- To override the profile's L2TPv3 tunnel configuration, select the L2TPv3 tunnel from those listed on the screen and click **Edit**.

The L2TPv3 tunnel configuration screen displays, with the **Session** tab selected by default.

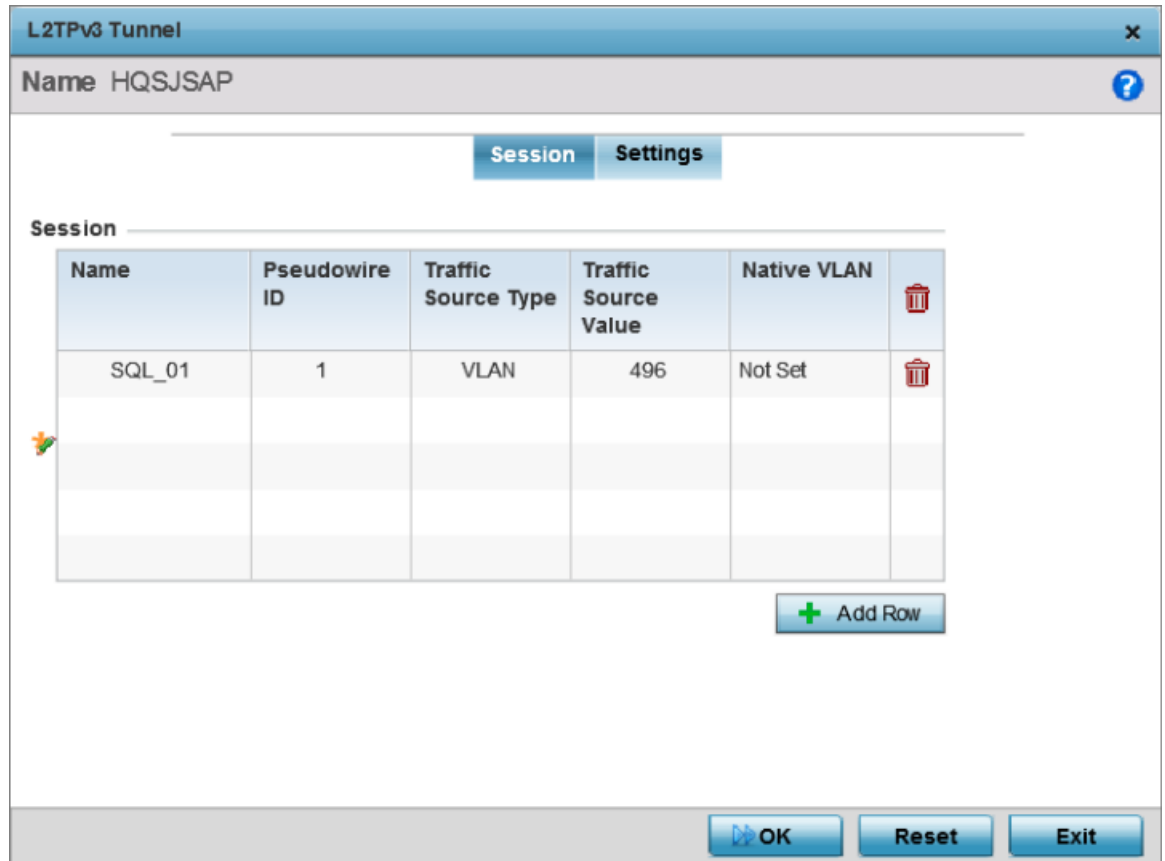


Figure 177: L2TPv3 Tunnel - Session Configuration Screen

- Refer to the **Session** table to review the configurations of the peers available for tunnel connection.
- Select **+ Add Row** and provide the following L2TPv3 session settings:

Name	Enter a 31 character maximum session name. There is no idle timeout for a tunnel. A tunnel is not usable without a session and a subsequent session name. The tunnel is closed when the last session tunnel session is closed.
Pseudowire ID	Define a pseudowire ID for this session. A pseudowire is an emulation of a layer 2 point-to-point connection over a PSN. A pseudowire was developed out of the necessity to encapsulate and tunnel layer 2 protocols across a layer 3 network.
Traffic Source Type	Lists the type of traffic tunneled in this session (VLAN, etc.).

Traffic Source Value	Define a VLAN range to include in the tunnel session. Available VLAN ranges are from 1 - 4,094.
Native VLAN	Select this option to provide a VLAN ID that will not be tagged in tunnel establishment and packet transfer.

5. Click **OK** to save the L2TPv3 Tunnel session changes.

Settings Configuration

To define or override the L2TPv3 tunnel settings:

1. Select the **Settings** tab.

The L2TPv3 Tunnel **Settings** configuration screen displays.

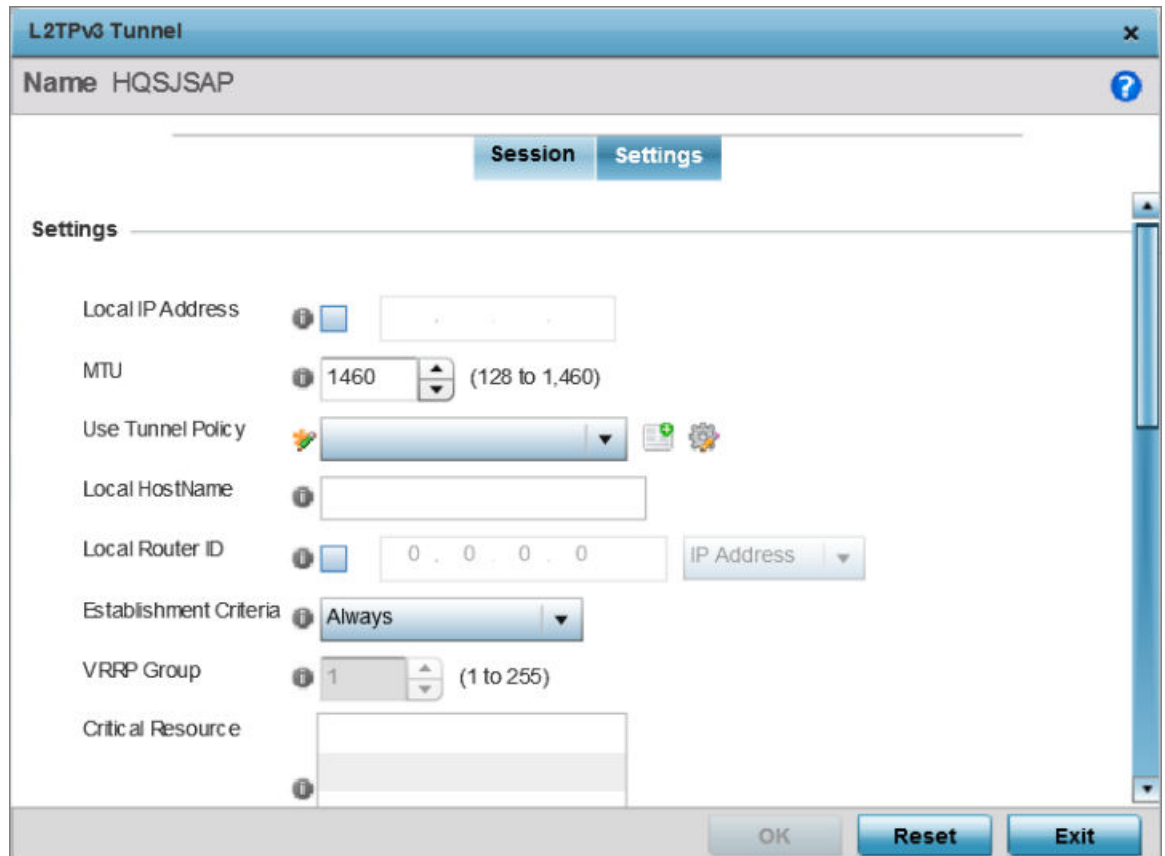


Figure 178: L2TPv3 Tunnel - Settings Configuration Screen

2. Define the following L2TP v3 Tunnel **Settings**:

Local IP Address	Enter the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address. This parameter is applicable when establishing the tunnel and responding to incoming tunnel create requests.
MTU	Set the MTU. The MTU is the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers. Define a MTU between 128 - 1,460 bytes. The default setting is 1,460. A larger MTU means processing fewer packets for the same amount of data.
Use Tunnel Policy	Select the L2TPv3 tunnel policy. The policy consists of user defined values for protocol specific parameters which can be used with different tunnels. If none is available a new policy can be created or an existing one can be modified. For more information, refer to L2TP V3 Configuration on page 770.
Local Hostname	Provide the tunnel specific hostname used by this tunnel. This is the hostname advertised in tunnel establishment messages.
Local Router ID	Specify the router ID sent in tunnel establishment messages with a potential peer device.
Establishment Criteria	<p>Configure establishment criteria for creating a tunnel between the device and the NOC. This criteria ensures only one tunnel is created between two sites where the tunnel is established between the vrrp-master/cluster master/rfdomain manager at the remote site and the controller at the NOC. The tunnel is created based on the role of the remote peer.</p> <ul style="list-style-type: none"> • always – The tunnel is always created irrespective of the role of the local device. • vrrp-master – The tunnel is only created when the local device is a VRRP master. • cluster-master – The tunnel is only created when the local device is a cluster master. • rf-domain-manager – The tunnel is only created when the local device is a RF-Domain manager. <p>In all the above cases, if the local device goes offline for any reason, the tunnel is brought down.</p>

VRRP Group	This field is enabled only when the <i>establishment criteria</i> is set to <i>vrrp-master</i> . Use the spinner to select the VRRP group.
Critical Resource	Enter the critical resources required for creating and maintaining a L2TPv3 tunnel. A tunnel is only established when all critical resources for the tunnel to be operational are available at the time when the tunnel is created. If any one of the listed critical resources goes down, the tunnel is disabled. When a tunnel is established, the listed critical resources are checked for availability. Tunnel establishment is started if the critical resources are available. Similarly, for incoming tunnel termination requests, listed critical resources are checked and tunnel terminations are only allowed when the critical resources are available. For more information on managing critical resources, see Profile Overrides - List of Critical Resources on page 562 .

3. Define the following **Rate Limit** settings:

Rate limiting manages the maximum rate sent to or received from L2TPv3 tunnel members.

Session Name	Use the drop-down menu to select the tunnel session that will have the direction, burst size and traffic rate settings applied.
Direction	Select the direction for L2TPv3 tunnel traffic rate limiting. Egress traffic is outbound L2TPv3 tunnel data coming to the controller, service platform or access point. Ingress traffic is inbound L2TPv3 tunnel data coming to the controller, service platform or access point.
Max Burst Size	Set the maximum burst size for egress or ingress traffic rate limiting (depending on which direction is selected) on a L2TPv3 tunnel. Set a maximum burst size between 2 - 1024 kbytes. The smaller the burst, the less likely the upstream packet transmission will result in congestion for L2TPv3 tunnel traffic. The default setting is 320 bytes.
Rate	Set the data rate (from 50 - 1,000,000 kbps) for egress or ingress traffic rate limiting (depending on which direction is selected) for an L2TPv3 tunnel. The default setting is 5000 kbps.
Background	Set the random early detection threshold in % for background traffic. Set a value from 1 - 100%. The default is 50%.
Best-Effort	Set the random early detection threshold in % for best-effort traffic. Set a value from 1 - 100%. The default is 50%.
Video	Set the random early detection threshold in % for video traffic. Set a value from 1 - 100%. The default is 25%.
Voice	Set the random early detection threshold in % for voice traffic. Set a value from 1 - 100%. The default is 25%.

4. Review the **Peer** configurations. Select **+ Add Row** and configure a maximum of two peer configurations.

5. Define the following **Peer** parameters:

Peer ID	Define the primary peer ID used to set the primary and secondary peer for tunnel fail over. If the peer is not specified, tunnel establishment does not occur. However, if a peer tries to establish a tunnel with this access point, it creates the tunnel if the hostname and/or Router ID matches.
Router ID	Specify the router ID sent in tunnel establishment messages with this specific peer.
Hostname	Assign the peer a hostname that can be used as matching criteria in the tunnel establishment process.
Encapsulation	Select either IP or UDP as the peer encapsulation protocol. UDP uses a simple transmission model without implicit handshakes. The default setting is <i>IP</i> .
Peer IP Address	Select this option to enter the numeric IP address used as the destination peer address for tunnel establishment.
UDP Port	If UDP encapsulation is selected, use the spinner control to define the UDP encapsulation port.
IPSec Secure	Enable this option to enable security on the connection between the access point and the Virtual Controller.
IPSec Gateway	Specify the IP Address of the IPSec Secure Gateway.

6. Define the following **Fast Failover** parameters:

Enable	When enabled, the device starts sending tunnel requests on both peers, and in turn, establishes the tunnel on both peers. If disabled, tunnel establishment only occurs on one peer, with failover and other functionality the same as legacy behavior. If fast failover is enabled after establishing a single tunnel the establishment is restarted with two peers. One tunnel is defined as active and the other as standby. Both tunnels perform connection health checkups with individual hello intervals. This setting is disabled by default.
Enable Aggressive Mode	When enabled, tunnel initiation hello requests are set to zero. For failure detections, hello attempts are not retried, regardless of defined retry attempts. This setting is disabled by default.

7. Click **OK** to save the L2TPv3 Tunnel changes.

Click **Reset** to revert the screen to its last saved configuration.

Profile Overrides - Manual Session

After successful tunnel connection and establishment, you can create individual sessions. Each session is a single data stream. After successful session establishment, data corresponding to that session (pseudowire) can be transferred. If a session is down, the pseudowire associated with it is shut down as well.

To override a profile's L2TPv3 manual session configuration at the device level:

1. Select the **Manual Session** tab.

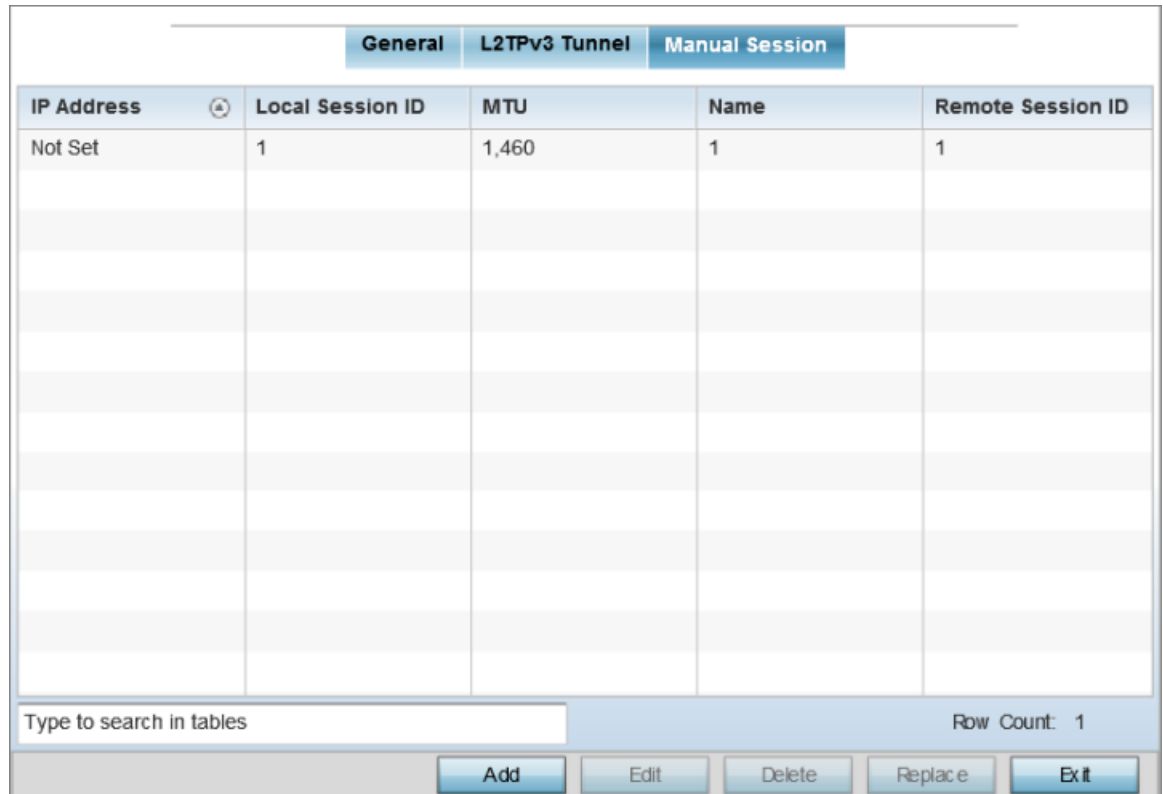


Figure 179: L2TPv3 Tunnel - Manual Session Configuration Screen

2. Review the existing manual session configurations, to determine whether a session should be created or modified:

IP Address	Lists the IP address assigned as the local tunnel end point address, not the interface IP address. This IP is used as the tunnel source IP address. If this parameter is not specified, the source IP address is chosen automatically based on the tunnel peer IP address. This parameter is applicable when establishing the session and responding to incoming requests.
Local Session ID	Displays the numeric identifier assigned to each listed tunnel session. This is the pseudowire ID for the session. This pseudowire ID is sent in a session establishment message to the L2TP peer.
MTU	Displays each session's MTU. The MTU is the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers in this session. A larger MTU means processing fewer packets for the same amount of data.
Name	Lists the name assigned to each listed manual session.
Remote Session ID	Lists the remote session ID passed in the establishment of the tunnel, used a unique identifier for this tunnel session.

Adding and Editing Manual Session

You can add a new L2TPv3 manual session configuration or edit an existing configuration.

1. Click **Add** to create a new L2TPv3 manual session. If creating a new configuration, assign it a 31 character maximum Name.

After a successful tunnel connection and establishment, the session is created. Each session name represents a single data stream.

2. To override the profile's L2TPv3 manual session configuration, select the L2TPv3 session from those listed on the screen and click **Edit**.

The L2TPv3 manual session configuration screen displays.

Manual Session

Name ★

Settings

IP Address

Peer IP ★

Local Session ID (1 to 63)

MTU (128 to 1,460)

Remote Session ID (1 to 4,294,967,295)

Encapsulation

UDP Port (1,024 to 65,535)

Source Type

Source Value ★ (1 - 4094) (2,4,7-12,...)

Native VLAN (1 to 4,094)

Cookie

Cookie Size	Value 1	Value 2	End Point	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Figure 180: L2TPv3 - Manual Session Configuration Screen

3. Set or override the following session parameters:

IP Address	Specify the IP address used to be as tunnel source IP address. If not specified, the tunnel source IP address is selected automatically based on the tunnel peer IP address. This address is applicable only for initiating the tunnel. When responding to incoming tunnel create requests, it would use the IP address on which it had received the tunnel create request.
Peer IP	Set the IP address of an L2TP tunnel destination peer. This is the peer allowed to establish the tunnel.
Local Session ID	Set the numeric identifier for the tunnel session. This is the pseudowire ID for the session. This pseudowire ID is sent in a session establishment message to the L2TP peer.
MTU	Define the session's MTU (<i>maximum transmission unit</i>) as the size (in bytes) of the largest protocol data unit the layer can pass between tunnel peers in this session. A larger MTU means processing fewer packets for the same amount of data.
Remote Session ID	Use the spinner control to set the remote session ID passed in the establishment of the tunnel and set a unique identifier for this tunnel session. Assign an ID from 1 - 4,294,967,295.
Encapsulation	Select either IP or UDP as the peer encapsulation protocol. The default setting is IP. UDP uses a simple transmission model without implicit handshakes.
UDP Port	If UDP encapsulation is selected, use the spinner control to define the UDP encapsulation port. This is the port where the L2TP service is running.
Source Type	Select a VLAN as the virtual interface source type.
Source Value	Define the Source Value range (1 - 4,094) to include in the tunnel. Tunnel session data includes VLAN tagged frames.
Native VLAN	Select this option to define the native VLAN that's not tagged.

4. Select the **+ Add Row** button, in the **Cookie** table, to set the following:

Cookie Size	Set the size of the cookie field within each L2TP data packet. Options include 0 , 4 and 8 . The default setting is 0.
Value 1	Set the cookie value first word.
Value 2	Set the cookie value second word.
End Point	Define whether the tunnel end point is local or remote .

5. Click **OK** to save the changes to the session configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - GRE

GRE (*Generic routing encapsulation*) tunneling can be configured to bridge Ethernet packets between WLANs and a remote WLAN gateway over a GRE tunnel. The tunneling of 802.3 packets using GRE is an alternative to MiNT or L2TPv3. Related

features like ACLs for extended VLANs are still available using layer 2 tunneling over GRE.

Using GRE, access points map one or more VLANs to a tunnel. The remote endpoint is a user-configured WLAN gateway IP address, with an optional secondary IP address should connectivity to the primary GRE peer be lost. VLAN traffic is expected in both directions in the GRE tunnel. A WLAN mapped to these VLANs can be either open or secure. Secure WLANs require authentication to a remote RADIUS server available within your deployment using standard RADIUS protocols. access points can reach both the GRE peer as well as the RADIUS server using IPv4.

To override an access point's GRE tunnel configuration.

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Network** and select **GRE**.

The GRE Tunnel screen displays. This screen lists existing GRE tunnel configurations.

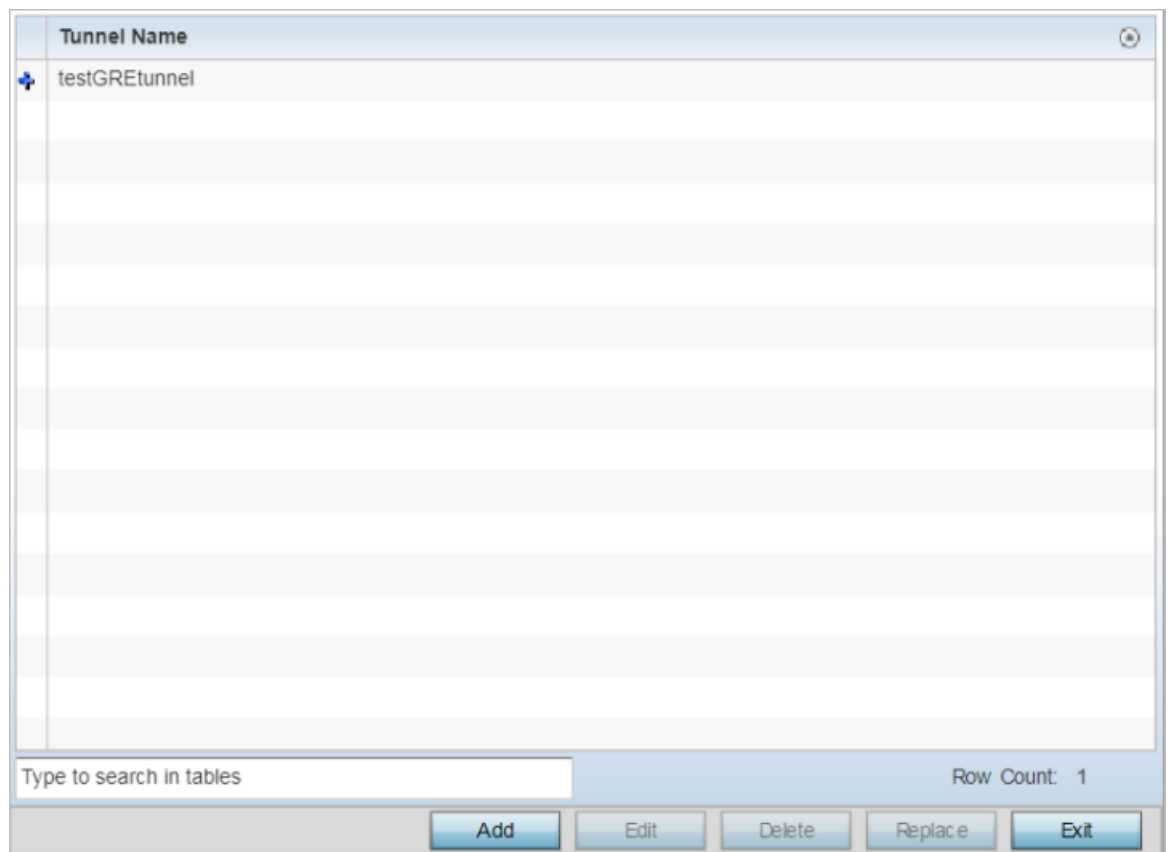


Figure 181: Profile Overrides - Network - GRE Configuration Main Screen

- Select a tunnel from those listed on the screen and click **Edit**.
You can add new tunnels or delete existing tunnels.

The GRE tunnel configuration screen displays.

Tunnel Name testGREtunnel

DSCP Options Reflect
 1

Tunneled VLANs 1

Native VLAN 1 (1 to 4,094)

Tag Native VLAN

MTU 1476 (900 to 1,476)

MTU6 1456 (1,236 to 1,456)

Peer

Peer index	Peer IP Address	<input type="button" value="Delete"/>
1	1.2.3.4	<input type="button" value="Delete"/>

Establishment Criteria

Criteria Always

VRRP Group 1 (1 to 255)

Failover

Enable Failover

Ping Interval 1 (1 to 250)

Figure 182: GRE Tunnel - Add/Edit Configuration Screen

- If creating a new GRE tunnel, assign it a name to distinguish its configuration.

6. Define the following GRE tunnel configurations:

DSCP Options	Use the spinner control to set the tunnel DSCP / 802.1q priority value from encapsulated packets to the outer packet IPv4 header.
Tunneled VLANs	Define the VLAN connected clients use to route GRE tunneled traffic within their respective VLANs.
Native VLAN	Set a numerical VLAN ID (1 - 4094) for the native VLAN. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. Additionally, the native VLAN is the VLAN untagged traffic is directed over when using a port in trunk mode.
Tag Native VLAN	Select this option to tag the native VLAN. The IEEE 802.1Q specification is supported for tagging frames and coordinating VLANs between devices. IEEE 802.1Q adds four bytes to each frame identifying the VLAN ID for upstream devices that the frame belongs to. If the upstream Ethernet device does not support IEEE 802.1Q tagging, it does not interpret the tagged frames. When VLAN tagging is required between devices, both devices must support tagging and be configured to accept tagged VLANs. When a frame is tagged, the 12 bit frame VLAN ID is added to the 802.1Q header so upstream Ethernet devices know which VLAN ID the frame belongs to. The device reads the 12 bit VLAN ID and forwards the frame to the appropriate VLAN. When a frame is received with no 802.1Q header, the upstream device classifies the frame using the default or native VLAN assigned to the Trunk port. The native VLAN allows an Ethernet device to associate untagged frames to a VLAN when no 802.1Q frame is included in the frame. This feature is disabled by default.

7. In the **Peer** table, click **+Add Row** and provide a maximum of two peer configurations.

The *Peer* table lists the credentials of the GRE tunnel end points.

Peer Index	Assign a numeric index to each peer to help differentiate tunnel end points.
Peer IP Address	Define the IP address of the added GRE peer to serve as a network address identifier.

8. Set the following **Establishment Criteria** for the GRE tunnel:

Criteria	Specify the establishment criteria for creating a GRE tunnel. In a multicontroller within a RF domain, it's always the master node with which the tunnel is established. Depending on which of the following options is selected, the GRE is established: <ul style="list-style-type: none"> • vrp-master - The tunnel is created only if the master node is the VRRP master. • cluster-master - The tunnel is created only if the master node is the cluster master. • rf-domain-manager - The tunnel is created only if the master node is the RF Domain manager. • always - The tunnel is automatically created, irrespective of whether the master node (device) is any one of the above three (3). In other words, the master node need not be any of the above three for the tunnel to be established.
VRRP Group	Set the VRRP group ID only enabled when the <i>Establishment Criteria</i> is set to <i>vrp-master</i> . A virtual router redundancy group enables the creation of a group of routers as a default gateway for redundancy. Clients can point to the IP address of the VRRP virtual router as their default gateway and utilize a different group member if a master becomes unavailable.

9. Define the following **Failover** parameters:

Enable Failover	Select this option to periodically ping the primary gateway to assess its availability for failover support.
Ping Interval	Set the duration between two successive pings to the gateway. Define this value in seconds from 0 - 86,400.
Number of Retries	Set the number of retry ping opportunities before the session is terminated.

10. Select the **OK** button located to save the changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - IGMP Snooping

The IGMP (*Internet Group Management Protocol*) is used for managing IP multicast group members. Controllers and service platforms listen to IGMP network traffic and forward IGMP multicast packets to radios on which the interested hosts are connected. On the wired side of the network, the controller or service platform floods all the wired interfaces. This feature reduces unnecessary flooding of multicast traffic in the network.

To override the access point's IGMP snooping configuration,

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Network** and select **IGMP Snooping**.
The IGMP Snooping configuration screen displays.

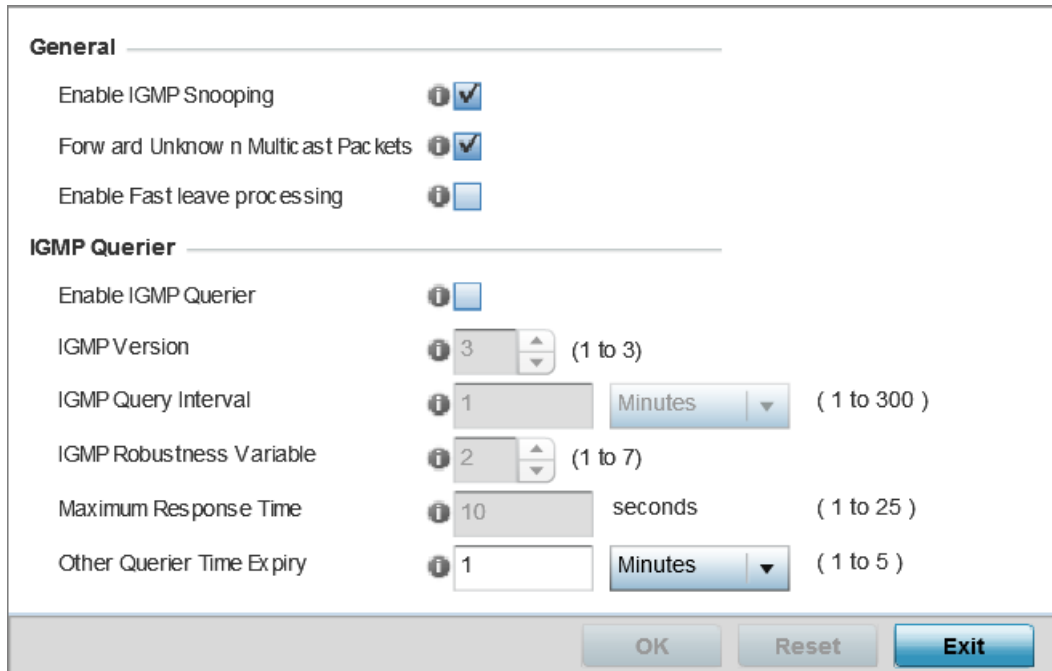


Figure 183: Profile Overrides - Network - IGMP Snooping Configuration Screen

- Set the following **General** IGMP Snooping parameters:

Enable IGMP Snooping	Select this option to enable IGMP snooping. If disabled, snooping on a per VLAN basis is also disabled. This feature is enabled by default. If disabled, the settings under the bridge configuration are overridden. For example, if IGMP snooping is disabled, but the bridge VLAN is enabled, the effective setting is disabled.
Forward Unknown Multicast Packets	Select this option to enable the forwarding of multicast packets from unregistered multicast groups. If disabled, the unknown multicast forward feature is also disabled for individual VLANs. This setting is enabled by default.

5. Set the following for **IGMP Querier** configuration:

Enable IGMP Querier	Select this option to enable IGMP querier. IGMP snoop querier is used to keep host memberships alive. It's primarily used in a network where there's a multicast streaming server and hosts subscribed to the server and no IGMP querier present. An IGMP querier sends out periodic IGMP query packets. Interested hosts reply with an IGMP report packet. IGMP snooping is only conducted on wireless radios. IGMP multicast packets are flooded on wired ports. IGMP multicast packets are not flooded on the wired port. IGMP membership is also learnt on it and only if present, then it is forwarded on that port.
IGMP Version	Use the spinner control to set the IGMP version compatibility to either version 1, 2 or 3. IGMPv1 is defined by RFC 1112, IGMPv2 is defined by RFC 2236 and IGMPv3 defined by RFC 4604 which defines both IGMPv3 and MLDv2. IGMPv2 improves over IGMPv1 by adding the ability for a host to signal desire to leave a multicast group. IGMPv3 improves over IGMPv2 by adding the ability to listen to multicast traffic originating from a set of source IP addresses exclusively. The default setting is 3.
IGMP Query Interval	Set the interval IGMP queries are made. This parameter is used only when the querier functionality is enabled. Define an interval value in Seconds (1 - 18,000), Minutes (1 - 300) and Hours (1 - 5). The default setting is one minute.
IGMP Robustness Variable	Sets the IGMP robustness variable. The robustness variable is a way of indicating how susceptible the subnet is to lost packets. IGMP can recover from robustness variable minus 1 lost IGMP packets. Define a robustness variable from 1 - 7. The default robustness value is 2.
Maximum Response Time	Specify the maximum interval (from 1 - 25 seconds) before sending a responding report. When no reports are received from a radio, radio information is removed from the snooping table. Only multicast packets are forwarded to radios present in the snooping table. For IGMP reports from wired ports, the controller or service platform forwards these reports to the multicast router ports. The default setting is 10 seconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

6. Select **OK** to save the IGMP snooping configuration changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - MLD Snooping

MLD (*Multicast Listener Discovery*) snooping enables a controller, service platform or access point to examine MLD packets and make forwarding decisions based on content. MLD is used by IPv6 devices to discover devices wanting to receive multicast packets destined for specific multicast addresses. MLD uses multicast listener queries and multicast listener reports to identify which multicast addresses have listeners and join multicast groups.

MLD snooping caps the flooding of IPv6 multicast traffic on controller, service platform or access point VLANs. When enabled, MLD messages are examined between hosts and multicast routers and to discern which hosts are receiving multicast group traffic. The controller, service platform or access point then forwards multicast traffic only to those interfaces connected to interested receivers instead of flooding traffic to all interfaces.

To override the access point's MLD snooping configuration,

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Network** and select **MLD Snooping**.

The MLD Snooping configuration screen displays.

The screenshot shows the MLD Snooping configuration interface. It is divided into two main sections: 'General' and 'MLD Querier'. In the 'General' section, 'Enable MLD Snooping' is a disabled checkbox, and 'Forward Unknown Multicast Packets' is a checked checkbox. The 'MLD Querier' section contains several settings: 'Enable MLD Querier' is disabled; 'MLD Version' is a dropdown menu set to 2; 'MLD Query Interval' is a text input set to 1 with a 'Minutes' dropdown; 'MLD Robustness Variable' is a dropdown menu set to 2; 'Maximum Response Time' is a text input set to 10000 with a '(1 to 25,000 milliseconds)' range indicator; and 'Other Querier Time Expiry' is a text input set to 1 with a 'Minutes' dropdown and '(1 to 5)' range indicator. At the bottom right, there are 'OK' and 'Reset' buttons.

Figure 184: Profile Overrides - Network - MLD Snooping Configuration Screen

4. Define the following **General** settings:

Enable MLD Snooping	Enable MLD snooping to examine MLD packets and make content forwarding for this profile. Packets delivered to group members are identified by a single multicast group address. Multicast packets are delivered to a group using best-effort reliability, just like IPv6 unicast. MLD snooping is disabled by default.
Forward Unknown Multicast Packets	Use this option to either enable or disable IPv6 unknown multicast forwarding. This setting is enabled by default.

5. Define the following **MLD Querier** settings:

Enable MLD Querier	Select this option to enable MLD querier on the controller, service platform or access point. When enabled, the device sends query messages to discover which network devices are members of a given multicast group. This setting is disabled by default.
MLD Version	Define whether MLD version 1 or 2 is utilized as the MLD querier. MLD version 1 is based on IGMP version 2 for IPv4. MLD version 2 is based on IGMP version 3 for IPv4 and is fully backward compatible. IPv6 multicast uses MLD version 2. The default MLD version is 2.
MLD Query Interval	Set the interval in which query messages are sent to discover device multicast group memberships. Set an interval in either Seconds (1 -18,000), Minutes (1 - 300) or Hours (1 - 5). The default interval is 1 minute.
MLD Robustness Variable	Set a MLD IGMP robustness value (1 - 7) used by the sender of a query. The MLD robustness variable enables refinements to account for expected packet loss on a subnet. Increasing the robust count allows for more packet loss, but increases the leave latency of the subnetwork unless the value is zero. The default variable is 2.
Maximum Response Time	Specify the maximum response time (from 1 - 25,000 milliseconds) before sending a responding report. Queriers use MLD reports to join and leave multicast groups and receive group traffic. The default setting is 10 milliseconds.
Other Querier time Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

6. Select **OK** to save the MLD Snooping configuration changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - Quality of Service (QoS)

The WiNG software uses different *Quality of Service (QoS)* screens to define WLAN and device radio QoS configurations.

QoS values are required to provide service priority to packets. For example, VoIP packets get higher priority than data packets to provide a better quality of service for high priority voice traffic.

The profile QoS screen maps the 6-bit Differentiated Service Code Point (DSCP) code points to the older 3-bit IP Precedent field located in the Type of Service byte of an IP header. DSCP is a protocol for specifying and controlling network traffic by class so that certain traffic types get precedence. DSCP specifies a specific per-hop behavior that is applied to a packet. This QoS assignment can be overridden as needed, but removes the device configuration from the profile that may be shared with other similar access point models.

To override an access point profile's QoS configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Network** and select **Quality of Service (QoS)**.

The **Traffic Shaping** → **Basic Configuration** screen displays by default.

The screenshot shows the 'Basic Configuration' tab for QoS Traffic Shaping. It includes an 'Enable' checkbox, a 'Total Bandwidth' field (10) with a unit dropdown (Mbps), and a 'Rate Configuration' table. The 'Rate Configuration' table has columns for 'Class Index', 'Rate', and 'Rate Unit'. There are also two mapping tables: 'App-Category to Class Mapping' and 'Application to Class Mapping', both with columns for the mapping key and 'Traffic Shape Class'. 'Add Row' buttons are present for the Rate and Application to Class Mapping tables. At the bottom, there are 'OK', 'Reset', and 'Exit' buttons.

Figure 185: QoS - Traffic Shaping - Basic Configuration Screen

4. Select **Enable** to provide traffic shaping using the defined bandwidth, rate and class mappings.

Apply traffic shaping to specific applications to apply application categories. When application and ACL rules are conflicting, applications have priority, followed by application categories, then ACLs.

5. Set the **Total Bandwidth** configurable for the traffic shaper. Set the value from either 1 - 1,000 Mbps, or from 250 - 1,000,000 Kbps.
6. Select **+ Add Row** within the **Rate Configuration** table to set the Class Index (1 - 4) and Rate (in either Kbps, Mbps or percentage) for the traffic shaper class. Use the rate configuration to control the maximum traffic rate sent or received on the device. Consider this form of rate limiting on interfaces at the edge of a network to limit traffic into or out of the network. Traffic within the set limit is sent and traffic exceeding the set limit is dropped or sent with a different priority.

7. Refer to the **IP ACL Class Mapping** table and select **+ Add Row** to apply an IPv4 formatted ACL to the shaper class mapping. Select **+ Add Row** to add mappings.
8. Refer to the **IPv6 ACL Class Mapping** table and select **+ Add Row** to apply an IPv6 formatted ACL to the shaper class mapping. Select **+ Add Row** to add mappings.

**Note**

For more information on creating IP based firewall rules, refer to [Configuring IP Firewall Rules](#) on page 841 and [Setting an IPv4 or IPv6 Firewall Policy](#) on page 841.

9. Refer to the **App-Category to Class Mapping** table and select **+ Add Row** to apply an application category to shaper class mapping. Select **+ Add Row** to add mappings by selecting the application category and its traffic shaper class. For more information on creating an application category, refer to [Application](#) on page 814.
10. Refer to the **Application to Class Mapping** table and select **+ Add Row** to apply an application to shaper class mapping. Select **+ Add Row** to add mappings by selecting the application and its traffic shaper class. For more information on creating an application, refer to [Application](#) on page 814.
11. Select the **OK** button to save the traffic shaping basic configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Advanced Traffic Shaping

1. Select the **Traffic Shaping → Advanced Configuration** tab.
The **Traffic Shaping → Advanced Configuration** screen displays.

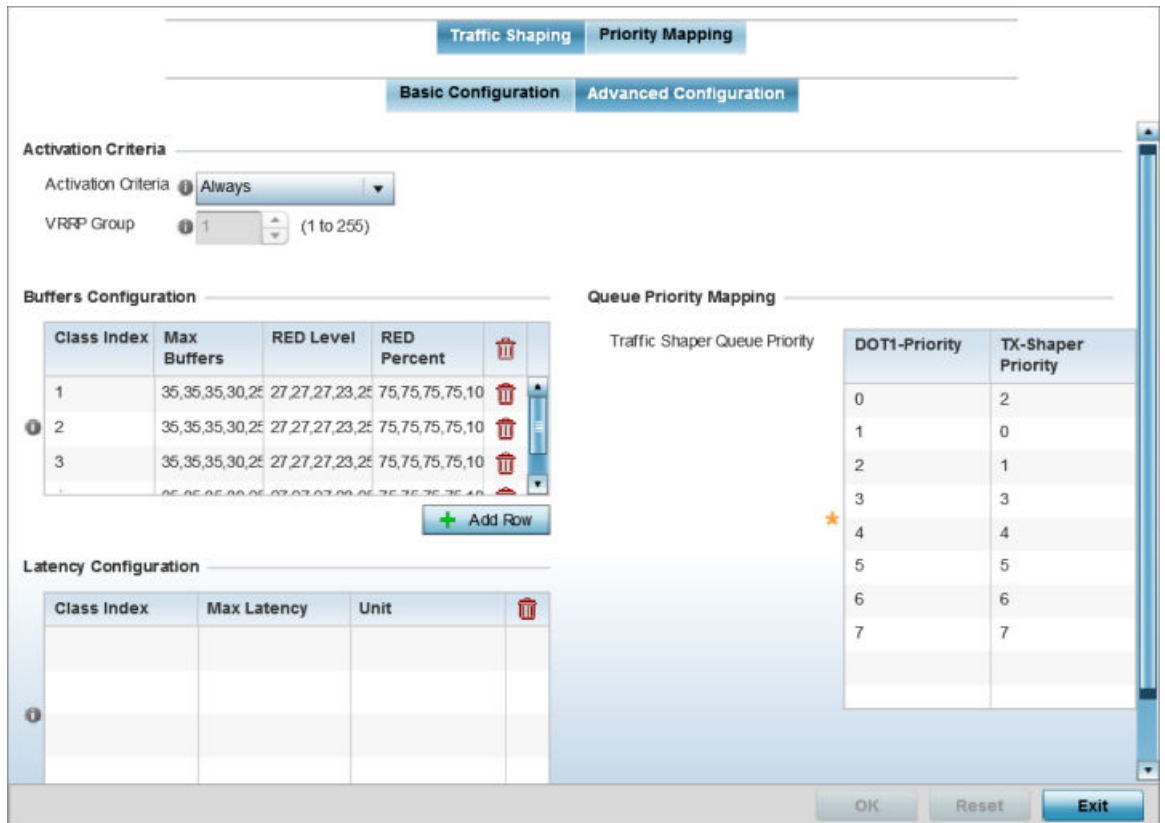


Figure 186: QoS - Traffic Shaping - Advanced Configuration Screen

2. In the **Activation Criteria** field, set the following traffic shaper activation criteria:

<p>Activation Criteria</p>	<p>Use the drop-down menu to determine when the traffic shaper is invoked. Options include: vrrp-master, cluster-master, rf-domain-manager and Always. A VRRP master responds to ARP requests, forwards packets with a destination link MAC layer address equal to the virtual router MAC layer address, rejects packets addressed to the IP associated with the virtual router and accepts packets addressed to the IP associated with the virtual router. The solitary cluster master is the cluster member elected, using a priority assignment scheme, to provide management configuration and Smart RF data to other cluster members. Cluster requests go through the elected master before dissemination to other cluster members. The RF Domain manager is the elected member capable of storing and provisioning configuration and firmware images for other members of the RF Domain.</p>
<p>VRRP Group</p>	<p>Set the VRRP group ID from 1 - 255. VRRP groups is only enabled when the Establishment Criteria is set to vrrp-master.</p>

3. In the **Buffers Configuration** table, click **+ Add Row** and set the following:

Class Index	Set a class index from 1 - 4.
Max Buffers	Set this value to specify the queue length limit after which the queue starts to drop packets. Set the maximum queue lengths for packets. The upper length is 400 for access points.
RED Level	Set the packet queue length for RED. The upper limit is 400 for access points. The rate limiter uses the RED (<i>random early detection</i>) algorithm for rate limiting traffic. RED is a queueing technique for congestion avoidance. RED monitors the average queue size and drops or marks packets. If the buffer is near empty, all incoming packets are accepted. When the queue grows, the probability for dropping an incoming packet also grows. When the buffer is full, the probability has reached 1 and all incoming packets are dropped.
RED Percent	Set a percentage (1 - 100) for RED rate limiting at a percentage of maximum buffers.

4. Select **+ Add Row** within the **Latency Configuration** table to set the Class Index (1 - 4), Max Latency and latency measurement Unit. Max latency specifies the time limit after which packets start dropping (maximum packet delay in the queue). The maximum number of entries is 8. Select whether msec (default) or usec is unit for latency measurement.

When a new packet arrives it knows how much time to wait in the queue. If a packet takes longer than the latency value, it is dropped. By default latency is not set, so packets remain in queue for long time.

5. Refer to the **Queue Priority Mapping** table to set the traffic shaper queue priority and specify a particular queue inside a class. There are 8 queues (0 - 7), and traffic is queued in each based on incoming packets mark 802.1p markings.
6. Select **OK** to save the traffic shaping advanced configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Priority Mapping

1. Select the **Priority Mapping** tab.

The **Quality of Service (QoS) → Priority Mapping** screen displays.

The screenshot shows the 'Priority Mapping' configuration screen. At the top, there are two tabs: 'Traffic Shaping' and 'Priority Mapping', with 'Priority Mapping' selected. Below the tabs, the title 'Priority Mapping' is displayed. The screen is divided into two main sections: 'DSCP Mapping' and 'IPv6 Traffic Class Mapping'. Each section contains a table with two columns: the first column represents the source identifier (DSCP or Traffic Class) and the second column represents the '802.1p Priority'. The 'DSCP Mapping' table has rows for DSCP values 0 through 9, with 802.1p Priority values of 0 for DSCP 0-7 and 1 for DSCP 8-9. An orange asterisk is next to the row for DSCP 4. The 'IPv6 Traffic Class Mapping' table has rows for Traffic Class values 0 through 9, with 802.1p Priority values of 0 for Traffic Class 0-7 and 1 for Traffic Class 8-9. An orange asterisk is next to the row for Traffic Class 4. At the bottom of the screen, there are three buttons: 'OK', 'Reset', and 'Exit'.

DSCP	802.1p Priority
0	0
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	1
9	1

Traffic Class	802.1p Priority
0	0
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	1
9	1

Figure 187: QoS - Priority Mapping Configuration Screen

2. In the **DSCP Mapping** table, set the following IP DSCP mappings for untagged frames:

DSCP	Lists the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification.
802.1p Priority	<p>Assign a 802.1p priority as a 3-bit IP precedence value in the Type of Service field of the IP header used to set the priority. The valid values for this field are 0-7. Up to 64 entries are permitted. The priority values are:</p> <ul style="list-style-type: none"> • 0 – <i>Best Effort</i> • 1 – <i>Background</i> • 2 – <i>Spare</i> • 3 – <i>Excellent Effort</i> • 4 – <i>Controlled Load</i> • 5 – <i>Video</i> • 6 – <i>Voice</i> • 7 – <i>Network Control</i> <p>Note: Use the spinner controls within the 802.1p Priority field for each DSCP row to change its priority value.</p>

3. In the **IPv6 Traffic Class Mapping** table, set or override the following IPv6 DSCP settings for untagged frames:

Traffic Class	Devices that originate a packet must identify different classes or priorities for IPv6 packets. Devices use the traffic class field in the IPv6 header to set this priority.
802.1p Priority	<p>Assign a 802.1p priority as a 3-bit IPv6 precedence value in the Type of Service field of the IPv6 header used to set the priority. The valid values for this field are 0-7. Up to 64 entries are permitted. The priority values are:</p> <ul style="list-style-type: none"> • 0 – <i>Best Effort</i> • 1 – <i>Background</i> • 2 – <i>Spare</i> • 3 – <i>Excellent Effort</i> • 4 – <i>Controlled Load</i> • 5 – <i>Video</i> • 6 – <i>Voice</i> • 7 – <i>Network Control</i>

4. Select **OK** to save the priority mapping changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - Spanning Tree

The STP (*Spanning Tree Protocol*), standardized in IEEE 802.1D, is a network protocol that builds a loop-free logical topology for Ethernet networks. The basic function of STP is to prevent bridge loops and the broadcast radiation that results from them. Spanning

tree also allows a network design to include backup links to provide fault tolerance if an active link fails.

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides → Network** and select **Spanning Tree**.

The Spanning Tree configuration screen displays.

The screenshot shows the Spanning Tree Configuration screen with the following sections:

- MSTP Configuration:**
 - MSTP Enable:
 - Max Hop Count: 20 (7 to 127)
 - MST Config Name: My Name
 - MST Revision Level: 0 (0 to 255)
 - Cisco MSTP Interoperability: Disable
 - Hello Time: 2 (1 to 10)
 - Forward Delay: 15 (4 to 30)
 - Maximum Age: 20 (6 to 40)
- PortFast:**
 - PortFast BPDU Filter:
 - PortFast BPDU Guard:
- Error Disable:**
 - Enable Recovery:
 - Recovery Interval: 300 (10 to 1,000,000)
- Spanning Tree Instance:**

Instance	Priority	

+ Add Row
- Spanning Tree Instance VLANs:**

Instance	VLANs	

+ Add Row

Buttons: OK, Reset, Exit

Figure 188: Spanning Tree Configuration Screen

4. Set the following **MSTP Configuration** parameters:

MSTP Enable	Select this option to enable MSTP for this profile. MSTP is disabled by default, so if requiring different (groups) of VLANs with the profile supported network segment.
Max Hop Count	Define the maximum number of hops the BPDU will consider valid in the spanning tree topology. The available range is from 7 - 127. The default setting is 20.
MST Config Name	Define a 64 character maximum name for the MST region as an identifier.
MST Revision Level	Set a numeric revision value ID for MST configuration information. Set a value from 0 - 255. The default setting is 0.
Cisco MSTP Interoperability	Select either the Enable or Disable radio buttons to enable/disable interoperability with Cisco's version of MSTP, which is incompatible with standard MSTP. This setting is disabled by default.
Hello Time	Set a BPDU hello interval from 1 - 10 seconds. BPDUs are exchanged regularly (every 2 seconds by default) and enable supported devices to keep track of network changes and star/stop port forwarding as required.
Forward Delay	Set the forward delay time from 4 - 30 seconds. When a device is first attached to a port, it does not immediately start to forward data. It first processes BPDUs and determines the network topology. When a host is attached the port always goes into the forwarding state, after a delay of while it goes through the listening and learning states. The time spent in the listening and learning states is defined by the forward delay (15 seconds by default).
Maximum Age	Use the spinner control to set the maximum time (in seconds) to listen for the root bridge. The root bridge is the spanning tree bridge with the smallest (lowest) bridge ID. Each bridge has a unique ID and a configurable priority number, the bridge ID contains both. The available range is from 6 - 40. The default setting is 20.

5. Define the following **Port Fast** parameters:

PortFast BPDU Filter	Enable to invoke a BPDU filter for this portfast enabled port. Enabling the BPDU filter feature ensures this port channel does not transmit or receive any BPDUs. BPDUs are exchanged regularly and enable the access point to keep track of network changes and to start and stop port forwarding as required. This option is disabled by default.
PortFast BPDU Guard	Enable to invoke a BPDU guard for the portfast enabled port. Enabling the BPDU Guard feature means this port will shutdown on receiving a BPDU. Thus, no BPDUs are processed. BPDUs are exchanged regularly and enable the access point to keep track of network changes and to start and stop port forwarding as required. This option is disabled by default.

6. Define the following **Error Disable** settings:

Enable Recovery	Select this option to enable a error disable timeout resulting from a BPDU guard. This setting is disabled by default.
Recovery Interval	Define the recovery interval used to enable disabled ports. The available range is from 10 - 1,000,000 seconds with a default setting of 300.

7. Use the **Spanning Tree Instance** table to add indexes to the spanning tree topology.

Add up to 16 indexes and use the Priority setting to define the bridge priority used to determine the root bridge. The lower the setting defined, the greater the likelihood of becoming the root bridge in the spanning tree topology.

8. Use the **Spanning Tree Instance VLANs** table to add VLAN instance indexes (by numeric ID) and VLANs to the spanning tree topology.

9. Select the **OK** to save the STP changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - IPv4 Routing

Routing is the process of selecting IP paths to send access point managed network traffic. Use the Routing screen to set destination IP and gateway addresses enabling assignment of static IP addresses for requesting clients without creating numerous host pools with manual bindings. This eliminates the need for a long configuration file and reduces the resource space required to maintain address pools.

Both IPv4 and IPv6 routes are separately configurable using their appropriate tabs. For IPv6 networks, routing is the part of IPv6 that provides forwarding between hosts located on separate segments within a larger IPv6 network where IPv6 routers provide packet forwarding for other IPv6 hosts.

To override the access point profile's static routes:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Network** and select **Routing**.
The **IPv4 Routing** configuration screen displays.

IPv4 Routing IPv6 Routing

IP Routing

Policy Based Routing

Policy Based Routing

Static Routes

Network Address	Gateway	Default Gateway	

Default Route Priority

Static Default Route Priority (1 to 8,000)

DHCP Client Default Route Priority (1 to 8,000)

Enable Routing Failure

Use Network Address of 0.0.0.0/0 to Set Default Gateway

OK Reset Exit

Figure 189: Profile Overrides - IPv4 Routing Configuration Screen

- Select **IP Routing** to enable static routes using IPv4 addresses. This option is enabled by default.
- In the **Policy Based Routing** field, use the Policy Based Routing drop-down menu to apply a policy. Select the **Create** icon to create a policy based route or select the **Edit** icon to edit an existing policy after selecting it in the drop-down list. For more information on creating a Policy Based Routing Policy, see [Policy Based Routing \(PBR\)](#) on page 765.

6. In the Statis Routes table, click **Add Row +** and provide the following statis route details:

Network Address	Add network IP addresses and network masks
Gateway	Provide the Gateway's IP address. This is the gateway used to route traffic to the specified network.
Default Gateway	Provide the Default Gateway's IP address. This is the gateway used to route traffic to the specified network.

7. In the **Default Route Priority** field, and set the following parameters:

Static Default Route Priority	Use the spinner control to set the priority value (1 - 8,000) for the default static route. This is weight assigned to this route versus others that have been defined. The default setting is 100.
DHCP Client Default Route Priority	Use the spinner control to set the priority value (1 - 8,000) for the default route learnt from the DHCP client. The default setting is 1000.
Enable Routing Failure	When selected, all default gateways are monitored for activity. The system will failover to a live gateway if the current gateway becomes unusable. This feature is enabled by default.

8. Select the **OK** button to save the IPv4 routing configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - IPv6 Routing

1. Select the **IPv6 Routing** tab.

IPv6 networks are connected by IPv6 routers. IPv6 routers pass IPv6 packets from one network segment to another.

The IPv6 Routing configuration screen displays.

The screenshot shows the IPv6 Routing configuration interface. It features two tabs: 'IPv4 Routing' and 'IPv6 Routing', with 'IPv6 Routing' currently active. The configuration is split into two columns. The left column includes 'Unicast Routing' (checked), 'Unique Local Address Reject Route' (unchecked), 'System Neighbor Solicitation Interval' (1000 ms), and 'System Neighbor Discovery Reachable Time' (30000 ms). The right column includes 'IPv6 Hop Limit' (64), 'Router Advertisement Conversion to Unicast' (RA Convert, Throttle, Max RAs), and 'System NS Retransmit Interval' (1000 ms). Below these settings is an 'IPv6 Routes' table with columns for Network Address, Gateway, Interface, and Default Gateway. An 'Add Row' button is located at the bottom right of the table. At the very bottom of the screen are 'OK', 'Reset', and 'Exit' buttons.

Figure 190: IPv6 Routing Configuration Screen

2. Select **Unicast Routing** to enable IPv6 unicast routing for this profile. Keeping unicast enabled allows the profile's neighbor advertisements and solicitations in unicast (as well as multicast) to provide better neighbor discovery. This setting is enabled by default.
3. Select **Unique Local Address Reject Route** to enable rejecting local routes in the format FC00::/7.
4. Set a **System NS Retransmit Interval** (from 1,000 to 3,600,000 milliseconds) as the interval between NS (*neighbor solicitation*) messages. NS messages are sent by a node to determine the link layer address of a neighbor, or verify a neighbor is still reachable via a cached link-layer address. The default is 1,000 milliseconds.
5. Set a **System ND Reachable Time** (from 5,000 to 3,600,000 milliseconds) as the time a neighbor is assumed to be reachable after receiving a receiving a ND (*neighbor discovery*) confirmation for their reachability. The default is 30,000 milliseconds.
6. Set an **IPv6 Hop Count** (from 1 - 255) as the maximum number of hops considered valid when sending IP packets. The default setting is 64.

7. Set the following **Router Advertisement Conversion to Unicast** settings:

RA Convert (milliseconds)	Select this option to convert multicast router advertisements (RA) to unicast router advertisements at the dot11 layer. Unicast addresses identify a single network interface, whereas a multicast address is used by multiple hosts. This setting is disabled by default.
Throttle	Select this option to throttle RAs before converting to unicast. Once enabled, set the throttle interval and maximum number of RAs. This setting is disabled by default.
Throttle Interval (milliseconds)	Enable this setting to define the throttle interval (3 - 1,800 seconds). The default setting is 3 seconds.
Max RAs	Enable this setting to define the maximum number of router advertisements per router (1 - 256) during the throttle interval. The default setting is 1.

8. In the **IPv6 Routes** table, click **+ Add Row** and add additional 256 IPv6 route resources.

The IPv6 static route **Add Row** screen displays.

Figure 191: Add IPv6 Static Route Window

Network Address	Set the IPv6 network address. Other than the length and slightly different look versus an IPv4 address, the IPv6 address concept is same as IPv4.
Gateway	Set the IPv6 route gateway. A network gateway in IPv6 is the same as in IPv4. A gateway address designates how traffic is routed out of the current subnet.
Interface	If using a link local address, set the VLAN (1 - 4,094) used a virtual routing interface for the local address.

9. Select **OK** to save the IPv6 static route changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - OSPF Settings

OSPF (*Open Shortest Path First*) is a link-state IGP (*interior gateway protocol*). OSPF routes IP packets within a single routing domain (autonomous system), like an enterprise LAN. OSPF gathers link state information from neighbor routers and constructs a network topology. The topology determines the routing table presented to the Internet Layer which makes routing decisions based solely on the destination IP address found in IP packets.

To override an access point's profile OSPF configurations:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Network** and select **OSPF**.

The **OSPF** → **OSPF Settings** configuration screen displays.

The screenshot shows the OSPF Settings configuration screen. It features three tabs: **OSPF Settings**, **Area Settings**, and **Interface Settings**. The **OSPF Settings** tab is selected. The configuration options are as follows:

- Enable OSPF**:
- Router ID**:
- Auto-Cost**: (1 to 4,294,967)
- Passive Mode on All Interfaces**:
- Passive Removed**: VLAN ID (1 to 4,294,967) with a green arrow button.
- Passive Mode**: VLAN ID (1 to 4,294,967) with a green arrow button.
- VRRP State Check**:
- OSPF Overload Protection**:
 - Number of Routes**: (1 to 4,294,967,295)
 - Retry Count**: (1 to 32)
 - Retry Time Out**: (1 to 3,600)
 - Reset Time**: (1 to 86,400)
- Default Information**:
 - Originate**:

At the bottom right, there are buttons for **OK**, **Reset**, and **Exit**.

Figure 192: Profile Overrides - OSPF Settings Configuration Screen

4. Select the **Enable OSPF** check box, and provide the following dynamic routing settings:

Router ID	Select this option to define a router ID (numeric IP address). This ID must be established in every OSPF instance. If not explicitly configured, the highest logical IP address is duplicated as the router identifier. However, since the router identifier is not an IP address, it does not have to be a part of any routable subnet in the network.
Auto-Cost	Select this option to specify the reference bandwidth (in Mbps) used to calculate the OSPF interface cost if OSPF is either STUB or NSSA. The default setting is 1.
Passive Mode on All Interfaces	When selected, all layer 3 interfaces are set as an OSPF passive interface. This setting is disabled by default.
Passive Removed	If <i>enabling</i> Passive Mode on All Interfaces , use the spinner control to select VLANs (by numeric ID) as OSPF <i>non</i> passive interfaces. Multiple VLANs can be added to the list.
Passive Mode	If <i>disabling</i> Passive Mode on All Interfaces , use the spinner control to select VLANs (by numeric ID) as OSPF passive interfaces. Multiple VLANs can be added to the list.
VRRP State Check	Select this option to enable checking of VRRP state. If the interface's VRRP state is not Backup , then the interface is published via OSPF.

5. Set the following **OSPF Overload Protection** parameters:

Number of Routes	Use the spinner controller to set the maximum number of OSPN routes permitted. The available range is from 1 - 4,294,967,295.
Retry Count	Set the maximum number of retries (OSPF resets) permitted before the OSPF process is shut down. The available range is from 1 - 32. The default setting is 5.
Retry Time Out	Set the duration (in seconds) the OSPF process remains off before initiating its next retry. The available range is from 1 - 3,600 seconds. The default is 60 seconds.
Reset Time	Set the reset time (in seconds) that, when exceeded, changes the retry count is zero. The available range is from 1 - 86,400. The default is 360 seconds.

6. Set the following **Default Information**:

Originate	Select this option to make the default route a distributed route. This setting is disabled by default.
Always	Enabling this setting continuously maintains a default route, even when no routes appear in the routing table. This setting is disabled by default.
Metric Type	Select this option to define the exterior metric type (1 or 2) used with the default route.
Route Metric	Select this option to define route metric used with the default route. OSPF uses path cost as its routing metric. It's defined by the speed (bandwidth) of the interface supporting a given route.

7. In the **Route Redistribution** table, click **+ Add Row** and set the types of routes that can be used by OSPF.

Route Type	Set the <i>Route Type</i> used to define the redistributed route. Options include: connected , kernel and static .
Metric Type	Select this check box, and define the exterior metric type (1 or 2) used with the route redistribution.
Metric	Select this option, and define route metric used with the redistributed route.

8. In the **OSPF Network** table, click **+Add Row** and configure the following:

Network	Add the IP address and mask of the Network(s) participating in OSPF.
Area ID	Define the OSPF area (IP address) to which the network belongs.

9. In the **Clear OSPF Process**, click **Clear** to clear all OSPF Routing table entries.
10. Set an **OSPF Default Route Priority** (1 - 8,000) as the priority of the default route learnt from OSPF. The default priority is 7000.
11. Click **OK** to save the OSPF setting changes.
- Click **Reset** to revert to the last saved configuration.

OSPF - Area Settings

An OSPF Area contains a set of routers exchanging LSAs (*Link State Advertisements*) with others in the same area. Areas limit LSAs and encourage aggregate routes.

To override the access point profile's OSPF area settings:

1. Select the **Area Settings** tab.

The OSPF Area main screen displays. This screen lists existing OSPF Area configurations.

Area ID	Authentication Type	Type
0.0.0.1	simple-password	non-stub

Type to search in tables Row Count: 1

Figure 193: OSPF - Area Setting Configuration Screen

2. Review existing **Area Settings** configurations:

Area ID	Displays either the IP address or integer representing the OSPF area.
Authentication Type	Lists the authentication schemes used to validate the credentials of dynamic route connections.
Type	Lists the OSPF area type in each listed configuration.

- To apply overrides, select an area entry from those listed on the screen, and click **Edit**.

You can also add new area configurations or delete existing configurations.

The add/edit OSPF Area screen displays.

Figure 194: OSPF - Add/Edit OSPF Area Configuration Screen

- Set the **OSPF Area** configuration.

Area ID	Use the drop-down menu and specify either an IP address or Integer for the OSPF area.
Authentication Type	Select either None , simple-password or message-digest as credential validation scheme used with the OSPF dynamic route. The default setting is <i>None</i> .
Type	Set the OSPF area type as either stub , totally-stub , nssa , totally-nssa or non-stub .
Default Cost	Select this option to set the default summary cost advertised if creating a stub. Set a value from 1 - 16, 777,215.
Translate Type	Define how messages are translated. Options include translate-candidate , translate-always and translate-never . The default setting is <i>translate-candidate</i> .
Range	Specify a range of addresses for routes matching address/mask for OSPF summarization.

- Click **OK** to save the area configuration changes.

Click **Reset** to revert to the last saved configuration.

OSPF - Interface Settings

To override the access point profile's OSPF interface settings:

1. Select the **Interface Settings** tab.

The OSPF interface configuration displays.

Name	Type	Description	Admin Status	VLAN	IP Address
vlan1	VLAN		Enabled	1	dhcp

Figure 195: OSPF - Interface Main Screen

2. Review existing **Interface Settings**.

Name	Displays the name defined for the interface configuration.
Type	Displays the type of interface.
Description	Lists each interface's 32 character maximum description.
Admin Status	A green check mark defines the interface as active and currently enabled with the profile. A red "X" defines the interface as currently disabled and not available for use.
VLAN	Lists the VLAN IDs set for each listed OSPF route virtual interface.
IP Address	Displays the IP addresses defined as virtual interfaces for dynamic OSPF routes. Zero config and DHCP can be used to generate route addresses, or a primary and secondary address can be manually provided.

OSPF Basic General Settings

To add a new VLAN configuration or override an existing VLAN configuration:

1. Select **Add** or select the VLAN from those listed on the screen and click **Edit**.
You can also delete existing configurations.

The **Basic Configuration** screen displays, with the **General** tab selected by default.

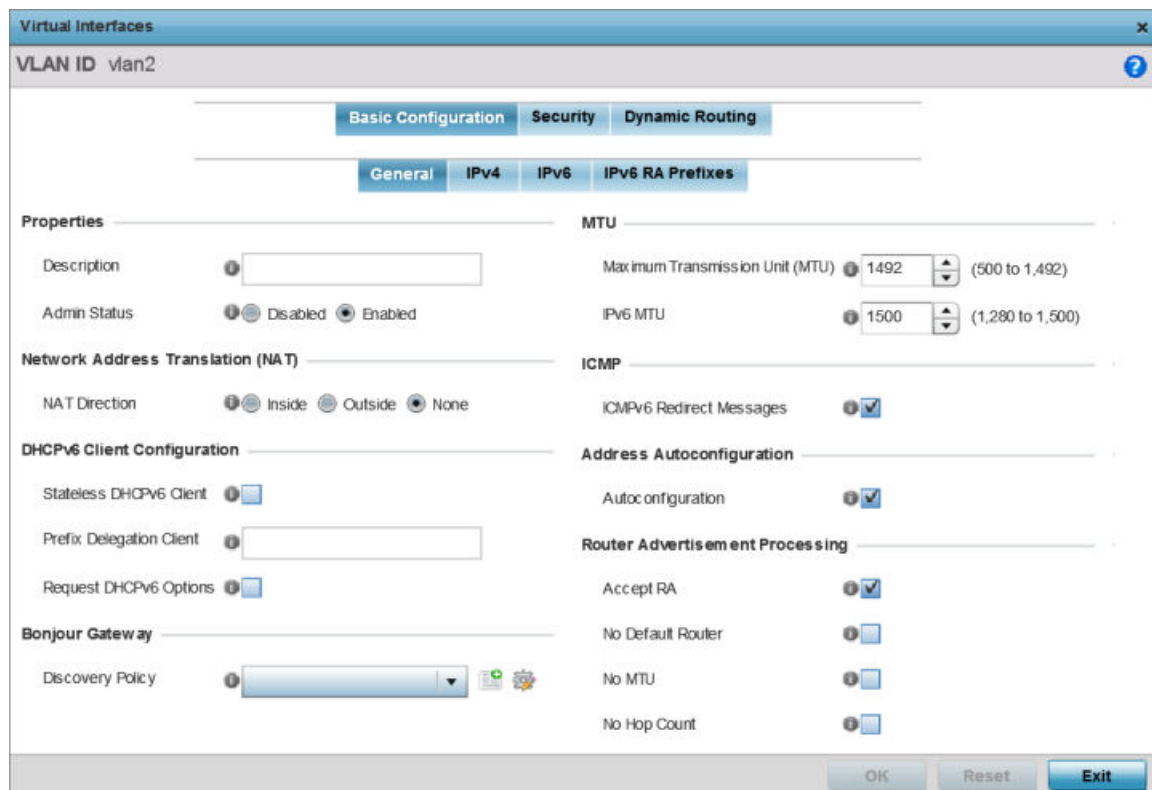


Figure 196: OSPF - VLAN Interface Configuration Screen

2. If creating a new Virtual Interface, use the **VLAN ID** spinner control to define a numeric ID from 1 - 4094.
3. Define the following parameters from within the **Properties** field:

Description	Provide or edit a description (up to 64 characters) for the Virtual Interface that helps differentiate it from others with similar configurations.
Admin Status	Either select the Disabled or Enabled radio button to define this interface’s current status within the network. When set to Enabled, the Virtual Interface is operational and available. The default value is Disabled.

4. Define the **Network Address Translation (NAT)** direction.

Select one the following options:

- **Inside** - The inside network is transmitting data over the network to its intended destination. On the way out, the source IP address is changed in the header and replaced by the (public) IP address.
- **Outside** - Packets passing through the NAT on the way back to the LAN are searched against the records kept by the NAT engine. There the destination IP address is changed back to the specific internal private class IP address in order to reach the LAN over the network.
- **None** - No NAT activity takes place. This is the default setting.

5. Set the following **DHCPv6 Client Configuration** parameters:

The *Dynamic Host Configuration Protocol for IPv6* (DHCPv6) provides a framework for passing configuration information.

Stateless DHCPv6 Client	Select this option to request information from the DHCPv6 server using stateless DHCPv6. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. This setting is disabled by default.
Prefix Delegation Client	Specify a 32 character maximum request prefix for prefix delegation from a DHCPv6 server over this virtual interface. Devices use prefixes to distinguish destinations that reside on-link from those reachable using a router.
Request DHCPv6 Options	Select this option to request DHCPv6 options on this virtual interface. DHCPv6 options provide configuration information for a node that must be booted using the network rather than locally. This setting is disabled by default.

6. Set the following **MTU** settings:

Maximum Transmission Unit (MTU)	Set the PPPoE client MTU from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size. The default MTU is 1,492.
IPv6 MTU	Set an IPv6 MTU for this virtual interface from 1,280 - 1,500. A larger MTU provides greater efficiency because each packet carries more user data while protocol overheads, such as headers or underlying per-packet delays, remain fixed; the resulting higher efficiency means a slight improvement in bulk protocol throughput. A larger MTU results in the processing of fewer packets for the same amount of data. The default is 1,500.

7. Within the **ICMP** field, define whether ICMPv6 redirect messages are sent. Redirect requests data packets be sent on an alternative route. This setting is enabled by default.

8. Within the **Address Autoconfiguration** field, define whether to configure IPv6 addresses on this virtual interface based on the prefixes received in router advertisement messages. Router advertisements contain prefixes used for link determination, address configuration and maximum hop limits. This setting is enabled by default.
9. Set the following **Router Advertisement Processing** settings for the virtual interface. Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information.

Accept RA	Enable this option to allow router advertisements over this virtual interface. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters. This setting is enabled by default.
No Default Router	Select this option to consider routers unavailable on this interface for default router selection. This setting is disabled by default.
No MTU	Select this option to <i>not use</i> the existing MTU setting for router advertisements on this virtual interface. If the value is set to zero no MTU options are sent. This setting is disabled by default.
No Hop Count	Select this option to <i>not use</i> the hop count advertisement setting for router advertisements on this virtual interface. This setting is disabled by default.

10. Use the **Discovery Policy** drop-down menu to define the Bonjour Gateway Discovery Policy. Bonjour is Apple's service discovery protocol.
11. Select **OK** to save the changes to the basic configuration.
Select **Reset** to revert to the last saved configuration.

OSPF IPv4 Settings

IPv4 is a connectionless protocol. It operates on a best effort delivery model that does not guarantee delivery or assures proper sequencing or avoidance of duplicate delivery (unlike TCP).

To set the VLAN IPv4 settings:

1. Select the **IPv4** tab.

The OSPF VLAN interface IPv4 configuration screen displays.

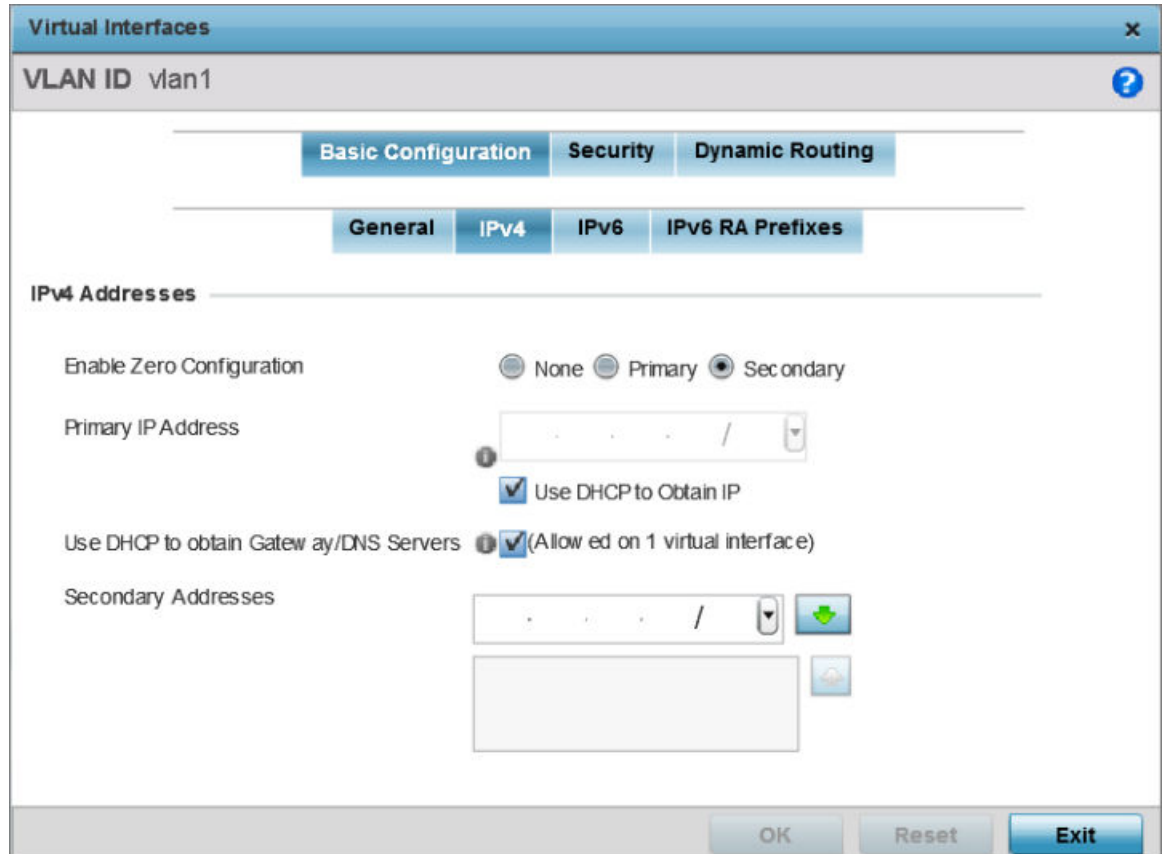


Figure 197: OSPF - VLAN interface IPv4 Configuration Screen

2. Set the following network information from within the **IPv4 Addresses** field:

<p>Enable Zero Configuration</p>	<p>Zero configuration can provide a primary or secondary IP addresses for the virtual interface. Zero configuration (or zero config) is a wireless connection utility included with Microsoft Windows XP and later as a service dynamically selecting a network to connect based on a user's preferences and various default settings. Zero config can be used instead of a wireless network utility from the manufacturer of a computer's wireless networking device. This value is set to None by default.</p>
<p>Primary IP Address</p>	<p>Define the IP address for the VLAN associated Virtual Interface.</p>
<p>Use DHCP to Obtain IP</p>	<p>Select this option to allow DHCP to provide the IP address for the Virtual Interface. Selecting this option disables the Primary IP address field.</p>

Use DHCP to obtain Gateway/DNS Servers	Select this option to allow DHCP to obtain a default gateway address and DNS resource for one virtual interface. This setting is disabled by default and only available when the Use DHCP to Obtain IP option is selected.
Secondary Addresses	Use this parameter to define additional IP addresses to associate with VLAN IDs. The address provided in this field is used if the primary IP address is unreachable.

3. Select **OK** to save the changes to the IPv4 configuration.

Select **Reset** to revert to the last saved configuration.

OSPF IPv6 Settings

IPv6 is the latest revision of the *Internet Protocol* designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters.

To set the VLAN IPv6 settings:

1. Select the **IPv6** tab to set IPv6 settings for this virtual interface.

The OSPF VLAN interface IPv6 configuration screen displays.

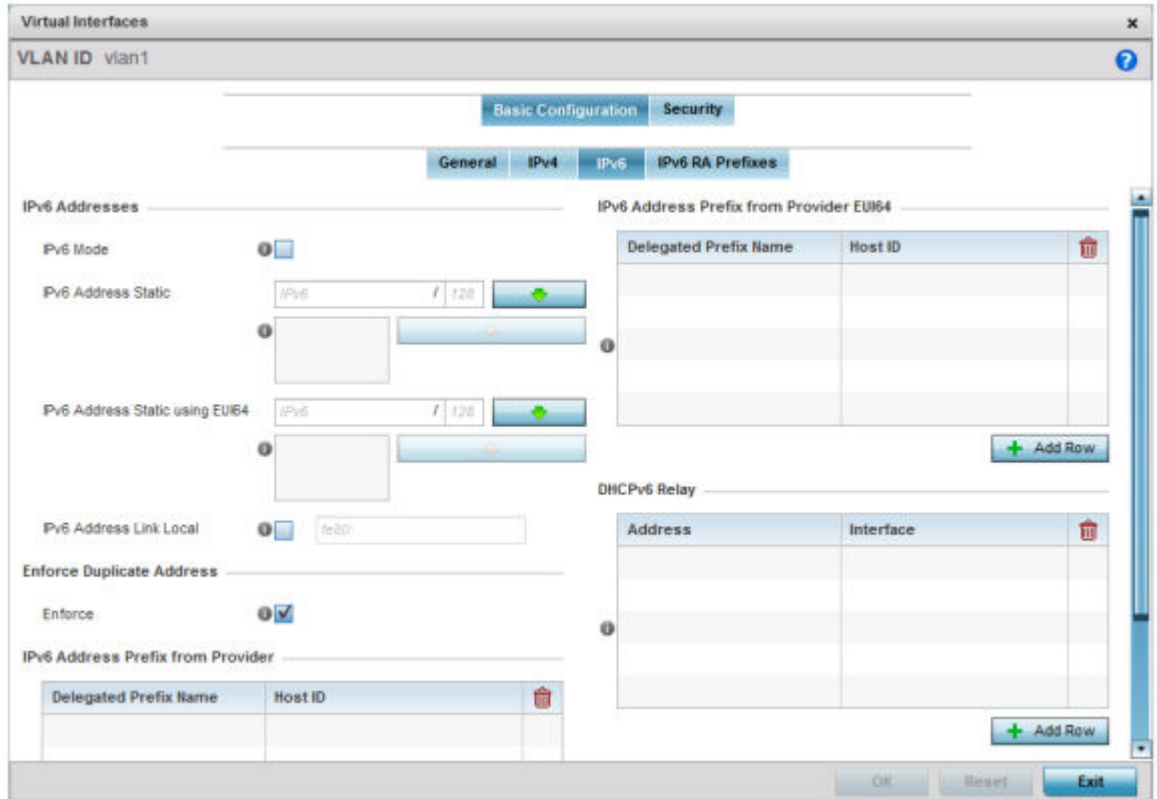


Figure 198: OSPF - VLAN Interface IPv6 Configuration Screen

2. Refer to the **IPv6 Addresses** field to define how IP6 addresses are created and utilized.

IPv6 Mode	Select this option to enable IPv6 support on this virtual interface. IPv6 is disabled by default.
IPv6 Address Static	Define up to 15 global IPv6 IP addresses that can be created statically. IPv6 addresses are represented as eight groups of four hexadecimal digits separated by colons.

IPv6 Address Static using EUI64	Optionally set up to 15 global IPv6 IP addresses (in the EUI-64 format) that can be created statically. The IPv6 EUI-64 format address is obtained through a 48-bit MAC address. The MAC is initially separated into two 24-bit segments, with one being an OUI (Organizationally Unique Identifier) and the other being client specific. A 16-bit 0xFFFE is then inserted between the two 24-bit segments for the 64-bit EUI address. IEEE has chosen FFFE as a reserved value which can only appear in EUI-64 generated from an EUI-48 MAC address.
IPv6 Address Link Local	Provide the IPv6 local link address. IPv6 requires a link local address assigned to every interface the IPv6 protocol is enabled, even when one or more routable addresses are assigned.

3. Enable the **Enforce Duplicate Address** option to enforce duplicate address protection when any wired port is connected and in a forwarding state. This option is enabled by default.
4. In the **IPv6 Address Prefix from Provider** table, click **+ Add Row** and create IPv6 format prefix shortcuts as supplied by an ISP.

The IPv6 Address from Provider - Add Row screen displays.

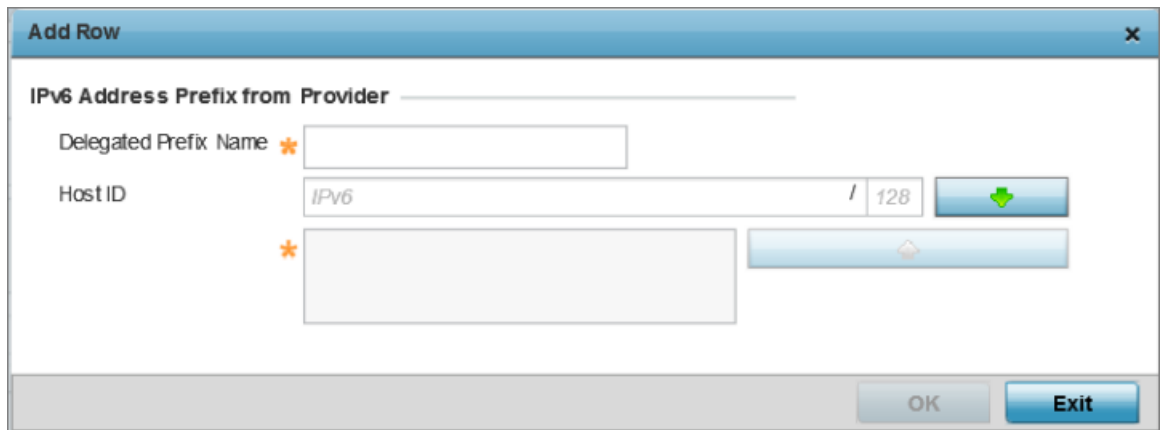


Figure 199: OSPF - IPv6 Add IPv6 Address Prefix from Provider Screen

Delegated Prefix Name	Enter a 32 character maximum name for the IPv6 address prefix from provider.
Host ID	Define the subnet ID, host ID and prefix length.

5. Select **OK** to save the IPv6 prefix from provider configuration changes.
Select **Exit** to close the screen without saving the updates.
6. In the **IPv6 Address Prefix from Provider EUI64** table, click **+ Add Row** and set an (abbreviated) IP address prefix in EUI64 format.

The IPv6 Address from Provider EUI64 - Add Row screen displays.

Figure 200: OSPF - IPv6 Add Address Prefixes from Provider EU164

Delegated Prefix Name	Enter a 32 character maximum name for the IPv6 prefix from provider in EUI format. Using EUI64, a host can automatically assign itself a unique 64-bit IPv6 interface identifier without manual configuration or DHCP.
Host ID	Define the subnet ID and prefix length.

7. Select **OK** to save the IPv6 prefix from provider in EUI64 format changes.
Select **Exit** to close the screen without saving the updates.
8. Refer to the **DHCPv6 Relay** table to set the address and interface of the DHCPv6 relay.

The DHCPv6 relay enhances an extended DHCP relay agent by providing support in IPv6. DHCP relays exchange messages between a DHCPv6 server and client. A client and relay agent exist on the same link. When A DHCP request is received from the client, the relay agent creates a relay forward message and sends it to a specified server address. If no addresses are specified, the relay agent forwards the message to all DHCP server relay multicast addresses. The server creates a relay reply and sends it back to the relay agent. The relay agent then sends back the response to the client.

- Select **+ Add Row** to launch a sub screen wherein a new DHCPv6 relay address and interface VLAN ID can be set.

Figure 201: OPSF - VLAN Interface DHCPv6 Relay Configuration Screen

Address	Enter an address for the DHCPv6 relay. These DHCPv6 relay receive messages from DHCPv6 clients and forward them to DHCPv6 servers. The DHCPv6 server sends responses back to the relay, and the relay then sends these responses to the client on the local network.
Interface	Select this option to enable a spinner control to define a VLAN ID from 1 - 4,094 used as the virtual interface for the DHCPv6 relay. The interface designation is only required for link local and multicast addresses. A local link address is a locally derived address designed for addressing on a single link for automatic address configuration, neighbor discovery or when no routing resources are available.

- Click **OK** to save the DHCPv6 relay configuration changes.
Click **Exit** to close the screen without saving the updates.

OSPF IPv6 RA Prefixes

To set the VLAN IPv6 RA Prefixes:

1. Select the **IPv6 RA Prefixes** tab.

The IPv6 RA Prefix configuration screen displays.

The screenshot shows the 'Virtual Interfaces' configuration window for 'VLAN ID vlan2'. The 'IPv6 RA Prefixes' tab is selected. Below the tabs, there is a 'Router Advertisement Policy' dropdown menu. The main area contains a table for configuring IPv6 RA Prefixes. The table has the following columns: Prefix Type, Prefix or Id, Site Prefix, Valid Lifetime Type, Valid Lifetime Sec, Valid Lifetime Date, Valid Lifetime Time, Preferred Lifetime Type, Preferred Lifetime Sec, Preferred Lifetime Date, Autoconfig, Preferred Lifetime Time, On Link, and a delete icon. The table is currently empty. There is an 'Add Row' button at the bottom right of the table area. At the bottom of the window, there are 'OK', 'Reset', and 'Exit' buttons.

Prefix Type	Prefix or Id	Site Prefix	Valid Lifetime Type	Valid Lifetime Sec	Valid Lifetime Date	Valid Lifetime Time	Preferred Lifetime Type	Preferred Lifetime Sec	Preferred Lifetime Date	Autoconfig	Preferred Lifetime Time	On Link	

Figure 202: OSPF - VLAN Interface IPv6 RA Prefix Configuration Screen

2. Use the **Router Advertisement Policy** drop-down menu to select and apply a policy to the virtual interface.

Router advertisements are periodically sent to hosts or sent in response to solicitation requests. The advertisement includes IPv6 prefixes and other subnet and host information. For more information on Router Advertisement Policy, see [IPv6 Router Advertisement Policy](#) on page 798.

- Review the configurations of existing IPv6 advertisement policies. If needed select + **Add Row** to define the configuration of an additional IPv6 RA prefix.

The add/edit IPv6 RA Prefixes configuration screen displays.

The screenshot shows the 'Add Row' configuration window for IPv6 RA Prefixes. The settings are as follows:

- Prefix Type:** Prefix
- Prefix or ID:** IPv6 / 128
- Site Prefix:** IPv6 / 128
- Valid Lifetime Type:** External (Fixed)
- Valid Lifetime Sec:** 30 Days
- Valid Lifetime Date:** [Calendar icon]
- Valid Lifetime Time:** 1 : 0 AM
- Preferred Lifetime Type:** External (Fixed)
- Preferred Lifetime Sec:** 7 Days
- Preferred Lifetime Date:** [Calendar icon]
- Preferred Lifetime Time:** 1 : 0 AM
- Autoc onfig:**
- On Link:**

Buttons: OK, Exit

Figure 203: Add/Edit IPv6 RA Prefixes Configuration Screen

- Set the following **IPv6 RA Prefixes** settings:

Prefix Type	Set the prefix delegation type used with this configuration. Options include, Prefix, and prefix-from-provider. The default setting is Prefix. A prefix allows an administrator to associate a user defined name to an IPv6 prefix. A provider assigned prefix is made available from an ISP (<i>Internet Service Provider</i>) to automate the process of providing and informing the prefixes used.
Prefix or ID	Set the actual prefix or ID used with the IPv6 router advertisement.
Site Prefix	The site prefix is added into a router advertisement prefix. The site address prefix signifies the address is only on the local link.

Valid Lifetime Type	Set the lifetime for the prefix's validity. Options include External (fixed) , decrementing and infinite . If set to <i>External (fixed)</i> , just the <i>Valid Lifetime Sec</i> setting is enabled to define the exact time interval for prefix validity. If set to <i>decrementing</i> , use the lifetime date and time settings to refine the prefix expiry period. If the value is set for <i>infinite</i> , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is External (fixed).
Valid Lifetime Sec	If the lifetime type is set to <i>External (fixed)</i> , set the Seconds, Minutes, Hours or Days value used to measurement criteria for the prefix's expiration. 30 days, 0 hours, 0 minutes and 0 seconds is the default lifetime.
Valid Lifetime Date	If the lifetime type is set to decrementing, set the date in MM/DD/YYYY format for the expiration of the prefix.
Valid Lifetime Time	If the lifetime type is set to decrementing, set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM PM radio buttons to set the appropriate hour.
Preferred Lifetime Type	Set the administrator preferred lifetime for the prefix's validity. Options include External (fixed) , decrementing and infinite . If set to <i>External (fixed)</i> , just the <i>Valid Lifetime Sec</i> setting is enabled to define the exact time interval for prefix validity. If set to <i>decrementing</i> , use the lifetime date and time settings to refine the prefix expiry period. If the value is set for <i>infinite</i> , no additional date or time settings are required for the prefix and the prefix will not expire. The default setting is <i>External (fixed)</i> .
Preferred Lifetime Sec	If the administrator preferred lifetime type is set to External (fixed), set the Seconds, Minutes, Hours or Days value used to measure criteria for the prefix's expiration. 30 days, 0 hours, 0 minutes and 0 seconds is the default lifetime.
Preferred Lifetime Date	If the administrator preferred lifetime type is set to decrementing, set the date in MM/DD/YYYY format for the expiration of the prefix.
Preferred Lifetime Time	If the preferred lifetime type is set to decrementing, set the time for the prefix's validity. Use the spinner controls to set the time in hours and minutes. Use the AM PM radio buttons to set the appropriate hour.
Autoconfig	Autoconfiguration includes generating a link-local address, global addresses via stateless address autoconfiguration and duplicate address detection to verify the uniqueness of the addresses on a link. This setting is enabled by default.
On Link	Select this option to keep the IPv6 RA prefix on the local link. The default setting is enabled.

5. Click **OK** to save the IPv6 RA prefix configuration changes.

Click **Exit** to close the screen without saving the updates.

OSPF VLAN Security Settings

To set the VLAN security settings:

1. Select the **Security** tab.

The VLAN Interface security configuration screen displays.

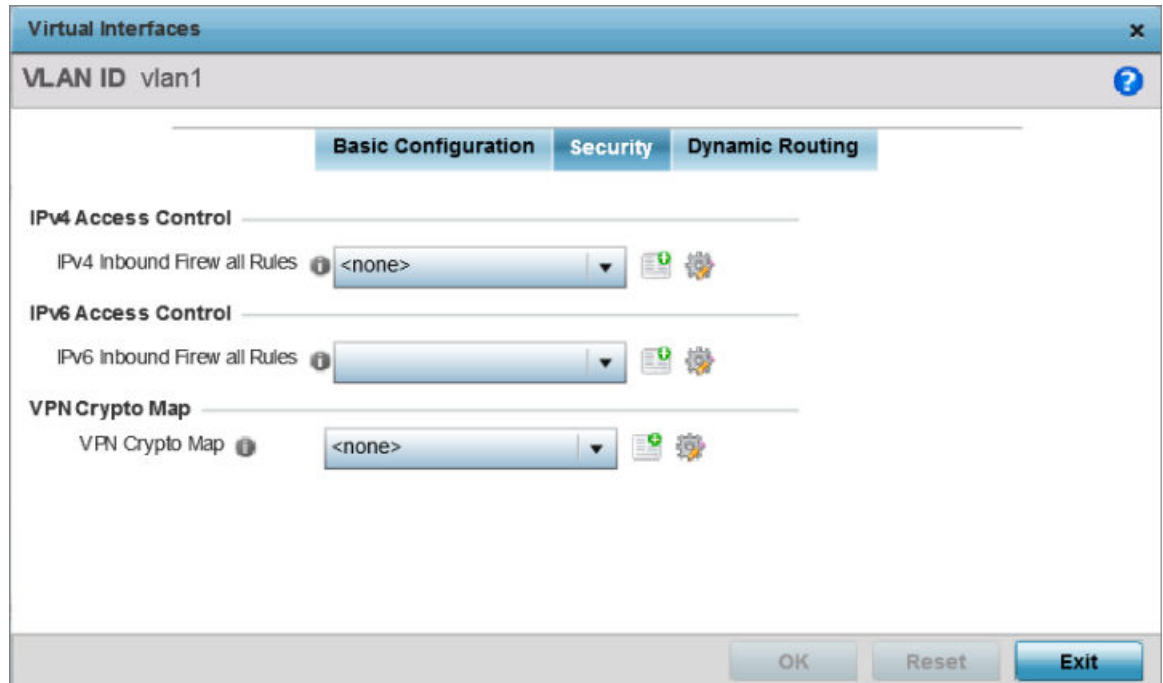


Figure 204: OSPF - VLAN Interface Security Configuration Screen

2. Use the **IPv4 Inbound Firewall Rules** drop-down menu to select the IPv4 specific inbound firewall rules to apply to this profile's virtual interface configuration. Select the **Create** icon to define a new IPv4 firewall rule configuration or select the **Edit** icon to modify an existing configuration.

IPv4 is a connectionless protocol for packet switched networking. IPv4 operates as a best effort delivery method, since it does not guarantee delivery, and does not ensure proper sequencing or duplicate delivery (unlike TCP).

IPv4 and IPv6 are different enough to warrant separate protocols. IPv6 devices can alternatively use stateless address autoconfiguration. IPv4 hosts can use link local addressing to provide local connectivity. For more information on IPv4 firewall rules, see [Configuring IP Firewall Rules](#) on page 841.

3. Use the **IPv6 Inbound Firewall Rules** drop-down menu to select the IPv6 specific inbound firewall rules to apply to this profile's virtual interface configuration. Select the **Create** icon to define a new IPv6 firewall rule configuration or select the **Edit** icon to modify an existing configuration.

IPv6 is the latest revision of the *Internet Protocol* replacing IPv4. IPv6 provides enhanced identification and location information for systems routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. For more information on IPv6 firewall rules, see [Configuring IP Firewall Rules](#) on page 841.

- Use the **VPN Crypto Map** drop-down menu to select and apply a VPN crypto map entry to apply to the OSPF dynamic route.

Crypto Map entries are sets of configuration parameters for encrypting packets passing through the VPN Tunnel. If a Crypto Map configuration does not exist suiting the needs of this virtual interface, select the **Create** icon to define a new Crypto Map configuration or the **Edit** icon to modify an existing configuration.

- Select **OK** to save the OSPF route security configuration changes.
Select **Reset** to revert to the last saved configuration.

OSPF Dynamic Routing Settings

To set the VLAN dynamic routing:

- Select the **Dynamic Routing** tab.

The OSPF VLAN Interface Dynamic Routing configuration screen displays.

The screenshot shows the 'Virtual interfaces' configuration window for 'vlan200'. The 'Dynamic Routing' tab is active. Under 'OSPF Settings', Priority is 0, Cost is 1, and Bandwidth is 1. Under 'OSPF Authentication', the type is 'None'. The 'MD5 Authentication' table is empty. The bottom of the window has 'OK', 'Reset', and 'Exit' buttons.

Key ID	Password	

Figure 205: OSPF - VLAN Interface Dynamic Routing Screen

2. In the OSPF Settings field, override the following parameters:

Priority	Select this option to set the OSPF priority used to select the network designated route. Use the spinner control to set the value from 0 - 255.
Cost	Select this option to set the cost of the OSPF interface. Use the spinner control to set the value from 1 - 65,535.
Bandwidth	Set the OSPF interface bandwidth (in Kbps) from 1 - 10,000,000.

3. Use the **Chosen Authentication Type** drop-down to select the authentication type used to validate credentials within the OSPF dynamic route. Options include: **simple-password**, **message-digest**, **null** and **None**. The default is *None*.

4. In the **MD5 Authentication** table, click **+ Add Row** and configure the following:

MD5 is a message digest algorithm using a cryptographic hash producing a 128-bit (16-byte) hash value, usually expressed in text as a 32 digit hexadecimal number. MD5 has been utilized in a wide variety of cryptographic applications, and is also commonly used to verify data integrity.

Key ID	Use the spinner control to set the OSPF message digest authentication key ID. The available range is from 1 - 255.
Password	Set the password (associated with the Key ID) used for an MD5 validation of authenticator credentials. The password is the OSPF key either displayed as series or asterisks.

5. Click **OK** to save the IPv6 RA prefix configuration changes.

Click **Exit** to close the screen without saving the updates.

Profile Overrides - Forwarding Database

A Forwarding Database forwards or filters packets on behalf of the managing controller, service platform or access point. The bridge reads the packet's destination MAC address and decides to either forward the packet or drop (filter) it. If it's determined the destination MAC is on a different network segment, it forwards the packet to the segment. If the destination MAC is on the same network segment, the packet is dropped (filtered). As nodes transmit packets through the bridge, the bridge updates its forwarding database with known MAC addresses and their locations on the network. This information is then used to decide to filter or forward the packet.

To override an access point profile's forwarding database configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Network** and select **Forwarding Database**.

The Forwarding Database configuration screen displays

The screenshot shows the configuration interface for the Forwarding Database. At the top, there is a section for 'Aging Time' with a 'Bridge Aging Time' input field set to 300, with a range of (0,10-1000000 seconds). Below this is the 'Static Forwarding Table', which is a table with four columns: 'MAC Address', 'VLAN ID', 'Interface Name', and a delete icon. The table contains two entries: one with MAC Address 02-03-04-05-06-07, VLAN ID 1, and Interface FI123; the other with MAC Address 0A-0B-0C-0D-0E-0F, VLAN ID 4, and Interface FI345. There are several empty rows below. At the bottom right of the table is a '+ Add Row' button. At the bottom right of the entire screen are 'OK' and 'Reset' buttons.

Figure 206: Profile Overrides - Forwarding Database Configuration Screen

- Define a **Bridge Aging Time** from 0, 10-1,000,000 seconds.

The aging time defines the length of time an entry will remain in the bridge's forwarding table before it is deleted due to lack of activity. If an entry replenishes a destination, generating continuous traffic, this timeout value will never be invoked. However, if the destination becomes idle, the timeout value represents the length of time that must be exceeded before an entry is deleted from the forwarding table. The default setting is 300 seconds.

- In the **Static Forwarding Table** table, click **+Add Row** and define the following:

MAC Address	Set or override a destination MAC Address. The bridge reads the packet's destination MAC address and decides to forward the packet or drop (filter) it. If it's determined the destination MAC is on a different network, it forwards the packet to the segment. If the destination MAC is on the same network segment, the packet is dropped (filtered).
VLAN ID	Define the target VLAN ID if the destination MAC is on a different network segment.
Interface Name	Provide the name of the interface used as the target destination interface for the target MAC address.

- Select **OK** to save the changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - Bridge VLAN

A VLAN (*Virtual LAN*) is separately administrated virtual network within the same physical network. VLANs are broadcast domains defined within switches to allow control of broadcast, multicast, unicast, and unknown unicast within a Layer 2 device.



Note

For information, see [Bridge VLAN Configuration](#) on page 220.

To override an access point profile's Bridge VLAN configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand the **Network** node and select **Bridge VLAN**. The Bridge VLAN Main screen displays. This screen displays existing Bridge VLAN configurations.

VLAN	Description	Edge VLAN Mode	Trust ARP Responses	Trust DHCP Responses
12	lancelot	✓	✗	✗

Type to search in tables Row Count: 1

4. Review the following VLAN configuration parameters to determine whether an update is warranted:

VLAN	Lists the numerical identifier defined for the Bridge VLAN when initially created. The available range is from 1 - 4095. This value cannot be modified during the edit process.
Description	Lists a description of the VLAN assigned when it was created or modified. The description should be unique to the VLAN's specific configuration and help differentiate it from other VLANs with similar configurations.

Edge VLAN Mode	Defines whether the VLAN is currently in edge VLAN mode. A green checkmark defines the VLAN as extended. An edge VLAN is the VLAN where hosts are connected. For example, if VLAN 10 is defined with wireless clients, and VLAN 20 is where the default gateway resides, VLAN 10 should be marked as an edge VLAN and VLAN 20 shouldn't. When defining a VLAN as an edge VLAN, the firewall enforces additional checks on hosts in that VLAN. For example, a host cannot move from an edge VLAN to another VLAN and still keep firewall flows active.
Trust ARP Response	When ARP trust is enabled, a green checkmark displays. When disabled, a red "X" displays. Trusted ARP packets are used to update the IP-MAC Table to prevent IP spoof and arp-cache poisoning attacks.
Trust DHCP Responses	When DHCP trust is enabled, a green checkmark displays. When disabled, a red "X" displays. When enabled, DHCP packets from a DHCP server are considered trusted and permissible. DHCP packets are used to update the DHCP Snoop Table to prevent IP spoof attacks.

5. Select **Add** to define a new bridge VLAN configuration, **Edit** to modify an existing bridge VLAN configuration or **Delete** to remove a VLAN configuration.

Bridge VLAN General Settings

To define a bridge VLAN general configuration:

1. Select **Add** to define a new Bridge VLAN configuration, **Edit** to modify an existing Bridge VLAN configuration or **Delete** to remove a VLAN configuration.

The **General** tab displays by default.

The screenshot shows the 'Bridge VLAN' configuration window for 'VLAN 1'. The window has a title bar with 'Bridge VLAN' and a close button. Below the title bar, the VLAN ID '1' is displayed. The main content area is divided into three tabs: 'General' (selected), 'IGMP Snooping', and 'MLD Snooping'. The 'General' tab contains the following settings:

- Description:** A text input field.
- Per VLAN Firewall:** A checkbox that is checked.
- URL Filter:** A dropdown menu.
- Application Policy:** A dropdown menu.
- Extended VLAN Tunnel:**
 - Bridging Mode:** A dropdown menu set to 'Automatic'.
 - IP Outbound Tunnel ACL:** A dropdown menu set to '<none>'.
 - IPv6 Outbound Tunnel ACL:** A dropdown menu.
 - MAC Outbound Tunnel ACL:** A dropdown menu set to '<none>'.
 - Tunnel Over Level 2:** A checkbox.
- Extended VLAN Tunnel Authentication:**
 - Mac Authentication:** A checkbox.
 - Captive Portal Enforcement:** A dropdown menu set to 'None'.
- VLAN Tunnel Optimizations:**
 - Level 2 Tunnel Broadcast Optimization:** A checkbox.
 - Level 2 Forward Additional Packet Types:** A dropdown menu set to 'None'.
- Tunnel Rate Limit:** A section with a table of settings:

Mint Link Level	Rate	Max Burst Size	Background	Best-Effort	Video

At the bottom of the window, there are three buttons: 'OK', 'Reset', and 'Exit'.

2. If adding a new Bridge VLAN configuration, use the spinner control to define a **VLAN** ID between 1 - 4094. This value must be defined and saved before the General tab can become enabled and the remainder of the settings defined. VLAN IDs 0 and 4095 are reserved and unavailable.

3. Set the following general bridge VLAN parameters:

Description	If creating a new Bridge VLAN, provide a description (up to 64 characters) unique to the VLAN's specific configuration to help differentiate it from other VLANs with similar configurations.
Per VLAN Firewall	Enable this setting to provide firewall allow and deny conditions over the bridge VLAN. This setting is enabled by default.

4. Set or override the following **URL Filter** parameters. Web filters are used to control the access to resources on the Internet:

URL Filter	Use the drop-down menu to select a URL filter to use with this Bridge VLAN.
------------	---

5. Set or override the following **Application Policy** parameters. Use the drop-down to select the appropriate Application Policy to use with this Bridge VLAN configuration.6. Set the following **Extended VLAN Tunnel** parameters:

Bridging Mode	Specify one of the following bridging modes for the VLAN. <i>Automatic</i> : Select automatic to let the controller, service platform or access point determine the best bridging mode for the VLAN. <i>Local</i> : Select Local to use local bridging mode for bridging traffic on the VLAN. <i>Tunnel</i> : Select Tunnel to use a shared tunnel for bridging traffic on the VLAN. <i>isolated-tunnel</i> : Select isolated-tunnel to use a dedicated tunnel for bridging VLAN traffic.
IP Outbound Tunnel ACL	Select an IP Outbound Tunnel ACL for outbound traffic from the drop-down menu. If an appropriate outbound IP ACL is not available, select the <i>Create</i> button to make a new one.
MAC Outbound Tunnel ACL	Select a MAC Outbound Tunnel ACL for outbound traffic from the drop-down menu. If an appropriate outbound MAC ACL is not available click the Create button to make a new one.
Tunnel Over Level 2	Select this option to allow VLAN traffic to be tunneled over level 2 links. This setting is disabled by default.

**Note**

Local and Automatic bridging modes do not work with ACLs. ACLs can only be used with tunnel or isolated-tunnel modes.

7. Set the following **Extended VLAN Tunnel Authentication** settings:

MAC Authentication	Select to enable source MAC authentication for extended VLAN and tunneled traffic (MiNT and L2TPv3) on this bridge VLAN. When enabled, it provides fast path authentications of clients, whose captive portal session has expired. This option is disabled by default.
Captive-Portal Authentication	Use the drop-down menu to specify authentication mode used for extended VLAN and tunneled traffic, on this Bridge VLAN. The options are: None – No Authentication mode used. This is the default setting. Authentication Failure – Configures MAC Authentication as the primary and Captive-Portal Authentication as the fall-back authentication mode. Always – Configures Captive-Portal Authentication as the only mode of Authentication
Edge VLAN Mode	Select this option to enable edge VLAN mode. When selected, the edge controller's IP address in the VLAN is not used, and is now designated to isolate devices and prevent connectivity. This feature is enabled by default.

8. Set the following **Layer 2 Firewall** parameters:

Trust ARP Response	Select this option to use trusted ARP packets to update the DHCP Snoop Table to prevent IP spoof and arp-cache poisoning attacks. This feature is disabled by default.
Trust DHCP Responses	Select this option to use DHCP packets from a DHCP server as trusted and permissible within the managed network. DHCP packets are used to update the DHCP Snoop Table to prevent IP spoof attacks. This feature is disabled by default.
Edge VLAN Mode	Select this option to enable edge VLAN mode. When selected, the edge controller's IP address in the VLAN is not used, and is now designated to isolate devices and prevent connectivity. This feature is enabled by default.

9. Click the **OK** button to save the changes to the General tab.

Click **Reset** to revert to the last saved configuration.

Bridge VLAN IGMP Snooping

IGMP is used for managing IP multicast group members. Controllers and service platforms listen to IGMP network traffic and forward IGMP multicast packets to radios on which the interested hosts are connected. On the wired side of the network, the controller or service platform floods all the wired interfaces. This feature reduces unnecessary flooding of multicast traffic in the network.

To override a device's profile bridge VLAN IGMP settings:

1. Select the **IGMP Snooping** tab.

2. Define the following **General IGMP** parameters:

Enable IGMP Snooping	Select the check box to enable IGMP snooping. If disabled, snooping on a per VLAN basis is also disabled. This feature is enabled by default. If disabled, the settings under bridge configuration are overridden. For example, if IGMP snooping is disabled, but the bridge VLAN is enabled, the effective setting is disabled.
Forward Unknown Unicast Packets	Select the check box to enable to forward multicast packets from unregistered multicast groups. If disabled (the default setting), the unknown multicast forward feature is also disabled for individual VLANs.
Enable Fast Leave Processing	Select this option to remove a Layer 2 LAN interface from the IGMP snooping forwarding table entry without initially sending IGMP group-specific queries to the interface. When receiving a group specific IGMPv2 leave message, IGMP snooping removes the interface from the Layer 2 forwarding table entry for that multicast group, unless a multicast router was learned on the port. Fast-leave processing enhances bandwidth management for all hosts on the network.
Last Member Query Count	Specify the number of group specific queries sent before removing an IGMP snooping entry.

3. Within the **Multicast Router** section, select those interfaces used as multicast router interfaces. Multiple interfaces can be selected and overridden. Set the **pim-dvmrp** or **static Multicast Routing Learn Mode**. DVMRP builds a parent-child database using a constrained multicast model to build a forwarding tree rooted at the source of the multicast packets. Multicast packets are initially flooded down this source tree. If redundant paths are on the source tree, packets are not forwarded along those paths.

4. Set the following **IGMP Querier** parameters:

Enable IGMP Snooping	IGMP snoop querier is used to keep host memberships alive. It's primarily used in a network where there's a multicast streaming server, hosts subscribed to the server and no IGMP querier present. An IGMP querier sends out periodic IGMP query packets. Interested hosts reply with an IGMP report packet. IGMP snooping is only conducted on wireless radios. IGMP multicast packets are flooded on wired ports. IGMP multicast packet are not flooded on the wired port. IGMP membership is also learnt on it and only if present, then it is forwarded on that port.
Source IP Address	Define an IP address applied as the source address in the IGMP query packet. This address is used as the default VLAN querier IP address.
IGMP Version	Use the spinner control to set the IGMP version compatibility to either version 1, 2 or 3. The default setting is 3.
Maximum Response Time	Specify the maximum time (from 1 - 25 seconds) before sending a responding report. When no reports are received from a radio, radio information is removed from the snooping table. For IGMP reports from wired ports, reports are only forwarded to the multicast router ports. The default setting is 10 seconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 1 minute.

5. Select the **OK** button to save the changes to the bridge VLAN IGMP Snooping tab.
Select **Reset** to revert to the last saved configuration.

MLD Snooping

MLD (*Multicast Listener Discovery*) snooping enables a controller, service platform or access point to examine MLD packets and make forwarding decisions based on content. MLD is used by IPv6 devices to discover devices wanting to receive multicast packets destined for specific multicast addresses. MLD uses multicast listener queries and multicast listener reports to identify which multicast addresses have listeners and join multicast groups.

MLD snooping caps the flooding of IPv6 multicast traffic on controller, service platform or access point VLANs. When enabled, MLD messages are examined between hosts and multicast routers and to discern which hosts are receiving multicast group traffic. The controller, service platform or access point then forwards multicast traffic only to those interfaces connected to interested receivers instead of flooding traffic to all interfaces.

To set the MLD Snooping parameters:

1. Select the **MLD Snooping** tab.

The screenshot shows the 'Bridge VLAN' configuration window for 'VLAN 1'. The 'MLD Snooping' tab is selected. The configuration is organized into sections: General, Multicast Router, and MLD Querier. In the General section, 'Enable MLD Snooping' and 'Forward Unknown Multicast Packets' are both checked. In the Multicast Router section, 'Interface Names' includes checkboxes for ge1, ge2, radio1, and radio2, with ge2 selected. 'Multicast Router Learn Mode' is set to 'pim-dvmrp'. In the MLD Querier section, 'Enable MLD Querier' is checked, 'MLD Version' is 1, 'Maximum Response Time' is 1 millisecond, and 'Other Querier Timer Expiry' is 60 seconds. At the bottom, there are 'OK', 'Reset', and 'Exit' buttons.

Section	Parameter	Value
General	Enable MLD Snooping	<input checked="" type="checkbox"/>
	Forward Unknown Multicast Packets	<input checked="" type="checkbox"/>
Multicast Router	Interface Names	ge1, ge2, radio1, radio2 (ge2 selected)
	Multicast Router Learn Mode	pim-dvmrp
MLD Querier	Enable MLD Querier	<input checked="" type="checkbox"/>
	MLD Version	1 (1 to 2)
	Maximum Response Time	1 (1 to 25,000 milliseconds)
	Other Querier Timer Expiry	60 (60 to 300 seconds)

Figure 207: Network Bridge VLAN screen, MLD Snooping tab

2. Define the following **General** MLD snooping parameters for the Bridge VLAN configuration:

Enable MLD Snooping	Enable MLD snooping to examine MLD packets and support content forwarding on this Bridge VLAN. Packets delivered are identified by a single multicast group address. Multicast packets are delivered using best-effort reliability, just like IPv6 unicast. MLD snooping is enabled by default.
Forward Unknown Packets	Use this option to either enable or disable IPv6 unknown multicast forwarding. This setting is enabled by default.

3. Define the following **Multicast Router** settings:

Interface Names	Select the ge or radio interfaces used for MLD snooping.
Multicast Router Learn Mode	Set the pim-dvmrp or static multicast routing learn mode. DVMRP builds a parent-child database using a constrained multicast model to build a forwarding tree rooted at the source of the multicast packets. Multicast packets are initially flooded down this source tree. If redundant paths are on the source tree, packets are not forwarded along those paths.

4. Set the following **MLD Querier** parameters for the profile's Bridge VLAN configuration:

Enable MLD Querier	Select this option to enable MLD querier on the controller, service platform or access point. When enabled, the device sends query messages to discover which network devices are members of a given multicast group. This setting is enabled by default.
MLD Version	Define whether MLD version 1 or 2 is utilized with the MLD querier. MLD version 1 is based on IGMP version 2 for IPv4. MLD version 2 is based on IGMP version 3 for IPv4 and is fully backward compatible. IPv6 multicast uses MLD version 2. The default MLD version is 2.
Maximum Response Time	Specify the maximum response time (from 1 - 25,000 milliseconds) before sending a responding report. Queriers use MLD reports to join and leave multicast groups and receive group traffic. The default setting is 1 milliseconds.
Other Querier Timer Expiry	Specify an interval in either Seconds (60 - 300) or Minutes (1 - 5) used as a timeout interval for other querier resources. The default setting is 60 seconds.

5. Click the **OK** button located at the bottom right of the screen to save the changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - CDP

The CDP (*Cisco Discovery Protocol*) is a proprietary Data Link Layer protocol implemented in Cisco networking equipment. It's primarily used to obtain IP addresses of neighboring devices and discover their platform information. CDP is also used to obtain information about the interfaces the access point uses. CDP runs only over the data link layer enabling two systems that support different network-layer protocols to learn about each other.

To override an access point profile's CDP configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Network** and select **Cisco Discovery Protocol (CDP)**.

The CDP configuration screen displays.

Figure 208: Profile Overrides - Network - CDP Configuration Screen

4. Select the **Enable CDP** option, and set the following parameters:

Hold Time	Set a hold time (in seconds) for the transmission of CDP packets. Set a value from 10 - 1,800. The default setting is 180 seconds.
Timer	Use the spinner control to set the interval for CDP packet transmissions. The default setting is 60 seconds.

5. Select the **OK** button to save the CDP configuration changes.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - LLDP

The LLDP (*Link Layer Discovery Protocol*) provides a standard way for a controller or access point to advertise information about themselves to networked neighbors and store information they discover from their peers.

LLDP is neighbor discovery protocol that defines a method for network access devices using Ethernet connectivity to advertise information about them to peer devices on the same physical LAN and store information about the network. It allows a device to learn higher layer management and connection endpoint information from adjacent devices.

Using LLDP, an access point is able to advertise its own identification, capabilities and media-specific configuration information and learn the same information from connected peer devices.

LLDP information is sent in an Ethernet frame at a fixed interval. Each frame contains one m LLDP PDU (*Link Layer Discovery Protocol Data Unit*). A single LLDP PDU is transmitted in a single 802.3 Ethernet frame.

To override the access point profile's LLDP configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Network** and select **Link Layer Discovery Protocol (LLDP)**.

The LLDP configuration screen displays.

Link Layer Discovery Protocol (LLDP)

Enable LLDP

Hold Time (10 to 1,800)

Timer (5 to 900)

Inventory Management Discovery

Extended Power via MDI Discovery DEFAULT FOR TYPE

OK Reset Exit

Figure 209: Profile Overrides - Network - LLDP Configuration Screen

4. Select the **Enable LLDP** option, and set the following parameters:

Hold Time	Use the spinner control to set the hold time (in seconds) for transmitted LLDP PDUs. Set a value from 10 - 1,800. The default hold time is 180 seconds.
Timer	Set the interval used to transmit LLDP PDUs. Define an interval from 5 - 900 seconds. The default setting is 60 seconds.
Inventory Management Discovery	Select this option to include LLDP-MED inventory management discovery TLV in LLDP PDUs. This setting is enabled by default.
Extended Power via MDI Discovery	Select this option to include LLDP-MED (<i>LLDP - Media Endpoint Discovery</i>) extended power via MDI (<i>Media Dependent Interface</i>) discovery TLV in LLDP PDUs. This setting is disabled by default.

5. Select **OK** to save the LLDP configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Miscellaneous

An access point profile can include a hostname within a DHCP lease for a requesting device. This helps an administrator track the leased DHCP IP address by hostname

for the supported device profile. When numerous DHCP leases are assigned, an administrator can better track the leases when hostnames are used instead of devices. At the device level, this setting can be overridden.

To override an access point profile's miscellaneous settings:

1. Go to **Configuration** → **Devices** → **Device Overrides**.


The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Network** and select **Miscellaneous**.

The miscellaneous configuration screen displays.

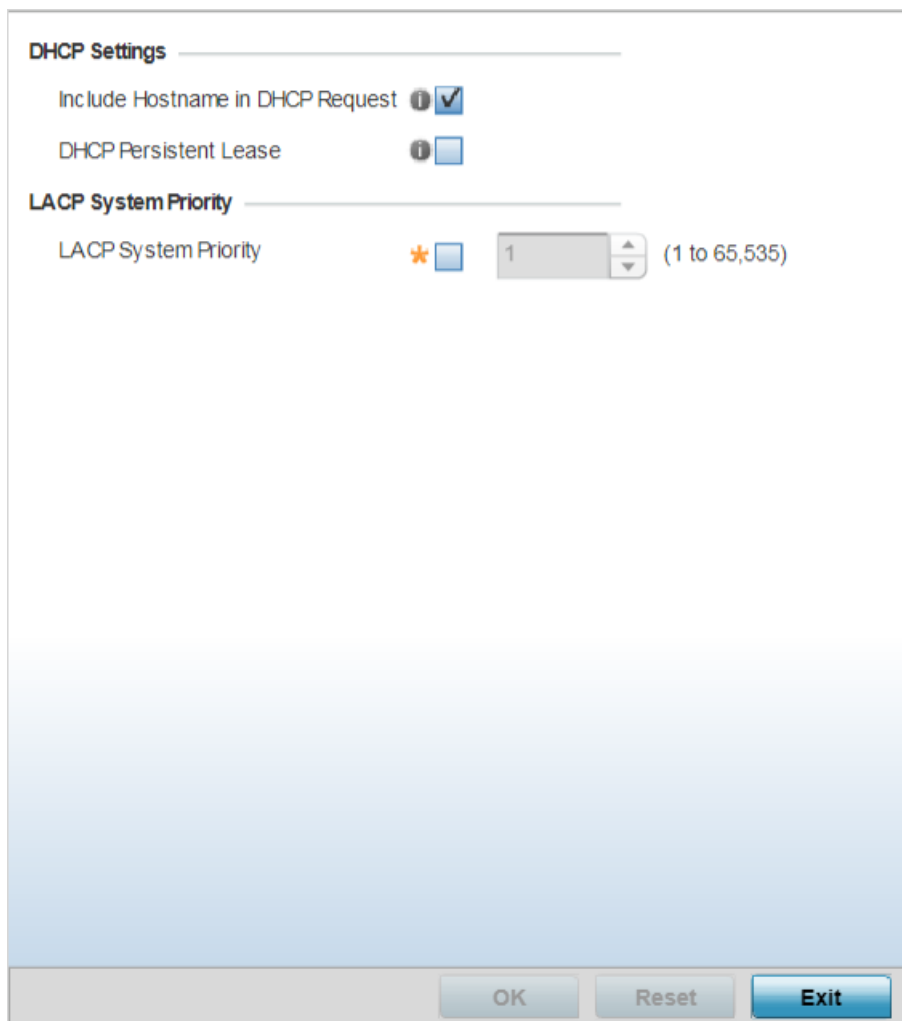

The screenshot shows a configuration window with two sections. The first section, titled "DHCP Settings", contains two items: "Include Hostname in DHCP Request" with an information icon and a checked checkbox, and "DHCP Persistent Lease" with an information icon and an unchecked checkbox. The second section, titled "LACP System Priority", contains one item: "LACP System Priority" with an information icon, an orange asterisk icon, an unchecked checkbox, a numeric input field containing "1", and a range indicator "(1 to 65,535)". At the bottom of the window are three buttons: "OK", "Reset", and "Exit".

Figure 210: Profile Overrides - Network - Miscellaneous Configuration Screen

4. In the **DHCP Settings** field, set the following parameters:

Include Hostname in DHCP Request	Select to enable the inclusion of hostname in a DHCP lease for a requesting device. This feature is enabled by default.
DHCP Persistent Lease	Select to enable retention of the last-used lease (used by the access point) if the access point's DHCP server resource were to become unavailable. This feature is enabled by default.

5. In the **LACP System Priority** field, select the **LACP System Priority** option and use the associated spinner control to set this access point's priority in the LACP negotiation process.

Use to configure an LACP-enabled peer's system priority value. LACP (*Link Aggregation Control Protocol*) uses this system priority value along with the peer's MAC address to form the system ID. In a LAG (*Link Aggregation Group*), the peer with the lower system ID initiates LACP negotiations with another peer. In scenarios, where both peers have the same system-priority value assigned, the peer with the lower MAC gets precedence.

6. Select **OK** to save the miscellaneous configuration changes.
Select **Reset** to revert to the last saved configuration.

Aliases Overview

With large deployments, the configuration of remote sites utilizes a set of shared attributes, of which a small set of attributes are unique for each location. For such deployments, maintaining separate configuration (WLANs, profiles, policies and ACLs) for each remote site is complex. Migrating any global change to a particular configuration item to all the remote sites is a complex and time consuming operation.

Also, this practice does not scale gracefully for quick growing deployments.

An alias enables an administrator to define a configuration item, such as a hostname, as an alias once and use the defined alias across different configuration items such as multiple ACLs.

Once a configuration item, such as an ACL, is utilized across remote locations, the alias used in the configuration item (ACL) is modified to meet local deployment requirement. Any other ACL or other configuration items using the modified alias also get modified, simplifying maintenance at the remote deployment.

Aliases have scope depending on where the Alias is defined. Alias are defined with the following scopes:

- Global aliases are defined from the **Configuration → Network → Alias** screen. Global aliases are available for use globally across all devices, profiles and RF Domains in the system.
- Profiles aliases are defined from **Configuration → Devices → System Profile → Network → Alias**. These aliases are available for use to a specific group of wireless controllers or access points. Alias values defined in this profile override alias values defined within global aliases.
- RF Domain aliases are defined from **Configuration → Devices → RF Domain → Alias** screen. These aliases are available for use for a site as a RF Domain is site specific.

RF Domain alias values override alias values defined in a global alias or a profile alias configuration.

- Device aliases are defined from **Configuration → Devices → Device Overrides → Network → Alias** screen. Device alias are utilized by a single device only. Device alias values override alias values defined in a global alias, profiles alias or RF Domain alias configuration.

Using an alias, configuration changes made at a remote location override any updates at the management center. For example, if an Network Alias defines a network range as 192.168.10.0/24 for the entire network, and at a remote deployment location, the local network range is 172.16.10.0/24, the Network Alias can be overridden at the deployment location to suit the local requirement. For the remote deployment location, the Network Alias works with the 172.16.10.0/24 network. Existing ACLs using this Network Alias need not be modified and will work with the local network for the deployment location. This simplifies ACL definition and management while taking care of specific local deployment requirements.

Aliases can be classified as:

- Basic Alias
- Network Group Alias
- Network Service Alias

Network Basic Alias

A *basic alias* is a set of configurations consisting of *VLAN*, *Host*, *Network*, *Address Range*, and *String* alias configurations. A VLAN alias is a configuration for optimal VLAN re-use and management for local and remote deployments. A host alias configuration is for a particular host device's IP address. A network alias configuration is utilized for an IP address on a particular network. An address range alias is a configuration for a range of IP addresses.

To set a network basic alias configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network. Select a target access point.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Network** and select **Alias**.

The **Basic Alias** screen displays.

Figure 211: Network - Basic Alias Screen

- Select **+ Add Row**, in the **VLAN Alias** table to add a VLAN alias settings.

VLANs aliases can be used at different deployments. For example, if a named VLAN is defined as 10 for the central network, and the VLAN is set at 26 at a remote location, the VLAN can be overridden at the deployment location with an alias. At the remote deployment location, the network is functional with a VLAN ID of 26 but utilizes the name defined at the centrally managed network. A new VLAN need not be created specifically for the remote deployment.

Name	If adding a new VLAN Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
VLAN	Use the spinner control to set a numeric VLAN from 1 - 4094.

- Select **+ Add Row**, in the **Address Range Alias** table to add an address range alias settings.

This option creates an alias for a range of IP address that can be utilized at different deployments. For example, if an ACL defines a pool of network addresses as 192.168.10.10 through 192.168.10.100 for an entire network, and a remote location's network range is 172.16.13.20 through 172.16.13.110, the remote location's ACL can be overridden using an alias. At the remote location, the ACL works with the

172.16.13.20-110 address range. A new ACL need not be created specifically for the remote deployment location.

Name	If adding a new Address Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Start IP	Set a starting IP address used with a range of addresses utilized with the address range alias.
End IP	Set a ending IP address used with a range of addresses utilized with the address range alias.



Note

An address range alias can be used to replace an IP address range in IP firewall rules.

6. Select **+ Add Row**, in the **Host Alias** table to add a host alias settings:

This option creates aliases for hosts that can be utilized at different deployments. For example, if a central network DNS server is set a static IP address, and a remote location's local DNS server is defined, this host can be overridden at the remote location. At the remote location, the network is functional with a local DNS server, but uses the name set at the central network. A new host need not be created at the remote location. This simplifies creating and managing hosts and allows an administrator to better manage specific local requirements.

Name	If adding a new Host Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Host	Set the IP address of the host machine.

7. Select **+ Add Row**, in the **Network Alias** table to add a network alias settings:

This option create aliases for IP networks that can be utilized at different deployments. For example, if a central network ACL defines a network as 192.168.10.0/24, and a remote location's network range is 172.16.10.0/24, the ACL can be overridden at the remote location to suit their local (but remote) requirement. At the remote location, the ACL functions with the 172.16.10.0/24 network. A new ACL need not be created specifically for the remote deployment. This simplifies ACL definition and allows an administrator to better manage specific local requirements.

Name	If adding a new Network Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Network	Provide a network address in the form of host/mask.

8. Select **+ Add Row**, in the **String Alias** table to add a string alias settings:

This option creates aliases for strings that can be utilized at different deployments. For example, if the main domain at a remote location is called loc1.domain.com and at another deployment location it is called loc2.domain.com, the alias can be overridden at the remote location to suit the local (but remote) requirement. At one

remote location, the alias functions with the loc1.domain.com domain and at the other with the loc2.domain.com domain.

Name	If adding a new String Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Value	Provide a string value to use in the alias.



Note

A string alias can be used to replace domain name strings in DHCP.

9. Select **OK** when completed to update the basic alias rules.
Select **Reset** to revert the screen back to its last saved configuration.

Network Group Alias

A *network group alias* is a set of configurations consisting of host and network configurations. Network configurations are complete networks in the form of 192.168.10.0/24 or an IP address range in the form of 192.168.10.10-192.168.10.20. Host configurations are in the form of a single IP address, 192.168.10.23.

A network group alias can contain multiple definitions for a host, network, and IP address range. A maximum of eight (8) host entries, eight (8) network entries and eight (8) IP addresses range entries can be configured inside a network group alias. A maximum of 32 network group alias entries can be created.

You can add a new network group alias configuration or edit an existing configuration.

1. Select **Add** to create a new alias, **Edit** to modify the attributes of an existing alias, or **Delete** to remove obsolete aliases.
Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

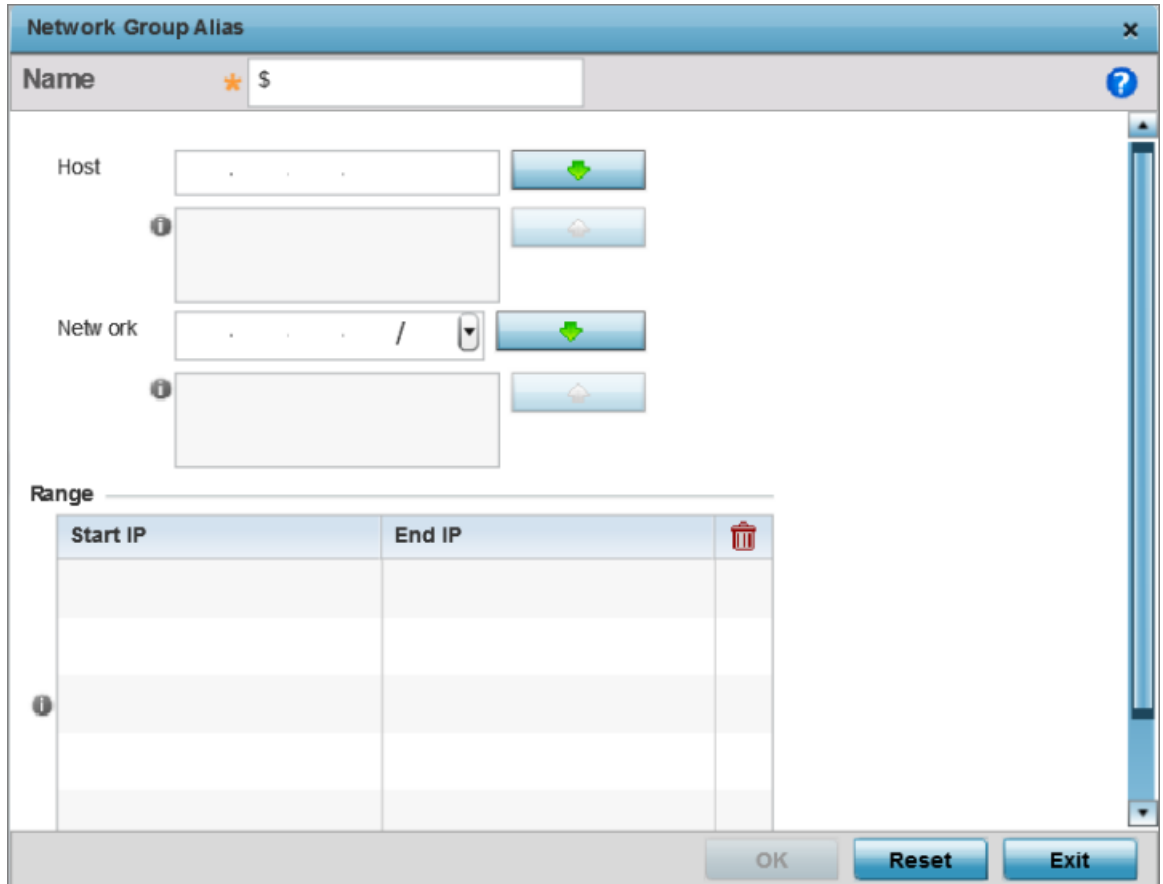


Figure 213: Network Alias - Network Group Alias Add Screen

2. If you are adding a new network alias rule, provide a name up to 32 characters. The network group alias name always starts with a dollar sign (\$).
3. Define the following network group alias parameters:

Host	Specify the Host IP address for up to eight IP addresses supporting network aliasing. Select the down arrow to add the IP address to the table.
Network	Specify the netmask for up to eight IP addresses supporting network aliasing. Subnets can improve network security and performance by organizing hosts into logical groups. Applying the subnet mask to an IP address separates the address into a host address and an extended network address. Select the down arrow to add the mask to the table.

4. Select **+ Add Row**, in the **Range** table to specify the **Start IP** address and **End IP** address for the alias range, or double-click on an existing alias range entry to edit it.

5. Select **OK** when completed to update the network group alias settings.
Select **Reset** to revert the screen to its last saved configuration.

Network Service Alias

A *network service alias* is a set of configurations that consist of protocol and port mappings. Both source and destination ports are configurable. For each protocol, up to two source port ranges and up to two destination port ranges can be configured. A maximum of four protocol entries can be configured per network service alias.

Use a service alias to associate more than one IP address to a network interface, providing multiple connections to a network from a single IP node.

A network service alias can be used to substitute protocols and ports in IP firewall rules.

Select the **Network Service Alias** tab.

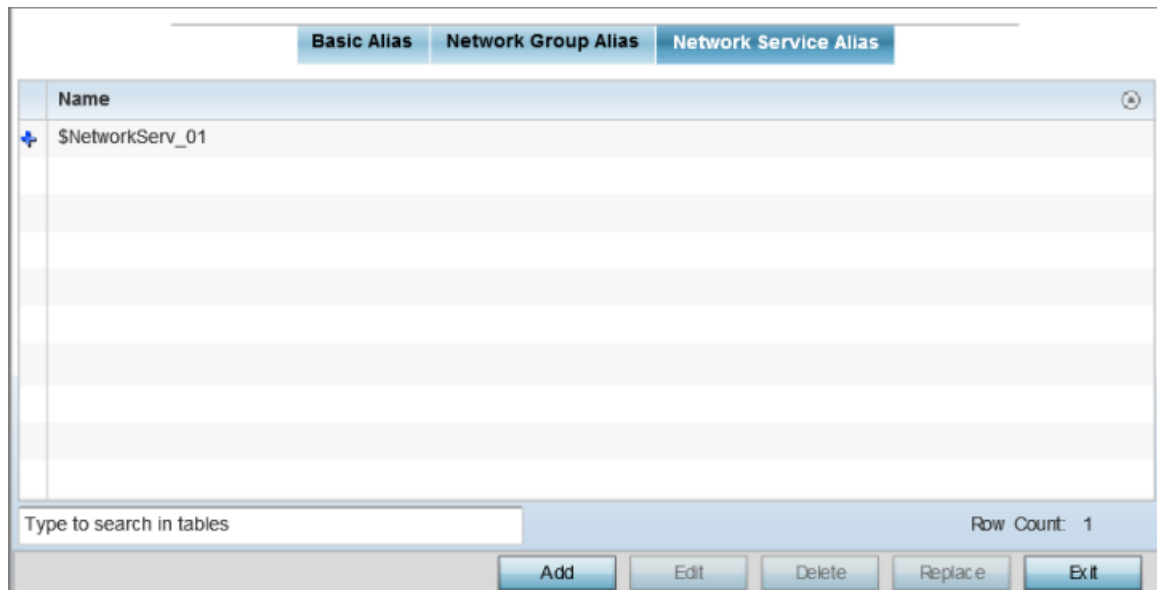


Figure 214: Network Alias - Network Service Alias Screen

Adding and Editing Network Service Alias

You can add a new network service alias configuration or edit an existing configuration.

1. Select **Add** to create a new network service alias.

Select an existing network service alias and click **Edit** to modify it. Select **Delete** to remove an existing network service alias from those available in the list.

Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

Protocol	Source Port(Low and High)	Destination Port(Low and High)
* EIGRP	88	Enter Range
		Enter Range

Figure 215: Network Alias - Network Service Alias Add screen

2. If you are adding a new Network Service Alias, give it a Name up to 32 characters to distinguish this alias configuration from others with similar attributes.



Note

The Network Service Alias name always starts with a dollar sign (\$).

3. Select **+ Add Row**, in the **Entry** table and specify the following parameters:

Protocol	Specify the protocol for which the alias is created. Use the drop down to select the protocol from eigrp , gre , icmp , igmp , ip , vrrp , igmp , ospf , tcp and udp . Select other if the protocol is not listed. When a protocol is selected, its protocol number is automatically selected.
Source Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the source ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) ranges can be specified.
Destination Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the destination ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.

4. Select **OK** when completed to update the network service alias rules.

Select **Reset** to revert the screen back to its last saved configuration.

Aliases - Encrypted String

An encrypted string alias maps a user-friendly name to a string value. The string value displays as encrypted text when "password-encryption" is enabled. Encrypted-string aliases can be used for string configuration parameters that are encrypted by the "password-encryption" feature.

To configure an encrypted string alias on an access point:

1. Select the **Encrypted String** alias tab.

The encrypted string alias configuration screen displays.

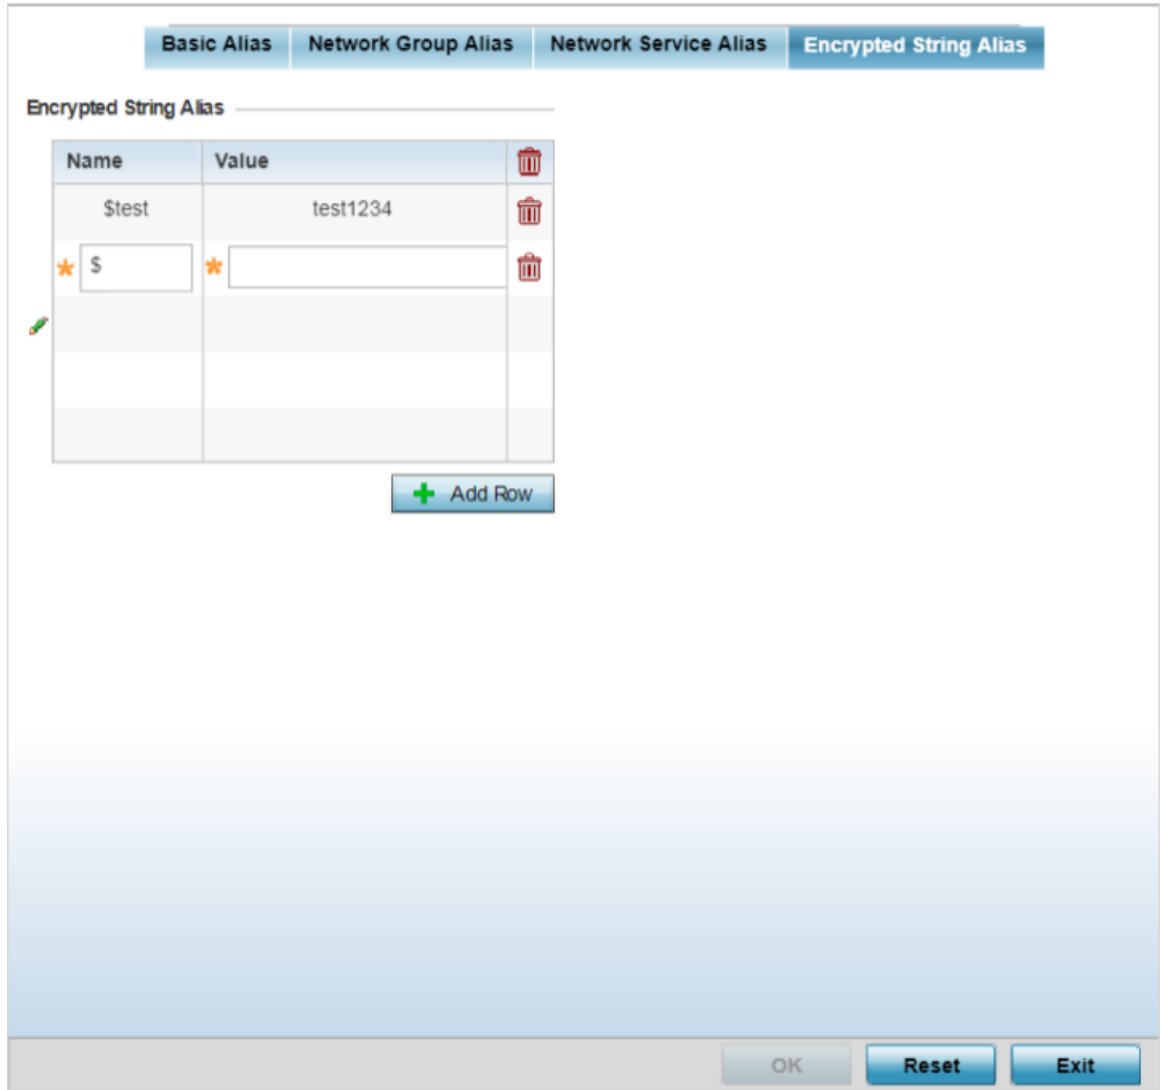


Figure 216: Profile Overrides - Encrypted String Alias Configuration Screen

2. In the **Encrypted String Alias** table, click **+ Add Row** and set the following parameters:

Name	Provide a name for the encrypted string alias. Note: The alias name should start with a dollar sign (\$), and not exceed 32 characters in length.
Value	Enter the string value associated with the alias name provides above.

3. Select **OK** when completed to update the encrypted string alias rules.
Select **Reset** to revert the screen back to its last saved configuration.

Profile Overrides - IPv6 Neighbors

IPv6 neighbor discovery uses ICMP messages and solicited multicast addresses to find the link layer address of a neighbor on the same local network, verify the neighbor's reachability and track neighboring devices.



Note

For more information on IPv6 neighbor discovery, see [Profile Overrides - IPv6 Neighbors](#) on page 523.

At the device level, you can override the device profile's IPv6 neighbor settings. To override the access point Profile's IPv6 neighbor configurations:

1. Go to **Configuration → Devices → Device Overrides**.
The **Device Overrides** screen displays. This screen lists devices within the managed network.
2. Select an access point.
The selected access point's configuration menu displays.
3. Expand **Profile Overrides → Network** and select **IPv6 Neighbor**.
The IPv6 neighbor configuration screen displays.

IPv6 Address	MAC Address	Switch VLAN Interface	Device Type

Figure 217: Profile Overrides - Network - IPv6 Neighbor Configuration Screen

4. In the **IPv6 Neighbor Timeout** field, set the **IPv6 Neighbor Entry Timeout** in either Seconds (15 - 86,400), Minutes (1 - 1,440), Hours (1 - 24) or Days (1). The default setting is 1 hour.

5. In the **IPv6 Neighbor Discovery** table, click **+ Add Row** and set the following parameters:

IPv6 Address	Provide a static IPv6 IP address for neighbor discovery. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the Neighbor Discovery Protocol via ICMPv6 (<i>Internet Control Message Protocol version 6</i>) router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet Layer configuration parameters. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
MAC Address	Enter the hardware encoded MAC addresses of up to 256 IPv6 neighbor devices. A neighbor is interpreted as reachable when an acknowledgment is returned indicating packets have been received and processed. If packets are reaching the device, they're also reaching the next hop neighbor, providing a confirmation the next hop is reachable.
Switch VLAN Interface	Use the spinner control to set the virtual interface (from 1 - 4094) used for neighbor advertisements and solicitation messages.
Device Type	Specify the device type for this neighbor solicitation is for. Options include: Host , Router and DHCP Server . The default setting is <i>Host</i> .

6. Select **OK** to save the IPv6 neighbor configuration changes.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Security

A profile can have its own firewall policy, wireless client role policy, WEP shared key authentication, NAT policy and VPN policy applied. If an existing firewall, client role or NAT policy is unavailable create the required security policy configuration. Once created, a configuration can have an override applied as needed to meet the changing data protection requirements of a device's deployed environment. However, in doing so this device must now be managed separately from the profile configuration shared by other identical models within the network.

For more information on applying an override to an existing device profile, refer to the following sections:

- [Profile Overrides - VPN](#) on page 525
- [Profile Overrides - Auto IPSec Tunnel](#) on page 536
- [Profile Overrides - Settings](#) on page 537
- [Profile Overrides - Certificate Revocation](#) on page 539
- [Profile Overrides - Trustpoints](#) on page 540
- [Profile Overrides - NAT Pool](#) on page 542
- [Profile Overrides - Bridge NAT](#) on page 552
- [Profile Overrides - Application Visibility \(AVC\)](#) on page 555

Profile Overrides - VPN

VPN can be overridden by using either the inbuilt wizards or by manually configuring the required parameters. This section describes how to use the inbuilt wizards to override the VPN parameters. The user interface provides two (2) wizards that provide different levels of configuration.

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides → Security** and select **VPN**.

The selected access point's **Security** configuration screen displays, with the **VPN** option selected by default.

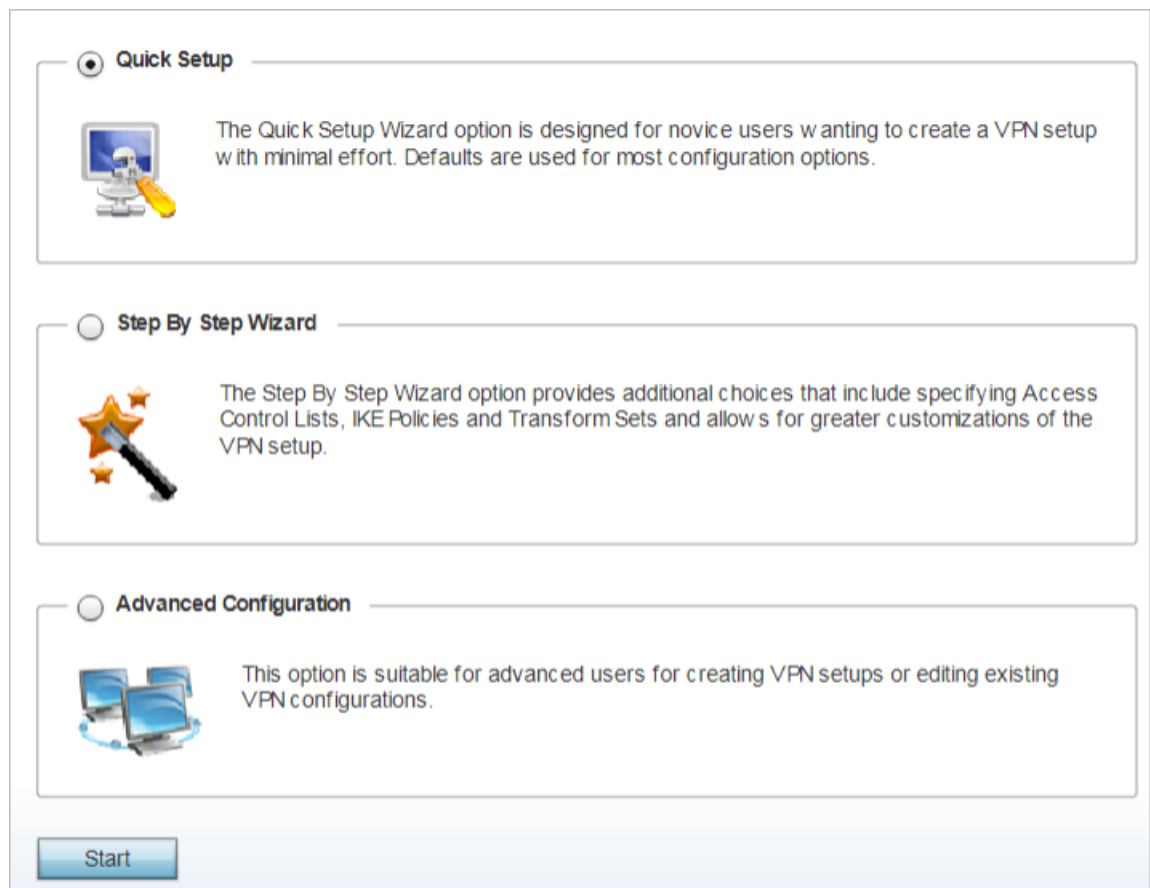


Figure 218: Profile Overrides - Security - VPN Configuration Screen

The following options are available:

- Quick Setup - Use this wizard to setup basic VPN Tunnel on the device. This wizard is aimed at novice users and enables them to setup a basic VPN with minimum effort. This wizard uses default values for most of the parameters.



Note

This option is selected by default. If you wish to use any of the other options on this screen, select the option and click **Start**.

- Step-by-Step wizard - Use this wizard to setup a VPN Tunnel step by step. This wizard is aimed at intermediate users who require the ability to customize some of the parameters.
- Advanced Configuration - Use this option to configure the VPN parameters manually.

4. Click **Start** to launch the **Quick Setup** wizard.

The Quick Setup wizard creates a VPN connection with minimum manual configuration. Default values are retained for most of the parameters.

The quick setup screen displays.

The screenshot shows the 'Quick Setup' wizard interface. The fields and options are as follows:

- Tunnel Name**: A text input field with a red star and a help icon.
- Tunnel Type**: Radio buttons for **Site-to-Site** (selected) and **Remote Access**.
- Select Interface**: Checkboxes for **VLAN** (selected), **WWAN**, and **PPPoE**. The VLAN field contains the value '1'.
- Traffic Selector (ACL)**: A section containing:
 - Source** and **Destination**: IP address input fields with red stars and help icons.
 - Add Rule**: A button to add a new rule.
 - A table with columns **Source** and **Destination**, and a trash icon.
- Peer**: Radio buttons for **IP Address** (selected) and **Host Name**, followed by an IP address input field.
- Authentication**: Radio buttons for **Certificate** (selected) and **Pre-Shared Key**.
- Local Identity**: Radio buttons for **IP Address** (selected), **FQDN**, and **Email**, followed by an input field.
- Remote Identity**: Radio buttons for **IP Address** (selected), **FQDN**, and **Email**, followed by an input field.
- IKE Policy**: Radio buttons for **All** (selected), **IKEV1**, and **IKEV2**, followed by a dropdown menu showing 'ikev1-default'.
- Transform Set**: A dropdown menu showing 'default'.

At the bottom right, there are **Save** and **Cancel** buttons.

Figure 219: VPN Quick Setup Wizard Screen

5. Provide the following VPN tunnel configurations:

Tunnel Name	Provide a name for the tunnel. Tunnel name must be such that it easily identifies the tunnel uniquely.
Tunnel Type	Configure the tunnel type as one of the following: <ul style="list-style-type: none"> • Site-to-Site – Select to create a secured connection between two sites. • Remote Access – Provides access to a network to remote devices.
Select Interface	Configure the interface for creating the tunnel. The following options are available: <ul style="list-style-type: none"> • VLAN – Select to configure tunnel over a Virtual LAN interface. Use the spinner to configure the VLAN number. • WWAN – Select to configure tunnel over the WWAN interface. • PPPoE – Select to configure tunnel over the PPPoE interface
Traffic Selector (ACL)	Configure ACLs that manage the traffic passing through the VPN Tunnel. <ul style="list-style-type: none"> • Source – Provide the source network along with its mask. • Destination – Provide the destination network along with its mask. <p>Note: Click Add Rule to add the rule into the ACL.</p>
Peer	Configure the peer for this tunnel. The peer device can be specified either by its hostname or IP address.
Authentication	Configure the authentication used to identify peers. The options are: <ul style="list-style-type: none"> • Certificate – Select to apply certificate-base peer authentication. • Pre-Shared Key – Select to enforce pre-shared key based peer authentication. If selecting this option, provide the PSK in the associated field.
Local Identity	Configure the local identity used with peer configuration for an IKE exchange with the target VPN IPsec peer. Options include: <ul style="list-style-type: none"> • IP Address • FQDN • Email <p>The default setting is <i>IP Address</i>.</p>

Remote Identity	<p>Configure the access point remote identifier for an IKE exchange with the target VPN IPsec peer. The options include:</p> <ul style="list-style-type: none">• IP Address• FQDN• Email <p>The default setting is <i>IP Address</i>.</p>
IKE Policy	<p>Configure the IKE policy to use. IKE is used to exchange authentication keys. The options are:</p> <ul style="list-style-type: none">• All – Select to use any IKE policy.• IKE1 – Select to only use IKE 1.• IKE2 – Select to only use IKE 2.
Transform Set	<p>Configure the transform set used to specify how traffic is protected within the crypto ACL defining the traffic that needs to be protected. Select the appropriate traffic set from the drop-down menu.</p>

6. Click **Save** to save the VPN Tunnel configuration.

To exit without saving, click **Cancel**.

7. Select the **Step-By-Step Wizard** option, and click **Start** to launch the wizard.

The Step-By-Step wizard creates a VPN connection with more manual configuration than the Quick Setup Wizard. Use this wizard to manually configure Access Control Lists, IKE Policy, and Transform Sets to customize the VPN Tunnel.

The **Step-by-Step wizard → Basic Configuration** (step 1/4) screen displays by default.

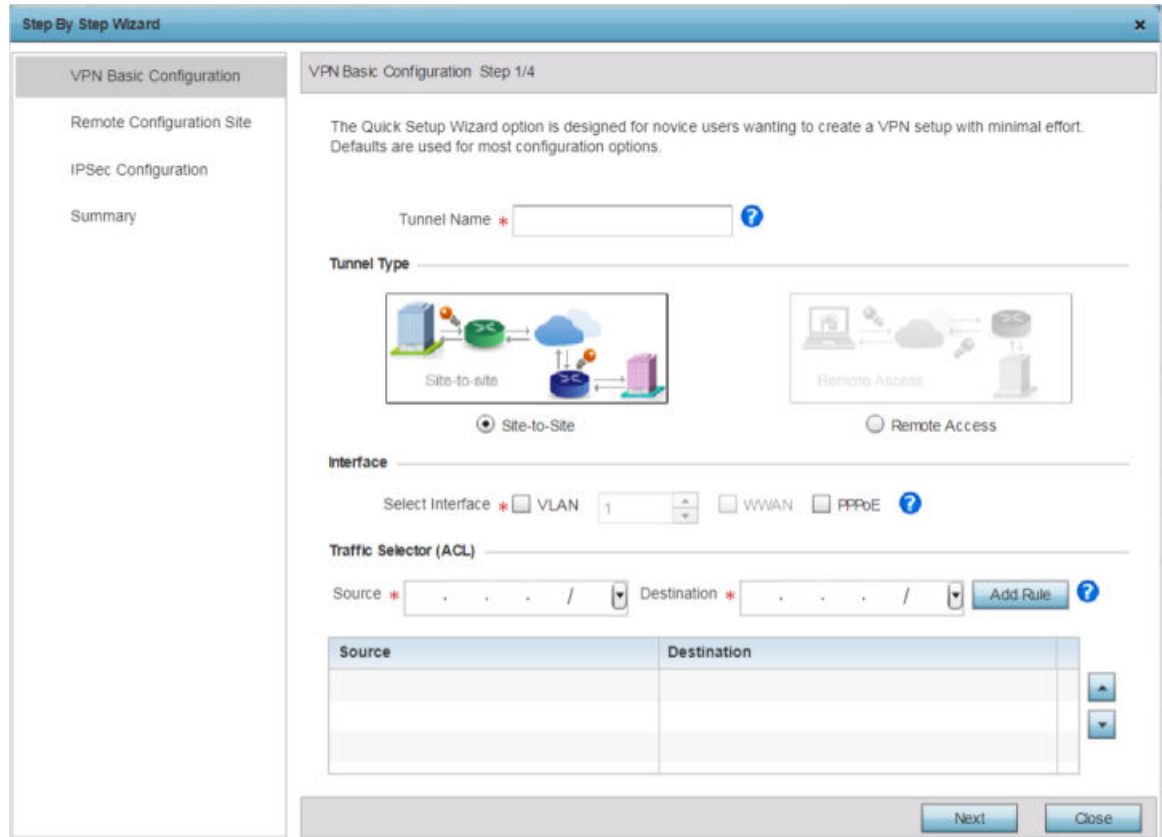


Figure 220: VPN Basic Configuration Screen Step 1/4

8. Provide the following basic configurations:

Tunnel Name	Provide a name for the tunnel. Tunnel name must be such that it easily identifies the tunnel uniquely.
Tunnel Type	<p>Configure the tunnel type as one of the following:</p> <ul style="list-style-type: none"> • Site-to-Site – Select to create a secured connection between two remote sites. • Remote Access – Select to create a tunnel between an user device and a network. In other words, select to provide access to a network to remote devices.

<p>Interface</p>	<p>Configure the interface for the tunnel. The options are:</p> <ul style="list-style-type: none"> • VLAN – Select to configure tunnel over a Virtual LAN interface. Use the spinner to configure the VLAN number. • WWAN – Select to configure tunnel over the WWAN interface. • PPPoE – Select to configure tunnel over the PPPoE interface
<p>Traffic Selector (ACL)</p>	<p>This field creates the Access Control List (ACL) that is used to control who uses the network.</p> <ul style="list-style-type: none"> • Source – Provide the source network IP address along with its mask. • Destination – Provide the destination network IP address along with its mask. <p>Note: Click Add Rule to add the rule into the ACL.</p>

9. Click **Next**.

The **Step-by-Step Wizard → Remote Configuration Site** (step 2/4) screen displays.

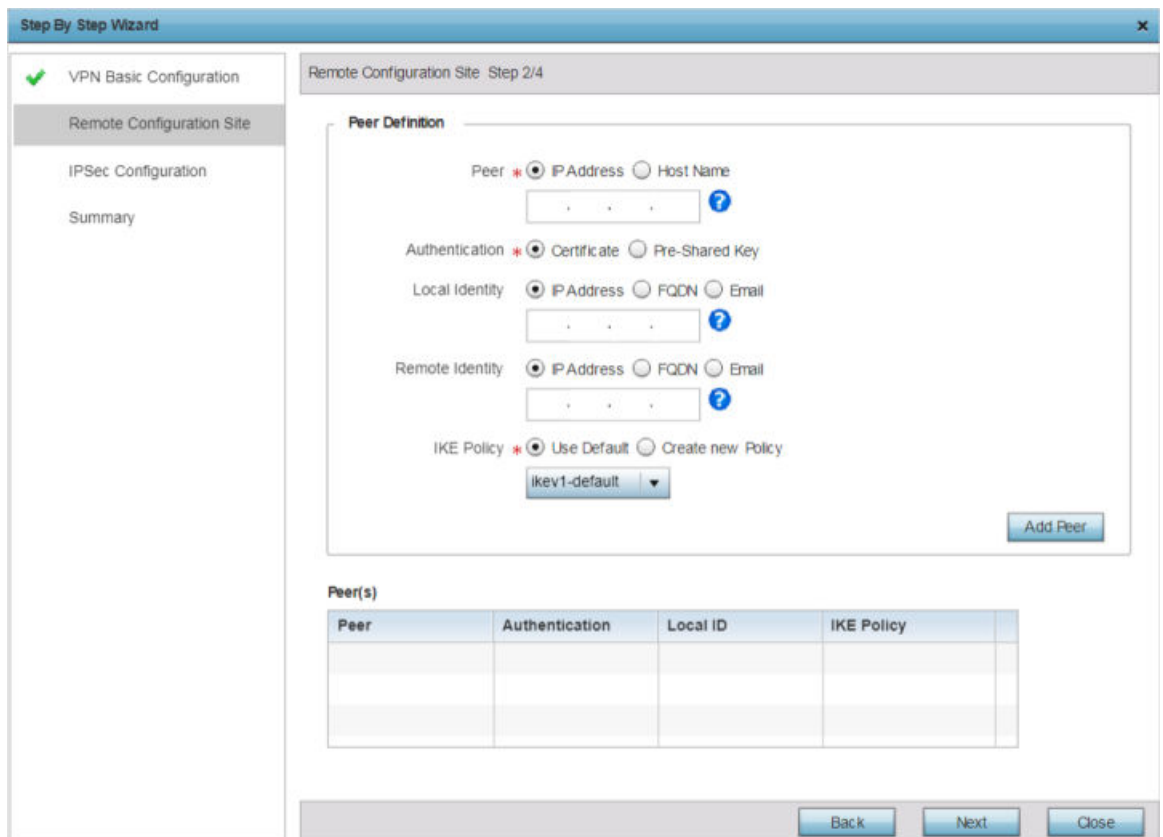


Figure 221: Remote Configuration Site Step 2/4 Screen


10. Provide the following remote site configuration:

Peer	<p>Specify the peer for this device when forming a tunnel. The peer can be identified by its IP address or hostname.</p> <ul style="list-style-type: none"> • IP Address - Select and specify the peer's IP address in the associated field. • Host Name - Select and specify the peer's hostname in the associated field.
Authentication	<p>Configure the mode of authentication used by the tunnel peers. The options are:</p> <ul style="list-style-type: none"> • Certificate – Select to apply certificate-base peer authentication. • Pre-Shared Key – Select to enforce pre-shared key based peer authentication. If selecting this option, provide the PSK in the associated field.
Local Identity	<p>Configure the local identity used with peer configuration for an IKE exchange with the target VPN IPsec peer. Options include:</p> <ul style="list-style-type: none"> • IP Address • FQDN • Email <p>The default setting is <i>IP Address</i>.</p>
Remote Identity	<p>Configure the access point remote identifier for an IKE exchange with the target VPN IPsec peer. The options include:</p> <ul style="list-style-type: none"> • IP Address • FQDN • Email <p>The default setting is <i>IP Address</i>.</p>
IKE Policy	<p>Configure the IKE policy to use when creating this VPN Tunnel. The following options are available:</p> <ul style="list-style-type: none"> • Use Default – Select this option to use the default IKE profiles. Select one of ike1-default or ike2-default. • Create new Policy – Select this option to create a new IKE policy. Select and click Create new Policy button to launch the IKE Policy creation window. <p>The default setting is <i>IP Address</i>.</p>

11. Click the **Add Peer** button to move the tunnel peer information into the **Peer(s)** table. This table lists all the peers configured for the VPN Tunnel.

12. Click **Next**.

The **Step-by-Step Wizard → IPSec Configuration** (step 3/4) screen displays.

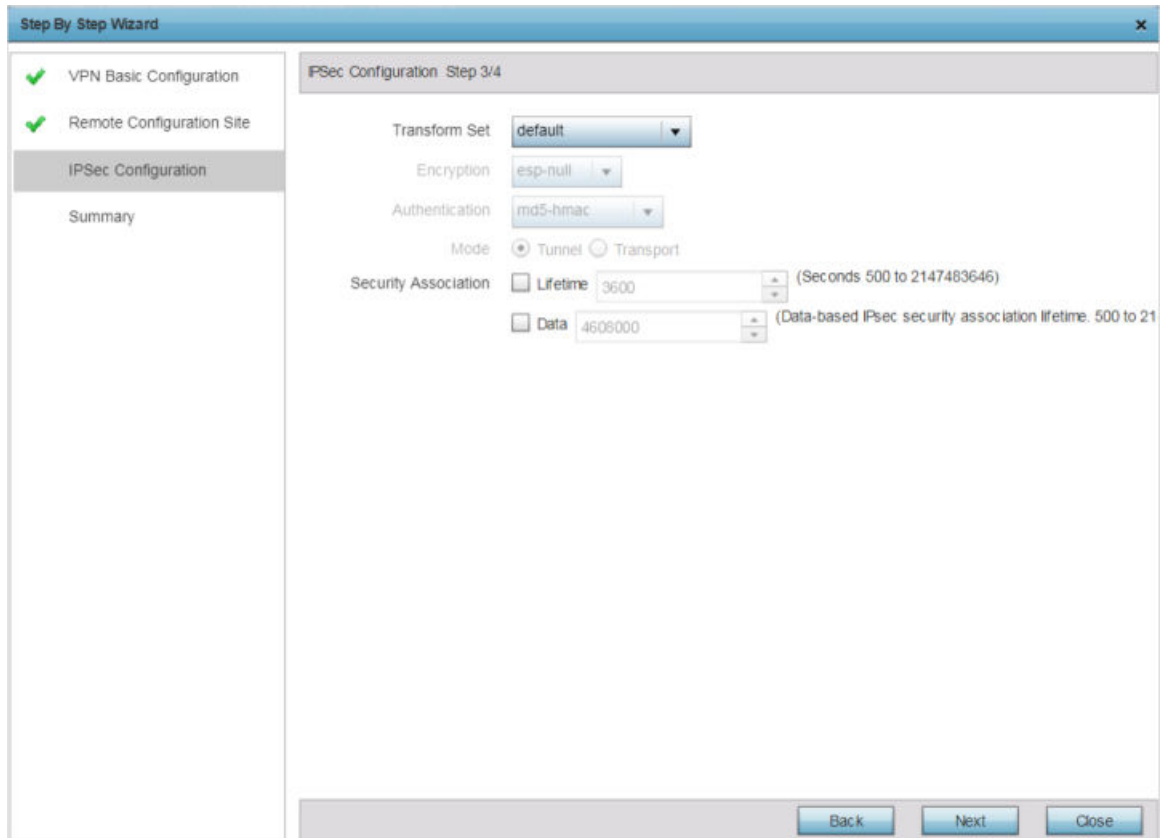

The screenshot shows a window titled "Step By Step Wizard" with a sub-header "IPSec Configuration Step 3/4". On the left, a navigation pane lists "VPN Basic Configuration", "Remote Configuration Site", "IPSec Configuration" (selected), and "Summary". The main area contains the following configuration options:

- Transform Set: default
- Encryption: esp-null
- Authentication: md5-hmac
- Mode: Tunnel Transport
- Security Association: Lifetime: 3600 (Seconds 500 to 2147483646)
- Data: 4608000 (Data-based IPsec security association lifetime. 500 to 2147483646)

At the bottom right, there are three buttons: "Back", "Next", and "Close".

Figure 222: IPSec Configuration Step 3/4 Screen

13. Provide the following configurations:

Transform Set	<p>Transform set is a set of configurations exchanged for creating the VPN tunnel and impose a security policy. Use the Transform Set drop-down menu and select one of the following options:</p> <ul style="list-style-type: none"> • default - Select to apply the default, system-provided security policy. • Create New Policy - Select to create new security policies. when selected the Encryption, Authentication and Mode fields are enabled. • Authentication – The authentication used to identify tunnel peers. • Mode – The mode of the tunnel. This is how the tunnel will operate. <p>Note:</p>
Encryption	<p>Specify the encryption mode used with the tunnel. The options are:</p> <ul style="list-style-type: none"> • esp-null • des • 3des • aes • aes-192 • aes-256
Authentication	<p>Specify the authentication mode used to identify tunnel peers. the options are:</p> <ul style="list-style-type: none"> • md5-hmac • sha-hmac • sha256-hmac • aes-xcbc-mac <p>This is the method peers authenticate with as the source of the packet to other peers after a VPN Tunnel has been created.</p>

Mode	<p>Configure the mode of transport used to transmit packets through the tunnel. The options are:</p> <ul style="list-style-type: none"> • Tunnel – Select this mode when the tunnel is between two routers or servers. • Transport – Select this mode when the tunnel is created between a client and a server.
Security Association	<p>Configure the lifetime of a SA (<i>security association</i>). Keys and SAs should be periodically renewed to maintain security of the tunnel.</p> <ul style="list-style-type: none"> • Lifetime – Duration in seconds after which the keys should be changed. Set a value in from 500 - 2,147,483,646 seconds. The default value is 3,600 seconds. • Data – Select this option to enable data-based IPsec security association. Provide the data threshold for determining the need of Key change. The key is changed after this quantity of data has been encrypted/ decrypted. Set a value from 500 - 2,147,483,646 KBs.

14. Click **Next**.

The **Step-by-Step Wizard** → **Summary** (step 4/4) screen displays.

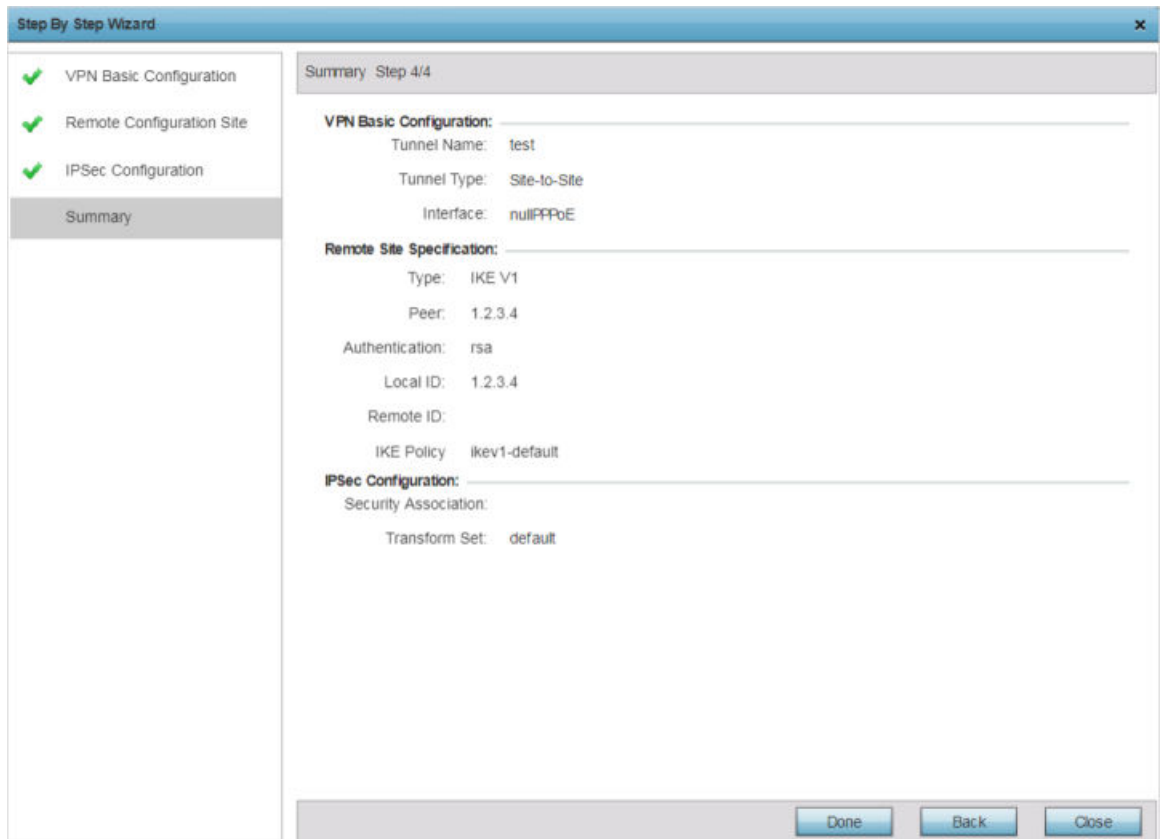


Figure 223: Summary Step 4/4 Screen

15. Review the configuration and click **Done** to create the VPN tunnel.

Use the **Back** button to go back to previous screen for making modifications to the configuration. Click **Close** to close the wizard without creating a VPN Tunnel.

16. Select the **Advanced Configuration** option, to configure the VPN parameters manually.

For detailed information manually configuring the VPN configurations, see [Defining Profile VPN Settings](#) on page 244.

Profile Overrides - Auto IPSec Tunnel

IPSec tunnels are established to secure traffic, data and management traffic, from access points to remote wireless controllers. Secure tunnels must be established between access points and the wireless controller with minimum configuration pushed through DHCP option settings.



Note

WiNG 7.1 release does not support L2TPv3 tunneling on AAP505i and AP510i model access points. This feature will be supported in future releases.

To override profile's Auto IPSec Tunnel configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Security** and select **Auto IPSec Tunnel**.

The Auto IPSec Tunnel configuration screen displays.

Figure 224: Profile Overrides - Security - Auto IPSec Tunnel Configuration Screen

4. Refer to the following table to configure the Auto IPsec Tunnel settings:

Group ID	Configure the ID string used for IKE authentication. String length can be between 1 and 64 characters.
Authentication Type	Set the IPsec Authentication Type. Options include PSK (Pre Shared Key) or RSA .
Authentication Key	Set the common key for authentication between the remote tunnel peer. Key length is between 8 and 21 characters.
IKE Version	Configure the IKE version to use. The available options are: ikev1-main , ikev1-aggr and ikev2 .
Enable NAT after IPsec	Select this option to enable NAT after IPsec. Enable this if there are NATted networks behind VPN tunnels.
Use Unique ID	In scenarios having different access points behind different NAT boxes and routers have the same IP address, it is not possible to create a tunnel between the wireless controller and the access point because the wireless controller does not identify the access point uniquely. When this option is selected, each access point behind a same NAT box or router will have an unique ID which is used to create the VPN tunnel.
Re-Authentication	Select this option to re-authenticate the key on a IKE rekey. This setting is disabled by default.
IKE Life Time	Set a lifetime in either seconds (600 - 86,400), minutes (10 - 1,440), hours (1 - 24), or days (1) for IKE security association duration. The default setting is 8600 seconds.

5. Click **OK** to save the Auto IPsec Tunnel configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Settings

To override a profile's security settings:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Security** and select **Settings**.

The security settings configuration screen displays.

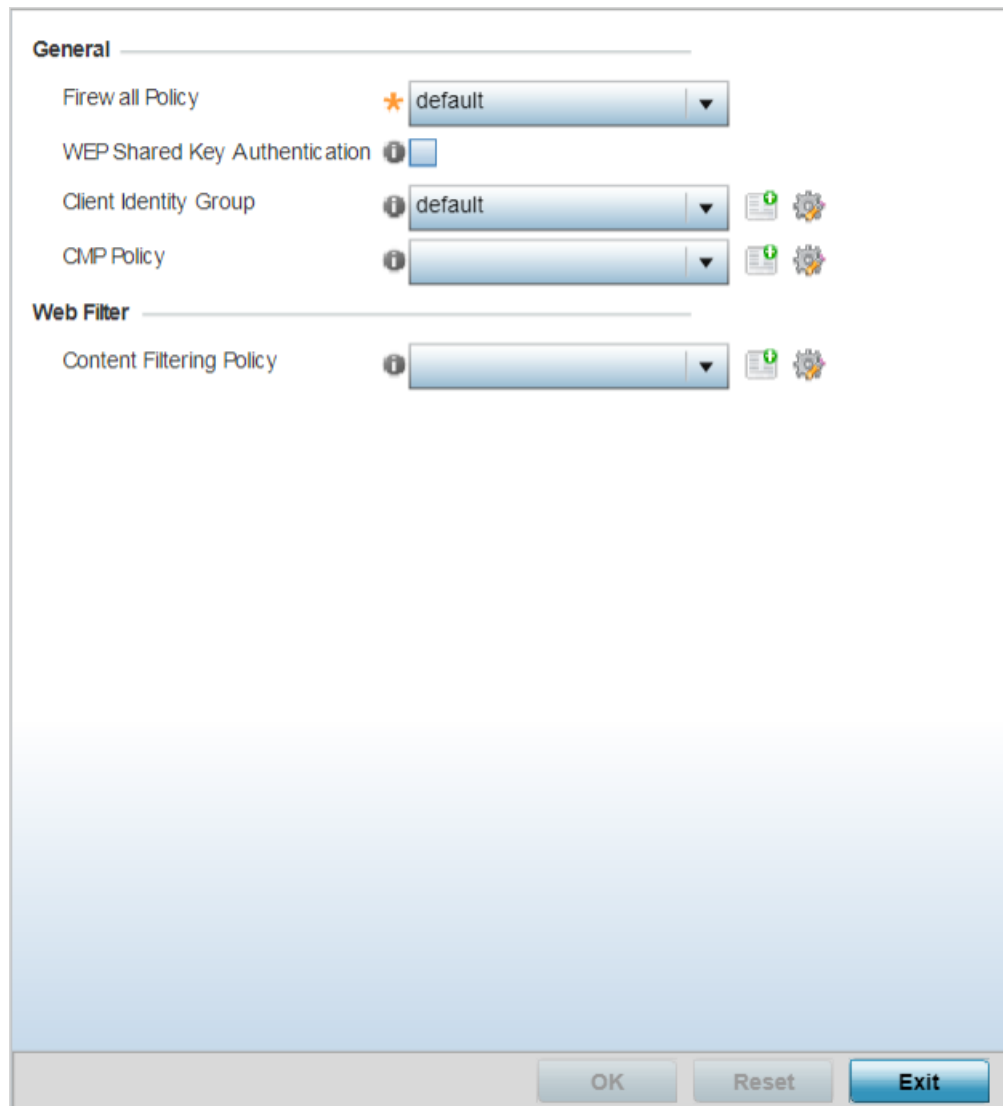


Figure 225: Security Settings Configuration Screen

- Use the firewall policy from the **Firewall Policy** drop-down menu to select and apply a firewall policy on the device. The policy applied here will override the profile's firewall settings. If an existing firewall policy does not meet your requirements, select the **Create** icon to create a new firewall policy that can be applied to this profile. An existing policy can also be selected and edited as needed using the **Edit** icon.
- Select the **WEP Shared Key Authentication** option to override the profile's WEP key configuration at the device level. WEP keys are used to access the network. The access point, other proprietary routers, and our clients use the key algorithm to convert an ASCII string to the same hexadecimal number. Clients without our adapters need to use WEP keys manually configured as hexadecimal numbers. This option is disabled by default.

6. Use the **Client Identity Group** drop-down menu to select the client identity group to use with this device. This setting overrides access point's profile client identity settings. A client identity is a set of unique fingerprints used to identify a class of devices. This information is used to configure permissions and access rules for devices classes in the network. A client identity group is a collection of client identities that identify devices and applies specific permissions and restrictions on these devices. For more information, see [Device Fingerprinting](#) on page 867.
7. In the **Web Filter** field, use the **Content Filtering Policy** drop-down menu to select or override the URL Filter configuration on the access point.

Web filtering is used to restrict access to resources on the Internet. For more information on configuring Web Filtering policies, see [Web Filtering](#) on page 824.

Profile Overrides - Certificate Revocation

A CRL (*certificate revocation list*) is a list of revoked certificates that are no longer valid. A certificate can be revoked if the CA (*certificate authority*) has improperly issued a certificate, or if a private key is compromised. The most common reason for revocation is that the user is no longer in sole possession of the private key.

To override an access point profile's CRL configurations:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Security** and select **Certificate Revocation**. The certificate revocation list (CRL) configuration screen displays.

The screenshot shows the 'Certificate Revocation List (CRL) Update Interval' configuration screen. It features a table with the following columns: 'Trustpoint Name', 'URL', 'Hours', and a trash icon. The table is currently empty. Below the table is a '+ Add Row' button. At the bottom of the screen are three buttons: 'OK', 'Reset', and 'Exit'. A blue override icon is visible on the left side of the table.

Figure 226: Certificate Revocation List (CRL) Configuration Screen



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

- In the **Certificate Revocation List (CRL) Update Interval** table, click **+ Add Row** and configure the following:
Use this option to quarantine certificates from use in the network. Additionally, a certificate can be placed on hold for a user defined period. If, for instance, a private key was found and nobody had access to it, its status could be reinstated.

Trustpoint Name	Provide the name of the trustpoint. The name should not exceed 32 characters.
URL	Enter the third-party resource ensuring the trustpoint's legitimacy.
Hours	Use this spinner control to specify an interval (in hours) after which a device copies a CRL file from an external server and associates it with a trustpoint.

- Click **OK** to save the CRL changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Trustpoints

A RADIUS certificate links identity information with a public key enclosed in the certificate. A CA is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues

with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate.

To override a RADIUS Trustpoint configuration at the device level:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Security** and select **Trustpoints**.

The trustpoints configuration screen displays.

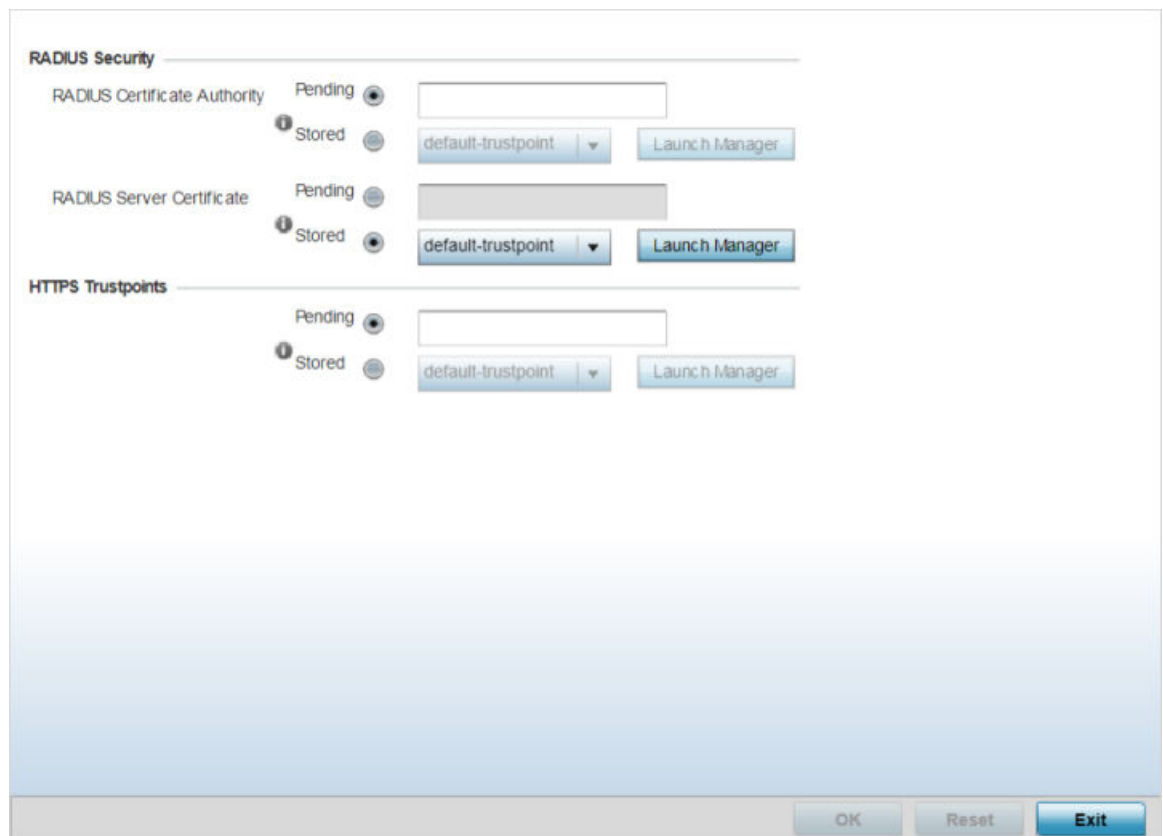


Figure 227: Trustpoints Configuration Screen

4. Set the following **RADIUS Security** certificate settings:

RADIUS Certificate Authority	<p>Select Pending to use a certificate that is in the process of being created or is yet to be created. As such certificates will not be listed under the Stored drop-down, use this method instead. Using this option is not a guarantee that the trust point will work as intended if the trust point is not loaded on to the device. The trust point can be created later, however, it must be present on the device when the device is deployed.</p> <p>Select Stored to enable a drop-down menu where an existing certificate can be leveraged or use default-trustpoint. To leverage an existing certificate, click the Launch Manager button.</p>
RADIUS Server Certificate	<p>Select Pending radio button to use a certificate that is in the process of being created or is yet to be created. As such certificates will not be listed under the Stored drop-down, use this method instead. Using this option is not a guarantee that the trust point will work as intended if the trust point is not loaded on to the device. The trust point can be created later, however, it must be present on the device when the device is deployed.</p> <p>Select Stored to enable a drop-down menu where an existing certificate can be leveraged or use default-trustpoint. To leverage an existing certificate, click the Launch Manager button.</p>

5. In the **HTTPS Trustpoints** field, set the following parameters:

HTTPS Trustpoint	<p>Select Pending to use a certificate that is in the process of being created or is yet to be created.</p> <p>Select Stored to enable a drop-down menu where an existing certificate/trustpoint can be used. where an existing certificate can be leveraged or use default-trustpoint. To leverage an existing certificate, click the Launch Manager button. For more information, see Certificate Management on page 1011.</p>
------------------	---

6. Click **OK** to save the RADIUS Trustpoints configuration overrides.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - NAT Pool

NAT (*Network Address Translation*) is a technique to modify network address information within IP packet headers in transit. This enables mapping one IP address to another to protect wireless controller, service platform or access point managed network address credentials. With typical deployments, NAT is used as an IP masquerading technique to hide private IP addresses behind a single, public facing, IP address.

Additionally, NAT is a process of modifying network address information in IP packet headers while in transit across a traffic routing device for the purpose of remapping one IP address to another. In most deployments NAT is used in conjunction with IP masquerading which hides RFC1918 private IP addresses behind a single public IP address.

NAT can provide a profile outbound internet access to wired and wireless hosts connected to a controller, service platform or access point. Many-to-one NAT is the

most common NAT technique for outbound internet access. Many-to-one NAT allows a controller, service platform or access point to translate one or more internal private IP addresses to a single, public facing, IP address assigned to a 10/100/1000 Ethernet port or 3G card.



Note

The WiNG 7.1 release does not support NAT on AP505 and AP510 model access points. This feature will be supported in future releases.

To override an access point profile's NAT configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Security** and select **NAT**.

The **NAT Pool** screen displays by default. This screen lists the NAT policies that have been created thus far. Any of these policies can be selected and applied to a profile.



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

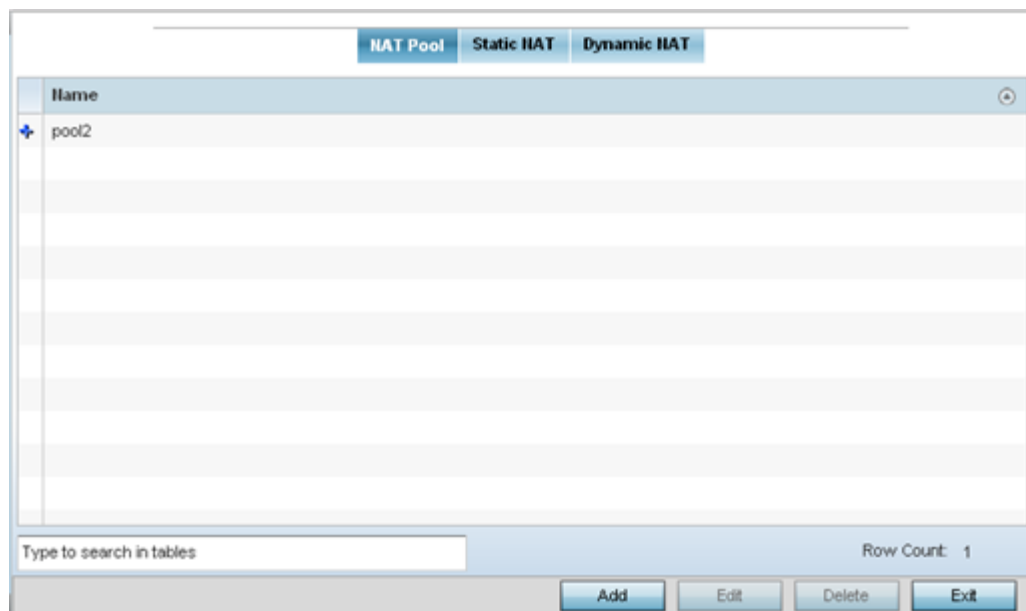


Figure 228: Profile Overrides - Security - NAT Pool Main Screen

- To modify an existing NAT policy, select it and click **Edit**.

To create a new NAT policy, click **Add**. To delete an obsolete NAT policy, select it and click **Delete**.

The **NAT Pool** window displays.

Figure 229: NAT Configuration - Add/Edit NAT Pool Window

- If adding a new NAT policy, in the **Name** field, provide a `name` to help distinguish it from others with similar configurations.
- In the **IP Address Range** table, click **+ Add Row** and define a range of IP addresses. The IP addresses defined here are hidden from the public internet. NAT modifies network address information in the defined IP range while in transit across a traffic routing device. NAT only provides IP address translation and does not provide a firewall. A branch deployment with NAT by itself will not block traffic from potentially being routed through a NAT device. Consequently, NAT should be deployed with a stateful firewall.

Start IP	Enter the first IP address in the range
End IP	Enter the last IP address in the range.

- Click **OK** to save the NAT pool configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Static NAT - Source

Static NAT creates a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a perimeter interface with the internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual address

- To create a new source IP address, from an internal network, to a NAT IP address click **Add**.

The **Add Source NAT** window displays.

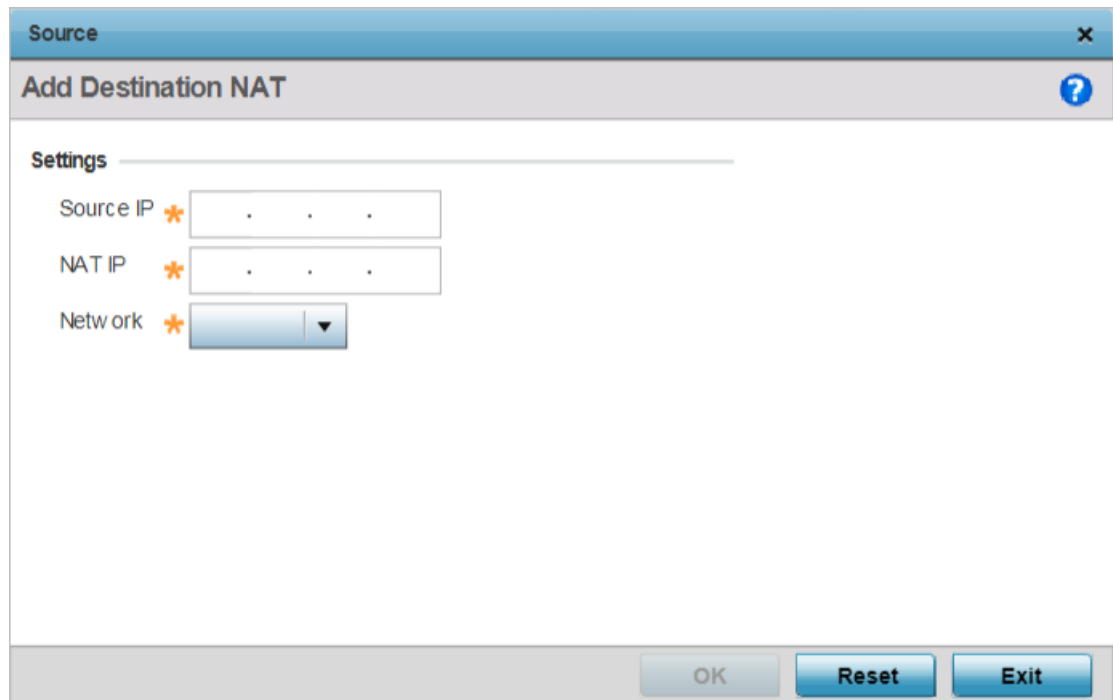


Figure 231: NAT Configuration - Add Static NAT Source IP Address Window

- Define the following parameters:

Source IP	Enter the address used at the (internal) end of the static NAT configuration. This address (once translated) will not be exposed to the outside world when the translation address is used to interact with the remote destination.
NAT IP	Enter the IP address of the matching packet to the specified value. The IP address modified can be either source or destination based on the direction specified.
Network	Select Inside or Outside NAT as the network direction. The default setting is Inside. Select <i>Inside</i> to create a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a perimeter interface with the internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual address of the server from users on insecure interfaces. Casual access by unauthorized users becomes much more difficult. Static NAT requires a dedicated address on the outside network for each host.

- Click **OK** to save the static NAT source configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Static NAT - Destination

- To create a new NAT destination configuration, click **Add**.
The **Add Destination NAT** window displays.

The screenshot shows a configuration window titled "Destination" with a subtitle "Add Destination NAT". The window contains a "Settings" section with the following fields:

- Protocol: Any
- Destination IP: [IP address input]
- Destination Port: 1 (other)
- NAT IP: [IP address input]
- NAT Port: 1 (other)
- Network: [Network selection]

At the bottom of the window, there are three buttons: "OK", "Reset", and "Exit".

Figure 233: NAT Configuration - Add Static NAT Destination IP Address Window

- Set or override the following destination configuration parameters.

Static NAT creates a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a perimeter interface with the internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual address of the server from users on insecure interfaces. Casual access by

unauthorized users becomes much more difficult. Static NAT requires a dedicated address on the outside network for each host.

Protocol	<p>Select the protocol for use with static translation. Available options are TCP, UDP and Any. The default setting is <i>Any</i>.</p> <p>TCP is a transport layer protocol used by applications requiring guaranteed delivery. It is a sliding window protocol handling both timeouts and retransmissions. TCP establishes a full duplex virtual connection between two endpoints. Each endpoint is defined by an IP address and a TCP port number.</p> <p>The UDP (<i>User Datagram Protocol</i>) offers only a minimal transport service, non-guaranteed datagram delivery, and provides applications direct access to the datagram service of the IP layer. UDP is used by applications not requiring the level of service of TCP or are using communications services (multicast or broadcast delivery) not available from TCP.</p>
Destination IP	Enter the local address used at the (source) end of the static NAT configuration. This address (once translated) will not be exposed to the outside world when the translation address is used to interact with the remote destination.
Destination Port	Set the local port number used at the (source) end of the static NAT configuration. The default value is port 1.
NAT IP	Enter the IP address of the matching packet to the specified value. The IP address modified can be either source or destination based on the direction specified.
NAT Port	Enter the port number of the matching packet to the specified value. This option is valid only if the direction specified is destination .
Network	<p>Select Inside or Outside NAT as the network direction. The default setting is Inside.</p> <p>Select Inside to create a permanent, one-to-one mapping between an address on an internal network and a perimeter or external network. To share a web server on a perimeter interface with the internet, use static address translation to map the actual address to a registered IP address. Static address translation hides the actual address of the server from users on insecure interfaces. Casual access by unauthorized users becomes much more difficult. Static NAT requires a dedicated address on the outside network for each host.</p>

6. Click **OK** to save the static NAT destination configuration changes.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Dynamic NAT

Dynamic NAT configurations translate the IP address of packets going out from one interface to another interface based on configured conditions. Dynamic NAT requires packets be switched through a NAT router to generate translations in the translation table.

To override the dynamic NAT configurations:

1. Select the **Dynamic NAT** tab.

The **Dynamic NAT** main screen displays by default.

Source List ACL	Network	Interface	Overload Type	NAT Pool	Overload IP	ACL Precedence
nat	inside	vlan10	Interface IP Address			1

Figure 234: NAT Configuration - Dynamic NAT Main Screen

2. Review the following to determine whether a new dynamic NAT configuration needs to be created, or whether an existing one can be edited or deleted:

Source List ACL	Lists an ACL to define the packet selection criteria for the NAT configuration. NAT is applied only on packets which match a rule defined in the access-list. These addresses (once translated) are not exposed to the outside world when the translation address is used to interact with the remote destination.
Network	Displays Inside or Outside NAT as the network direction for the dynamic NAT configuration.
ACL Precedence	Lists the administrator-assigned priority set for the listed source list ACL. The lower the value listed, the higher the priority assigned to this ACL rule.
Interface	Lists the VLAN (from 1 - 4094) used as the communication medium between the source and destination points within the NAT configuration.
Overload Type	Displays the overload type used when several internal addresses are NATed to only one or a few external addresses. Options include NAT Pool , One Global Address and Interface IP Address . The default setting is Interface IP Address.

NAT Pool	Displays the name of an existing NAT pool used with the dynamic NAT configuration.
Overload IP	If One Global IP Address is selected as the Overload Type , define an IP address to use as a filter address for the IP ACL rule.

- To modify an existing dynamic NAT configuration, select it and click **Edit**. To remove an existing configuration, select it and click **Delete**.
- To create a new dynamic NAT configuration, click **Add**.

The **Source** window displays.

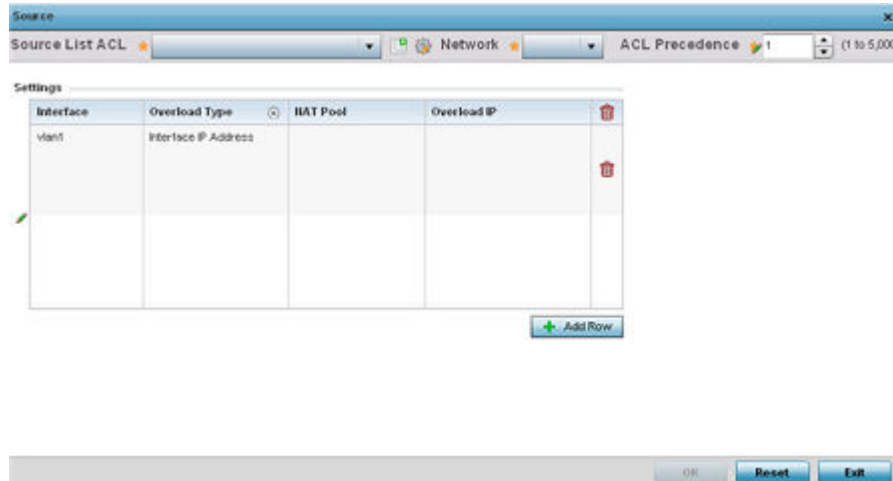


Figure 235: Profile Overrides - Security - NAT - Dynamic NAT - Source ACL List Screen

- Set or override the following to define the Dynamic NAT configuration:

Source List ACL	Select an ACL name to define the packet selection criteria for NAT. NAT is applied only on packets which match a rule defined in the access-list. These addresses (once translated) will not be exposed to the outside world when the translation address is used to interact with the remote destination.
Network	Select Inside or Outside NAT as the network direction for the dynamic NAT configuration. Inside is the default setting.
ACL Precedence	Set the priority (from 1 - 5000) for the source list ACL. The lower the value, the higher the priority assigned to the ACL rule.
Interface	Select the VLAN (from 1 - 4094) or WWAN used as the communication medium between the source and destination points within the NAT configuration. Ensure that the VLAN selected adequately supports the intended network traffic within the NAT supported configuration.
Overload Type	Define the overload type used when several internal addresses are NATed to only one or a few external addresses. Options include NAT Pool , One Global Address , and Interface IP Address . The default setting is Interface IP Address.

NAT Pool	Provide the name of an existing NAT pool for use with the dynamic NAT configuration. Note: This option is enabled only if the Overload Type is set to NAT Pool .
Overload IP	If One Global IP Address is selected as the Overload Type , define an IP address to use as a filter address for the IP ACL rule.

- Click **OK** to save the dynamic NAT configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Bridge NAT

Use Bridge NAT to manage Internet traffic originating at a remote site. In addition to traditional NAT functionality, Bridge NAT provides a means of configuring NAT for bridged traffic through an access point. NAT rules are applied to bridged traffic through the access point, and matching packets are NATed to the WAN link instead of being bridged on their way to the router.

Using Bridge NAT, a tunneled VLAN (extended VLAN) is created between the NoC and a remote location. When a remote client needs to access the Internet, Internet traffic is routed to the NoC, and from there routed to the Internet. This increases the access time for the end user on the client.

To resolve latency issues, Bridge NAT identifies and segregates traffic heading towards the NoC and outwards towards the Internet. Traffic towards the NoC is allowed over the secure tunnel. Traffic towards the Internet is switched to a local WLAN link with access to the Internet.



Note

Bridge NAT supports single AP deployments only. This feature cannot be used in a branch deployment with multiple access points.

To override an access point profile's Bridge NAT configuration:

- Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

- Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides** → **Security** and select **Bridge NAT**.

The Bridge NAT configuration screen displays.

Access List	Interface	NAT pool	Overload IP	Overload Type	ACL Precedence
FWR_01	vlan1	NAT_Pool_01		nat-pool	10

Type to search in tables

Row Count: 1

Add Edit Delete

Figure 236: Profile Overrides - Bridge NAT Configuration - Main Screen

- Review the following to determine whether a new Bridge NAT configuration requires creation or an existing configuration modified or removed:

Access List	Lists the ACL applying IP address access/deny permission rules to the Bridge NAT configuration.
Interface	Lists the communication medium (outgoing layer 3 interface) between source and destination points. This is either the access point's pppoe1 or wan1 interface or the VLAN used as the redirection interface between the source and destination.
NAT Pool	Lists the names of existing NAT pools used with the Bridge NAT configuration. This displays only when the Overload Type , in the Bridge NAT configuration, is set to NAT Pool .
Overload IP	Lists the IP address used globally for numerous local addresses.
Overload Type	Lists the overload type used with the listed IP ACL rule. Displays as either NAT Pool , One Global Address or Interface IP Address .
ACL Precedence	Lists the administrator assigned priority set for the ACL. The lower the value, higher is the priority assigned to the ACL rules.

- To override an existing Bridge NAT configuration, select it from the displayed list and click **Edit**.

To create a new Bridge NAT configuration, click **Add**. To delete an obsolete configuration, select it and click **Delete**.

The Dynamic NAT configuration window displays.

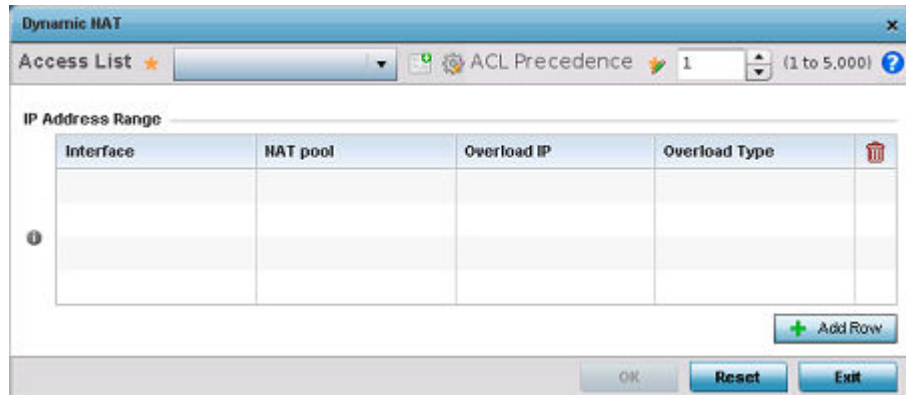


Figure 237: Profile Overrides - Bridge NAT - Add/Edit Dynamic NAT Window

- Use the **Access List** drop-down menu to select and apply an ACL to the policy based forwarding rule.

A new ACL can be defined by selecting the **Create** icon, or an existing set of IP ACL rules can be modified by selecting the **Edit** icon.

- In the **IP Address Range** table, review the existing IP addresses and address ranges configured to access the Internet.

Interface	Lists the outgoing layer 3 interface on which traffic is re-directed. The interface can be an access point WWAN or PPPoE interface. Traffic can also be redirected to a designated VLAN.
NAT Pool	Displays the NAT pool used by this Bridge NAT entry. A value is only displayed only when Overload Type has been set to NAT Pool.
Overload IP	Lists the IP address used to represent a large number local addresses for this configuration.
Overload Type	Displays the override type for this policy based forwarding rule.

8. Select **+ Add Row** to set new **IP Address Range** settings for the Bridge NAT configuration.

The Add Row window displays.

Figure 238: Bridge NAT - Dynamic NAT - Add IP address and Address Configuration Window

9. Select **OK** to save the **Add Row** and **Dynamic NAT** screens.
Select **Reset** to revert to the last saved configuration.

Profile Overrides - Application Visibility (AVC)

DPI (*Deep packet inspection*) is an advanced packet filtering technique functioning at the application layer. Use DPI to find, identify, classify, reroute or block packets containing specific data or codes that other packet filtering techniques (examining only packet headers) cannot detect.

Enable DPI to scan data packets passing through the WiNG managed network. The contents of each packet are scanned, occasionally logged and blocked or routed to their destination. Deep packet inspection helps an ISP block the spread of viruses, illegal downloads and prioritize data transmitted by bandwidth-heavy applications (video and VoIP applications) to help prevent network congestion.



Note

Application Visibility is available only on AP-7562, AP-8432 and AP-8533 access points.

To override an access point profile's AVC configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Security** and select **Application Visibility (AVC)**.



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The **Application Visibility (AVC)** configuration screen displays.

Application Visibility and Control Settings

- Enable dpi
- Enable Application Logging
- Application Logging Level Notification
- Enable Voice/Video Metadata
- Enable HTTP Metadata
- Enable SSL Metadata
- Enable TCP RTT

Custom Applications for DPI

Custom Applications

- test
-
-
-

[Create](#)

App Groups for TCP RTT

Application Group

<none>

amazon

OK Reset Exit

Figure 239: Profile Overrides - Application Visibility (AVC) Configuration Screen

4. Set or override the following **Application Visibility and Control Settings**:

Enable dpi	Enable this setting to provide deep-packet inspection (application assurance) by inspecting every byte of each application header packet passing through the controller or service platform. When enabled, application data streams are inspected at a granular level to help prevent viruses and spyware from accessing the WiNG managed network.
Enable Applications Logging	Select this option to enable event logging for DPI application recognition. This setting is disabled by default.
Applications Logging Level	If enabling DPI application recognition event logging, set the logging level. Severity levels include Emergency, Alert, Critical, Errors, Warning, Notice, Info , and Debug . The default logging level is <i>Notification</i> .
Enable Voice/ Video Metadata	Select this option to enable the metadata extraction from voice and video classified flows. The default setting is disabled.
Enable HTTP Metadata	Select this option to enable extraction of metadata from HTTP application data flows. The default setting is disabled.
Enable SSL Metadata	Select this option to enable extraction of metadata from SSL application data flows. The default setting is disabled.
Enable TCP RTT	Select this option to enable extraction of RTT information from TCP flows. The default setting is disabled.

5. Review the **Custom Applications for DPI** field to select the custom applications available for this device profile.

For information on creating custom applications and their categories, see [Application](#) on page 814.

6. If you are enabling TCP-RTT metadata collection, use the **App Groups for TCP RTT** field to specify the application groups for which TCP-RTT metadata collection is to be enabled.

Select the **Application Groups** from the drop-down menu and use the green, down arrow to move the selection to the box below. You can add a maximum of eight groups to the list.

If the desired application group is not available, select the **Create** icon to define a new application group configuration or select the **Edit** icon to modify an existing application group. For information on creating custom application groups, see [Application](#) on page 814.

7. Click **OK** to save the changes or overrides.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - VRRP

A default gateway is a critical resource for connectivity. However, it's prone to a single point of failure. Thus, redundancy for the default gateway is required by the access point. If WAN backhaul is available, and a router failure occurs, then an access point should act as a router and forward traffic on to its WAN link.

Define an external VRRP (*Virtual Router Redundancy Protocol*) configuration when router redundancy is required in a wireless network requiring high availability.

The election of a VRRP master is central to the configuration of VRRP. A VRRP master (once elected) performs the following functions:

To override an access point profile's VRRP configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.


2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides**, and select **VRRP**.

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The **VRRP → VRRP** configuration screen displays by default.

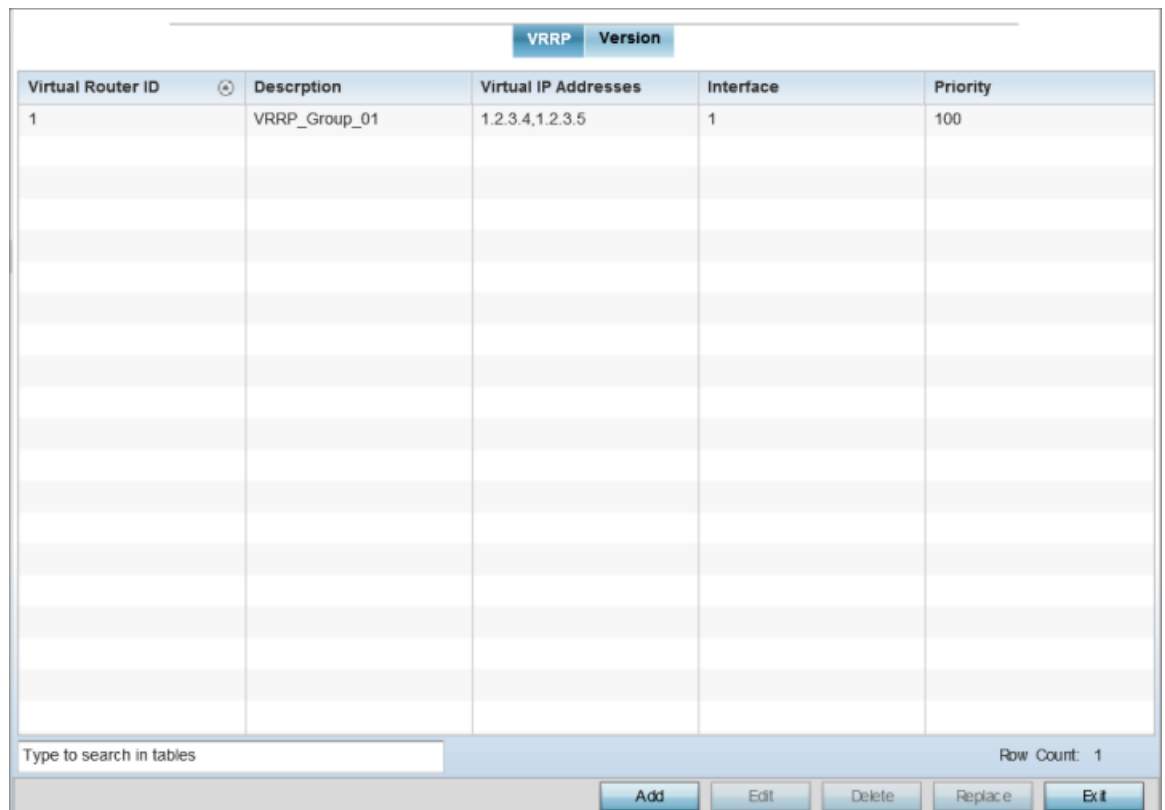

The screenshot shows the VRRP configuration interface. At the top, there are two tabs: 'VRRP' (selected) and 'Version'. Below the tabs is a table with the following columns: 'Virtual Router ID', 'Description', 'Virtual IP Addresses', 'Interface', and 'Priority'. The table contains one row of data:

Virtual Router ID	Description	Virtual IP Addresses	Interface	Priority
1	VRRP_Group_01	1.2.3.4,1.2.3.5	1	100

At the bottom of the table, there is a search bar with the text 'Type to search in tables' and a 'Row Count: 1' indicator. Below the search bar are five buttons: 'Add', 'Edit', 'Delete', 'Replace', and 'Exit'.

Figure 240: Profile Overrides - VRRP - VRRP Configuration Main Screen

4. Review the following VRRP configuration data to assess whether a new VRRP configuration is required or whether an existing VRRP configuration can be modified or removed:

Virtual Router ID	A numerical index (from 1 - 255) used to differentiate VRRP configurations. The index is assigned when a VRRP configuration is initially defined. This ID identifies the virtual router for which a packet is reporting status.
Description	A description assigned to the VRRP configuration when it was either created or modified. The description is implemented to provide additional differentiation beyond the numerical virtual router ID.
Virtual IP Addresses	The virtual interface IP address used as the redundant gateway address for the virtual route.
Interface	The interfaces selected on the access point to supply VRRP redundancy failover support.
Priority	A numerical value (from 1 - 254) used for the virtual router master election process. The higher the numerical value, the higher the priority in the election process.

5. Click **Add** to create a new VRRP configuration.

Click **Edit** to modify or override the attributes of a existing VRRP configuration. If necessary, existing VRRP configurations can be selected and permanently removed by clicking **Delete**.

The screenshot shows the VRRP configuration window for Virtual Router ID 1. The 'General' tab is active. The configuration includes:

- Description:** A text field containing 'router1' with a checkmark and a plus icon.
- Priority:** A numeric spinner set to 100, with a range of (1 to 254).
- Virtual IP Addresses:** A list of IP addresses. The first entry is '157. 235. 232. 32' with a 'Clear' button. Below it are three entries of '0 . 0 . 0 . 0', each with a 'Clear' button.
- Advertisement Interval Unit:** A dropdown menu set to 'seconds'.
- Advertisement Interval:** A numeric spinner set to 1, with a range of (1 to 255). There are also two smaller spinners for milliseconds (250 to 999) and centiseconds (100 to 4,095).
- Preempt:** A checked checkbox with a plus icon.
- Preempt Delay:** A numeric spinner set to 1, with a range of (1 to 65,535 seconds).
- Interface:** A dropdown menu set to 'VLAN ID 1', with a range of (1 to 4,094).

At the bottom right, there are 'OK', 'Cancel', and 'Exit' buttons.

Figure 241: Device Overrides - VRRP - Virtual Router Screen

6. If you are creating a new VRRP configuration, assign a **Virtual Router ID** from 1 - 255. In addition to functioning as numerical identifier, the ID identifies the virtual router for which a packet is reporting status.

7. Define the following VRRP **General** parameters:

Description	In addition to an ID assignment, a virtual router configuration can be assigned a textual description (up to 64 characters) to further distinguish it from others with a similar configuration.
Priority	Use the spinner control to set a VRRP priority setting from 1 - 254. The controller or service platform uses the defined setting as criteria in selection of a virtual router master. The higher the value, the greater the likelihood of this virtual router ID being selected as the master.
Virtual IP Addresses	Provide up to eight IP addresses representing the Ethernet switches, routers, or security appliances defined as virtual router resources.
Advertisement Interval Unit	Select either seconds , milliseconds or centiseconds as the unit used to define VRRP advertisements. After an option is selected, the spinner control becomes enabled for that Advertisement Interval option. The default interval unit is seconds. If you are changing the VRRP group version from 2 to 3, the advertisement interval must be in centiseconds. Use VRRP group version 2 when the advertisement interval is either in seconds or milliseconds.
Advertisement Interval	After an Advertisement Interval Unit is selected, use the spinner control to set the interval the VRRP master sends out advertisements on each of its configured VLANs. The default setting is 1 second.
Preempt	Select this option to ensure a high priority backup router is available to preempt a lower priority backup router resource. The default setting is enabled. When selected, the Preempt Delay option becomes enabled to set the actual delay interval for pre-emption. This setting determines if a node with a higher priority can take over all the Virtual IPs from the nodes with a lower priority.
Preempt Delay	If the Preempt option is selected, use the spinner control to set the delay interval (in seconds) for preemption.
Interface	Select this value to enable or disable VRRP operation and define the VLAN (1 - 4,094) interface where VRRP will be running. These are the interfaces monitored to detect a link failure.

8. Refer to the **Protocol Extension** field to define the following:

Sync Group	Select the option to assign a VRRP sync group to this VRRP ID's group of virtual IP addresses. This triggers VRRP fail over if an advertisement is not received from the virtual masters that are part of this VRRP sync group. This setting is disabled by default.
Network Monitoring: Local Interface	Select wwan1, pppoe1, and VLAN ID(s) as needed to extend VRRP monitoring to these local access point interfaces. Once selected, these interfaces can be assigned an increasing or decreasing level or priority for virtual routing in the VRRP group.

Network Monitoring: Critical Resource	Assign the priority level for the selected local interfaces. Backup virtual routers can increase or decrease their priority in case the critical resources connected to the master router fail, and then transition to the master state themselves. Additionally, the master virtual router can lower its priority if the critical resources connected to it fails, so the backup can transition to the master state. This value can only be set on the backup or master router resource, not both. Options include None , increment-priority and decrement priority .
Network Monitoring: Delta Priority	Use this setting to decrement the configured priority (by the set value) when the monitored interface is down. When critical resource monitoring is enabled, the value is incremented by the setting defined.

- Click **OK** to save the VRRP configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - VRRP Version

To set or override the VRRP Version configuration:

- Select the **Version** tab to define the VRRP version scheme used with the configuration.

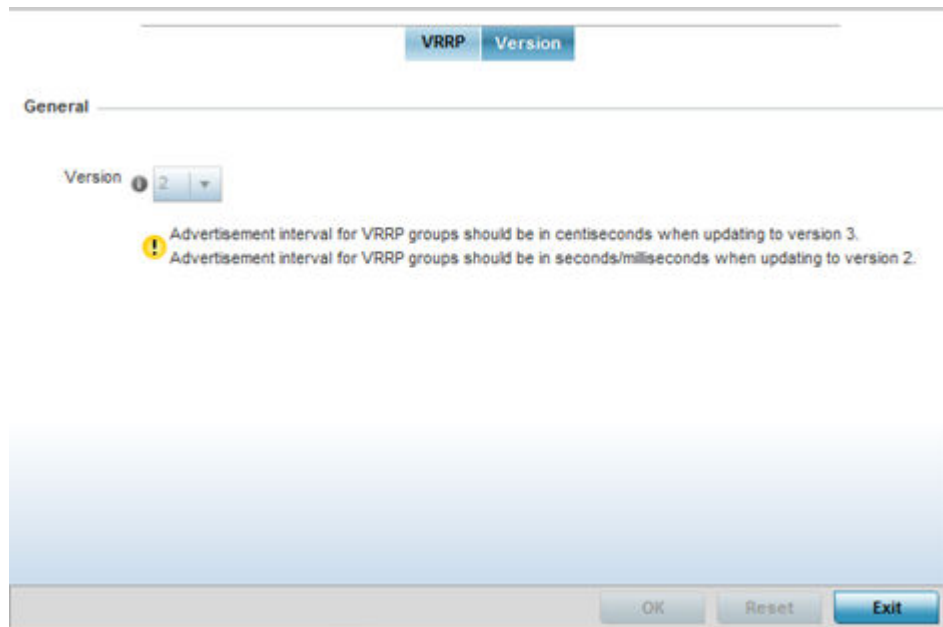


Figure 242: Device Overrides - VRRP Screen - Version Tab

VRRP version 3 (RFC 5798) and 2 (RFC 3768) are selectable to set the router redundancy. Version 3 supports sub-second (centisecond) VRRP failover and support services over virtual IP. For more information on the VRRP protocol specifications (available publicly) refer to <http://www.ietf.org/rfc/rfc3768.txt> (version 2) and <http://www.ietf.org/rfc/rfc5798.txt> (version 3).

- Click **OK** to save the VRRP Version configuration changes.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - List of Critical Resources

Critical resources are device IP addresses or interface destinations on the network inter-operated as critical to the health of the network. The critical resource feature allows for the continuous monitoring of these addresses. A critical resource, if not available, can result in the network suffering performance degradation. A critical resource can be a gateway, a AAA server, a WAN interface, or any hardware or service on which the stability of the network depends. Critical resources are pinged regularly by the access point. If there is a connectivity issue, an event is generated stating a critical resource is unavailable. By default, no critical resource policy is enabled, and one needs to be created and implemented.

Critical resources can be monitored directly through the interfaces on which they are discovered. For example, a critical resource on the same subnet as the access point can be monitored by its IP address. However, a critical resource located on a VLAN must continue to be monitored on that VLAN.

Critical resources configured for access point profiles, can be overridden at the device level. To override an access point profile's critical resource configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- Expand **Profile Overrides**, and select **Critical Resources**.
The **List of Critical Resources** screen displays by default.

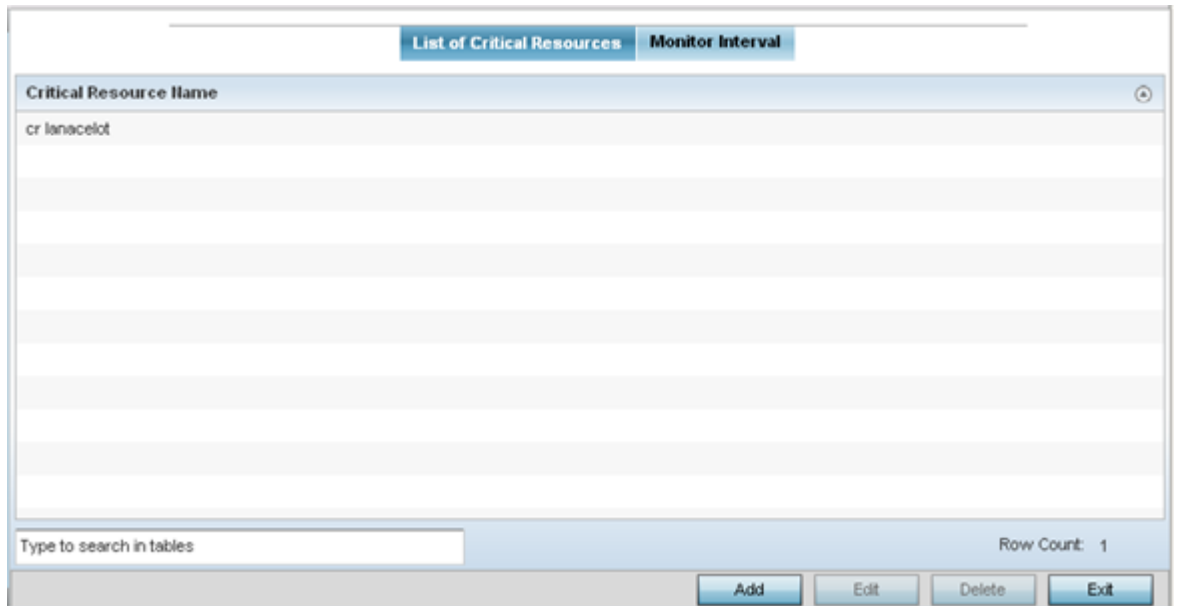


Figure 243: Profile Overrides - Critical Resources - List of Critical Resources Screen

The screen lists the destination IP addresses or interfaces (VLAN, WWAN, or PPPoE) used for critical resource connection. IP addresses can be monitored directly by the access point or controller. However, a VLAN, WWAN, or PPPoE must be monitored behind an interface.

- To set or override an existing critical resource configuration, click **Edit**.
Click **Add** to add a new critical resource and connection method.

Critical Resource Monitoring

Critical Resource Name *

Settings

Use Flows Sync Adoptees

Offline Resource Detection Any

Monitor Criteria cluster-master

Monitor Via IP . . . Interface vlan 1

Resources:

IP Address	Mode	Port	VLAN	
*				

+ Add Row

OK Reset Exit

Figure 244: Critical Resources Screen - Adding a Critical Resource

- If you are adding a new critical resource, in the **Critical Resource Name** field, provide a name up to 32 characters.
- Select **Use Flows** so that the critical resource will monitor using firewall flows for DHCP or DNS instead of ICMP or ARP packets.
This reduces the amount of traffic on the network. This setting is disabled by default.
- Select **Sync Adoptees** to sync adopted devices to state changes with a resource-state change message .
This setting is disabled by default.
- Use the **Offline Resource Detection** drop-down menu to define how critical resource event messages are generated.
Options include **Any** and **All**. If you select **Any**, an event is generated when the state of any single critical resource changes. If you select **All**, an event is generated when the state of all monitored critical resources change.

9. Use the **Monitor Criteria** drop-down menu to select either **rf-domain-manager**, **cluster-master** or **All** as the resource for monitoring critical resources by one device and updating the rest of the devices in a group.

If you select **rf-domain-manager**, the current rf-domain manager performs resource monitoring, and the rest of the devices do not. The RF-domain-manager updates any state changes to the rest of the devices in the RF Domain.

With the **cluster-master** option, the cluster master performs resource monitoring and updates the cluster members with state changes.

With a controller-managed RF Domain, set **Monitoring Criteria** to **All** because the controller might not know the VLAN bridged locally by the devices in the RF Domain monitoring DHCP.

10. In the **Monitor Via** field, select the **IP** option to monitor a critical resource directly (within the same subnet) using the provided IP address as a network identifier.
11. In the **Monitor Via** field, select the **Interface** check box to monitor a critical resource using the critical resource's **VLAN**, **WWAN1** or **PPPoE1** interface.

If you select **VLAN**, use the spinner control to define the destination VLAN ID used as the interface for the critical resource.

12. In the **Resources** table, click **+ Add Row** and define the following parameters:

IP Address	Provide the IP address of the critical resource. This is the address used by the access point to ensure the critical resource is available. Up to four addresses can be defined.
Mode	Set the ping mode used when the availability of a critical resource is validated. The options are: <ul style="list-style-type: none"> • arp-only – Use only the ARP (<i>Address Resolution Protocol</i>) for pinging the critical resource. ARP is used to resolve hardware addresses when only the network layer address is known. • arp-and-ping – Use both ARP and ICMP (<i>Internet Control Message Protocol</i>) for pinging the critical resource and sending control messages (for example, <i>device not reachable</i> or <i>requested service not available</i>).
Port	Provide the port on which the critical resource is available. Use the spinner control to set the port number.
VLAN	Using the spinner control, define the VLAN on which the critical resource is available.

13. Click **OK** to save the critical resource configuration changes.

Click **Reset** to revert to the last saved configuration.

Critical Resources - Monitor Interval

To override the critical resource monitoring interval configuration:

1. Select the **Monitor Interval** tab.

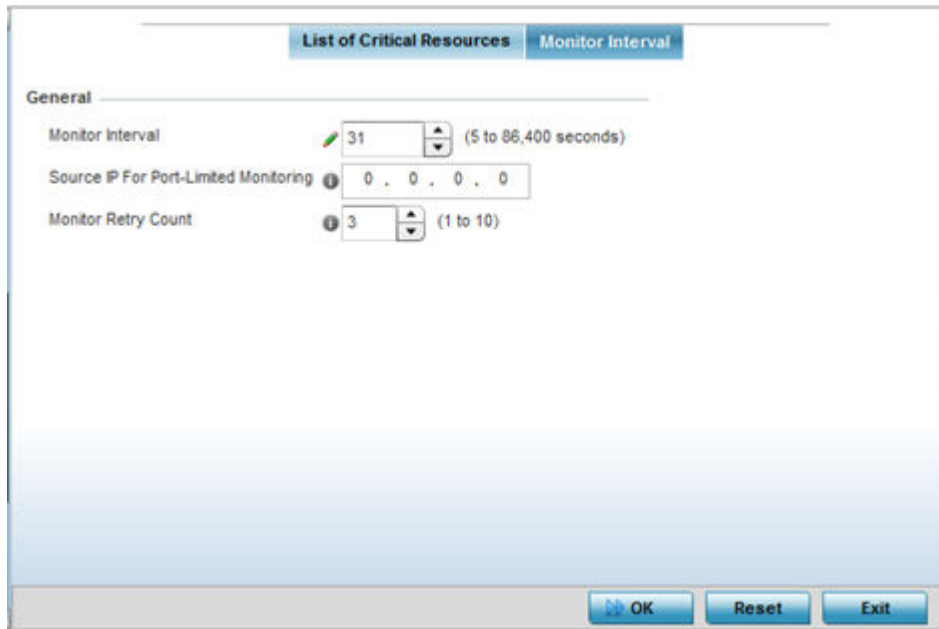


Figure 245: Critical Resources Screen - Monitor Interval Tab

2. Use **Monitor Interval** to set the duration, in seconds, between two successive pings to the critical resource.

Select a duration between 5 and 86,400 seconds. The default setting is 30 seconds.

3. Use **Source IP for Port-Limited Monitoring** to define the IP address used as the source address in ARP packets used to detect a critical resource on a layer 2 interface.

Generally, the source address 0.0.0.0 is used in the ARP packets used to detect critical resources. However, some devices do not support that IP address and drop the ARP packets. Use this field to provide an IP address specifically used for this purpose. The IP address used for Port-Limited Monitoring must be different from the IP address configured on the device.

4. Use **Monitor Retry Count** to set the number of retry connection attempts (1 - 10) permitted before this device connection is defined as down (offline).

The default setting is three connection attempts.

5. Click **OK** to save the and monitor interval changes.

Click **Reset** to revert to the last saved configuration.

Override Services Configuration

Use this option to override the access point's captive portal server configurations at the device level. You can also override the RADIUS server, DHCP server, Bonjour Gateway Forwarding Policy, and ImagoTag Policy settings.

To set or override the access point profile's services configuration:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

- 3. Expand **Profile Overrides** and select **Services**.
The **Services** configuration screen displays.

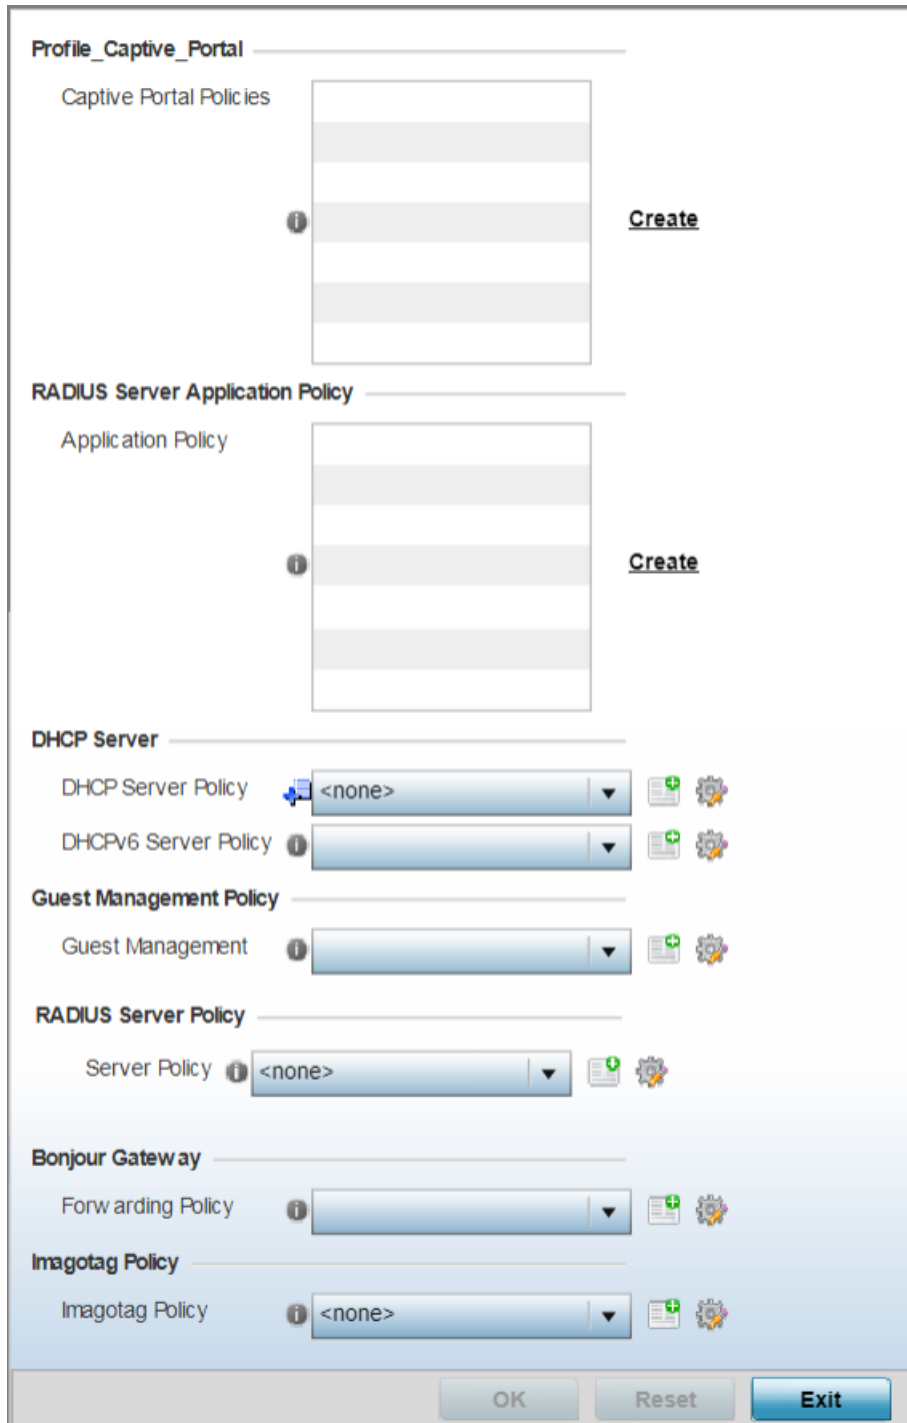


Figure 246: Profile Overrides - Service Configuration Screen

4. Refer to the **Profile_Captive_Portal** field to select or set a guest access configuration (captive portal) for use with this profile.

Captive portals are access policies that guests temporary and restrictive access to the access point managed network.

A captive portal is a browser-based authentication mechanism that forces unauthenticated users to a web page. Captive portals capture and re-direct a wireless user's web-browser session to a captive portal login page where the user must enter valid credentials to access the wireless network. Once logged into the captive portal, additional *Acknowledgment*, *Agreement*, *Welcome*, *No Service* and *Fail* customized pages enhance screen flow and user experience.

5. Select an existing captive portal policy.

If an existing captive portal policy does not meet your requirements, use the **Create** or **Edit** icons to create a new captive portal policy or edit an existing policy. For more information, see [Captive Portal Policy](#) on page 893.

6. In the **RADIUS Server Application Policy** section select an Application policy or Purview Application policy based on the AP type. This will override the selection made in the profile context.

For legacy WiNG 802.11ac APs, running WiNG 7.2.1 OS, select an Application policy from those listed on the screen. To create a new policy click, **Create** and the define the Application policy settings. For information on creating Application policies, see [Application Policy](#) on page 810.

For 802.11ax APs, running WiNG 7.1.2 or later version of the WiNG 7 OS, select a Purview Application policy. To create a new policy click, **Create** and the define the Application policy settings. Refer the WiNG 7.2.1 CLI Reference guide for information on Purview Application Policy.

Use this option to enforce RADIUS *change of authorization* (CoA) in the profile configuration context. when enforced, successfully authenticated users are reauthenticated and the attributes of their active AAA session changed based on the rules defined by the application policy.

7. Use the **DHCP Server Policy** drop-down menu to assign this device a DHCP server policy.

Dynamic Host Configuration Protocol (DHCP) is a client-server protocol that manages IPv4 and IPv6 address assignment to network resources and mobile devices. Central to the DHCP IP address management process is the DHCP server that dynamically assigns IP addresses and related configuration information, such as gateways and subnet masks to the DHCP client.

If an existing DHCP policy does not meet your requirements, click the **Create** icon to create a new policy configuration that can be applied to this profile, or click the **Edit** icon to modify the parameters of an existing DHCP Server policy.

8. Use the **DHCPv6 Server Policy** drop-down menu assign this device a DHCPv6 server policy.

DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes, or other configuration attributes required on an IPv6 network. DHCP in IPv6 works in with IPv6 router discovery. With the proper RA flags, DHCPv6 works like DHCP for IPv4. The central difference is the way a device identifies itself if assigning addresses manually instead of selecting addresses dynamically from a pool.

If an existing DHCP policy for IPv6 does not meet your requirements, use the **Create** or **Edit** icons to create a new DHCPv6 server policy or edit an existing policy.

9. Use the **RADIUS Server Policy** drop-down menu to select an existing RADIUS server policy to use as a user validation security mechanism with this device.

A profile can have its own unique RADIUS server policy to authenticate users and authorize access to the network. A profile's RADIUS policy provides the centralized management of controller or service platform authentication data (usernames and passwords). When an client attempts to associate, an authentication request is sent to the RADIUS server.

If an existing RADIUS policy does not meet your requirements, use the **Create** or **Edit** icons to create a new RADIUS server policy or edit an existing policy.

10. Refer to the **Bonjour Gateway** field to select or set a Bonjour Gateway Forwarding Policy.

Bonjour is Apple's implementation of zero-configuration networking (Zeroconf). Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates devices such as printers, other computers and services that these computers offer over a local network. Bonjour provides a general method to discover services on a LAN. It allows users to set up a network without any configuration. Services such as printers, scanners and filesharing servers can be found using Bonjour. Bonjour only works within a single broadcast domain. However, with special DNS configuration, it can be extended to find services across broadcast domains.

Bonjour Forwarding Policy enables discovery of services on VLANs which are not visible to the device running the Bonjour Gateway. Bonjour forwarding enables forwarding of Bonjour advertisements across VLANs to enable the Bonjour Gateway device to build a list of services and the VLANs where these services are available.

11. Use the **Location Policy** drop-down menu to select and apply a location policy to the controller/virtual controller. The location policy provides the ExtremeLocation server's hostname and ExtremeLocation tenant's location API key. This information is required by the controller to authenticate and authorize with the ExtremeLocation server. Use the **Create** or **Edit** icons to create a new policy or edit an existing policy.

**Note**

For information on creating location policies, see [Location Policy](#) on page 761.

12. Refer to the **Imagotag Policy** field to select or set a Imagotag Policy. Use the drop-down menu to select and apply an Imagotag Policy to the AP's profile. You can use the **Create** to create a new policy or **Edit** icon to edit an existing policy.

For more information on enabling support for SES-imagotag's ESL tags, see [Configure Imagotag Policy](#) on page 957.

13. Select **OK** to save services configuration overrides.

Select **Reset** to revert to the last saved configuration.

Profile Overrides - Management Settings

There are mechanisms to allow or deny management access to the network for separate interfaces and protocols: HTTP, HTTPS, Telnet, SSH, and SNMP.

These management access configurations can be applied strategically to profiles as resource permissions dictate for the profile. Additionally, overrides can be applied to customize a device's management configuration, if deployment requirements change and a device's configuration must be modified from its original device profile configuration.

Additionally, an administrator can define a profile with unique configuration file and device firmware upgrade support. You can override the management configurations of a profile at the device level. To override an access point profile's management settings:

To define or override a profile's management configuration:

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Management**.



Note

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The management **Settings** configuration screen displays.

Message Logging

Enable Message Logging i

Remote Logging Host	Port	🗑️

Facility to Send Log Messages i local7 ▼

Syslog Logging Level i Warning ▼

Console Logging Level i Warning ▼

Buffered Logging Level i Warning ▼

Time to Aggregate Repeated Messages i 0 Seconds ▼ (0 to 60)

Forward Logs to Controller i Error ▼

System Event Messages

Enable System Events i

Enable System Event Forwarding i

Events E-mail Notification

SMTP Server i Hostname ▼

Port of SMTP i (1 to 65,535)

Sender Email Address i

OK Reset Exit

Figure 247: Profile Overrides - Management - Settings Configuration Screen

4. In the **Message Logging** field, select the **Enable Message Logging** checkbox to enable message logging. When enabled, system events are logged to a log file or a syslog server.

Selecting this check box enables the rest of the parameters required to define the profile's logging configuration. This option is disabled by default.

5. In the **Remote Logging Host** table provide the following:

Remote Logging Host	Define numerical (non DNS) IP addresses for up to four external resources where logged system events can be sent by the access point. Select the trash icon as needed to remove an IP address from the list.
Port	Define the ports at which the external resources are reachable.

6. Configure the following **Message Logging** parameters:

Facility to Send Log Messages	Use the drop-down menu to specify the local server (if used) for access point event log transfers.
System Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Console Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Buffered Logging Level	Event severity coincides with the syslog logging level defined for the profile. Assign a numeric identifier to log events based on criticality. Severity levels include: 0 - Emergency, 1 - Alert, 2 - Critical, 3 - Errors, 4 - Warning, 5 - Notice, 6 - Info and 7 - Debug . The default logging level is <i>4 - Warning</i> .
Time to Aggregate Repeated Messages	Define the increment (or interval) system events are logged on behalf of the access point. The shorter the interval, the sooner the event is logged. Either define an interval in seconds (0 - 60) or minutes (0 -1). The default value is 0 seconds.
Forward Logs to Controller	Select this option to define a log level for forwarding event logs to the control. Log levels include Emergency, Alert, Critical, Error, Warning, Notice, Info and Debug. The default logging level is Error.

7. Refer to the **System Event Messages** field to define or override how system messages are logged and forwarded on behalf of the profile.
- Select **Enable System Events** to allow the profile to capture system events and append them to a log file.
It is important to log individual events to discern an overall pattern that may be negatively impacting performance. This setting is enabled by default.
 - Select **Enable System Event Forwarding** to enable the forwarding of system events.
This setting is enabled by default.

8. Refer to the **Events E-mail Notification** field to define or override how system event notification emails are sent.

SMTP Server	Specify either the hostname or IP address of the outgoing SMTP server where notification emails are originated.
Port of SMTP	If a non-standard SMTP port is used on the outgoing SMTP server, select this option and specify a port from 1 - 65,535 for the outgoing SMTP server to use.
Sender E-mail Address	Specify the email address from which notification email is originated. This is the <i>from</i> address on notification email.
Recipient's E-mail Address	Specify one or more email addresses to be the recipients of event email notifications.
Username for SMTP Server	Specify the username of the sender on the outgoing SMTP server. Many SMTP servers require users to authenticate with an username and password before sending email through the server.
Password for SMTP Server	Specify password associated with the username of the sender on the outgoing SMTP server. Many SMTP servers require users to authenticate with an username and password before sending email through the server.

9. In the **Persist Configuration Across Reloads** field, use the **Configure** drop-down menu to define whether the access point saves a configuration received from a Virtual Controller AP to flash memory.

The configuration would then be made available if the this access point reboots and the Virtual Controller AP is not reachable. Options include **Enabled**, **Disabled**, and **Secure**.

10. Refer to the **HTTP Analytics** field to define analytic compression settings and update intervals.

Compress	Select this option to use data compression to when sending updates to the controller.
Update Interval	Set the interval – in minutes, seconds, or hours – when the collected data is sent to the external analytics engine.

11. Click **OK** to save the management setting overrides.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Management Firmware

To override the access point profile's firmware upgrade settings:

1. Select **Management** → **Firmware**.

The management **Firmware** upgrade setting configuration screen displays.

Figure 248: Management - Firmware Upgrade Configuration Screen

2. Refer to the **Auto Install via DHCP Option** field to configure automatic configuration file and firmware updates.

Enable Configuration Update	Select this option to enable automatic configuration file updates for the controller profile from a location external to the access point.
Enable Firmware Update	Select this option to enable automatic firmware updates for this profile from a user-defined remote location. This value is disabled by default.

3. In the **Automatic Adopted Device Firmware Upgrade** section, define an automatic firmware upgrade from a local file.

Enable Controller Update of Device Firmware	Select the access point model to upgrade using its associated Virtual Controller AP's most recent firmware file for that model. This parameter is enabled by default.
Number of Concurrent Upgrades	Use the spinner control to define the maximum number (1 - 128) of adopted APs that can receive a firmware upgrade at the same time. Keep in mind that during a firmware upgrade, the access point is offline and unable to perform its normal client support role until the upgrade process is complete. Note: This is applicable in case the access point is a virtual controller.

4. Click **OK** to save the management firmware overrides.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Management Heartbeat

To override the access point profile's management heartbeat configuration:

1. Select **Managemt → Heartbeat**.

The management **Heartbeat** setting configuration screen displays.

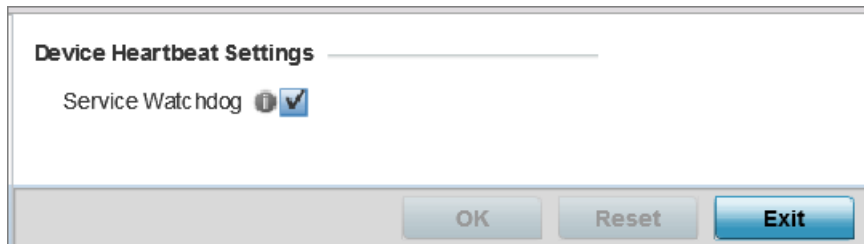


Figure 249: Managemnet - Heartbeat Configuration Screen

2. Select the **Service Watchdog** option to implement heartbeat messages.
This ensures that associated devices are up and running and can interoperate effectively. The Service Watchdog is enabled by default.
3. Click **OK** to save the changes and overrides made to the profile's configuration.
Click **Reset** to revert to the last saved configuration.

Profile Overrides - Meshpoint

An access point can be configured to be a part of a meshed network. A mesh network is one where nodes in the network can communicate with each other where each node can maintain more than one path to its peers. Mesh networking enables users to access broadband applications anywhere, including moving vehicles, by providing robust, reliable, and redundant connectivity to all the members of the network. When one of the nodes in a mesh network becomes unavailable, the other nodes in the network can still communicate with each other directly or through intermediate nodes.

Mesh point is the name given to a device that is a part of a meshed network.

Use the **Mesh Point** screen to configure or override the parameters that set how this device behaves as a part of the mesh network.



Note

WiNG 7.1 release does not provide MeshConnex support on AP505 and Ap510 model access points. This feature will be supported in future releases.

1. Go to **Configuration → Devices → Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** and select **Meshpoint**.

A blue override icon (to the left of a parameter) defines the parameter as having an override applied. To remove an override go to the **Basic Configuration** section of the device and click **Clear Overrides**. This removes all overrides from the device.

The **Meshpoint** main screen displays.

Mesh Connex	Is Root	Preferred Root	Root Selection Method	Preferred Neighbor	Preferred Interface	Monitor Critical Resources	Monitor Primary Port Link	Path Method
+ mesh point 1	✗ No		None		None	✗ No	✗ No	None
+ mesh point 2	✗ No		None		None	✓ Yes	✓ Yes	None

Type to search in tables Row Count: 2

Figure 250: Profile Overrides - Meshpoint - Main Screen

4. To modify or override an existing meshpoint settings, click **Edit**.
 To create a new meshpoint, click **Add**. If necessary, existing configurations can be selected and permanently removed by clicking **Delete**.

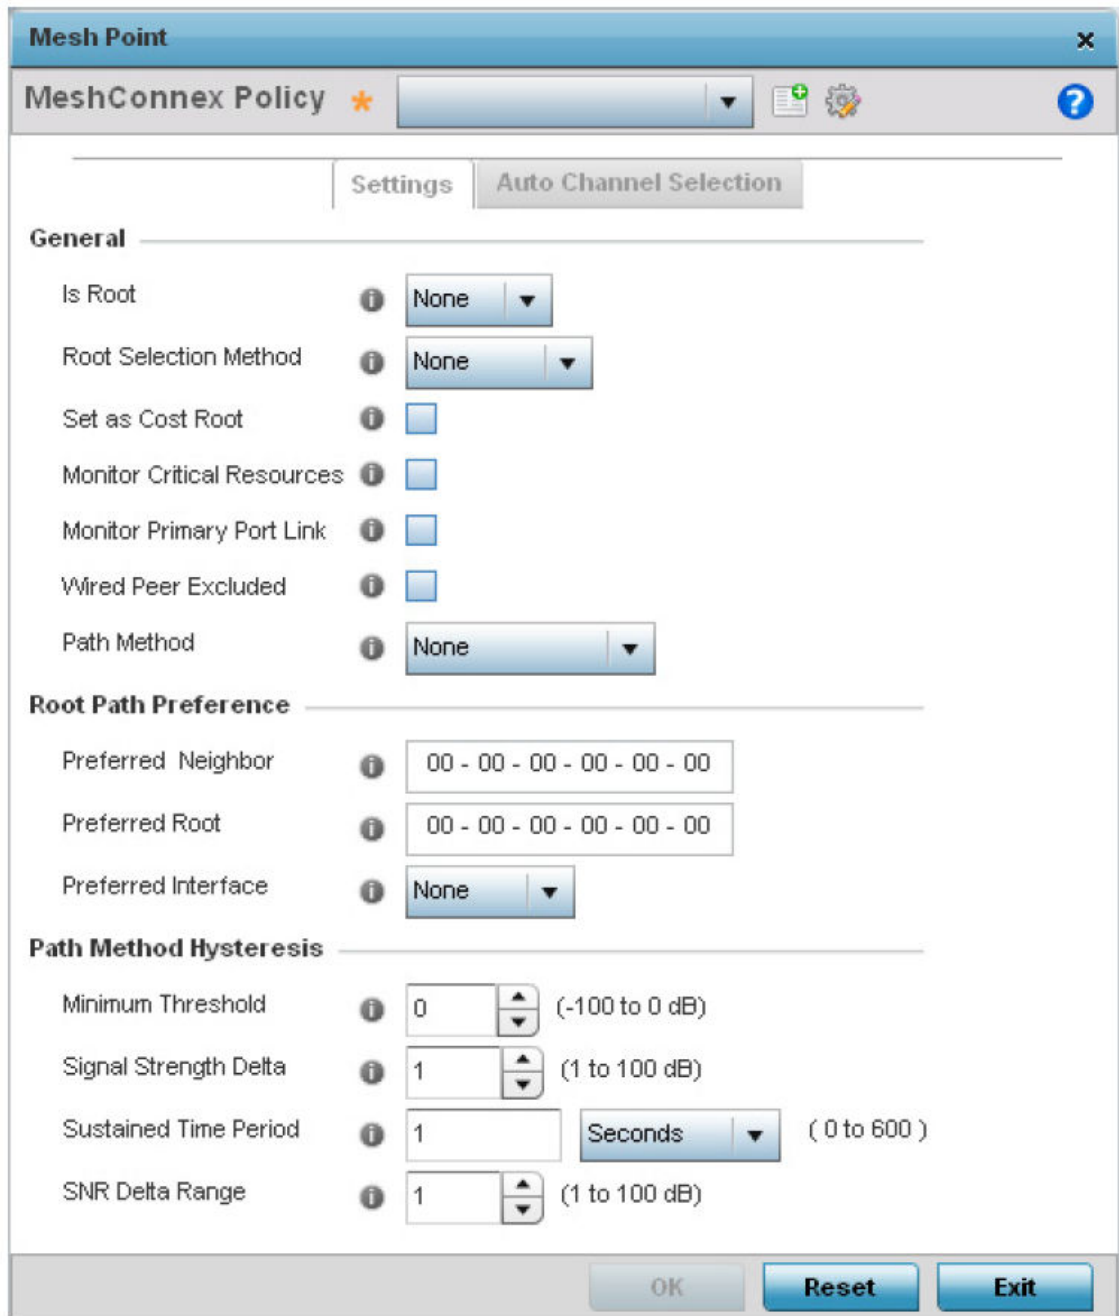


Figure 251: Mesh Point Settings Screen

5. Define the following **General** mesh point settings:

MeshConnex Policy	Provide a name for the Mesh Connex Policy. Use the Create icon to create a new Mesh Connex Policy. To edit an existing policy, select it from the drop-down and click the Edit icon. For more information on creating or editing a Mesh Connex Policy, see MeshConnex Policies on page 730.
Is Root	Select the root behavior of this access point. True means that this access point is a root node for this mesh network, and False means that it is not a root node. A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network.
Root Selection Method	Use the drop-down menu to determine whether this mesh point is the root or non-root mesh point. Select either None (the default setting) or auto-mint .
Set as Cost Root	Select this option to set the mesh point as the cost root for mesh point root selection. This setting is disabled by default.
Monitor Critical Resources	Select this option to enable critical resource monitoring for this mesh point.
Monitor Primary Port Link	Select to enable monitoring of primary port link is enabled for this mesh connex policy. If the primary port link is not present and if the device is a mesh root, it is automatically changed to a non-root device. When the primary port link becomes available again, the non-root device is changed back to a root device.
Path Method	Select the method used for path selection in a mesh network. Available options include: <ul style="list-style-type: none"> • None – No criteria are used in root path selection. • uniform – The path selection method is uniform (two paths are considered equivalent if the average value is the same for these paths). • mobile-snr-leaf – The access point is mounted on a vehicle or a mobile platform (WiNG models only). The path to the route is selected based on the SNR (<i>Signal To Noise Ratio</i>) with the neighbor device. • snr-leaf – The path with the best signal to noise ratio is always selected. • bound-pair – Select this option to bind one mesh point connection at a time. Once established, other mesh point connection requests are denied.

**Note**

An AP 7161 model access point can be deployed as a VMM (*vehicular mounted modem*) to provide wireless network access to a mobile vehicle such as a car or train. A VMM provides layer 2 mobility for connected devices. VMM does not provide layer 3 services, such as IP mobility.

6. Set the following **Root Path Preference** values:

Preferred Neighbor	Specify the MAC address of a preferred neighbor for this mesh point.
Preferred Root	Specify the MAC address of a preferred mesh root for this mesh point.
Preferred Interface	Select the preferred Interface for this mesh point. Select None to set no preferences. The other interface choices are 2.4 GHz and 5 GHz.

7. Set the following **Path Method Hysteresis**:

Minimum Threshold	Enter the minimum value for SNR above which a candidate for the next hop in a dynamic mesh network is considered for selection. This field along with Signal Strength Delta and Sustained Time Period are used to dynamically select the next hop in a dynamic mesh network. The default setting is 0 dB.
Signal Strength Delta	Enter a delta value in dB. A candidate for selection as a next hop in a dynamic mesh network must have a SNR value that is higher than the value configured here. This field along with the Minimum Threshold and Sustained Time Period are used to dynamically select the next hop in a dynamic mesh network. The default setting is 1 dB.
Sustained Time Period	Enter the duration (in seconds or minutes) for the duration a signal must sustain the constraints specified in the Minimum Threshold and Signal Strength Delta path hysteresis values. These values are used to dynamically select the next hop in a dynamic mesh network. The default setting is 1 second.
SNR Delta Range	Select the root selection method hysteresis (from 1 - 100dB) SNR delta range a candidate must sustain. The default setting is 1 dB.

8. Click **OK** to save changes made to the mesh point configuration.

Click **Reset** to revert to the last saved configuration.

ACL - Dynamic Root Selection Configuration

1. Click the **Auto Channel Selection** tab to configure the parameters for the MeshConnex Auto Channel Selection policy.

The screenshot shows the 'Mesh Point' configuration window for 'MeshConnexPolicy_01'. The 'Auto Channel Selection' tab is active, and the 'Dynamic Root Selection' sub-tab is selected. The configuration is split into two sections: 'For 2.4 GHz' and 'For 5.0/4.9 GHz'. Each section contains the following parameters:

- Channel Width:** Set to 'Automatic'.
- Priority Meshpoint:** An unchecked checkbox next to an empty text field.
- Off-channel Duration:** Set to 50 milliseconds (range: 20 to 250 milliseconds).
- Off-channel Scan Frequency:** Set to 6 (range: 1 to 60) with a unit dropdown set to 'Seconds'.
- Meshpoint Root:** A sub-section containing:
 - Sample Count:** Set to 5 (range: 1 to 10 samples).
 - Channel Hold Time:** Set to 30 (range: 0 to 1,440) with a unit dropdown set to 'Minutes'.

At the bottom of the window are 'OK', 'Reset', and 'Exit' buttons.

Figure 252: Mesh Point Auto Channel Selection Screen - Dynamic Root Selection Tab

The **Dynamic Root Selection** screen displays by default. This screen provides configuration for the 2.4 GHz and 5.0/4.9 GHz frequencies.

2. Refer to the following for more information on the **Auto Channel Selection** → **Dynamic Root Selection** screen. These descriptions are common for configuring the 2.4 GHz and 5.0/4.9 GHz frequencies.

Channel Width	Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include: <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz.
Priority Meshpoint	Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.
Off-channel Duration	Set the duration (from 20 - 250 milliseconds) the scan dwells on each channel when performing an off channel scan. The default is 50 milliseconds.
Off-channel Scan Frequency	Set the duration (from 1- 60 seconds) between two consecutive off channel scans. The default is 6 seconds.
Meshpoint Root: Sample Count	Configure the number of scan samples (from 1- 10) for data collection before a mesh channel is selected. The default is 5.
Meshpoint Root: Channel Hold Time	Configure the duration (from 0 - 1440 minutes) to remain on a channel before channel conditions are reassessed for a possible channel change. Set this value to zero (0) to prevent an automatic channel selection from occurring. The default setting is 30 minutes.

3. Click **OK** to save the changes made to the mesh point configuration.

Click **Reset** to revert to the last saved configuration.

ACL - Path Method SNR Configuration

1. Select the **Path Method SNR** tab to configure SNR ratio values when selecting the path to the meshpoint root.

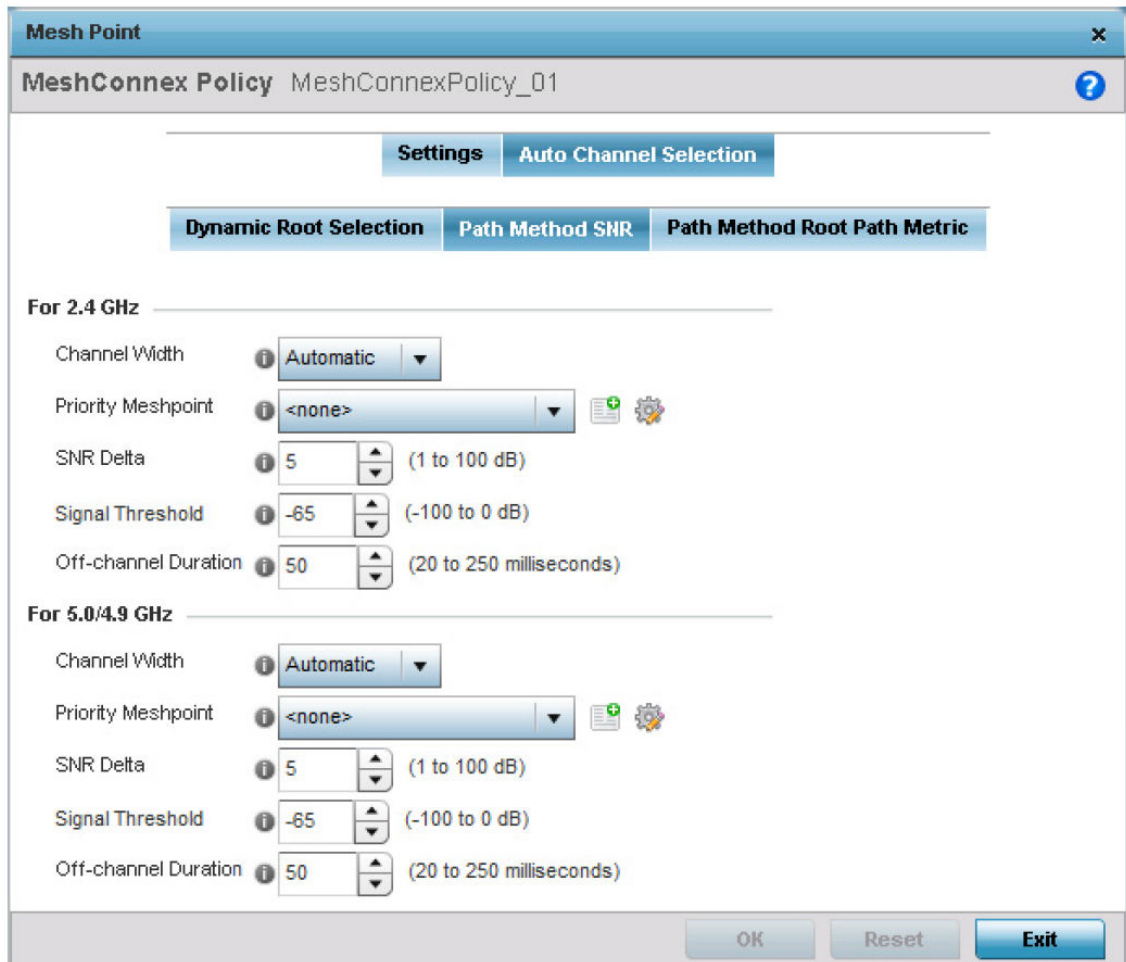


Figure 253: Mesh Point Auto Channel Selection Screen - Path Method SNR Tab

2. Set the following for both **2.4 GHz** and **5.0/4.9 GHz**:

Channel Width	Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include: <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz.
Priority Meshpoint	Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.

SNR Delta	<p>Set the SNR ratio delta (from 1 - 100 dB) for mesh path selections.</p> <p>When path selection occurs, the defined value is utilized for selecting the optimal path. A better candidate, on a different channel, must have a signal strength that exceeds this delta value when compared to the signal strength of the next hop in the mesh network. The default setting is 5 dB.</p>
SNR Threshold	<p>Set the SNR threshold for mesh path selections (from -100 to 0 dB).</p> <p>If the signal strength of the next mesh hop falls below this set value, a scan is triggered to select a better next hop. the default setting is -65 dB.</p>
Off-channel Duration	<p>Set the duration (from 20 - 250 milliseconds) the scan dwells on each channel when performing an off channel scan. The default is 50 milliseconds.</p>

3. Click **OK** to save the changes made to the mesh point configuration.
Click **Reset** to revert to the last saved configuration.

ACL - Path Method Root Path Metric Configuration

1. Select the **Path Method Root Path Metric** tab to calculate root path metrics.

The screenshot displays the 'Mesh Point' configuration window for 'Mesh Connex Policy MCP_Office_01'. The 'Auto Channel Selection' tab is active, and the 'Path Method Root Path Metric' sub-tab is selected. The configuration is for a 2.4 GHz network. The 'Meshpoint' section includes: Channel Width set to 'Automatic'; Priority Meshpoint set to '<none>'; Path Minimum set to 1000 (range 100 to 20,000); Path Metric Threshold set to 1500 (range 800 to 65,535); and Tolerance Period set to 1 Minute (range 1 to 10). The 'Meshpoint Root' section includes: Sample Count set to 5 (range 1 to 10 samples); Off-channel Duration set to 50 (range 20 to 250 milliseconds); Channel Switch Delta set to 10 (range 5 to 35 dBm); and Off-channel Scan Frequency set to 6 (range 1 to 60). The interface includes 'OK', 'Reset', and 'Exit' buttons at the bottom.

Figure 254: Mesh Point Auto Channel Selection Screen - Path Method Root Path Metric Tab

2. Set the following **Path Method Root Path Metric** values.

These descriptions apply to both the **2.4 GHz** and **5.0/4.9 GHz** frequencies.

Channel Width	Set the channel width the meshpoint's automatic channel scan assigns to the selected radio. Available options include: <ul style="list-style-type: none"> • Automatic – The channel width is calculated automatically. This is the default value. • 20 MHz – Sets the width between adjacent channels as 20 MHz. • 40 MHz – Sets the width between adjacent channels as 40 MHz.
Priority Meshpoint	Configure the meshpoint monitored for automatic channel scans. This is the meshpoint assigned priority over other available mesh points. When configured, a mesh connection is established with this mesh point. If not configured, a meshpoint is automatically selected.
Meshpoint: Path Minimum	Set the minimum path metric (from 100 - 20,000) for establishing mesh connections. The default setting is 1000.
Meshpoint: Path Metric Threshold	Configure a minimum threshold (from 800 - 65535) for triggering an automatic channel selection for meshpoint selection. The default is 1500.
Meshpoint: Tolerance Period	Configure the duration to wait before triggering an automatic channel selection for the next hop. The default is 1 minute.
Meshpoint Root: Sample Count	Set the number of scans (from 1- 10) for data collection before a mesh point root is selected. The default is 5.
Meshpoint Root: Off-channel Duration	Configure the duration (from 20 - 250 milliseconds) that the scan dwells on each channel when performing an off-channel scan. The default is 50 milliseconds.
Meshpoint Root: Channel Switch Delta	Configure the delta (from 5 - 35 dBm) that triggers a meshpoint root automatic channel selection when exceeded. The default is 10 dBm.
Meshpoint Root: Off-channel Scan Frequency	Configure the duration (from 1 -60 seconds) between two consecutive off channel scans for meshpoint root. The default is 6 seconds.
Meshpoint Root: Channel Hold Time	Set the minimum duration (from 0 - 1440 minutes) to remain on a selected channel before channel conditions are reassessed for a possible channel change. Set this value to zero (0) to prevent an automatic channel selection from occurring. The default is 30 minutes.

3. Click **OK** to save the changes made to the mesh point configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Advanced Client Load Balancing

Advanced device settings sets or overrides a profile's MiNT and/or NAS configurations.

MiNT secures controller profile communications at the transport layer. Using MiNT, a device can be configured to only communicate with other authorized (MiNT enabled) devices. access point managed devices can communicate with each other

exclusively over a MINT security domain. Keys can also be generated externally using any application (like openssl). These keys must be present on the managed device managing the domain for key signing to be integrated with the UI. A MAP device that needs to communicate with another first negotiates a security context with that device. The security context contains the transient keys used for encryption and authentication. A secure network requires users to know about certificates and PKI. However, administrators do not need to define security parameters for access points to be adopted (secure WISPe being an exception, but that isn't a commonly used feature). Also, users can replace any device on the network or move devices around and they continue to work. Default security parameters for MiNT are such that these scenarios continue to function as expected, with minimal user intervention required only when a new network is deployed.

The profile database on the RADIUS server consists of user profiles for each connected NAS (*Network Access Server*) port. Each profile is matched to a username representing a physical port. When users are authorized, it queries the user profile database using a username representative of the physical NAS port making the connection.

To set or override the client load balancing configuration at the device level:

1. Go to **Configuration** → **Devices** → **Device Overrides**.

The **Device Overrides** screen displays. This screen lists devices within the managed network.

2. Select an access point.

The selected access point's configuration menu displays.

3. Expand **Profile Overrides** → **Advanced**.

The **Client Load Balancing** screen displays by default.

The screenshot shows the 'Client Load Balancing' configuration screen. It features the following sections and options:

- Group ID:** A text input field for defining a group ID.
- Select a Band Control Strategy:** A dropdown menu currently set to 'Prefer 5 GHz'.
- Neighbor Selection Strategies:** Three checkboxes, all of which are checked:
 - Using probes from common clients
 - Using notifications from roamed clients
 - Using smart-rf neighbor detection
- Band Load Balancing:** A checkbox for 'Balance Band Loads by Ratio', which is currently unchecked.
- Channel Load Balancing:** Two checkboxes:
 - 'Balance 2.4 GHz Channel Loads' (unchecked)
 - 'Balance 5 GHz Channel Loads' (unchecked)
- AP Load Balancing:** A checkbox for 'Balance AP Loads', which is currently unchecked.
- Advanced Parameters:** A section header for further configuration options.

At the bottom of the screen, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 255: Profile Overrides - Advanced - Client Load Balancing Configuration Screen

4. Use the **Group ID** field to define a group ID of up to 32 characters.
5. Use the **SBC strategy** drop-down menu to determine how band steering is conducted.

Options include **Prefer 5GHz**, **Prefer 2.4 GHz** and **distribute-by-ratio**. The default value is **Prefer 5GHz**.

6. Set the following **Neighbor Selection Strategies**:

Using Probes from common clients	Select this option to select neighbors (peer devices) using probes from common clients. This option is enabled by default.
Using Notifications from roamed clients	Select this option to select neighbors (peer devices) using roam notifications from roamed clients. This option is enabled by default.
Using smart-rf neighbor detection	Select this option to select neighbors (peer devices) using the Smart RF neighbor detection algorithm. This option is enabled by default.

7. Enable **Balance Band Loads by Ratio**, in the **Band Load Balancing** field, to distribute an access point's client traffic load across both the 2.4 and 5 GHz radio bands.

8. Configure the following **Channel Load Balancing** settings:

Balance 2.4 GHz Channel Loads	Select this option to balance the access point's 2.4GHz radio load across the channels supported in the country of deployment. This can prevent congestion on the 2.4GHz radio if a channel is overutilized.
Balance 5 GHz Channel Loads	Select this option to balance the access point's 5GHz radio load across the channels supported in the country of deployment. This can prevent congestion on the 5GHz radio if a channel is overutilized.

9. Enable **Balance AP Loads**, in the **AP Load Balancing** field, to distribute client traffic evenly among neighbor access points.

AP loads are balanced by assigning a ratio to both the 2.4 and 5GHz bands.

Balancing radio load by band ratio allows an administrator to assign a greater weight to radio traffic on either the 2.4 or 5 GHz band.

10. Set the following **Advanced** parameters:

Max. 2.4 GHz Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 2.4 GHz load between APs load and load on this access point. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing load balances between access points.
Min. Value to Trigger 2.4 Ghz Channel Balancing	Define a threshold (between 1 - 100) the access point uses (when exceeded) to initiate access point load balancing in the 2.4GHz radio band. Set this value higher when wishing to keep radio traffic within the current access point. The default is 70%.
Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughput	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio throughput in the overall access point load calculation. Increase this value if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.

Max. 5 GHz Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 5 GHz load between APs load and load on this access point. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing load balances between access points.
Min. Value to Trigger 5 Ghz Channel Balancing	Define a threshold (between 1 - 100) the access point uses (when exceeded) to initiate access point load balancing in the 5GHz radio band. Set this value higher when wishing to keep radio traffic within the current access point. The default is 70%
Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughput	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio throughput in the overall access point load calculation. Assign this value higher if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.

11. Define the following **AP Load Balancing** settings:

Min. Value to Trigger Load Balancing	Set the access point radio threshold value (from 0 - 100%) used to initiate load balancing across other access point radios. When this radio load exceeds the defined threshold, load balancing is initiated. The default is 70%.
Max. AP Load Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing access point radio load balances. The default setting is 1%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing access point radio load balances.
Weightage given to Client Count	Assign a weight (between 0 - 100) the access point uses to prioritize 2.4 and 5 GHz radio client count in the overall 2.4 and 5GHz radio load calculation. Increase this value if this access point is intended to support numerous clients and their throughput is interpreted as secondary to maintaining client association. The default setting is 90%.
Weightage given to Throughout	Assign a weight (between 0 - 100) the access point uses to prioritize throughput in the access point load calculation. Increase this value if throughput and radio performance are considered mission critical within the access point managed network. The default setting is 10%.

12. Set the following **Band Control** values:

Max. Band Load Difference Considered Equal	Set a value (between 0 - 100) considered an adequate discrepancy when comparing 2.4 and 5GHz radio band load balances on this access point. The default setting is 10%. Thus, using a default setting of 1% means 1% is considered inconsequential when comparing 2.4 and 5 GHz load balances on this access point.
Band Ratio (2.4 GHz)	Set a loading ratio (between 0 - 10) the access point 2.4 GHz radio uses in respect to radio traffic load on the 2.4 GHz band. This allows an administrator to weight client traffic load if wishing to prioritize client traffic load on the 2.4 GHz radio band. The higher this value is set, the greater the weight assigned to radio traffic load on the 2.4 GHz radio band. The default setting is 1.
Band Ratio (5 GHz)	Set a loading ratio (between 0 - 10) the access point 5 GHz radio uses in respect to radio traffic load on the 5 GHz band. This allows an administrator to weight client traffic load if wishing to prioritize client traffic load on the 5 GHz radio band. The higher this value is set, the greater the weight assigned to radio traffic load on the 5 GHz radio band. The default setting is 1.
5 GHz load at which both bands enabled	Set a load percentage (between 0 - 100) that enables the other band (2.4 GHz) to share load with the current band.
2.4 GHz load at which both bands enabled	Set a load percentage (between 0 - 100) that enables the other band (5 GHz) to share load with the current band.

13. Define the following **Neighbor Selection** settings:

Minimal signal strength for common clients	Set the minimum signal strength require to learn about neighbors from clients that are common with the neighbor access point.
Minimum number of clients seen	Set the minimum number of common clients seen before the neighbor is learned.
Max confirmed neighbors	Set the maximum number of learned neighbors stored at this device.
Minimum signal strength for smart-rf neighbors	Set the minimum signal strength of neighbor devices that are learned through Smart RF before being recognized as neighbors.

14. Click **OK** to save the changes made to the profile's advanced client load balance configuration

Click **Reset** to revert to the last saved configuration.

Profile Overrides - Advanced MiNT Protocol

To set or override MiNT Protocol related configurations at the device level:

1. Select **MiNT Protocol**.

The MiNT **Settings** tab displays by default.

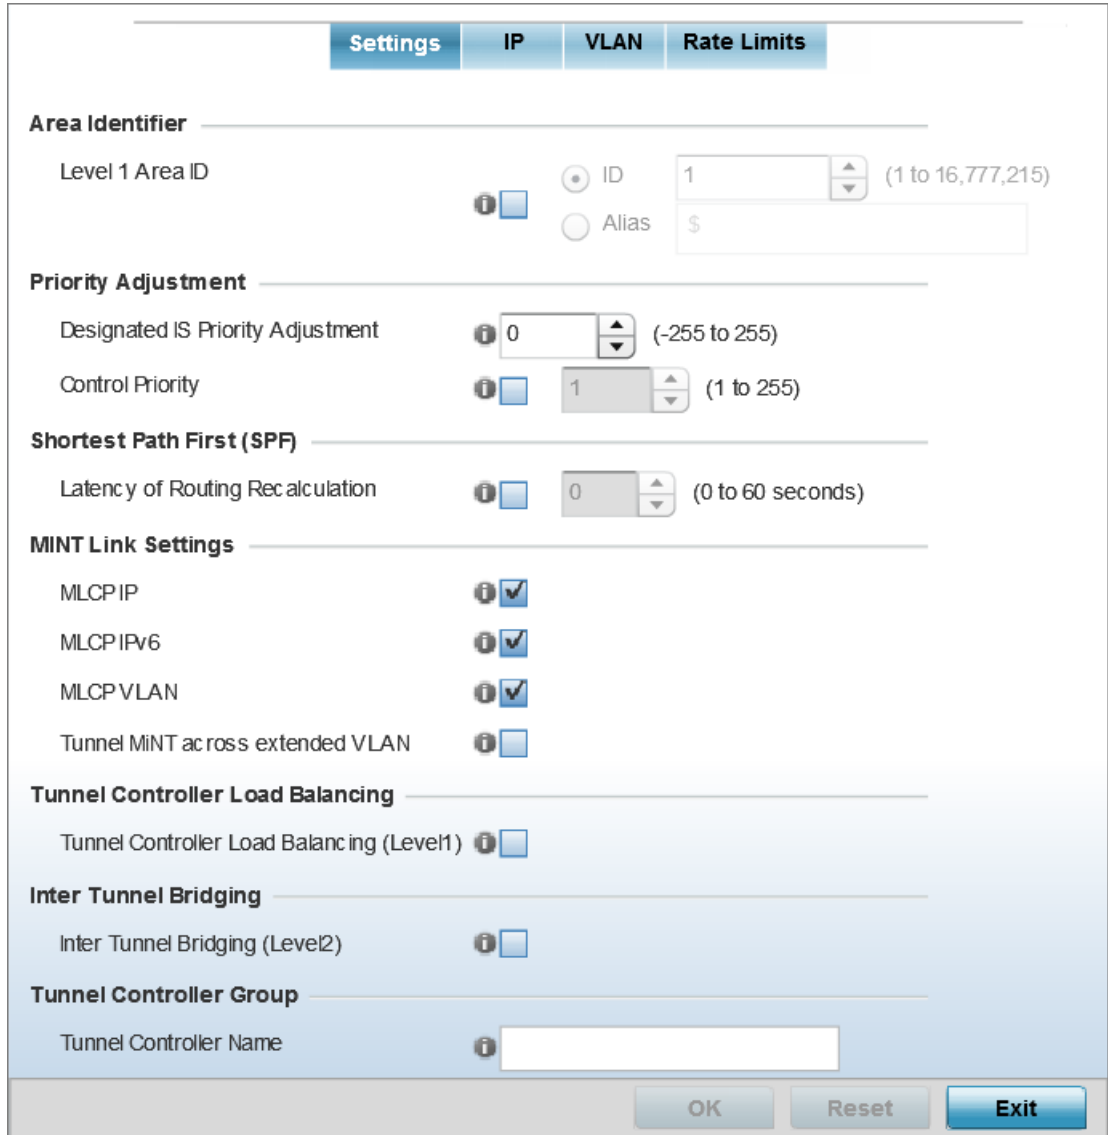


Figure 256: Profile Overrides - Advanced MiNT Settings Configuration Screen

2. In the **Area Identifier** field, define or override the Level 1 and Level 2 Area IDs used by the profile's MiNT configuration.

Level 1 Area ID	Select this option to enable a spinner control for setting the Level 1 Area ID from 1 - 16,777,215. The default value is disabled. Alternatively, provide an alias by selecting the Alias option and adding the alias name to this field.
-----------------	--

3. In the **Priority Adjustment** field, set or override the following settings:

Designated IS Priority Adjustment	Use the spinner control to set a Designated IS Priority Adjustment setting from -255 - +255. This is the value added to the base level DIS priority to influence the DIS (<i>Designated IS</i>) election. A value of +1 or greater increases DISiness. The default setting is 0.
Control Priority	Select to set the priority of this device with respect to others, within the network, in being selected as the Level 2 router. Higher the value, higher is the chances of the device of becoming the Level 2 router. Note: This option is disabled by default.

4. In the **Shortest Path First (SPF)** field, select the **Latency of Routing Recalculation** option to enable the spinner control used for defining or overriding a latency period (from 0 - 60 seconds).

The option is disabled by default.

5. Define or override the following **MiNT Link Settings**:

MLCP IP	Select this option to enable MLCP (<i>MiNT Link Creation Protocol</i>) by IP Address. MLCP is used to create a UDP/IP link from the device to a neighbor. The neighboring device can be another AP. Note: This option is enabled by default.
MLCP IPv6	Select this option to enable MLCP by IPv6 Address. MLCP by IPv6 is used to create one UDP/IP link from the device to a neighbor. The neighboring device does not need to be a virtual controller; it can be an standalone access point. Note: This option is enabled by default.
MLCP VLAN	Select this option to enable MiNT MLCP by VLAN. MLCP is used to create one VLAN link from the device to a neighbor. The neighboring device can be another AP. Note: This option is enabled by default.
Tunnel MiNT across extended VLAN	Select this option to tunnel MiNT protocol packets across an extended VLAN. Note: This option is disabled by default.

6. Select **Tunnel Controller Load Balancing (Level 1)** to enable load balancing through a WLAN tunnel controller.

This option is disabled by default.

7. In the **Inter Tunnel Bridging** field, select **Inter Tunnel Bridging (Level 2)** to enable inter tunnel bridging.

This option is disabled by default.

8. In the **Tunnel Controller Group** field, enter a 64-character maximum Tunnel Controller Name for this tunneled-WLAN-controller interface.
9. In the **Preferred Tunnel Controller Group** field,
 - a. Enter the group name of clustered tunnel controllers in the **Preferred Tunnel Controller Name** field.
 - b. Click the **Re-elect Tunnel Controller for this AP** button to re-elect a different tunnel controller.

This is specific for this access point only.

10. Click **OK** to save the changes made to the MiNT protocol configuration.

Click **Reset** to revert to the last saved configuration.

11. Select the **IP** tab to display the link IP network address information shared by the devices managed by the MiNT configuration.

The IP tab displays the IP address, Routing Level, Listening Link, Port, Forced Link, Link Cost, Hello Packet Interval, Adjacency Hold Time, IPSec Secure, and IPSec GW information that managed devices use to communicate securely with each other.

The MiNT **IP** configuration screen displays.

	Settings	IP	VLAN	Rate Limits						
	IP	Routing Level	Listening Link	Port	Forced Link	Link Cost	Hello Packet Interval	Adjacency Hold Time	IPSec Secure	IPSec GW
+	192.168.	1	0	20	X	100	15s	46s	X	

Type to search in tables Row Count: 1

Figure 257: Profile Overrides - Advanced - MiNT - IP Configuration Screen

12. Click **Add** to create a new link IP configuration or **Edit** to override an existing configuration.

The add/edit MiNT IP configuration window displays.

Figure 258: Profile Overrides - Advanced - MiNT - Add IP MiNT Link

13. Set the following **Link IP** parameters for the MiNT network address configuration:

IP	Define or override the IP address used by peer access points for interoperation when supporting the MiNT protocol.
Port	To specify a custom port for MiNT links, select this option and use the spinner control to define or override the port number from 1 - 65,535.
Routing Level	Define or override a routing level of either 1 or 2.
Listening Link	Specify a listening link of either 0 or 1. UDP/IP links can be created by configuring a matching pair of links, one on each end point. However, that is error prone and does not scale. So UDP/IP links can also listen (in the TCP sense), and dynamically create connected UDP/IP links when contacted.
Forced Link	Select this option to specify the MiNT link as a forced link. Note: This setting is disabled by default.

Link Cost	Define or override a link cost from 1 - 10,000. The default value is 100.
Hello Packet Interval	Set or override an interval in either seconds (1 - 120) or minutes (1 - 2) for the transmission of hello packets. Note: The default interval is 15 seconds.
Adjacency Hold Time	Set or override a hold time interval in either seconds (2 - 600) or minutes (1 - 10) for the transmission of hello packets. The default interval is 46 seconds.
IPSec Secure	Select this option to use a secure link for IPSec traffic. This setting is disabled by default. When this option is enabled, both the header and the traffic payload are encrypted.
IPSec GW	Define either an IP address or hostname for the IPSec gateway.

14. Click **OK** to save the changes made to the MiNT protocol network address configuration.

Click **Reset** to revert to the last saved configuration.

15. Select the **VLAN** tab to display the link IP VLAN information shared by the access points managed by the MiNT configuration.

The MiNT **VLAN** configuration screen displays. The VLAN tab displays the VLAN, Routing Level, Link Cost, Hello Packet Interval, and Adjacency Hold Time managed devices use to communicate securely with each other.

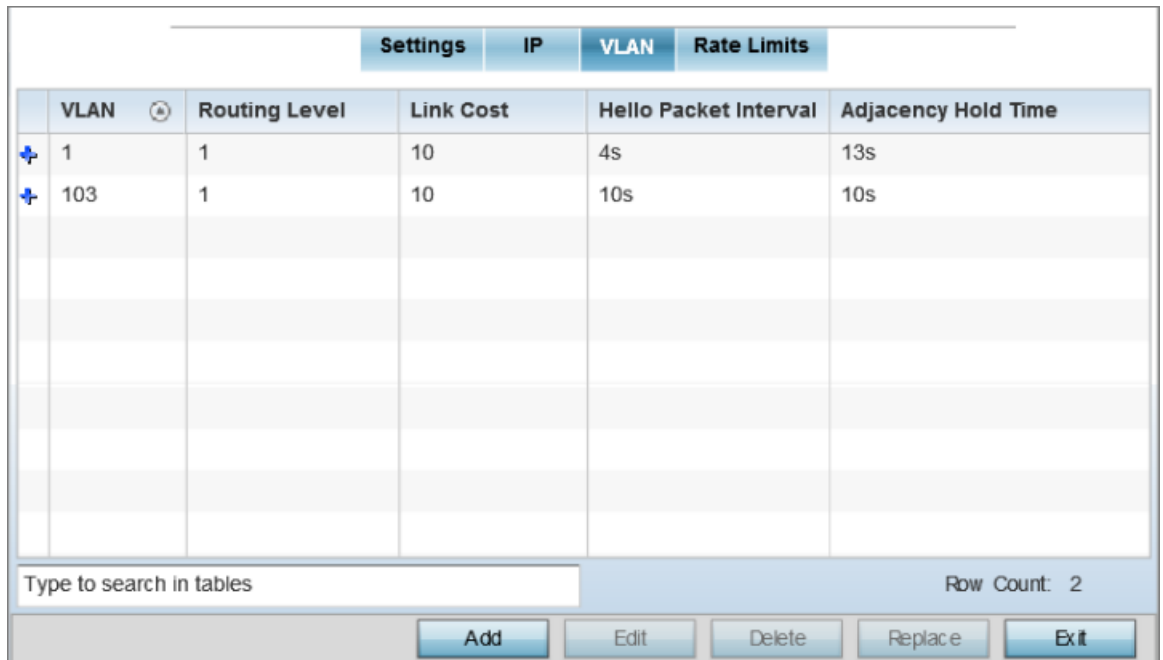


Figure 259: Profile Overrides - Advanced - MiNT - VLAN Tab

- Click **Add** to create a new VLAN link configuration or **Edit** to override an existing configuration.



Note

If creating a mesh link between two access points in *Standalone AP mode*, you will need to ensure a VLAN is available to provide the necessary MiNT link between the two Standalone APs.

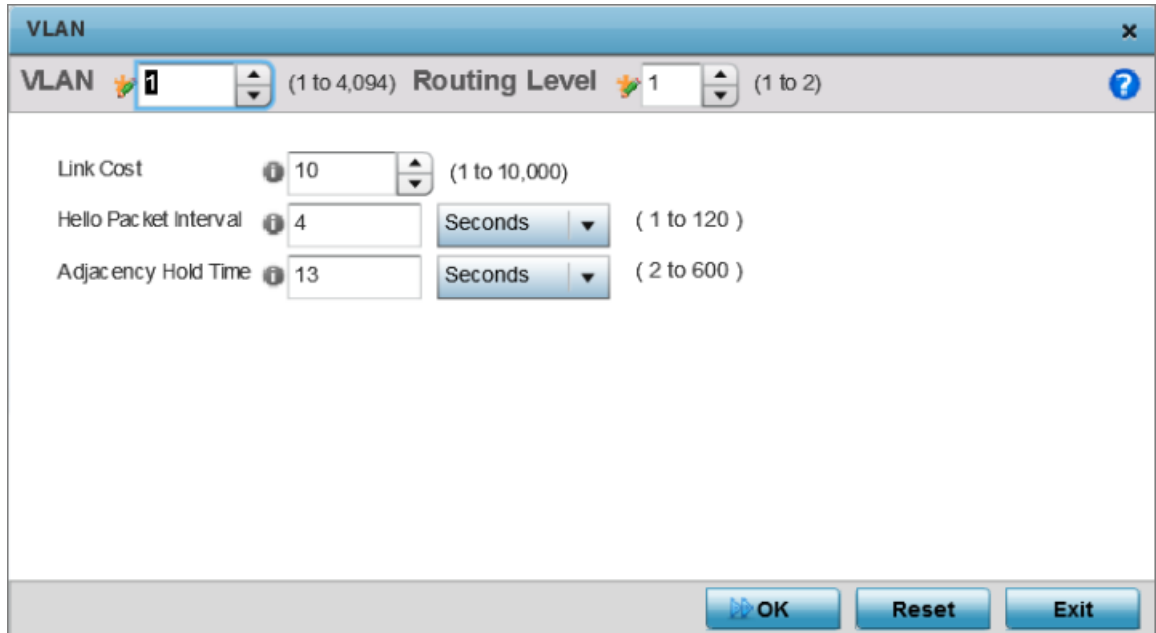


Figure 260: Advanced Profile Overrides MiNT Screen - Add/Edit VLAN

- Set the following **VLAN** parameters for the MiNT configuration:

VLAN	Define a VLAN ID from 1 - 4094 used by peer controllers for interoperation when supporting the MiNT protocol.
Routing Level	Define or override a routing level of either 1 or 2.
Link Cost	Use the spinner control to define or override a link cost from 1 - 10,000. Note: The default value is 10.

Hello Packet Interval	Set or override an interval in either seconds (1 - 120) or minutes (1 - 2) for the transmission of hello packets. Note: The default interval is 4 seconds.
Adjacency Hold Time	Set or override a hold time interval in either seconds (2 - 600) or minutes (1 - 10) for the transmission of hello packets. Note: p

18. Click **OK** to save the changes made to the MiNT protocol configuration.

Click **Reset** to revert to the last saved configuration.

19. Select the **Rate Limits** tab.

The Rate Limits tab displays the Protocol, Level, Link Type, VLAN, IP, Port, Rate, Max Burst Size, Background, Best-Effort, Video, and Voice rate limiting parameters for each of the configured device.

Excessive traffic can cause performance issues on an extended VLAN. Excessive traffic can be caused by numerous sources including network loops, faulty devices, or malicious software such as a worm or virus that has infected on one or more devices. Rate limiting reduces the maximum rate sent or received per wireless client. It prevents any single user from overwhelming the wireless network. It can also provide differential service for service providers. Uplink and downlink rate limits are usually configured on a RADIUS server using vendor specific attributes. Rate limits are extracted from the RADIUS server’s response. When such attributes are not present, the settings defined on the controller, service platform, or access point are applied. An administrator can set separate QoS rate limit configurations for data types transmitted from the network (upstream) and data transmitted from a wireless clients back to associated radios (downstream). Existing rate limit configurations display along with their virtual connection protocols and data traffic QoS customizations.

Protocol	Level	Link Type	VLAN	IP	Port	Rate	Max Burst Size	Background	Best-Effort	Video	Voice

Type to search in tables Row Count: 0

Figure 261: Advanced Profile Overrides MiNT Screen - Rate Limits Tab

20. Click **Add** to create a new MiNT rate limiting configuration or **Edit** to override an existing configuration.

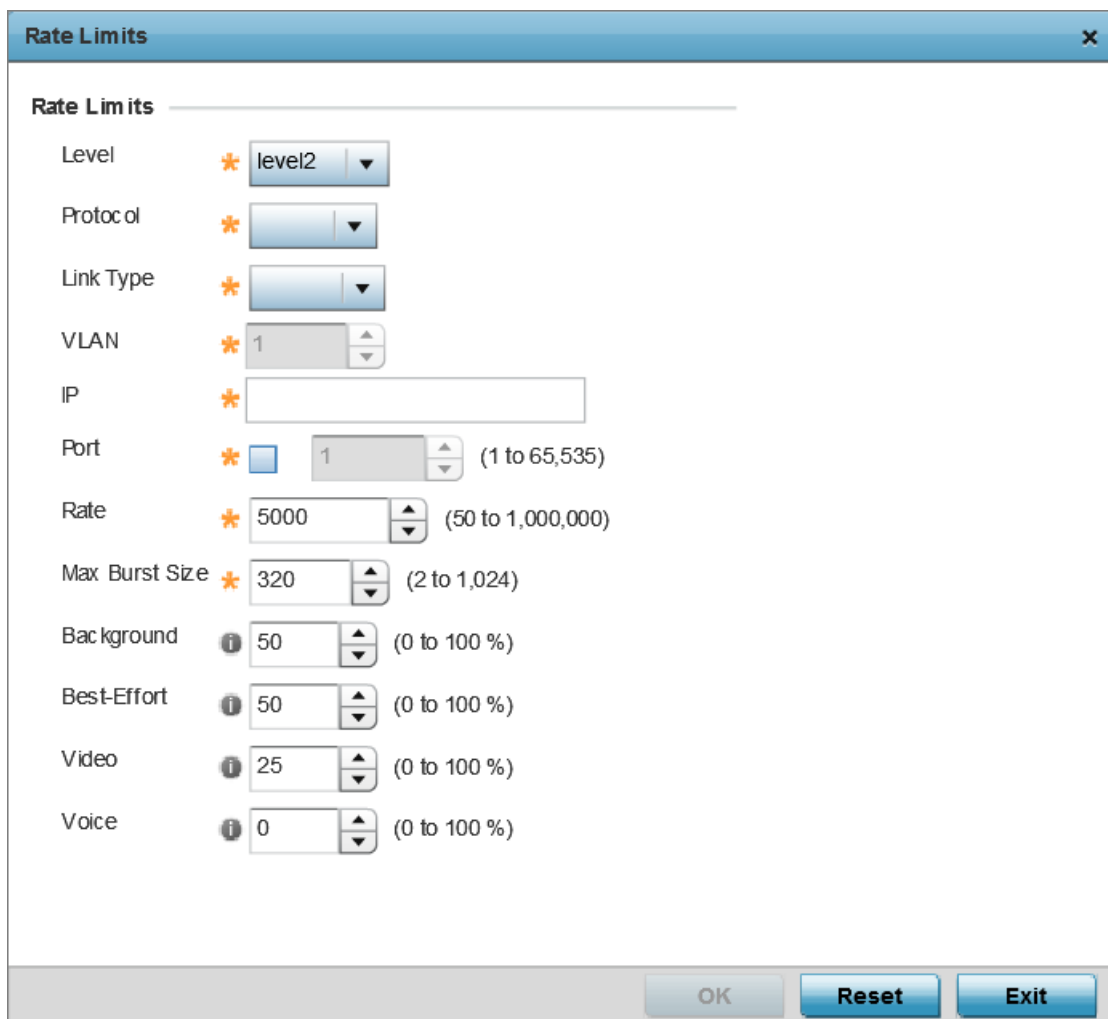


Figure 262: Advanced Profile Overrides MiNT Screen - Add/Edit Rate Limit

21. Set the following **Rate Limits** to complete the MiNT configuration:

Level	Select level2 to apply rate limiting for all links on level 2.
Protocol	Select either mlcp or link as this configuration's rate limit protocol. MLCP creates a UDP/IP link from the device to a neighbor. The neighboring device does not need to be a controller or service platform; it can be an access point with a path to the controller or service platform. Select link to rate limit using statically configured MiNT links.
Link Type	Select either vlan , to configure a rate limit configuration on a specific virtual LAN, or ip to set rate limits on a static IP address/port configuration.
VLAN	When Protocol is set to link and Link Type is set to vlan , select a virtual LAN from 1 - 4094 to refine the rate limiting configuration to a specific VLAN.

IP	When Protocol is set to link and Link Type is set to VLAN , enter the IP address as the network target for rate limiting.
Port	When Protocol is set to link and Link Type is set to VLAN , set the virtual port (1 - 65,535) used for rate limiting traffic.
Rate	Define a rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. Note: The default setting is 5000 kbps.
Max Burst Size	Set the maximum burst size from 0 - 1024 kb. The smaller the burst, the less likely the upstream packet transmission will result in congestion for the WLAN's client destinations. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should add a 10% margin (minimally) to allow for traffic bursts. Note: The default burst size is 320 kbytes.
Background	Configure the random early detection threshold (as a percentage) for low priority background traffic. Background packets are dropped and a log message generated if the rate exceeds the set value. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). Note: The default setting is 50%.
Best-Effort	Configure the random early detection threshold (as a percentage) for low priority best effort traffic. Best-effort packets are dropped and a log message generated if the rate exceeds the set value. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). Note: The default setting is 50%.

Video	<p>Configure the random early detection threshold (as a percentage) for high priority video traffic. Video packets are dropped and a log message generated if the rate exceeds the set value. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis).</p> <p>Note: The default setting is 25%.</p>
Voice	<p>Configure the random early detection threshold (as a percentage) for high priority voice traffic. Voice packets are dropped and a log message generated if the rate exceeds the set value. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis).</p> <p>Note: The default setting is 0%.</p>

22. Click **OK** to save the changes made to the MiNT protocol rate limit configuration.

Click **Reset** to revert to the last saved configuration.

Profile Overrides Antenna-id (AP510e/AP560h Only)

This section describes the antenna-id configuration for the AP510e and AP560h model access points.

AP510e Antenna-ID Configuration

The ExtremeMobility AP510e access point is a dual-radio access point, with eight, external Wi-Fi antennas grouped into: *group-1* (antenna ports 1 to 4) and *group-2* (antenna ports 5 to 8). To enable the AP510e radio, it is mandatory to configure the *antenna-id*. The antenna-id parameter specifies the antenna type used in the group-1 and/or group-2 antenna ports.

The AP510e antenna-id configuration depends on the software mode applied on the access point radios. The following table lists the antenna configurations required for the three different software modes supported on the AP510e model access point:

Table 8: AP510e: External Antenna Configurations

	Antenna Ports	
Software Mode	2.4/5G Antennas: 1, 2, 3, 4	5G Antennas: 5, 6, 7, 8

Table 8: AP510e: External Antenna Configurations (continued)

<p>Mode 1</p> <ul style="list-style-type: none"> • Radio 1: 2.4 GHz WLAN • Radio 2: 5 GHz WLAN <p>Note: This mode requires only <i>FOUR, dual-band</i> antennas connected to ANT sockets 1 to 4.</p>	Dual-band 2.4 GHz/5 GHz	None
<p>Mode 2</p> <ul style="list-style-type: none"> • Radio 1: 2.4/5 GHz Sensor • Radio 2: 5 GHz WLAN <p>Note: This mode requires <i>FOUR, dual-band</i> antennas connected to ANT sockets 1 to 4, and <i>FOUR, 5G-band</i> antennas connected to ANT sockets 5 to 8.</p>	Dual-band 2.4 GHz/5 GHz	None
<p>Mode 3</p> <ul style="list-style-type: none"> • Radio 1: 5 GHz WLAN • Radio 2: 5 GHz WLAN <p>Note: Requires <i>FOUR, 5G-band</i> antennas connected to ANT sockets 1 to 4, and <i>FOUR, 5G-band</i> antennas connected to ANT sockets 5 to 8.</p>	5 GHz	5 GHz

AP560h Antenna-ID Configuration

The ExtremeMobility AP560h access point is a dual-radio access point, with eight, internal Wi-Fi antennas, supporting two internal antenna modes: *30 degree* and *70 degree*.

To enable the AP560h radio, it is mandatory to configure the internal antenna mode as '30 degree' or '70 degree'.

To override the AP510e/ap560h access point profile's antenna-id configuration at the device level:

1. Go to **Configuration** → **Devices** → **Device Overrides**.
2. Select the target AP510e/AP560h device.

The selected device's configuration menu is displayed.

- Expand the **Advanced** menu and select **Antenna**.

General
Power
Adoption
Wired 802.1x
▶ Interface
▶ Network
▶ Security
VRRP
Critical Resources
Services
▶ Management
▼ Advanced
 Client Load Balancing
 MINT Protocol
 Antenna
 Miscellaneous

Antenna External Parameters

Antenna ID Group 1 Option ⓘ Default ▼

Antenna ID Group 2 Option ⓘ Default ▼

Antenna Internal Parameters

Antenna ID Internal Option ⓘ Default ▼

Figure 263: Advanced Device Overrides - Antenna Screen

AP510e antenna-id configuration

- In the **Antenna External Parameters** section, configure the following AP510e antenna-id settings:



Note

This configuration is needed only if the target device-type is AP510e.

Antenna ID Group 1 Option	<p>Use this drop-down menu to configure the antenna type used in the antenna ports 1 to 4 (group-1 antennas). The antenna types supported for 'group-1' and 'group-2' antenna ports are: ai-dq04360s, ml-2452-apa2-01, ml-2452-apa2-02, ml-2452-hpa5-036, ml-2452-hpag4a6-01, ml-2452-hpag5a8-01, ml-2452-pna5-01r, ml-2452-pna7-01r, ml-2452-pta4m4-036, ml-2452-sec6m4-036, ws-ai-dq05120.</p> <p>The default setting is 'Default', that is <i>no</i> antenna-type associated with the group-1 antenna ports and the radio is disabled.</p> <p>Note: Group-1 antenna configuration is required for all three software modes.</p> <p>Note: Refer to the table above for the supported software modes and the corresponding antenna configurations required.</p>
Antenna ID Group 2 Option	<p>Use this drop-down menu to configure the antenna type used in the antenna ports 5 to 8 (group-2 antennas). The antenna types supported for 'group-1' and 'group-2' antenna ports are: ai-dq04360s, ml-2452-apa2-01, ml-2452-apa2-02, ml-2452-hpa5-036, ml-2452-hpag4a6-01, ml-2452-hpag5a8-01, ml-2452-pna5-01r, ml-2452-pna7-01r, ml-2452-pta4m4-036, ml-2452-sec6m4-036, ws-ai-dq05120.</p> <p>The default setting is 'Default', that is <i>no</i> antenna-type associated with the group-2 antenna ports and the radio is disabled.</p> <p>Note: Group-2 antenna configuration is ONLY required for software mode 3.</p> <p>Note: Refer to the table above for the supported software modes and the corresponding antenna configurations required.</p>

AP560h antenna-id configuration

- In the **Antenna Internal Parameters** section, configure the following AP560h antenna-id settings:



Note

This option is visible only if the device-type selected is AP560. This configuration is needed only if the target device-type is AP560h

Antenna ID Internal Option	<p>Use this drop-down menu to configure the internal antenna mode. The options are:</p> <ul style="list-style-type: none"> • Default - This is the default setting. In the default setting, <i>no</i> antenna-mode is associated and the radio is disabled. Select either on of the following options to turn-on the radio. • internal-560h-30 - Sets the mode as 30 degree. • internal-560h-70 - Sets the mode as 70 degree.
----------------------------	--

6. Click **OK** to save the changes made to the profile's advanced antenna configuration. Click **Reset** to revert to the last saved configuration.

Profile Overrides - Advanced Miscellaneous

To define or override the access point profile's miscellaneous settings:

1. Select the **Advanced** → **Miscellaneous** menu item. The miscellaneous settings configuration screen displays.

Device RADIUS Authentication Parameters

NAS-Identifier Attribute

NAS-Port-Id Attribute

LEDs (Light Emitting Diodes)

Turn on LEDs
 Off (0)
 On (1)
 Flash Pattern (2)

MeshConnex Parameters

Root Path Monitor Interval
 (1 to 65,535)

RADIUS Dynamic Authorization

Additional Port
 (1 to 65,535) (Cisco ISE:1700)

Figure 264: Profile Overrides - Advanced - Miscellaneous Configuration Screen

2. In the **Device RADIUS Authentication Parameters** field,
 - a. Set a **NAS-Identifier Attribute** up to 253 characters in length.

This is the RADIUS NAS-Identifier attribute that typically identifies where a RADIUS message originates.
 - a. Set a **NAS-Port-Id Attribute** up to 253 characters in length.

This is the RADIUS NAS port ID attribute which identifies the device port where a RADIUS message originates.
3. In the **LEDs (Light Emitting Diodes)** field, select one of the following **Turn on LEDs** option: to enable the LEDs on an access point.
 - Off (0) - select to disable LEDs on the access point.
 - On (1) - select to enable LEDs on an access point.

**Note**

This is the default setting.

- Flash Pattern (2) - to enable the access point to blink in a manner different from its operational LED behavior.

**Note**

Enabling this option allows an administrator to validate that the access point has received its configuration from its managing controller during staging. In the staging process, the administrator adopts the access point to a staging controller to get an initial configuration before the access point is deployed at its intended location. Once the access point has received its initial configuration, its LED blinks in a unique pattern to indicate the initial configuration is complete.

4. In the **MeshConnex** field, use the **Root Path Monitor Interval** option to configure the interval (from 1 - 65,535 seconds) to monitor the path to the root node. This value specifies how often to check if the mesh point is up or down.
5. In the **RADIUS Dynamic Authorization** section, set the **Additional Port** value to enable a Cisco (*Identity Services Engine*) AAA (*Authentication, Authorization and Accounting*) server to dynamically authenticate a client.

Set this value to 1700. The allowed port range is 1 to 65,535.

When a client device requests access to the network, the Cisco ISE RADIUS server presents the client with a URL where a device's compliance is checked for definition file validity (this form of file validity checking is called *posture*). The check verifies, for example, that the device's anti-virus or anti-spyware software is valid. If the device complies, it is allowed access to the network.

6. Click **OK** to save the changes made to the profile's advanced miscellaneous configuration.

Click **Reset** to revert to the last saved configuration.

Password Encryption

Use this option to enable password encryption, and configure the passphrase used to encrypt passwords. When enabled, passwords configured within the system are displayed encrypted and not as clear text.

To enable password encryption:

1. Go to **Configuration → Devices**.
2. Select **Password Encryption**.

The **Password Encryption** screen displays.

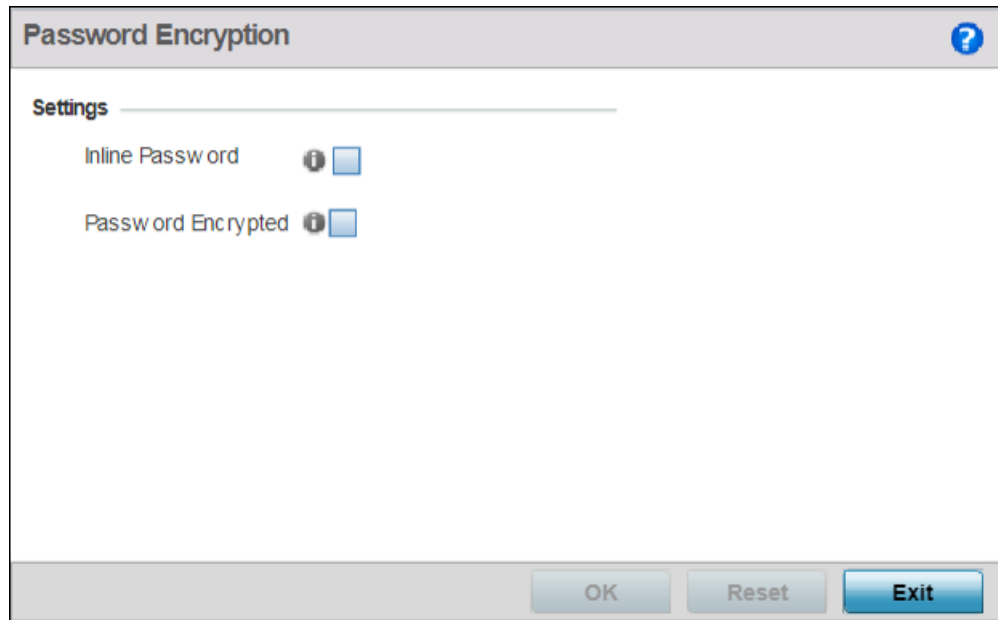


Figure 265: Configuration - Devices - Password Encryption Screen

3. Select the **Inline Password** option.

The inline password option moves the encryption key to the startup-config file. By default, the encryption key is not stored in the startup-config file.

4. Select the **Password Encrypted** option.
The **New Password** field is enabled.

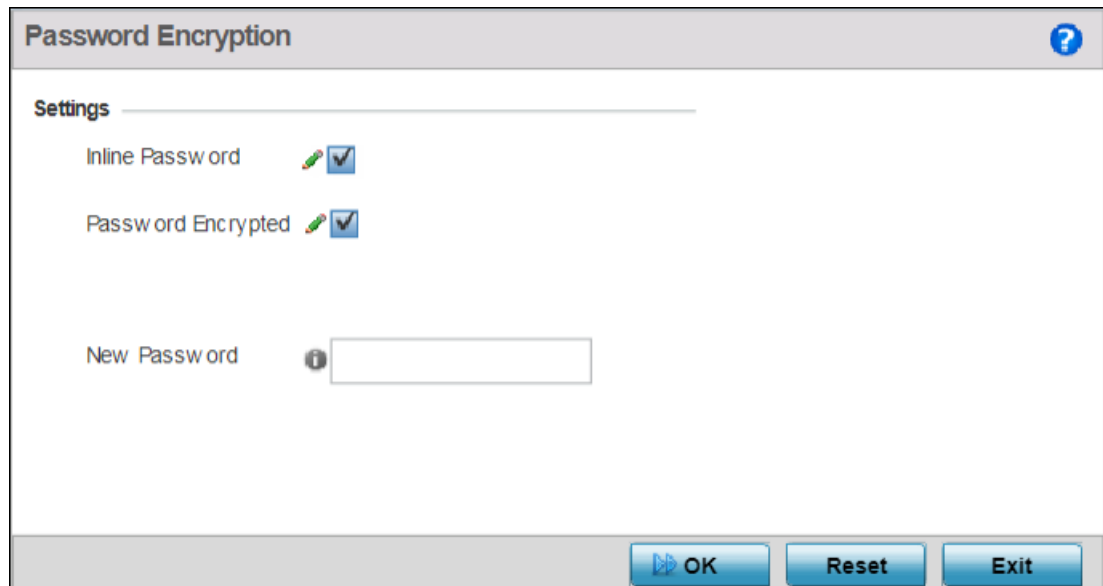
The image shows a configuration window titled "Password Encryption" with a question mark icon in the top right corner. Under the "Settings" section, there are three options: "Inline Password" with a pencil icon and a checked checkbox, "Password Encrypted" with a pencil icon and a checked checkbox, and "New Password" with an information icon and an empty text input field. At the bottom of the window, there are three buttons: "OK", "Reset", and "Exit".

Figure 266: Configuration - Devices - Password Encryption - New Password Field

5. Enter the secret phrase in the **New Password** field. The system uses this phrase to encrypt passwords.
6. Click **OK** to save password encryption configuration.
Click **Reset** to revert to the last saved configuration.

Auto-Provisioning Policies

Wireless devices can adopt and manage other wireless devices. For example, a wireless controller can adopt any number of access points. When a device is adopted, the device configuration is provisioned by the adopting device. Since multiple configuration policies are supported, an adopting device needs to define which configuration policies are used for a given adoptee. Auto-provisioning policies determine which configuration policies are applied to an adoptee based its properties. For example, a configuration policy could be assigned based on MAC address, IP address, CDP snoop strings, etc.

Once created an auto-provisioning policy can be used in profiles or device configuration objects. An Auto-Provisioning policy contains a set of ordered by precedence rules that either *deny* or *allow* adoption based on potential adoptee properties and a catch-all variable that determines if the adoption should be allowed when none of the rules is matched. All rules (both deny and allow) are evaluated sequentially starting with the rule with the lowest precedence. The evaluation stops as soon as a rule has been matched, no attempt is made to find a better match further down in the set.

The evaluation is performed using various matching criteria. The matching criteria supported include:

MAC	Matches the MAC address of a device attempting to be adopted. Either a single MAC address or a range of MAC addresses can be specified.
VLAN	Matches when adoption over a Layer 2 link matches the VLAN ID of an adoption request. Note that this is a VLAN ID as seen by the recipient of the request, in case of multiple hops over different VLANs this may differ from VLAN ID set by the sender. A single VLAN ID is specified in the rule. This rule is ignored for adoption attempts over Layer 3.
IP Address	Matches when adoption is using a Layer 3 link matches the source IP address of an adoption request. In case of NAT the IP address may be different from what the sender has used. A single IP, IP range or IP/mask is specified in the rule. This rule is ignored for adoption attempts over Layer 2.
Serial Number	Matches exact serial number (case insensitive).
Model	Matches exact model name (case insensitive).
DHCP Option	Matches the value found in DHCP vendor option 191 (case insensitive). DHCP vendor option 191 can be setup to communicate various configuration parameters to an AP. The value of the option in a string in the form of tag=value separated by a semicolon, e.g.'tag1=value1;tag2=value2;tag3=value3'. The access point includes the value of tag 'rf-domain', if present. This value is matched against the auto provisioning policy.
FQDN	Matches a substring to the FQDN of a device (case insensitive).
CDP	Matches a substring in a list of CDP snoop strings (case insensitive). For example, if an Access Point snooped 3 devices: controller1.extremenetworks.com, controller2.extremenetworks.com and controller3.extremenetworks.com, 'controller1', 'extremenetworks', 'extremenetworks.com', are examples of the substrings that will match.
LLDP	Matches a substring in a list of LLDP snoop strings (case insensitive). For example, if an Access Point snooped 3 devices: controller1.extremenetworks.com, controller2.extremenetworks.com and controller3.extremenetworks.com, 'controller1', 'extremenetworks', 'extremenetworks.com', are substrings match.

Auto provisioning is the process by which access points discover controllers or service platforms available in the network, pick the most desirable controller or service platform, establish an association, optionally obtain an image upgrade and obtain its configuration.

At adoption, an access point solicits and receives multiple adoption responses from controllers and service platforms available on the network. These adoption responses contain loading policy information the Access Point uses to select the optimum controller or service platform for adoption. By default, an auto provisioning policy generally distributes AP adoption evenly amongst available controller or service

platform. Modify existing adoption policies or create a new one as needed to meet the adoption requirements of a device and their assigned profile.



Note

A device configuration does not need to be present for an auto provisioning policy to take effect. Once adopted, and the device's configuration is defined and applied by the controller or service platform, the auto provisioning policy mapping does not have impact on subsequent adoptions by the same device.

Use an auto provisioning policy to define rules for adoption of access point by wireless controllers.

To review existing Auto-provisioning policies:

1. Select **Configuration** → **Devices** → **Auto-Provisioning Policy**.

The **Auto-Provisioning** screen displays by default. This screen displays existing auto-provisioning policies. Review these policies to determine whether a new policy requires creation, or an existing policy requires edit or deletion.

Auto-Provisioning Policy	Adopt if No Rules Match	Rerun Policy Rules Every Time AP Adopted
mypolicy	✔	✔

Type to search in tables Row Count: 1

Figure 267: Auto-Provisioning Policy Screen

2. Review the following parameters:

Auto-Provisioning Policy	Lists the name of each policy when it was created. It cannot be modified as part of the Auto-provisioning policy's edit process.
Adopt if No Rules Match	Displays whether this policy will adopt devices if no adoption rules apply. Doubleclick within this column to launch the edit screen where rules can be defined for device adoption. This feature is disabled by default
Rerun Policy Rules Every Time AP Adopted	Displays whether this policy will be run every time an AP is adopted. Double-click within this column to launch the edit screen where this option can be modified. This feature is disabled by default.

Configuring Auto-Provisioning Policy Rules

Auto-provisioning policies can be created or modified as unique deployment requirements dictate changes in the number of access point radios within a specific radio coverage area.

You can add a new auto-provisioning policy or edit an existing policy configuration.

1. Click **Add** to add a new policy. To modify an existing policy, select the policy from those listed on the screen and click **Edit**. To delete or replace an existing policy, select the policy and click **Delete** or **Replace** respectively.

If you are modifying an existing policy, the selected policy's **Rules** tab displays by default. Review the existing rules to determine whether a rule can be used as is, requires edit or whether new rules need to be defined.

The add new auto-provisioning policy screen displays.

Rule Precedence	Operation	Device Type	Match Type	Argument 1	Argument 2	RF Domain Name / Alias Name	Profile Name

Figure 268: Auto-Provisioning Policy - Add New Policy Screen

2. If adding a new auto-provisioning policy, provide a name in the **Auto-Provisioning Policy** field, and click **Continue**.



Note

The name must not exceed 32 characters.

The auto-provisioning policy configuration screen, with the **Rules** tab selected by default, displays.

3. If modifying an existing policy, the selected policy's **Rules** window displays by default.

Rule Precedence	Operation	Device Type	Match Type	Argument 1	Argument 2	RF Domain Name	Profile Name
1	allow	ap71xx	MAC Address	00-23-68-0F-40-6	00-23-68-0F-40-68	rf 2	RF2 Profile
3	allow	ap6511	Any			rf 3	default-ap6511
4	allow	ap6532	MAC Address	00-23-68-31-18-E	00-23-68-31-18-E0	rf 2	default-ap6532
5	allow	ap6532	MAC Address	5C-0E-8B-34-50-3	5C-0E-8B-34-50-3C	rf 1	default-ap6532
6	allow	ap6521	MAC Address	5C-0E-8B-08-73-A	5C-0E-8B-08-73-A	rf 4US	default-ap6521
7	allow	ap71xx	MAC Address	00-23-68-8F-C3-9	00-23-68-8F-C3-94	rf US	default-ap71xx
8	allow	ap71xx	MAC Address	5C-0E-8B-0E-3C-4	5C-0E-8B-0E-3C-4C	rf 2	RF2 Profile
9	allow	ap6532	MAC Address	5C-0E-8B-34-78-5	5C-0E-8B-34-78-54	mesh domain	meshpoint-profile
10	allow	ap6532	MAC Address	5C-0E-8B-34-71-1	5C-0E-8B-34-71-1E	mesh domain	meshpoint-profile
11	allow	ap6532	MAC Address	5C-0E-8B-33-B4-2	5C-0E-8B-33-B4-2E	mesh domain	meshpoint-profile
12	allow	ap71xx	MAC Address	00-15-70-88-93-6	00-15-70-88-93-64	rf 2	RF2 Profile

Figure 269: Auto-provisioning Policy - Rules Tab

4. Review the following data to determine whether a rule can be used as is, requires edit or whether new rules need to be defined:

Rule Precedence	Displays the precedence (sequence) the adoption policies rules are applied. Rules with the lowest precedence receive the highest priority. This value is set (from 1 - 1000) when adding a new auto-provisioning policy rule configuration.
Operation	Lists the operation taken upon receiving an adoption request from an access point: The following operations are available: <ul style="list-style-type: none"> allow – Allows the normal provisioning of connected access points upon request. deny – Denies (prohibits) the provisioning of connected access point upon request. redirect – When selected, an access point seeks a steering controller (upon adoption request), that will forward the network credentials of a designated controller resource that initiates the provisioning process. upgrade – Conducts the provisioning of requesting access points from this controller resource.
Device Type	Sets the access point model for which this policy applies. Adoption rules are specific to the selected model.

Match Type	<p>Lists the matching criteria used in the policy. This is like a filter and further refines the APs that can be adopted. The options are:</p> <ul style="list-style-type: none"> • MAC Address – The filter type is a MAC Address of the selected access point model. • IP Address – The filter type is the IP address of the selected access point model. • VLAN – The filter type is a VLAN. • Serial Number – The filter type is the serial number of the selected access point model. • Model Number – The filter type is the access point model number. • DHCP Option – The filter type is the DHCP option value of the selected access point model.
Argument 1	The number of arguments vary on the Match Type. This column lists the first argument value. This value is not set as part of the rule creation or edit process.
Argument 2	The number of arguments vary on the Match Type. This column lists the second argument value. This value is not set as part of the rule creation or edit process.
RF Domain Name	Sets the name of the RF Domain to which the device is adopted automatically. Select the Create icon to define a new RF Domain configuration or select the Edit icon to revise an existing configuration.
Profile Name	Defines the name of the profile used when the auto-provisioning policy is applied to a device. Select the Create icon to define a new profile configuration or the Edit icon to revise an existing configuration.

5. Click **Add** to add a new rule. The **Rule** screen displays.

Rule [Close]

Rule Precedence 1 (1 to 10,000) [Help]

Auto-Provisioning Policy

Operation

Operation * [Dropdown]

Device

Device Type * [Dropdown]

Match Parameters

Match Type [Dropdown]

Map to Profile / RF Domain

RF Domain Name / Alias Name [i] <none> [Dropdown]

Profile Name * [Dropdown]

Map to Area

Area [i] [Text Field]

Map to Floor

Floor [i] [Text Field]

1st Controller

Controller [i] [Text Field] [Dropdown: Hostname]

Pool [i] 1 [Spinner] (1 to 2)

2nd Controller

Controller [i] [Text Field] [Dropdown: Hostname]

Pool [i] 1 [Spinner] (1 to 2)

Routing Level

Level [i] 1 [Spinner] (1 to 2)

[OK] [Reset] [Exit]

Figure 270: Auto Provisioning Policy - Add / Edit Rule Screen

6. Define the following parameters:

Rule Precedence	Assign a priority from 1 - 10,000 for the application of the auto-provisioning policy rule. Rules with the lowest value have priority.
Operations	Define the operation taken upon receiving an adoption request from an access point: The following operations are available: <ul style="list-style-type: none"> • allow – Allows the normal provisioning of connected access points upon request. • deny – Denies (prohibits) the provisioning of connected access point upon request. • redirect – When selected, an access point seeks a steering controller (upon adoption request), that will forward the network credentials of a designated controller resource that initiates the provisioning process. • upgrade – Conducts the provisioning of requesting access points from this controller resource.
Device Type	Sets the access point model for which this policy applies. Adoption rules are specific to the selected model, as radio configurations are often unique to specific models.
Match Type	Set the matching criteria used in the policy. This is like a filter that further refines the APs that can be adopted. The options are: <ul style="list-style-type: none"> • MAC Address – The filter type is a MAC Address of the selected access point model. • IP Address – The filter type is the IP address of the selected access point model. • VLAN – The filter type is a VLAN. • Serial Number – The filter type is the serial number of the selected access point model. • Model Number – The filter type is the access point model number. • DHCP Option – The filter type is the DHCP option value of the selected access point model.
RF Domain Name / Alias Name	Use the RF Domain to which the device is adopted automatically. Use the drop-down menu to select the desired RF Domain from the list displayed. Alternately use an alias name to point to the RF Domain. Ensure that the alias is existing and configured. For more information on aliases, see Alias .
Profile Name	Define the profile used when an auto-provisioning policy is applied to a device.
Area	Enter a 64 character maximum deployment area name assigned to this policy.
Floor	Enter a 32 character maximum deployment floor name assigned to this policy.
1st Controller	If you have set <i>Operation</i> to <i>redirect</i> , provide a 1st choice steering controller <i>Hostname / IP Address</i> and <i>pool</i> to forward network credentials for a controller resource to initiate the provisioning process.

2nd Controller	If you have set <i>Operation</i> to <i>redirect</i> , provide a 2nd choice steering controller <i>Hostname / IP Address</i> and <i>pool</i> to forward network credentials for a controller resource to initiate the provisioning process.
Routing Level	If you have set <i>Operation</i> to <i>redirect</i> , specify the routing level as 1 or 2.

7. Click **OK** to save your changes. Click **Reset** to revert to your last saved configuration.

Configuring Auto-Provisioning Policy Adoption Criteria

To define the Auto-Provisioning Policy's rule matching adoption configuration:

1. Select the **Default** tab.

The Auto-Provisioning Default screen displays.

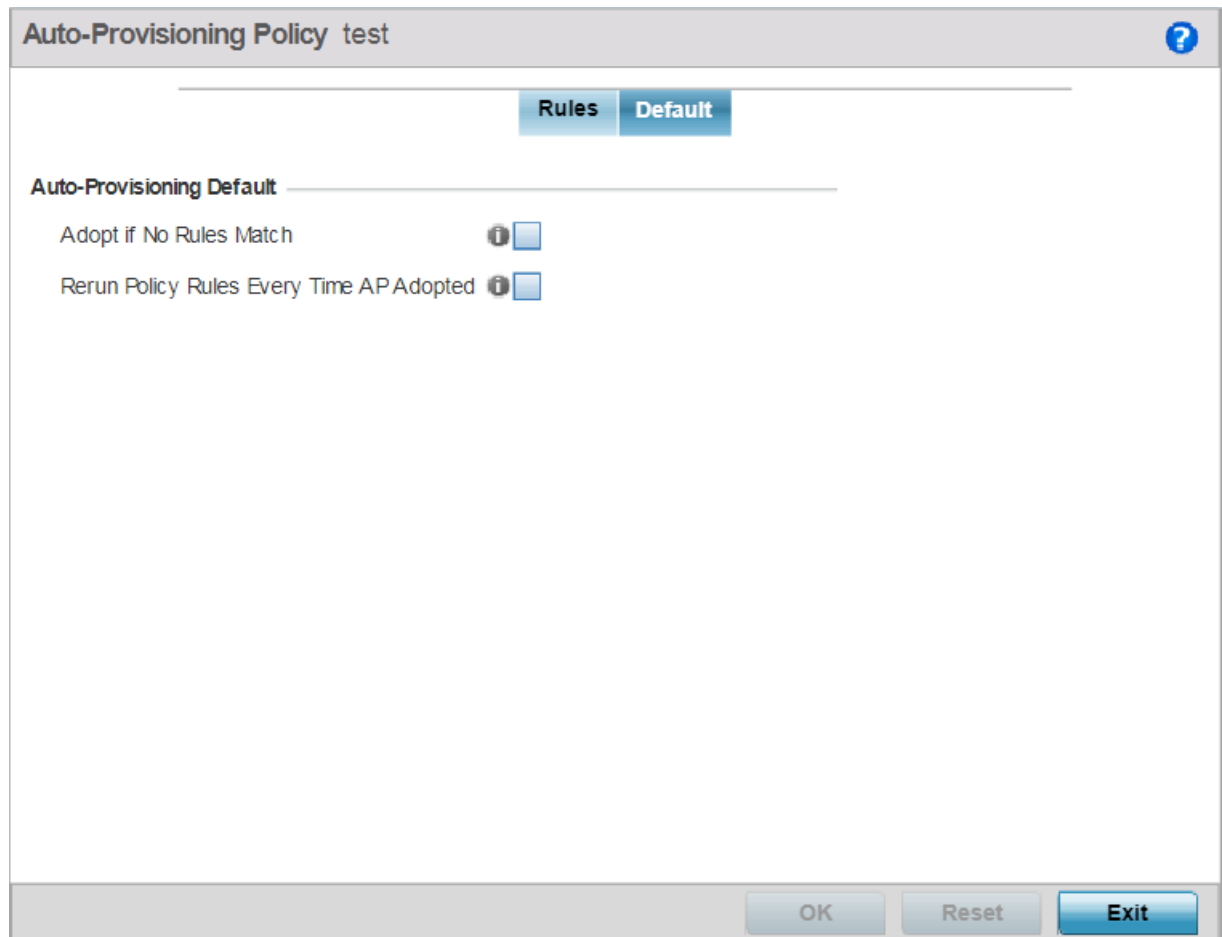


Figure 271: Auto-provisioning Policy - Default Tab

2. Select **Adopt if No Rules Match** to adopt when no matching filter rules apply. This setting is disabled by default.
3. Select **Rerun Policy Rules Every Time AP Adopted** to run this policy and apply its rule set every time an access point is adopted. This setting is disabled by default.

- Select **OK** to save the updates to the screen.
Select **Reset** to revert the screen to the last saved configuration.

Managing an Event Policy

Event policies enable an administrator to create specific notification mechanisms using one, some or all of the SNMP, syslog, forwarding or e-mail notification options available. Each listed event can have customized notification settings defined and saved as part of an event policy. Thus, policies can be configured and administrated in respect to specific sets of client association, authentication/encryption and performance events. Once policies are defined, they can be mapped to device profiles strategically as the likelihood of an event applies to particular devices. By default, there's no enabled event policy and one needs to be created and implemented.

Existing policies can have their event notification configurations modified as device profile requirements warrant.

To define an event policy configuration:

- Go to **Configuration → Devices → Event Policy**.

The **Event System Policy** screen displays.

Event Name	SNMP <input checked="" type="checkbox"/>	Syslog <input checked="" type="checkbox"/>	Forward to Controller <input type="checkbox"/>	Email Notification <input type="checkbox"/>

Figure 272: Configuration - Device Configuration - Event Policy Screen

- Ensure the **Activate Event Policy** button is selected to enable the screen for configuration. This option needs to remain selected to apply the event policy configuration to the access point profile.
- Use the **Select Event Module** drop-down menu on the top right-hand side of the screen to select an event module used to track the occurrence of each list event.

4. Review each event and select (or deselect) the **SNMP**, **Syslog**, **Forward to Switch** or **Email Notification** option as required for the event. Map an existing policy to a device profile as needed. Select Profile from the Map drop-down menu in the lower-left hand side of the screen. Expand the list of device profiles available, and apply the event policy as required.
5. Select **OK** to save the changes. Select **Reset** to revert to the last saved configuration. **Delete** obsolete rows as needed.



Wireless Configuration

[Manage Wireless LAN Policies](#) on page 622

[WLAN QoS Policies](#) on page 680

[Manage Radio QoS Policies](#) on page 696

[Configure Association ACL](#) on page 709

[Smart RF Policies](#) on page 712

[MeshConnex Policies](#) on page 730

[Mesh QoS Policy](#) on page 737

[Passpoint Policy](#) on page 746

[Sensor Policy](#) on page 757

[Location Policy](#) on page 761

A *Wireless Local Area Network* (WLAN) is a data-communications system and wireless local area network that flexibly extends the functionalities of a wired LAN. A WLAN links two or more computers or devices using spread-spectrum or OFDM modulation based technology. A WLAN does not require lining up devices for line-of-sight transmission, and are thus, desirable for wireless networking. Roaming users can be handed off from one connected access point to another, like a cellular phone system. WLANs can therefore be configured around the needs of specific user groups, even when they are not in physical proximity.

WLANs can provide an abundance of services, including data communications (allowing mobile devices to access applications), E-mail, file and print services or even specialty applications (such as guest access control and asset tracking).

Each WLAN configuration contains encryption, authentication and QoS policies and conditions for user connections. Connected access point radios transmit periodic beacons for each BSS. A beacon advertises the SSID, security requirements, supported data rates of the wireless network to enable clients to locate and connect to the WLAN.

WLANs are mapped to radios on each connected access point. A WLAN can be advertised from a single access point radio or can span multiple access points and radios. WLAN configurations can be defined to only provided service to specific areas of a site. For example a guest access WLAN may only be mapped to a 2.4GHz radio in a lobby or conference room providing limited coverage while a data WLAN is mapped to all 2.4GHz and 5GHz radios at the branch site providing complete coverage.

WLAN policies can be separately selected and refined in the **Configuration → Wireless** pane located on the top left-hand side of the UI.

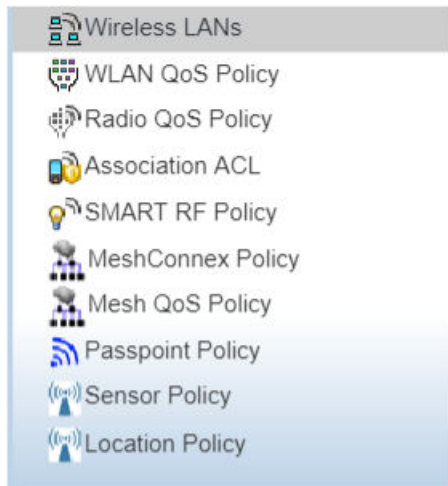


Figure 273: Configuration > Wireless Pane

Refer to the sections that follow for instructions on wireless configuration tasks.

Manage Wireless LAN Policies

To review the attributes of existing WLANs (policies) and, if necessary, modify their configurations:

1. Select **Configuration → Wireless → Wireless LANs** to display existing WLANs.

WLAN	SSID	Description	WLAN Status	VLAN Pool	Bridging Mode	DHCP Option 82	DHCPv6 LDRA	Authentication Type	Encryption Type	QoS Policy	Association ACL
ccmp_enc	ccmp		Enabled	1	Local	X	X	None	CCMP	default	
eapauth	eapauth		Enabled	1	Local	X	X	EAP	CCMP	default	
open	open		Enabled	1	Local	X	X	None	None	default	

Type to search in tables Row Count: 3

Figure 274: Wireless LANs Screen

2. Refer to the following (read only) information to assess the attributes of the each WLAN available:

WLAN	Displays the name of each available WLAN. Individual WLANs can selected and their SSID and client management properties modified. Each access point can support up to 16 WLANs per radio.
SSID	Displays the SSID assigned to the WLAN when created or last modified. Optionally, select a WLAN and click Edit to update the WLAN's SSID.
Description	Displays the brief description set for each listed WLAN when it was either created or modified.
WLAN Status	Lists each WLAN's current status as either Disabled or Enabled . A green check mark defines the WLAN as available to clients on all radios where it has been mapped. A red "X" defines the WLAN as shutdown, meaning even if the WLAN is mapped to radios, it is not available for clients to associate.
VLAN Pool	Lists each WLAN's current VLAN mapping. Mapping a WLAN to more than one VLANs is permitted. When a client associates with a WLAN, the client is assigned a VLAN by load balance distribution. The VLAN is picked from a pool assigned to the WLAN. Keep in mind however, typical deployments only map a single VLAN to a WLAN. The use of a pool is strictly optional.
Bridging Mode	Lists each WLAN's current bridging mode as either Local or Tunnel . Local infers VLAN traffic is bridged locally, Tunnel uses a shared tunnel for bridging the WLAN's VLAN traffic. Note: The default setting is Local.
DHCP Option 82	Displays whether DHCP Option 82 is enabled or not. DHCP option 82 provides additional information on the physical attachment of a client. Note: This option is disabled by default.
DHCPv6 LDRA	<i>Lightweight DHCPv6 Relay Agent (LDRA)</i> is used to insert relay-agent options in DHCPv6 message exchanges that identify client-facing interfaces. These relay agents are deployed to forward DHCPv6 messages between clients and servers when they are not on the same IPv6 link. A red "X" indicates that this WLAN acts as a DHCPv6 LDRA.
Authentication Type	Displays the name of the user authentication scheme each listed WLAN is using to secure its client membership transmissions. <i>None</i> is listed if authentication is not used within this WLAN. Refer to the Encryption Type column if no authentication is used to verify there is some sort of data protection used with the WLAN or risk no protection at all.

Encryption Type	Displays the name of the encryption type each listed WLAN is using to secure its client membership transmissions. <i>None</i> is listed if encryption is not used within this WLAN. Refer to the Authentication Type column to verify that there is some sort of data protection used with the WLAN or risk using this WLAN with no protection at all.
QoS Policy	Lists the QoS policy applied to each listed WLAN. A QoS policy needs to be custom selected (or created) for each WLAN in respect to the WLAN's intended client traffic and the voice, video, or normal data traffic it supports.
Association ACL	Lists the Association ACL policy applied to each listed WLAN. An Association ACL is a policy-based <i>Access Control List</i> (ACL) that either prevents or allows connection between wireless clients and a WLAN. The mapping of an Association ACL is strictly optional.

Use the sequential set of WLAN screens to define a unique configuration for each WLAN. Refer to the following sections to set WLAN configurations:

- [Configure WLAN Basic Settings](#) on page 624
- [Configure WLAN Security](#) on page 627
- [Configuring WLAN Firewall Settings](#) on page 647
- [Configure WLAN Client Settings](#) on page 662
- [Configure WLAN Accounting Settings](#) on page 666
- [Configure WLAN Service Monitoring Settings](#) on page 668
- [Configure Client Load-Balancing Settings](#) on page 671
- [Configure Advanced WLAN Settings](#) on page 672
- [Configure Auto Shutdown Settings](#) on page 678

Configure WLAN Basic Settings

When creating or modifying a WLAN, the **Basic Configuration** screen is the first screen that displays as part of the WLAN configuration screen flow. Use this screen to enable a WLAN and to and define its SSID, client behavior, and VLAN assignments.

To define a WLAN's basic configuration:

Before defining a WLAN's basic configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Deploy a separate VLAN for providing secure WLAN access.
- Define a separate VLAN for each WLAN providing guest access.

1. Select **Configuration** → **Wireless** → **Wireless LANs**.

The list of existing WLANs is displayed.

2. Select **Add** to create an additional WLAN, or select an existing WLAN then click **Edit** to modify its properties.

WLANs can also be removed as they become obsolete by selecting **Delete**.

The screenshot displays the 'WLAN Configuration' window. It is divided into several sections:

- WLAN Configuration:**
 - SSID: sanjose
 - Description: San Jose Office WLAN
 - WLAN Status: Disabled (radio button), Enabled (radio button)
 - QoS Policy: default
 - Bridging Mode: Local
 - DHCP Option 82:
 - DHCPv6 LDRA:
 - Bonjour Gateway Discovery Policy: (dropdown menu)
- Other Settings:**
 - Broadcast SSID:
 - Answer Broadcast Probes:
- VLAN Assignment:**
 - Single VLAN (radio button), VLAN Pool (radio button)
 - VLAN: (input field)
- RADIUS VLAN Assignment:**
 - Allow RADIUS Override:
- URL Filter:**
 - URL Filter: (dropdown menu)

At the bottom right, there are three buttons: OK, Reset, and Exit.

Figure 275: WLAN Basic Configuration Screen

3. Refer to the **WLAN Configuration** field to define the following:

WLAN	If adding a new WLAN, enter its name in the space provided. Spaces between words or characters are not permitted. The name could be a logical representation of the WLAN support function (engineering, marketing etc.). If editing an existing WLAN, the WLAN's name appears at the top of the screen and cannot be modified. A WLAN name cannot exceed 32 characters.
SSID	Enter or modify the <i>Services Set Identification</i> (SSID) associated with the WLAN. The maximum number of characters that can be used for the SSID is 32.

Description	Provide a textual description for the WLAN to help differentiate it from others with similar configurations. The description can be up to 64 characters.
WLAN Status	Select the Enabled radio button to make this WLAN active and available to clients on all radios where it has been mapped. Select the Disabled radio button to make this WLAN inactive, meaning even if the WLAN is mapped to radios, it is not available for clients to associate and use.
QoS Policy	Use the drop-down menu to assign an existing QoS policy to the WLAN or select the Create icon to define a new QoS policy or select the Edit icon to modify the configuration of the selected QoS Policy. QoS helps ensure each WLAN receives a fair share of the overall bandwidth, either equally or per the proportion configured. For information on creating a QoS policy that can be applied to WLAN, see WLAN QoS Policies on page 680.
Bridging Mode	Use the drop-down menu to specify the WLAN's bridging mode as either Local or Tunnel . Select <i>Local</i> to bridge VLAN traffic locally, or <i>Tunnel</i> to use a shared tunnel for bridging the WLAN's VLAN traffic. Note: The default setting is Local.
DHCP Option 82	Select this option to enable DHCP option 82. DHCP Option 82 provides additional information about the physical attachment of a client. Note: This setting is disabled by default.
DHCPv6 LDRA	Select this option to enable the DHCPv6 relay agent. The DHCPv6 LDRA allows for DHCPv6 messages to be transmitted on existing networks that do not currently support IPv6 or DHCPv6. Note: This setting is disabled by default.
Bonjour Gateway Discovery Policy	Use the drop-down menu to assign an existing Bonjour Gateway Discovery policy to the WLAN. The Bonjour Gateway Discovery Policy configures how Bonjour services can be located on this WLAN. It configures the VLANs on which these services can be found. For more information on Bonjour Gateway Discovery Protocol, see Setting the Bonjour Gateway Configuration on page 924. If needed, select the Create icon to define a new Bonjour Gateway Discovery policy or select the Edit icon to modify the configuration of a selected Bonjour Gateway Discovery Protocol.

4. Refer to the **Other Settings** field to define broadcast behavior within this specific WLAN.

Broadcast SSID	Select this check box to enable the broadcast of SSIDs within beacons. If a hacker tries to isolate and hack a SSID from a client, the SSID will display since the ESSID is in the beacon. Note: This option is enabled by default.
Answer Broadcast Probes	Select this check box to associate a client with a blank SSID (regardless of which SSID the wireless controller is currently using). Note: This option is enabled by default.

5. Refer to the **VLAN Assignment** field to add or remove VLANs for the selected WLAN, and define the number of clients permitted. Remember, users belonging to separate VLANs can share the same WLAN. It's not necessary to create a new WLAN for every VLAN in the network.

Single VLAN	Select this radio button to assign just one VLAN to this WLAN. If selecting this option, enter the name of the VLAN within the VLAN parameter field. Utilizing a single VLAN per WLAN is a more typical deployment scenario than using a VLAN pool.
VLAN Pool	Select this option to assign a set of VLANs to this WLAN. Use the table to configure the maximum number of clients that can use the configured per VLAN. Set a value in the range 0 - 8192 clients.

6. Select **Allow Radius Override**, in the **RADIUS VLAN Assignment** field, to allow an override to the WLAN configuration.

If, as part of the authentication process, the RADIUS server returns a client's VLAN-ID in the RADIUS Access-Accept packet, and this feature is enabled, all client traffic is forward on that VLAN. If disabled, the RADIUS server returned VLAN-ID is ignored and the VLAN configuration (defined earlier) is used. In other words,

If RADIUS authentication fails, the VLAN defined is the VLAN assigned to the WLAN.

7. Use the **URL Filter** field to configure user access restrictions to resources on the controller or service platform managed Internet. User access is controlled with URL Filters.

Use the **URL Filter** drop down menu to select a preconfigured URL Filter. To create a new URL Filter, use the **Create** button. To edit an existing URL Filter, use the **Edit** button.

8. Select **OK** to save the changes.

Select **Reset** to revert the screen to the last saved configuration.

Configure WLAN Security

Assign WLANs unique security configurations supporting authentication, captive portal (hotspot), self registration or encryption schemes as data protection requirements dictate.

Select Authentication

EAP
 EAP-PSK
 EAP-MAC
 MAC
 PSK / None

AAA Policy:

Reauthentication: (30 to 86,400)

Captive Portal

Enforcement: Captive Portal Enable Captive Portal if Primary Authentication Fails

Captive Portal Policy:

Passpoint Policy

Passpoint Policy:

Registration

Type of Registration:

Radius Group Name:

Expiry Time: (1 to 43,800 hours)

Agreement Refresh: (0 to 144,000 minutes)

External Controller

Enable: Follow AAA:

Host: Hostname:

Send Mode:

Select Encryption

OK Reset Exit

Figure 276: WLAN Security Screen

Authentication ensures that only known and trusted users or devices access a WLAN. Authentication is enabled per WLAN to verify the identity of both users and devices. Authentication is a challenge and response procedure for validating user credentials such as username, password and sometimes secret-key information.

A client must authenticate to an access point to receive resources from the network. Controllers and service platforms support EAP, EAP PSK, EAP-MAC, MAC and PSK/None authentication options.

The Extreme Networks Universal Access Points 6 GHz radios support only Wi-Fi Alliance (WFA) 6E Compliant network authentication methods. The AP3000/X and AP5010 6 GHz radios support SAE/SAE-PSK, and OWE (Opportunistic Wireless Encryption) for Open Networks.

Refer to the following to configure an authentication scheme for a WLAN:

- [802.1x EAP, EAP-PSK and EAP MAC](#) on page 629
- [MAC Authentication](#) on page 631
- [PSK / None](#) on page 632

Secure guest access to the network is referred to as captive portal access. A captive portal is guest access policy for providing guests temporary and restrictive access to the wireless network. Existing captive portal policies can be applied to a WLAN to provide secure guest access as needed.

A captive portal configuration provides secure authenticated access using a standard Web browser. Captive portals provide authenticated access by capturing and re-directing a wireless user's Web browser session to a captive portal login page where the user must enter valid credentials to access to the network. Once logged into captive portal, additional Agreement, Welcome and Fail pages provide the administrator with a number of options on captive portal screen flow and user appearance. Refer to [Captive Portal](#) on page 633 for information on assigning a captive portal policy to a WLAN.

A *passpoint* policy provides an interoperable platform for streamlining Wi-Fi access to access points deployed as public hotspots. Passpoint is supported across a wide range of wireless network deployment scenarios and client devices. For more information, see [Passpoint](#) on page 634.

Encryption is central for WLAN security, as it provides data privacy for traffic forwarded over a WLAN. When the 802.11 specification was introduced, Wired Equivalent Privacy (WEP) was the primary encryption mechanism. WEP has since been interpreted as flawed in many ways, and is not considered an effective standalone encryption scheme for securing a wireless controller WLAN. WEP is typically used WLAN deployments designed to support legacy clients. New device deployments should use either WPA or WPA2 encryption.

Encryption applies a specific algorithm to alter its appearance and prevent unauthorized hacking. Decryption applies the algorithm in reverse, to restore the data to its original form. A sender and receiver must employ the same encryption/decryption method to inter-operate. When both TKIP and CCMP are both enabled a mix of clients are allowed to associate with the WLAN. Some use TKIP, others use CCMP. Since broadcast traffic needs to be understood by all clients, the broadcast encryption type in this scenario is TKIP.

TKIP-CCMP, WPA2-CCMP, WEP 64, WEP 128 and Keyguard encryption options are supported.

Refer to the other topics in this chapter to configure an encryption scheme for a WLAN.

802.1x EAP, EAP-PSK and EAP MAC

The *Extensible Authentication Protocol* (EAP) is the de facto standard authentication method used to provide secure authenticated access to WLANs. EAP provides mutual authentication, secured credential exchange, dynamic keying and strong encryption.

802.1X EAP can be deployed with WEP, WPA or WPA2 encryption schemes to further protect user information forwarded over WLANs.

The EAP process begins when an unauthenticated supplicant (client device) tries to connect with an authenticator (in this case, the authentication server). An access point passes EAP packets from the client to an authentication server on the wired side of the access point. All other packet types are blocked until the authentication server (typically, a RADIUS server) verifies the client's identity.

802.1X EAP provides mutual authentication over the WLAN during authentication. The 802.1X EAP process uses credential verification to apply specific policies and restrictions to WLAN users to ensure access is only provided to specific wireless controller resources.

802.1X requires an 802.1X capable RADIUS server to authenticate users and a 802.1X client installed on each device accessing the EAP supported WLAN. An 802.1X client is included with most commercial operating systems, including Microsoft Windows, Linux, and Apple OS X.

The RADIUS server authenticating 802.1X EAP users can reside either internally or externally to a controller, service platform or access point. User account creation and maintenance can be provided centrally using ADSP or individually maintained on each device. If an external RADIUS server is used, EAP authentication requests are forwarded.

When using PSK with EAP, the controller, service platform or access point sends a packet requesting a secure link using a pre-shared key. The authenticating device must use the same authenticating algorithm and passcode during authentication. EAP-PSK is useful when transitioning from a PSK network to one that supports EAP. The only encryption types supported with this are TKIP, CCMP and TKIP-CCMP.

To configure EAP on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Select **EAP**, **EAP-PSK** or **EAP-MAC** as the **Authentication Type**.

Each option enables the radio buttons for various encryption mechanisms as an additional measure of WLAN security.

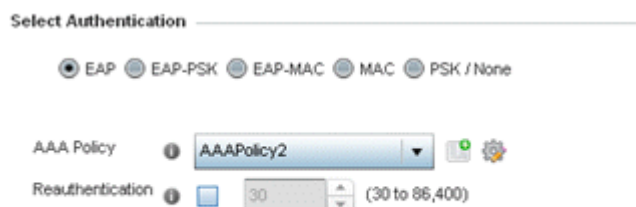


Figure 277: EAP, EAP-PSK or EAP MAC Authentication Screen

5. Select an existing AAA Policy from the drop-down menu or select the **Create** icon to the right of the **AAA Policy** parameter to display a screen where new AAA policies can be created.

Select the **Edit** icon to modify the configuration of the selected AAA policy.

Authentication, authorization, and accounting (EAP) is a framework for intelligently controlling access to the network, enforcing user authorization policies and auditing and tracking usage. These combined processes are central for securing wireless client resources and wireless network data flows.

For information on defining a new AAA policy that can be applied to a WLAN supporting EAP, EAP PSK or EAP MAC, see [AAA Policy](#) on page 778.

6. Select the **Reauthentication** option to force EAP supported clients to reauthenticate.

Use the spinner control set the number of seconds (between 30 - 86,400) that, when exceeded, forces the EAP supported client to reauthenticate to use the WLAN.

7. Select **OK** when completed to update the WLAN's EAP configuration.

Select **Reset** to revert to the last saved configuration.

Before defining a 802.1x EAP, EAP-PSK or EAP MAC supported configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- A valid certificate should be issued and installed on devices providing 802.1X EAP. The certificate should be issued from an Enterprise or public certificate authority to allow 802.1X clients to validate the identity of the authentication server prior to forwarding credentials.
- If using an external RADIUS server for EAP authentication, the round trip delay over the WAN should not exceed 150ms. Excessive delays over a WAN can cause authentication and roaming issues and impact wireless client performance. If experiencing excessive delays, consider using local RADIUS resources.

MAC Authentication

MAC is a device level authentication method used to augment other security schemes when legacy devices are deployed using static WEP.

MAC authentication can be used for device level authentication by permitting WLAN access based on device MAC address. MAC authentication is typically used to augment WLAN security options that do not use authentication (such as static WEP, WPA-PSK and WPA2-PSK) MAC authentication can also be used to assign VLAN memberships, Firewall policies, and access restrictions based on time and date.

MAC authentication can only validate devices, not users. MAC authentication only references a client's wireless interface card MAC address when authenticating the device, it does not distinguish the device's user credentials. MAC authentication is somewhat poor as a standalone data protection technique, as MAC addresses can be easily spoofed by hackers who can provide a device MAC address to mimic a trusted device within the network.

MAC authentication is enabled per WLAN profile, augmented with the use of a RADIUS server to authenticate each device. A device's MAC address can be authenticated against the local RADIUS server built into the device or centrally (from a datacenter). For RADIUS server compatibility, the format of the MAC address can be forwarded to the RADIUS server in non-delimited and or delimited formats:

To configure MAC authentication on a WLAN:

1. Select **MAC** as the **Authentication Type**.

Selecting **MAC** enables the radio buttons for the Open, WEP 64, WEP 128, WPA/WPA2-TKIP, WPA2-CCMP and Keyguard encryption options as additional measures for the WLAN.



Figure 278: MAC Authentication Screen

2. Select an existing AAA Policy from the drop-down menu or select the **Create** icon to the right of the **AAA Policy** parameter to display a screen where new AAA policies can be created.

Select the **Edit** icon to modify the configuration of the selected AAA policy.

3. Select the **Reauthentication** option to force EAP supported clients to reauthenticate.

Use the spinner control set the number of seconds (between 30 - 86,400) that, when exceeded, forces the EAP supported client to reauthenticate to use the WLAN.

4. Select **OK** when completed to update the WLAN's MAC configuration.

Select **Reset** to revert to the last saved configuration.

PSK / None

Open-system authentication can be referred to as no authentication, since no actual authentication and user credential validation takes place. A client user requests (and is granted) authentication with no credential exchange.

Such a security-free convention may be appropriate in certain guest networks wherein no proprietary information purposely exposed to requesting clients, and their access to the controller, service platform or access point managed network is temporary and closely administrated.



Figure 279: PSK / None Settings Screen



Note

Although **None** implies no authentication, this option is also used when pre-shared keys are used for encryption (thus the PSK in the description).

Captive Portal

A *captive portal* is guest access policy for providing guests temporary and restrictive access to the network. The primary means of securing such guest access is the use of a captive portal. For an overview of the captive portal process and information on how to define a captive portal policy, see [Captive Portal Policy](#) on page 893.

To assign a captive portal policy to a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Refer to the **Captive Portal** section in the WLAN Policy security screen.

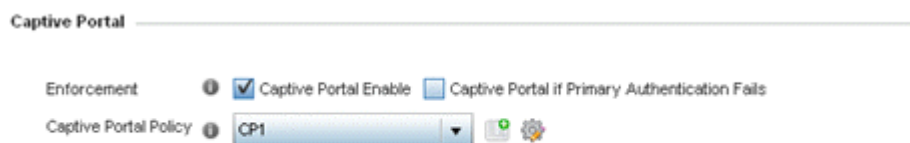


Figure 280: WLAN Policy Security Screen - Captive Portal Field

5. Select **Captive Portal Enable** if authenticated guest access is required with the selected WLAN.

This feature is disabled by default.

6. Select **Captive Portal if Primary Authentication Fails** to enable the captive portal policy if the primary authentication is unavailable.

This option is enabled only when **Captive Portal Enable** is selected.

7. Select the **Captive Portal Policy** to use with the WLAN from the drop-down menu.

If no relevant policies exist, select the **Create** icon to define a new policy to use with this WLAN or the **Edit** icon to update the configuration of an existing Captive Portal policy. For more information, see [Captive Portal Policy](#) on page 893.

8. Select **OK** when completed to update the WLAN's captive portal configuration.
Select **Reset** to revert to the last saved configuration.

Passpoint

A *passpoint policy* provides an interoperable platform for streamlining Wi-Fi access to access points deployed as public hotspots. Passpoint is supported across a wide range of wireless network deployment scenarios and client devices.

To assign a passpoint policy to a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Refer to the **Passpoint** field in the WLAN Policy security screen.



Figure 281: WLAN Policy Security Screen - Passpoint Policy

5. Select an existing passpoint policy from the drop down menu to apply it to the WLAN.
If no relevant policies exist, select the **Create** icon to define a new policy to use with this WLAN or the **Edit** icon to update the configuration of an existing passpoint policy. For more information on Passpoint Policy, see [Passpoint Policy](#) on page 746.
6. Select **OK** when completed to update the WLAN's passpoint policy configuration.
Select **Reset** to revert to the last saved configuration.

MAC Registration

MAC Registration provides returning (previously validated) clients quick access to controller, service platform or access point managed captive portal resources.

When a user enters a captive portal for the first time, user data is gathered and stored. This information is matched against the MAC address of the device accessing the captive portal.

The next time a user accesses the captive portal using this same credentials, they are authenticated immediately, since the device's MAC address is available within the controller, service platform or access point's database along with the requester's identification information. There's no need for additional credential validation after the initial credential verification.

To assign MAC Registration to a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.

3. Select **Security**.
4. Refer to the **Registration** field in the WLAN security screen.
Select the **Type of Registration** field to select the type of MAC registration to use with this WLAN.

Use **None** to disallow use of MAC Registration with this WLAN. Select device to register a new MAC address. If a MAC address already exists, allow access. Select **device-OTP** to register a new MAC device and send a OTP (*One Time Password*) for validation. Select user to register a new user by sending them a registration code to the e-mail address or mobile phone number provided by the user at login.
5. Use the **RADIUS Group Name** field to enter the RADIUS group to associate with MAC registrations.
When left blank, devices are not associated with a RADIUS group.
6. Select **Expiry Time**.
This is the duration for which MAC addresses are stored on the access point's database. Once this time expires, the user information is purged from the database. The user then has to provide login credentials as well as identification information again. The default value is 1500 days.
7. Set the **Agreement Refresh** as the amount of time before the agreement page is displayed if the user has not been logged during the specified period.
The default setting is 0 days.
8. Select **OK** when completed to update the WLAN's MAC registration configuration.
Select **Reset** to revert to the last saved configuration.

External Controller

An external configuration enables a *WLAN (Wireless Local Area Network)* WLAN to be managed remotely from either a controller or access point. However, this feature is disabled by default and must be manually enabled.

To set a WLAN's external security configuration:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Refer to the **External Controller** section in the WLAN Policy security screen.

The screenshot shows the 'External Controller' configuration section. It includes the following elements:

- Enable:** A checkbox that is currently unchecked.
- Follow AAA:** A checkbox that is currently unchecked.
- Host:** A text input field with an information icon (i) to its left, and a dropdown menu labeled 'Hostname' to its right.
- Send Mode:** A dropdown menu with an information icon (i) to its left, currently set to 'UDP'.

Figure 282: WLAN Policy Security Screen - External Controller Field

5. Select the **Enable** option if WLAN authentication is to be handled using an external resource.
6. Use the **Host** field to enter a hostname or IP address of the remote wireless controller.
Use the spinner control to select the type of the remote controller.
7. Use the **Proxy Mode** drop-down to configure the proxy mode for accessing remote resources.
8. Select **OK** when completed to update the WLAN's external controller configuration.
Select **Reset** to revert to the last saved configuration.

TKIP-CCMP

WPA (*Wi-Fi Protected Access*) is an encryption scheme specified in the IEEE *Wireless Fidelity* standard 802.11i. WPA provides more sophisticated data encryption than WEP. WPA is designed for corporate networks and small-business environments where more wireless traffic allows quicker discovery of encryption keys by an unauthorized person.

The encryption method is TKIP (*Temporal Key Integrity Protocol*). TKIP addresses WEP's weaknesses with a re-keying mechanism, a per-packet mixing function, a message integrity check and an extended initialization vector. However, TKIP also has vulnerabilities.

CCMP is a security standard used by the AES (*Advanced Encryption Standard*). AES serves the same function TKIP does for WPA-TKIP. CCMP computes a MIC (*Message Integrity Check*) using the proven CBC (*Cipher Block Chaining*) technique. Changing just one bit in a message produces a totally different result.

To configure TKIP-CCMP encryption on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.

- Select the **TKIP-CCMP** check box from within the **Select Encryption** field.

The screen populates with the parameters required to define a TKIP-CCMP configuration for the WLAN.

Select Encryption

TKIP-CCMP WEP 128 WEP 64 Open
 WPA2-CCMP KeyGuard

Key Settings

Enter 64 HEX or 8-63 ASCII Characters

Pre-Shared Key: ASCII

Key Rotation

Unicast Rotation Interval: 30 (30 to 86,400 seconds)
Broadcast Rotation Interval: 30 (30 to 86,400 seconds)

Advanced

TKIP Countermeasure Hold Time: Minutes (0 to 1,092)
Exclude WPA2 TKIP:
Use SHA256:

OK Reset Exit

Figure 283: WLAN Security - TKIP-CCMP Screen

- Define **Key Settings**.

Pre-Shared Key	Enter either an alphanumeric string of 8 to 63 ASCII characters or 64 HEX characters as the primary string both transmitting and receiving authenticators must share. The alphanumeric string allows character spaces. The string is converted to a numeric value. This passphrase saves the administrator from entering the 256-bit key each time keys are generated.
----------------	--

- Define **Key Rotation** values.

Unicast messages are addressed to a single device on the network. Broadcast messages are addressed to multiple devices. When using WPA2, a wireless client can use two keys: one unicast key, for its own traffic to and from an access point, and one broadcast key, the common key for all the clients in that subnet.

Rotating the keys is recommended the keys so a potential hacker would not have enough data using a single key to attack the deployed encryption scheme.

Unicast Rotation Interval	Define an interval for unicast key transmission interval from 30 - 86,400 seconds. Some clients have issues using unicast key rotation, so ensure you know which kind of clients are impacted before using unicast keys. This feature is disabled by default.
Broadcast Rotation Interval	When enabled, the key indices used for encrypting and decrypting broadcast traffic is alternatively rotated based on the defined interval. Define a broadcast key transmission interval from 30 - 86,400 seconds. Key rotation enhances the broadcast traffic security on the WLAN. This feature is disabled by default.

7. Define the **Fast Roaming** configuration used only with 802.1x EAP-WPA/WPA2 authentication.



Note

Fast Roaming is available only when the authentication is **EAP** or **EAP-PSK** and the selected encryption is either **TKIP-CCMP** or **WPA2-CCMP**.

Using 802.11i can speed up the roaming process from one access point to another. Instead of doing a complete 802.1x authentication each time a client roams between access points, 802.11i allows a client to re-use previous PMK authentication credentials and perform a four-way handshake. This speeds up the roaming process. In addition to reusing PMKs on previously visited access points, **Opportunistic Key Caching** allows multiple access points to share PMKs among themselves. This allows a client to roam to an access point it has not previously visited and reuse a PMK from another access point to skip 802.1x authentication.

Pre-Authentication	Selecting this option enables an associated client to carry out an 802.1x authentication with another access point before it roams to it. This enables a roaming client to send and receive data sooner by not having to conduct an 802.1x authentication after roaming. With pre-authentication, a client can perform an 802.1X authentication with other detected access points while still connected to its current access point. When a device roams to a neighboring access point, the device is already authenticated on the access point, thus providing faster re-association.
Pairwise Master Key (PMK) Caching	<i>Pairwise Master Key</i> (PMK) caching is a technique for sidestepping the need to re-establish security each time a client roams to a different switch. Using PMK caching, clients and switches cache the results of 802.1X authentications. Therefore, access is much faster when a client roams back to a switch to which the client is already authenticated.
Opportunistic Key Caching	This option enables the access point to use a PMK derived with a client on one access point, with the same client when it roams over to another access point. Upon roaming, the client does not have to do 802.1x authentication and can start sending and receiving data sooner.

8. Set the following **Advanced** settings for the TKIP-CCMP encryption scheme:

TKIP Countermeasure Hold Time	The TKIP Countermeasure Hold Time is the time a WLAN is disabled, if TKIP countermeasures have been invoked on the WLAN. Use the drop-down menu to define a value in either Hours (0-18), Minutes (0-1,092) or Seconds (0-65,535). The default setting is 1 second.
Exclude WPA2-TKIP	Select this option to advertise and enable support for only WPA-TKIP. This option can be used if certain older clients are not compatible with newer WPA2-TKIP information elements. Enabling this option allows backwards compatibility for clients that support WPA-TKIP and WPA2-TKIP, but do not support WPA2-CCMP. We recommend that you enable this feature if WPA-TKIP or WPA2-TKIP supported clients operate in a WLAN populated by WPA2-CCMP enabled clients. This feature is disabled by default.
Use SHA256	Select this option to enable SHA-256 authentication key management suite. This suite consists of a set of algorithms for key agreement, key derivation, key wrapping, and content encryption and provide a minimum cryptographic security level of 128 bits. This feature is disabled by default.

9. Select **OK** when completed to update the WLAN's TKIP-CCMP encryption configuration.

Select **Reset** to revert to the last saved configuration.

Before defining a WPA-TKIP supported configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Enable TKIP for legacy device support only when WPA2-CCMP support is not available.
- Although TKIP offers better security than WEP, it can be vulnerable to certain attacks.
- When both TKIP and CCMP are enabled, a mix of clients are allowed to associate with the WLAN. Some use TKIP, others use CCMP. Because broadcast traffic needs to be understood by all clients, the broadcast encryption type in this scenario is TKIP.

WPA2-CCMP

WPA2 is a newer 802.11i standard that provides even stronger wireless security than WPA (*Wi-Fi Protected Access*) and WEP. CCMP is the security standard used by the AES (*Advanced Encryption Standard*). AES serves the same function TKIP does for WPA-TKIP. CCMP computes a MIC (*Message Integrity Check*) using the proven CBC (*Cipher Block Chaining*) technique. Changing just one bit in a message produces a totally different result.

WPA2/CCMP is based on the concept of a RSN (*Robust Security Network*), which defines a hierarchy of keys with a limited lifetime (similar to TKIP). Like TKIP, the keys the administrator provides are used to derive other keys. Messages are encrypted using a 128-bit secret key and a 128-bit block of data. The end result is an encryption scheme as secure as any a controller, service platform or Access Point provides for its connected clients.

To configure WPA2-CCMP encryption on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Select **Add** to create an additional WLAN, or select an existing WLAN and select **Edit** to modify its security properties.
3. Select **Security**.
4. If WPA2-CCMP is required, select **PSK/None** in authentication.
5. Select the **WPA2-CCMP** check box from within the **Select Encryption** field.

The screen populates with the parameters required to define a WPA2-CCMP configuration for the new or existing WLAN.

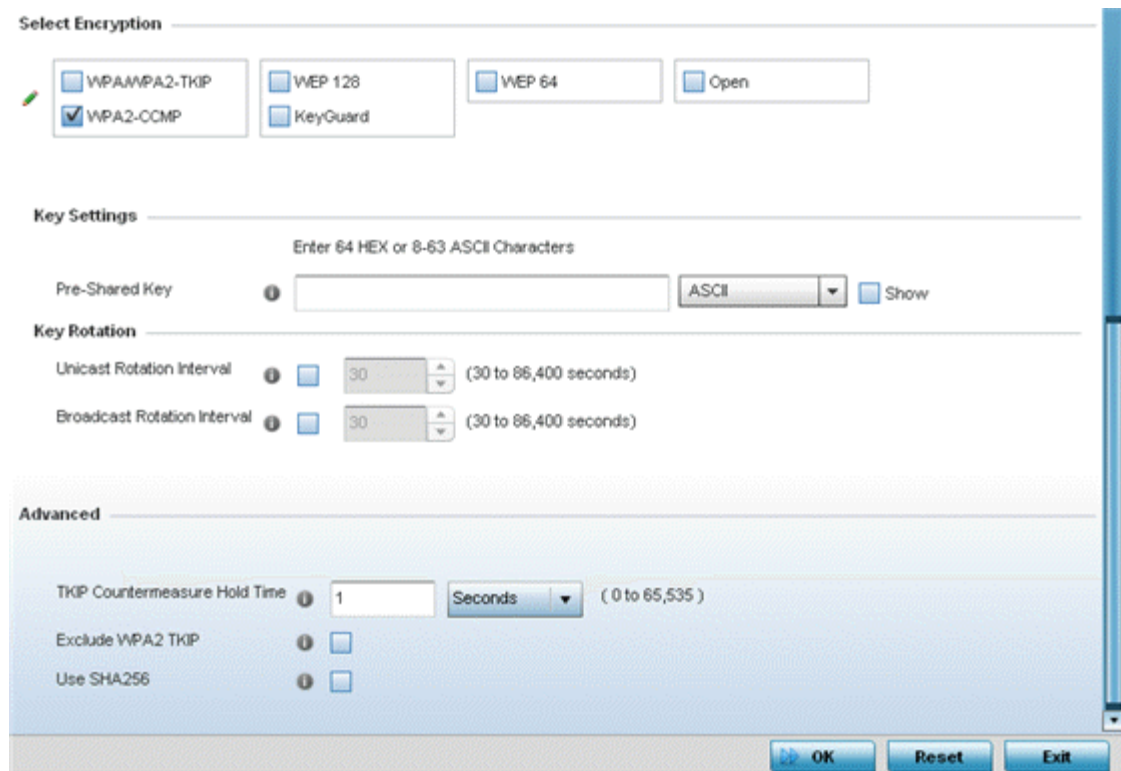


Figure 284: WLAN Security - WPA2-CCMP Screen

6. Define **Key Settings**.

Pre-Shared Key	Enter either an alphanumeric string of 8 to 63 ASCII characters or 64 HEX characters as the primary string both transmitting and receiving authenticators must share. The alphanumeric string allows character spaces. The string is converted to a numeric value. This passphrase saves the administrator from entering the 256-bit key each time keys are generated.
----------------	--

7. Define **Key Rotation** values.

Unicast messages are addressed to a single device on the network. Broadcast messages are addressed to multiple devices. When using WPA2, a wireless client can use two keys: one unicast key, for its own traffic to and from an Access Point, and one broadcast key, the common key for all the clients in that subnet.

Rotating the keys is recommended the keys so a potential hacker would not have enough data using a single key to attack the deployed encryption scheme.

Unicast Rotation Interval	Define an interval for unicast key transmission interval from 30 - 86,400 seconds. Some clients have issues using unicast key rotation, so ensure you know which kind of clients are impacted before using unicast keys. This feature is disabled by default.
Broadcast Rotation Interval	When enabled, the key indices used for encrypting and decrypting broadcast traffic is alternatively rotated based on the defined interval. Define a broadcast key transmission interval from 30 - 86,400 seconds. Key rotation enhances the broadcast traffic security on the WLAN. This feature is disabled by default.

- Define the **Fast Roaming** configuration used only with 802.1x EAP-WPA/WPA2 authentication.



Note

Fast Roaming is available only when the authentication is **EAP** or **EAP-PSK** and the selected encryption is either **TKIP-CCMP** or **WPA2-CCMP**.

Using 802.11i can speed up the roaming process from one access point to another. Instead of doing a complete 802.1x authentication each time a client roams between access points, 802.11i allows a client to re-use previous PMK authentication credentials and perform a four-way handshake. This speeds up the roaming process. In addition to reusing PMKs on previously visited access points, **Opportunistic Key Caching** allows multiple access points to share PMKs among themselves. This allows a client to roam to an access point it has not previously visited and reuse a PMK from another access point to skip 802.1x authentication.

Pre-Authentication	Selecting this option enables an associated client to carry out an 802.1x authentication with another access point before it roams to it. This enables a roaming client to send and receive data sooner by not having to conduct an 802.1x authentication after roaming. With pre-authentication, a client can perform an 802.1X authentication with other detected access points while still connected to its current access point. When a device roams to a neighboring access point, the device is already authenticated on the access point, thus providing faster re-association.
Pairwise Master Key (PMK) Caching	<i>Pairwise Master Key</i> (PMK) caching is a technique for sidestepping the need to re-establish security each time a client roams to a different switch. Using PMK caching, clients and switches cache the results of 802.1X authentications. Therefore, access is much faster when a client roams back to a switch to which the client is already authenticated.
Opportunistic Key Caching	This option enables the access point to use a PMK derived with a client on one access point, with the same client when it roams over to another access point. Upon roaming, the client does not have to do 802.1x authentication and can start sending and receiving data sooner.

9. Set the following **Advanced** settings for the WPA2-CCMP encryption scheme:

TKIP Countermeasure Hold Time	The TKIP Countermeasure Hold Time is the time a WLAN is disabled, if TKIP countermeasures have been invoked on the WLAN. Use the drop-down menu to define a value in either Hours (0-18), Minutes (0-1,092) or Seconds (0-65,535). The default setting is 1 second.
Exclude WPA2-TKIP	Select this option to advertise and enable support for only WPA-TKIP. This option can be used if certain older clients are not compatible with newer WPA2-TKIP information elements. Enabling this option allows backwards compatibility for clients that support WPA-TKIP and WPA2-TKIP, but do not support WPA2-CCMP. We recommend that you enable this feature if WPA-TKIP or WPA2-TKIP supported clients operate in a WLAN populated by WPA2-CCMP enabled clients. This feature is disabled by default.
Use SHA256	Select this option to enable SHA-256 authentication key management suite. This suite consists of a set of algorithms for key agreement, key derivation, key wrapping, and content encryption and provide a minimum cryptographic security level of 128 bits. This feature is disabled by default.

10. Select **OK** when completed to update the WLAN's WPA2-CCMP encryption configuration.

Select **Reset** to revert to the last saved configuration.

Before defining a WPA2-TKIP supported configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- WPA2-CCMP should be configured for all new (non-visitor) WLANs requiring encryption, as it's supported by the majority of the hardware and client vendors using wireless networking equipment.
- WPA2-CCMP supersedes WPA-TKIP and implements all the mandatory elements of the 802.11i standard. WPA2-CCMP introduces a new AES-based algorithm called CCMP which replaces TKIP and WEP and is considered significantly more secure.

WEP 64

WEP (*Wired Equivalent Privacy*) is a security protocol specified in the IEEE Wi-Fi (*Wireless Fidelity*) standard. WEP is designed to provide a WLAN with a level of security and privacy comparable to that of a wired LAN.

WEP can be used with open, shared, MAC and 802.1X EAP authentications. WEP is optimal for WLANs supporting legacy deployments when also used with 802.1X EAP authentication to provide user and device authentication and dynamic WEP key derivation and periodic key rotation. 802.1X provides authentication for devices and also reduces the risk of a single WEP key being deciphered. If 802.1X support is not available on the legacy device, MAC authentication should be enabled to provide device level authentication.

WEP 64 uses a 40-bit key concatenated with a 24-bit initialization vector (IV) to form the RC4 traffic key. WEP 64 is a less robust encryption scheme than WEP 128 (containing a shorter WEP algorithm for a hacker to potentially duplicate), but networks that require more security are at risk from a WEP flaw. WEP is only

recommended when clients are incapable of using more robust forms of security. The existing 802.11 standard alone offers administrators no effective method to update keys.

To configure WEP 64 encryption on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Select the **WEP 64** check box from within the **Select Encryption** field.

The screen populates with the parameters required to define a WEP 64 configuration for the new or existing WLAN.

The screenshot shows the 'WLAN Security - WEP 64' configuration window. At the top, under 'Select Encryption', there are checkboxes for WPA/WPA2-TKIP, WPA2-CCMP, WEP 128, KeyGuard, WEP 64 (checked), and Open. Below this is a 'Generate Keys' section with a text input field labeled 'Enter 4 to 32 Characters' and a 'Generate' button. The 'Transmit Key' section contains four rows for Key 1 through Key 4. Each row has a text input field labeled 'Enter 10 HEX or 5 ASCII Characters', a dropdown menu set to 'HEX', a 'Show' checkbox, and a radio button. The radio button for Key 1 is selected. At the bottom left is a 'Restore Default WEP Keys' button. At the bottom right are 'OK', 'Reset', and 'Exit' buttons.

Figure 285: WLAN Security - WEP 64 Screen

5. Configure the following WEP 64 settings:

Generate Keys	Specify a 4- to 32-character pass key and click Generate . The pass key can be any alphanumeric string. The controller or Access Point and their connected clients use the algorithm to convert an ASCII string to the same hexadecimal number. Clients without adapters need to use WEP keys manually configured as hexadecimal numbers.
Keys 1-4	Use the Key #1-4 fields to specify key numbers. For WEP 64 (40-bit key), the keys are 10 hexadecimal characters in length. Select one of these keys for default activation by clicking its radio button. Selecting Show displays a key in exposed plain text.
Restore Default WEP Keys	Select this button to restore the WEP algorithm to its default settings.

Default WEP 64 keys are as follows:

- Key 1 1011121314
- Key 2 2021222324

- Key 3 3031323334
 - Key 4 4041424344
6. Select **OK** when completed to update the WLAN's WEP 64 encryption configuration. Select **Reset** to revert to the last saved configuration.

Before defining a WEP 64 supported configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Additional layers of security (beyond WEP) should be enabled to minimize the likelihood of data loss and security breaches. WEP enabled WLANs should be mapped to an isolated VLAN with firewall policies restricting access to hosts and suspicious network applications.
- WEP enabled WLANs should be permitted access only to resources required by legacy devices.
- If WEP support is needed for WLAN legacy device support, 802.1X EAP authentication should also be configured in order for the WLAN to provide authentication and dynamic key derivation and rotation.

WEP 128

WEP (*Wired Equivalent Privacy*) is a security protocol specified in the IEEE Wi-Fi (*Wireless Fidelity*) standard. WEP is designed to provide a WLAN with a level of security and privacy comparable to that of a wired LAN.

WEP can be used with open, shared, MAC and 802.1 X EAP authentications. WEP is optimal for WLANs supporting legacy deployments when also used with 802.1X EAP authentication to provide user and device authentication and dynamic WEP key derivation and periodic key rotation. 802.1X provides authentication for devices and also reduces the risk of a single WEP key being deciphered. If 802.1X support is not available on the legacy device, MAC authentication should be enabled to provide device level authentication.

WEP 128 and Keyguard use a 104-bit key which is concatenated with a 24-bit IV (*initialization vector*) to form the RC4 traffic key. WEP may be all a small-business user needs for the simple encryption of wireless data. However, networks that require more security are at risk from a WEP flaw. WEP is recommended only when there are client devices incapable of using higher forms of security. The existing 802.11 standard alone offers administrators no effective method to update keys.

WEP 128 or Keyguard provides a more robust encryption algorithm than WEP 64 by requiring a longer key length and pass key. Thus, making it harder to hack through the replication of WEP keys.

To configure WEP 128 encryption on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.

4. Select the **WEP 128** check box from within the **Select Encryption** field.
The screen populates with the parameters required to define a WEP 128 configuration for the new or existing WLAN.

Figure 286: WLAN Security - WEP 128 Screen

5. Configure the following WEP 128 settings:

Generate Keys	Specify a 4- to 32-character pass key and click Generate . The pass key can be any alphanumeric string. The access point, other proprietary routers, and WiNG clients use the algorithm to convert an ASCII string to the same hexadecimal number. Clients without these WiNG adapters need to use WEP keys manually configured as hexadecimal numbers.
Keys 1-4	Use the Key #1-4 fields to specify key numbers. For WEP 128 (104-bit key), the keys are 26 hexadecimal characters in length. Select one of these keys for default activation by clicking its radio button. Selecting Show displays a key in exposed plain text.
Restore Default WEP Keys	Select this button to restore the WEP algorithm to its default settings.

Default WEP 128 keys are as follows:

- Key 1 101112131415161718191A1B1C
 - Key 2 202122232425262728292A2B2C
 - Key 3 303132333435363738393A3B3C
 - Key 4 404142434445464748494A4B4C
6. Select **OK** when completed to update the WLAN's WEP 128 encryption configuration.
Select **Reset** to revert to the last saved configuration.

Before defining a WEP 128 supported configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Additional layers of security (beyond WEP) should be enabled to minimize the likelihood of data loss and security breaches. WEP enabled WLANs should be mapped to an isolated VLAN with firewall policies restricting access to hosts and suspicious network applications.
- WEP enabled WLANs should be permitted access only to resources required by legacy devices.
- If WEP support is needed for WLAN legacy device support, 802.1X EAP authentication should also be configured in order for the WLAN to provide authentication and dynamic key derivation and rotation.

Keyguard

Keyguard (a form of WEP) could be all a small business needs for the simple encryption of wireless data.

Keyguard is a proprietary encryption method and an enhancement to WEP encryption, and was developed before the finalization of WPA-TKIP. The Keyguard encryption implementation is based on the IEEE Wi-Fi standard, 802.11i.

To configure Keyguard encryption on a WLAN:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its security properties.
3. Select **Security**.
4. Select the **Keyguard** check box from within the **Select Encryption** field.

The screen populates with the parameters required to define a keyguard configuration for the new or existing WLAN.

The screenshot shows the 'Select Encryption' dialog box. Under 'Select Encryption', the following options are visible:

- WPA/WPA2-TKIP
- WPA2-CCMP
- WEP 128
- KeyGuard
- WEP 64
- Open

Below this, there is a section for generating keys:

Enter 4 to 32 Characters
Generate Keys

Enter 26 HEX or 13 ASCII Characters

Key	Format	Show	Transmit Key
Key 1	HEX	<input type="checkbox"/>	<input checked="" type="radio"/>
Key 2	HEX	<input type="checkbox"/>	<input type="radio"/>
Key 3	HEX	<input type="checkbox"/>	<input type="radio"/>
Key 4	HEX	<input type="checkbox"/>	<input type="radio"/>

At the bottom left is a button:

At the bottom right are buttons:

Figure 287: WLAN Security - Keyguard Screen

5. Configure the following keyguard settings:

Generate Keys	Specify a 4- to 32-character pass key and click Generate . The pass key can be any alphanumeric string. The access point, other proprietary routers, and WiNG clients use the algorithm to convert an ASCII string to the same hexadecimal number. Clients without these WiNG adapters need to use keys manually configured as hexadecimal numbers.
Keys 1-4	Use the Key #1-4 fields to specify key numbers. For keyguard (104-bit key), the keys are 26 hexadecimal characters in length. Select one of these keys for default activation by clicking its radio button. Selecting Show displays a key in exposed plain text.
Restore Default WEP Keys	Select this button to restore the keyguard algorithm to its default settings. This might be necessary, for example, if the latest defined algorithm has been compromised and no longer provides its former measure of data security.

Default WEP keyguard keys are as follows:

- Key 1 101112131415161718191A1B1C
- Key 2 202122232425262728292A2B2C
- Key 3 303132333435363738393A3B3C
- Key 4 404142434445464748494A4B4C

6. Select **OK** when completed to update the WLAN's keyguard encryption configuration.

Select **Reset** to revert to the last saved configuration.

Before defining a keyguard configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- WiNG proprietary authentication techniques can also be enabled on WLANs supporting other WiNG proprietary techniques, such as keyguard.
- A WLAN using keyguard to support legacy devices should largely limit its use of keyguard to those legacy devices only.
- If WEP support is needed for WLAN legacy device support, 802.1X EAP authentication should be also configured in order for the WLAN to provide authentication and dynamic key derivation and rotation.

Configuring WLAN Firewall Settings

A firewall is a mechanism enforcing access control, and is considered a first line of defense in protecting proprietary information within the network. The means by which this is accomplished varies, but in principle, a Firewall can be thought of as mechanisms *allowing* and *denying* data traffic in respect to administrator defined rules. For an overview of Firewalls, see [Wireless Firewall](#) on page 826.

WLANs use Firewalls like *Access Control Lists (ACLs)* to filter/mark packets based on the WLAN from which they arrive, as opposed to filtering packets on Layer 2 ports. An ACL contains an ordered list of *Access Control Entries (ACEs)*. Each ACE specifies an action and a set of conditions (rules) a packet must satisfy to match the ACE. The order of conditions in the list is critical since filtering is stopped after the first match.

IP based Firewall rules are specific to source and destination IP addresses and the unique rules and precedence orders assigned. Both IP and non-IP traffic on the same Layer 2 interface can be filtered by applying both an IP ACL and a MAC.

Additionally, administrators can filter Layer 2 traffic on a physical Layer 2 interface using MAC addresses. A MAC Firewall rule uses source and destination MAC addresses for matching operations, where the result is a typical *allow*, *deny* or *mark* designation to WLAN packet traffic.

A MAC Firewall rule uses source and destination MAC addresses for matching operations, where the result is a typical allow, deny or mark designation to WLAN packet traffic.

Keep in mind that IP and non-IP traffic on the same Layer 2 interface can be filtered by applying both an IP ACL and a MAC ACL to the interface.

To review existing Firewall configurations, create a new Firewall configuration or edit the properties of a WLAN's existing Firewall:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify the properties of an existing WLAN.

3. Select **Firewall** from the Wireless LAN Policy options.

The screenshot shows the following configuration options:

- IP Firewall Rules:**
 - Inbound IP Firewall Rules: <none>
 - Outbound IP Firewall Rules: <none>
 - Inbound IPv6 Firewall Rules: <none>
 - Outbound IPv6 Firewall Rules: <none>
- MAC Firewall Rules:**
 - Inbound MAC Firewall Rules: <none>
 - Outbound MAC Firewall Rules: <none>
- Association ACL:**
 - Association ACL: <none>
- Application Policy:**
 - Application Policy: <none>
 - Enable Voice/Video Metadata:
 - Enable HTTP Metadata:
 - Enable SSL Metadata:
 - Enable TCP RTT:
- Trust Parameters:**
 - ARP Trust:
 - Validate ARP Header Mismatch:
 - DHCP Trust:
- IPv6 Settings:**
 - ND Trust:
 - Validate ND Header Mismatch:
 - DHCPv6 Trust:

Figure 288: WLAN Security - WLAN Firewall Screen

4. Select one of the following, using the drop-down menu:
- Inbound IP Firewall Rule
 - Outbound IP Firewall Rule
 - Inbound IPv6 Firewall Rules
 - Outbound IPv6 Firewall Rule

If no rules exist, select the **Create** icon to create a new firewall rule configuration. Select the **Edit** icon to modify the configuration of a selected Firewall policy configuration.

If you are creating a new rule, provide a name up to 32 characters.

5. Click **Add**.

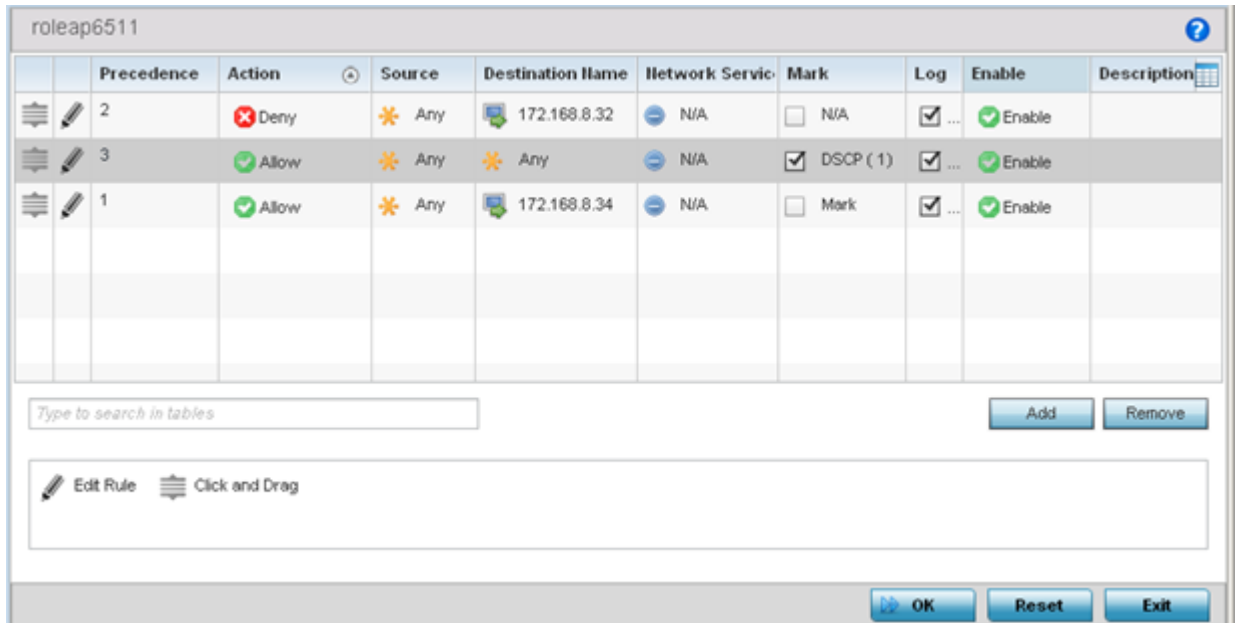


Figure 289: WLAN Security - IP Firewall Rules Screen

6. IP firewall rule configurations can either be modified as a collective group of variables or selected and updated individually as their filtering attributes require a more refined update.
 - a. Select the **Edit Rule** icon to the left of a particular IP firewall rule configuration to update its parameters collectively.



Figure 290: WLAN Security - IP Firewall Rules - Edit Rule Screen

- b. Click the icon in the **Description** column (top right-hand side of the screen) and select IP filter values as needed to add criteria into the configuration of the IP ACL.

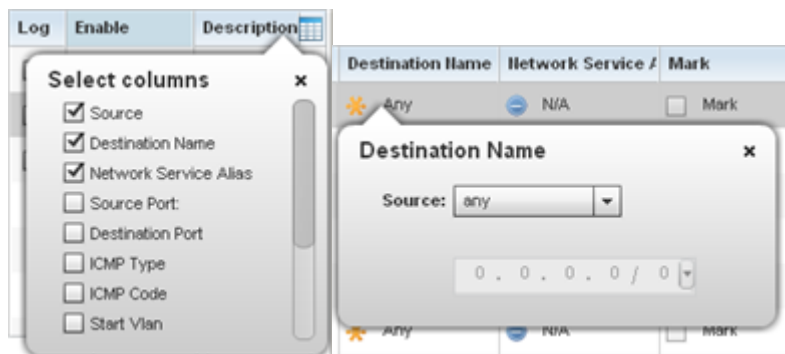


Figure 291: WLAN Security - IP Firewall Rules - IP Firewall Rules Add Criteria



Note

Only those selected IP ACL filter attributes display. Each value can have its current setting adjusted by selecting that IP ACL's column to display a pop-up to adjust that one value.

7. Define the following parameters for either inbound or outbound IP firewall rules:

Precedence	Specify or modify a precedence for this IP policy between 1 and 5000. Rules with lower precedence are always applied to packets first. If you modify a precedence to apply a higher integer, it will move down the table to reflect its lower priority.
Action	Every IP Firewall rule is made up of matching criteria rules. The action defines what to do with the packet if it matches the specified criteria. The following actions are supported: Deny Instructs the Firewall to prohibit a packet from proceeding to its destination Allow Instructs the Firewall to allow a packet to proceed to its destination
DNS Name	Specify the DNS Name which may be a full domain name, a portion of a domain name or a suffix. This name is used for the DNS Match Type criteria.
DNS Match Type	Specify the DNS matching criteria that the DNS Name can be matched against. This can be configured as an exact match for a DNS domain name, a suffix for the DNS name or a domain that contains a portion of the DNS name. If traffic matches the configured criteria in the DNS Match Type, that rule will be applied to the ACL.

Source	<p>Select the source IP address or network group configuration used as basic matching criteria for this IP ACL rule. Source options include:</p> <ul style="list-style-type: none"> • Any – Indicates any host device in any network. • Network – Indicates all hosts in a particular network. Subnet mask information must be provided for filtering based on network. • Host – Indicates a single host with a specific IP address. • Alias – Indicates a collection of IP addresses or hostnames or IP address ranges which are configured as a single unit. This is for ease of configuration of ACLs. When selected, all IP addresses or hostnames or IP address ranges are used in this ACL.
Destination	<p>Select the destination IP address or network group configuration used as a basis matching criteria for this IP ACL rule. Destination options include:</p> <ul style="list-style-type: none"> • Any – Indicates any host device in any network. • Network – Indicates all hosts in a particular network. Subnet mask information must be provided for filtering based on network. • Host – Indicates a single host with a specific IP address. • Alias – Indicates a collection of IP addresses or hostnames or IP address ranges which are configured as a single unit. This is for ease of ACL configuration. When selected, all IP addresses or hostnames or IP address ranges are used in this ACL.
Protocol	<p>Select the protocol to filter for this ACL. Use the drop down to select from a list of predefined protocol or use the spinner control to set a particular protocol number.</p>
Network Service Alias	<p>The <i>service alias</i> is a set of configurations consisting of protocol and port mappings. Both source and destination ports are configurable. Set an alphanumeric service alias (beginning with a \$) and include the protocol as relevant. Selecting either tcp or udp displays an additional set of specific TCP/UDP source and destination port options.</p>
Source Port	<p>If you are using either tcp or udp as the protocol, define whether the source port for incoming IP ACL rule application is any, equals, or an administrator defined range. If you are not using tcp or udp, this setting displays as N/A. This is the data local origination port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for low and high numeric range settings. A source port cannot be a destination port.</p>

Destination Port	If you are using either tcp or udp as the protocol, define whether the destination port for outgoing IP ACL rule application is any , equals , or an administrator defined range. If you are not using tcp or udp , this setting displays as N/A. This is the data destination virtual port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for low and high numeric range settings. A source port cannot be a destination port.
ICMP Type	Selecting ICMP as the protocol for the IP rule displays an additional set of ICMP specific options for ICMP type and code. The ICMP (<i>Internet Control Message Protocol</i>) uses messages identified by numeric type. ICMP messages are used for packet flow control or generated in IP error responses. ICMP errors are directed to the source IP address of the originating packet. Assign an ICMP type from 1-10.
ICMP Code	Selecting ICMP as the protocol for the IP rule displays an additional set of ICMP specific options for ICMP type and code. Many ICMP types have a corresponding code, helpful for troubleshooting network issues, for example <i>0 - Net Unreachable, 1 - Host Unreachable, and 2 - Protocol Unreachable</i> .
Start VLAN	Select a Start VLAN icon within a table row to set (apply) a start VLAN range for this IP ACL filter. The Start VLAN represents the virtual LAN beginning numeric identifier arriving packets must adhere to in order to have the IP ACL rules apply.
End VLAN	Select an End VLAN icon within a table row to set (apply) an end VLAN range for this IP ACL filter. The End VLAN represents the virtual LAN end numeric identifier arriving packets must adhere to in order to have the IP ACL rules apply.
Mark	Select this option to mark certain fields inside a packet before allowing them. Mark applies only for Allow rules. Mark sets the rule's 802.1p or dscp level (from 0 - 7)
Log	Select this option to create a log entry that a firewall rule has allowed a packet to be either denied or allowed.
Enabled	Select this option to enable or disable this particular IP Firewall rule in this rule set.
Description	Lists the administrator assigned description applied to the IP ACL rule. Select a description within the table to modify its character string as filtering changes warrant. Select the icon within the Description table header to launch a Select Columns screen used to add or remove IP ACL criteria from the table.

8. The **Precedence** column sets the priority of a IP Firewall rule within its rule set.

Click on this column and drag the rule to its appropriate place in the ruleset to set its precedence.

9. Select an existing Inbound IPv6 Firewall Rule or Outbound IPv6 Firewall Rule using the drop-down menu.

If no rules exist, select the **Create** icon to create a new firewall rule configuration. Select the Edit icon to modify the configuration of a selected firewall.

If creating a new rule, provide a name up to 32 characters.

10. Click **Add**.

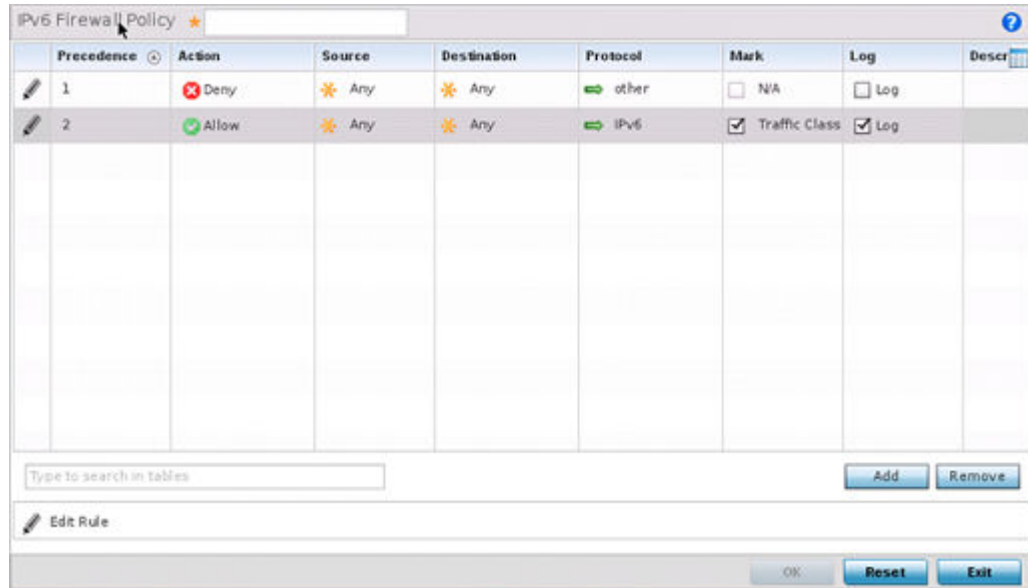


Figure 292: WLAN Security - IPv6 Firewall Rules screen

IPv6 Firewall rule configurations can either be modified as a collective group of variables or selected and updated individually as their filtering attributes require a more refined update.

11. Select the **Edit Rule** icon to the left of a particular IPv6 Firewall rule configuration to update its parameters collectively.

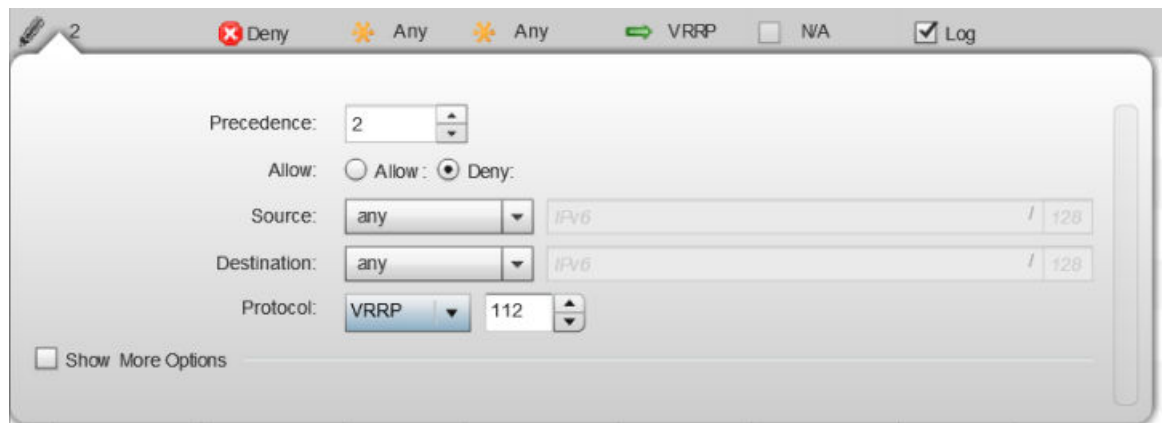


Figure 293: WLAN Security - IPv6 Firewall Rules - Edit Rule Screen

12. Click the icon in the **Description** column (top right-hand side of the screen) and select IPv6 filter values as needed to add criteria into the configuration of the IPv6 ACL.

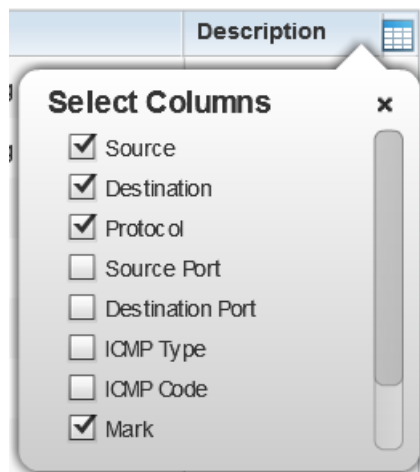


Figure 294: WLAN Security - IPv6 Firewall Rules - IPv6 Firewall Rules Add Criteria Screen

13. Define the following parameters for either inbound or outbound IPv6 firewall rules:

Precedence	Specify or modify a precedence for this IPv6 policy between 1-1500. Rules with lower precedence are always applied to packets first. If modifying a precedence to apply a higher integer, it will move down the table to reflect its lower priority. The Precedence column sets the priority of a IPv6 Firewall rule within its rule set.
Action	Every IPv6 Firewall rule is made up of matching criteria rules. The action defines what to do with the packet if it matches the specified criteria. The following actions are supported: Deny Instructs the Firewall to prohibit a packet from proceeding to its destination Allow Instructs the Firewall to allow a packet to proceed to its destination
Source	Select the source IPv6 address or network group configuration used as a basis matching criteria for this IPv6 ACL rule. Source options include: <ul style="list-style-type: none"> • Any – Indicates any host device in any network. • Network – Indicates all hosts in a particular IPv6 network. Subnet mask information must be provided for filtering based on network. • Host – Indicates a single host with a specific IPv6 address.

Destination	Select the destination IPv6 address or network group configuration used as a basis matching criteria for this IPv6 ACL rule. Destination options include: <ul style="list-style-type: none"> Any – Indicates any host device in any network. Network – Indicates all hosts in a particular IPv6 network. Subnet mask information must be provided for filtering based on network. Host – Indicates a single host with a specific IPv6 address.
Protocol	Select the protocol to filter for this IPv6 ACL. Use the drop down to select from a list of predefined protocol or use the spinner control to set a particular protocol number.
Source Port	If you are using either tcp or udp as the protocol, define whether the source port for incoming IPv6 ACL rule application is any , equals , or an administrator defined range. If you are not using tcp or udp , this setting displays as N/A. This is the data local origination port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for low and high numeric range settings. A source port cannot be a destination port.
Destination Port	If you are using either tcp or udp as the protocol, define whether the destination port for outgoing IPv6 ACL rule application is any , equals , or an administrator defined range. If you are not using tcp or udp , this setting displays as N/A. This is the data destination virtual port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for low and high numeric range settings. A source port cannot be a destination port.
ICMP Type	Selecting ICMP as the protocol for the IPv6 rule displays an additional set of ICMP specific options for ICMP type and code. The <i>Internet Control Message Protocol</i> (ICMP) uses messages identified by numeric type. ICMP messages are used for packet flow control or generated in IP error responses. ICMP errors are directed to the source IP address of the originating packet. Assign an ICMP type from 1-10.
ICMP Code	Selecting ICMP as the protocol for the IPv6 rule displays an additional set of ICMP specific options for ICMP type and code. Many ICMP types have a corresponding code, helpful for troubleshooting network issues, for example <i>0 - Net Unreachable, 1 - Host Unreachable, and 2 - Protocol Unreachable</i> .
Mark	Select this option to mark certain fields inside a packet before allowing them. Mark applies only for Allow rules. Mark sets the rule's 802.1p or dscp level (from 0 - 7)

Log	Select this option to create a log entry that a firewall rule has allowed a packet to be either denied or allowed.
Description	Lists the administrator assigned description applied to the IPv6 ACL rule. Select a description within the table to modify its character string as filtering changes warrant. Select the icon within the Description table header to launch a Select Columns screen used to add or remove IPv6 ACL criteria from the table.

14. Click **OK** to save all changes to the **IPv6 Firewall Rules** dialog.
Click **Exit** to close the dialog and return to the previous screen.
15. Select existing inbound or outbound MAC Firewall Rules using the drop-down menu.
If no rules exist, select **Create** to display a screen where Firewall rules can be created.
16. Select the **+ Add Row** button.
17. Select the added row to expand it into configurable parameters.

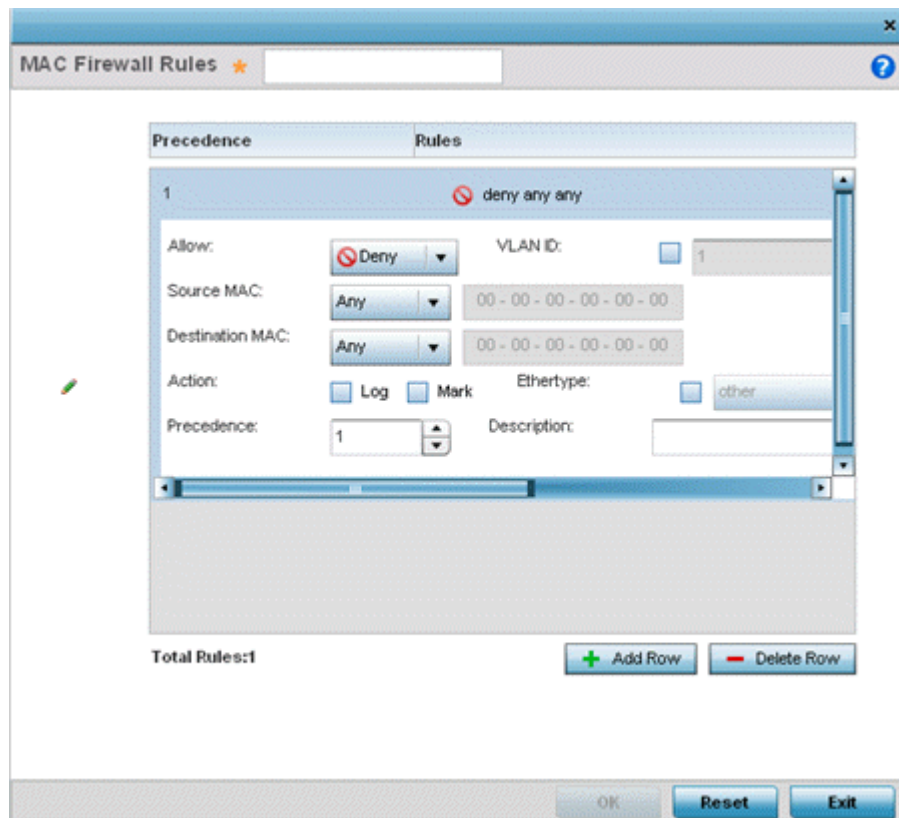


Figure 295: WLAN Security - MAC Firewall Rules Screen

18. Define the following parameters for either the inbound or outbound MAC Firewall Rules:

Allow	<p>Every IP Firewall rule is made up of matching criteria rules. The action defines what to do with the packet if it matches the specified criteria. The following actions are supported:</p> <p>Deny Instructs the Firewall to prohibit a packet from proceeding to its destination</p> <p>Permit Instructs the Firewall to allow a packet to proceed to its destination</p>
Source and Destination MAC	Enter both Source and Destination MAC addresses. The access point uses the source IP address, destination MAC address as basic matching criteria. Provide a subnet mask if using a mask.
Actions	<p>The following actions are supported:</p> <p>Log Creates a log entry that a Firewall rule has allowed a packet to either be denied or permitted.</p> <p>Mark Modifies certain fields inside the packet and then permits them. Therefore, mark is an action with an implicit permit.</p> <p>Mark, Log Conducts both mark and log functions.</p>
Traffic Class	Sets an ACL traffic classification value for the packets identified by this inbound MAC filter. Traffic classifications are used for QoS purposes. Use the spinner to define a traffic class from 1- 10.
Precedence	Use the spinner control to specify a precedence for this MAC Firewall rule between 1-1500. Access policies with lower precedence are always applied first to packets.
VLAN ID	Enter a VLAN ID representative of the shared SSID each user employs to interoperate within the network (once authenticated by the access point's local RADIUS server). Set the VLAN from 1 - 4094.
Match 802.1P	Configures IP DSCP to 802.1p priority mapping for untagged frames. Use the spinner control to define a setting from 0 - 7.

Ethertype	Use the drop-down menu to specify an Ethertype of either ipv6 , arp , wisp or monitor 8021q . An EtherType is a two-octet field within an Ethernet frame. It is used to indicate which protocol is encapsulated in the payload of an Ethernet frame. When other is selected, the ethertype value can be configured manually.
Description	Provide an ACL setting description (up to 64 characters) for the rule to help differentiate it from others with similar configurations.

19. Save the changes to the new MAC rule, or reset to the last saved configuration as needed.

20. Select the **+ Add Row** button.

21. Define the following parameters for **Association ACL**.

An Association ACL defines the rules used to allow/deny association to devices for this wireless LAN. If no Association ACL exists, select the **Create** button to display a new window where new ACL can be created.

Precedence	Enter a numerical value indicating the precedence of rule execution.
Starting MAC Address	Enter a MAC address to define the start of range. This field is mandatory.
Ending MAC Address	Enter a MAC address to define the end of range.
Allow/Deny	<p>Every Association ACL rule consists of matching criteria rules. The action defines what to do with the device if it matches the specified criteria. The following actions are supported:</p> <p>Deny Instructs the Firewall to prevent the device from associating with this WLAN</p> <p>Permit Instructs the Firewall to allow the device to associate with this WLAN</p>

22. Assign an **Application Policy** to the firewall and set the following metadata extraction rules:

Application Policy	<p>Use the drop-down menu to assign an application policy to the WLAN's firewall configuration. When an application is recognized and classified by the WiNG application recognition engine, administrator defined actions can be applied to that application. An application policy defines the rules or actions executed on recognized HTTP, SSL and .voice/video applications. For more information, refer to Application.</p> <p>Note: Application policy is not supported on the WiNG 7.1.X, AP5XX model access points.</p>
Voice/Video Metadata	<p>Select this option to enable the extraction of voice and video metadata flows. When enabled, administrators can track voice and video calls by extracting parameters (packets transferred and lost, jitter, audio codec and application name). Most Enterprise VoIP applications like Facetime, Skype for Business, and VoIP terminals can be monitored for call quality and visualized on the Extreme NSight UI in manner similar to HTTP and SSL. Call quality and metrics can be determined only from calls that are established as unencrypted. This setting is disabled by default.</p> <p>Note: Starting with WiNG 5.9.3, NSight is a separate target. For information on Extreme NSight™, refer to the Extreme NSight User Guide available at https://extremenetworks.com/documentation.</p>
HTTP Metadata	<p>Select this option to enable the extraction of HTTP flows. When enabled, administrators can track HTTP Websites accessed by both internal and guest clients and visualize HTTP data usage, hits, active time and total clients on the Extreme NSight UI. This setting is disabled by default.</p> <p>Note: Starting with WiNG 5.9.3, NSight is a separate target. For information on Extreme NSight™, refer to the Extreme NSight User Guide available at https://extremenetworks.com/documentation.</p>
SSL Metadata	<p>Select this option to enable the extraction of SSL flows. When enabled, administrators can track SSL Websites accessed by both internal and guest clients and visualize SSL data usage, hits, active time and total clients on the Extreme NSight UI. This setting is disabled by default.</p> <p>Note: Starting with WiNG 5.9.3, NSight is a separate target. For information on Extreme NSight™, refer to the Extreme NSight User Guide available at https://extremenetworks.com/documentation.</p>

23. Set the following **Trust Parameters**:

ARP Trust	Select this option to enable ARP trust on this WLAN. ARP packets received on this WLAN are considered trusted and information from these packets is used to identify rogue devices within the network. This setting is disabled by default.
Validate ARP Header Mismatch	Select this option to check for a source MAC mismatch in the ARP header and Ethernet header. This setting is enabled by default.
DHCP Trust	Select this option to enable DHCP trust on this WLAN. This setting is disabled by default.

24. Set the following **IPv6 Settings**:

ND Trust	Select this option to enable the trust of neighbor discovery requests on an IPv6 supported firewall on this WLAN. This setting is disabled by default.
Validate ND Header Mismatch	Select this option to enable a mismatch check for the source MAC within the ND header and Link Layer Option. This setting is enabled by default.
DHCPv6 Trust	Select this option to enable the trust all DHCPv6 responses on this WLAN's firewall. DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. This setting is disabled by default.
RA Guard	Select this option to enable router advertisements or ICMPv6 redirects on this WLAN's firewall. This setting is disabled by default.

25. Set the following **Wireless Client Deny** configuration:

Wireless Client Denied Traffic Threshold	When this option is enabled, any associated client, exceeding the thresholds configured for storm traffic, is either deauthenticated or blacklisted depending on the selected action. The threshold range is from 1- 1000000 packets per second. This feature is disabled by default.
Action	If you are enabling a wireless client threshold, use the drop-down menu to determine whether clients are deauthenticated when the threshold is exceeded, or blacklisted from connectivity for a user-defined interval. Selecting None applies no consequence to an exceeded threshold.
Blacklist Duration	Select this option and define a setting from 0 - 86,400 seconds. Offending clients can reauthenticate, once this blacklist duration has been exceeded.

26. Set a **Firewall Session Hold Time** in either Seconds (1 - 300) or Minutes (1 - 5).

This is the hold time for caching user credentials and Firewall state information when a client roams. The default setting is 30 seconds.

27. Click **OK** when completed to update this WLAN's Firewall settings.

Click **Reset** to revert the screen to its last saved configuration.

Before defining an access control configuration on a WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- IP and non-IP traffic on the same Layer 2 interface can be filtered by applying both an IP ACL and a MAC ACL to the interface.

Configure WLAN Client Settings

Each WLAN can maintain its own client setting configuration. These settings include wireless client inactivity timeouts and broadcast configurations.

Access points can support up to 256 clients each. Client load balancing can be enforced for the WLAN as more and more WLANs are deployed.

To define a WLAN's unique client support configuration:

1. Select **Configuration** → **Wireless** → **Wireless LANs** to display available WLANs.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its properties.
3. Select the **Client Settings** tab.

Client Settings	
Enable Client-to-Client Communication	<input checked="" type="checkbox"/>
Wireless Client Power	20 (0 to 20 dBm)
Wireless Client Idle Time	30 Minutes (1 to 1,440)
Max Firewall Sessions per Client	10 (10 to 10,000)
Max Clients Allowed Per Radio	256 (0 to 256)
Radio Resource Measurement	<input type="checkbox"/>
Radio Resource Measurement Channel Report	<input checked="" type="checkbox"/>
Enforce Client Load Balancing	<input type="checkbox"/>
Enforce DHCP Client Only	<input type="checkbox"/>
Proxy ARP Mode	Dynamic
Proxy ND Mode	Dynamic
Enforce DHCP-Offer Validation	<input type="checkbox"/>
Wing Client Extensions	
Move Operations	<input type="checkbox"/>
Smart Scan	<input type="checkbox"/>
Symbol Information Element	<input checked="" type="checkbox"/>
WMM Load Information Element	<input type="checkbox"/>
Scan Assist	<input type="checkbox"/>
FT Aggregate	<input type="checkbox"/>
Channel Info Interval	8

Figure 296: WLAN Policy Client Settings Screen

4. Define the following **Client Settings** for the WLAN:

Enable Client-to-Client Communication	Select this option to enable client to client communication within this WLAN. The default is enabled, meaning clients are allowed to exchange packets with other clients. It does not necessarily prevent clients on other WLANs from sending packets to this WLAN, but as long as this setting also disabled on that WLAN, clients are not permitted to interoperate.
Wireless Client Power	Use this parameter to set the maximum transmit power (between 0 - 20 dBm) communicated to wireless clients for transmission within the network. The default value is 20 dBm.
Wireless Client Idle Time	Set the maximum amount of time wireless clients are allowed to be idle within this WLAN. Set the idle time in either Seconds (60 - 86,400), Minutes (1 - 1,440), Hours (0 - 24), or Days (0 - 1). When this setting is exceeded, the client is no longer able to access resources and must re-authenticate. The default value is 1,800 seconds.
Max Firewall Sessions per Client	Select this option to set the maximum amount of sessions (between 10 - 10,000) clients within the network over the Firewall. When enabled, this parameter limits the number of simultaneous sessions allowed by the Firewall per wireless client. This feature is disabled by default.
Max Clients Allowed Per Radio	Select this option to set the maximum number of clients (from 1- 256 clients) allowed to connect using a single radio. When enabled, this parameter limits the number of clients that are allowed to connect to a single radio. This feature is set to 256 by default.
Radio Resource Measurement	Select this option to enable radio resource measurement capabilities (IEEE 802.11k) on this WLAN. 802.11k improves how traffic is distributed. In a WLAN, each device normally connects to an access point with the strongest signal. Depending on the number and locations of the clients, this arrangement can lead to excessive demand on one access point and under-utilization for others, resulting in degradation of overall network performance. With 802.11k, if the access point with the strongest signal is loaded to its capacity, a client connects to a underutilized access point. Even if the signal is weaker, the overall throughput is greater since it's an efficient use of the network's resources. This setting is enabled by default.
Radio Resource Measurement Channel Report	Select this option to enable radio resource measurement channel reporting (IEEE 802.11k) on this WLAN. This setting is disabled by default.

Enforce Client Load Balancing	Select this option to distribute clients evenly amongst associated access point radios. This feature is disabled by default. Client load balancing can be enforced for the WLAN as more and more WLANs are deployed. Loads are balanced by ignoring association and probe requests. Probe and association requests are not responded to, forcing a client to associate with another access point radio.
Enforce DHCP Client Only	Select the check box to enforce that the firewall allows packets from clients only if they used DHCP to obtain an IP address, disallowing static IP addresses. This feature is disabled by default.
Proxy ARP Mode	Use the drop-down menu to define the proxy ARP mode as either Strict or Dynamic . Proxy ARP is the technique used by the access point to answer ARP requests intended for another system. By faking its identity, the access point accepts responsibility for routing packets to the actual destination. Dynamic is the default value.
Enforce DHCP-Offer Validation	Select the check box to enforce DHCP offer validation. The default setting is disabled.

5. Define the following **Wing Client Extensions** for the WLAN:

Move Operations	Select the check box to enable the use of HFSR (<i>Hyper-Fast Secure Roaming</i>) for clients on this WLAN. This feature applies only to certain client devices and is disabled by default.
Smart Scan	Enable a smart scan to refine a clients channel scans to just a few channels as opposed to all available channels. This feature is disabled by default.
Symbol Information Element	Select the check box to support the Symbol Information Element with legacy Symbol Technology clients, thus making them optimally interoperable with the latest Extreme Networks access points. The default setting is enabled.
WMM Load Information Element	Select the check box to support a WMM Load Information Element in radio transmissions with legacy clients. The default setting is disabled.
Scan Assist	Enable scan assist to achieve faster roams on DFS channels by eliminating passive scans. Clients would get channel information directly from possible roam candidates. This setting is disabled by default.

FT Aggregate	Enable FT (<i>fast transition</i>) aggregate to increase roaming speed by eliminating separate key exchange handshake frames with potential roam candidates. Enable fast transition to complete an initial FT over DS handshake with multiple roam candidates (up to 6) at once, eliminating the need to send separate FT over DS handshakes to each roam candidate. This setting is disabled by default.
Channel Info Interval	Configure the channel information interval to periodically retrieve channel information directly from potential roam candidates without making a scan assist request.

6. Define the following **Coverage Hole Detection** settings to determine how detected coverage holes are managed:

Enable	Enable this setting to inform an access point when it experiences a coverage hole (area of poor wireless coverage). This setting is disabled by default.
Use 11k Clients	Optionally enable this setting to also use 802.11k-only-capable clients to detect coverage holes. This is a reduced set of coverage hole detection capabilities (only standard 11k messages and behaviors). This setting is disabled by default.
Threshold	Use the spinner control to set the access point signal strength (as seen by the client) below which a coverage hole incident is reported. The threshold can be set from -80 to -60.
Offset	Use the spinner control to set the offset added to the threshold to obtain the access point signal strength (as seen by the client) considered adequate. The offset can be set from 5 to 20.

7. Set the following **AP Attributes Information**:

Enable	Select this option to include the AP-Attributes information element in the beacon. The information element helps clients recognize which wing-extensions are supported by the AP. This setting is enabled by default.
Include Hostname	Select this option to include the AP's hostname in the AP-Attributes information element. This setting is disabled by default.

8. Define the following **Timeout Settings** for the WLAN:

Credential Cache Timeout	Set a timeout period for the credential cache in Days (0-1), Hours (0-24), Minutes (1-1440), or Seconds (60-86,4000). The default setting is 1 hour.
VLAN Cache Timeout	Set a timeout period for the VLAN cache in Days (0-1), Hours (0-24), Minutes (1-1440), or Seconds (60-86,4000). The default setting is 1 hour.

9. Select **Controller Assisted Mobility** to use a controller or service platform's mobility database to assist in roaming between RF Domains. This feature is disabled by default.

10. Use the **Device ID** settings, within the **OpenDNS** field, to specify a 16 character maximum OpenDNS device ID forwarded in a DNS query. OpenDNS extends DNS by adding additional features such as misspelling correction, phishing protection, and optional content filtering.
11. Click **OK** to save the changes.
Click **Reset** to revert the screen to the last saved configuration.

Configure WLAN Accounting Settings

Accounting is the method of collecting and sending security server information for billing, auditing, and reporting user data; such as start and stop times, executed commands (such as PPP), number of packets and number of bytes. Accounting enables wireless network administrators to track the services users are accessing and the network resources they are consuming. When accounting is enabled, the network access server reports and logs user activity to a RADIUS security server in the form of accounting records. Each accounting record is stored on a local access control server. The data can be analyzed for network management, client billing, and/or auditing. Accounting methods must be defined through AAA.

Accounting can be enabled and applied to WLANs, to uniquely log accounting events specific to the WLAN. Accounting logs contain information about the use of remote access services by users. This information is of great assistance in partitioning local versus remote users and how to best accommodate each. Remote user information can be archived to an external location for periodic network and user permission administration.

To configure WLAN accounting settings:

1. Go to **Configuration** → **Wireless** → **Wireless LANs**.
2. Click **Add** to create an additional WLAN, or select an existing WLAN and click **Edit** to modify its properties.

3. Select **Accounting**.

Figure 297: WLAN Accounting Screen4. Set the following **Syslog Accounting** information:

Enable Syslog Accounting	Use this option to generate accounting records in standard syslog format (RFC 3164). The feature is disabled by default.
Syslog Host	Use the drop-down menu to select either Hostname or IP Address . Based on the option you have selected, specify the IP address or hostname of the external syslog host where accounting records are routed. Note: Hostnames cannot include an underscore character.
Syslog Port	Use the spinner control to set the destination UDP port number of the external syslog host where the accounting records are routed. The default port is 514.
Proxy Mode	If a proxy is needed to connect to the syslog server, choose a proxy mode of Through RF Domain Manager or Through Wireless Controller . If no proxy is needed, select None .

Format	Specify the delimiter format for the MAC address to be packed in the syslog request. Available formats are No Delimiter (aabbccddeeff), Colon Delimiter (aa:bb:cc:dd:ee:ff), Dash Delimiter (aa-bb-cc-dd-ee-ff), Dot Delimiter (aabb.ccdd.eeff) and Middle Dash Delimiter (aabbcc-ddeeff).
Case	Specify to send the MAC addresses in either Uppercase or Lowercase for syslog requests. The default setting is Uppercase .

5. Select the **Enable RADIUS Accounting** check box to use an external RADIUS resource for AAA accounting.

When the check box is selected, an **AAA Policy** field displays. Either use the default AAA policy with the WLAN, or select **Create** to define a new AAA configuration that can be applied to the WLAN. This setting is disabled by default.

6. Click **OK** to save the changes.

Click **Reset** to revert the screen to the last saved configuration.

Accounting Deployment Considerations

Before defining a WLAN AAA configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- When using RADIUS authentication, the WAN port round trip delay should not exceed 150ms. Excessive delay over a WAN can cause authentication and roaming issues. When excessive delays exist, a distributed RADIUS service should be used.
- Authorization policies should be implemented when users need to be restricted to specific WLANs, or time and date restrictions need to be applied.
- Authorization policies can also apply bandwidth restrictions and assign Firewall policies to users and devices.

Configure WLAN Service Monitoring Settings

Service Monitoring is a mechanism for administrating external AAA server, captive portal server, access point adoption, and DHCP server activity for WLANs. Service monitoring enables an administrator to better notify users of a service's availability and make resource substitutions. Service monitoring can be enabled and applied to log activity as needed for specific WLANs.

External services can be rendered unavailable due to any of the following instances:

- When the RADIUS authentication server becomes unavailable. The RADIUS server could be local or external to the controller, service platform or access point.
- When an externally hosted captive portal is unavailable (for any reason)
- If an access point's connected controller or service platform becomes unavailable.
- When a monitored DHCP server becomes unavailable.

To configure Service Monitoring settings:

1. Go to **Configuration** → **Wireless** → **Wireless LANs** to display a high-level display of the existing WLANs.

2. Click **Add** to create an additional WLAN, or click **Edit** to modify the properties of an existing WLAN.
3. Click **Service Monitoring**.

AAA Server Monitoring

Captive Portal External Server Monitoring

Adoption Monitoring

Enable

VLAN (1 to 4,094)

DHCP Server Monitoring

Enable

VLAN (1 to 4,094)

CRM Name

DNS Server Monitoring

Enable

VLAN (1 to 4,094)

CRM Name

OK Reset Exit

Figure 298: WLAN Policy Service Monitoring Screen

4. Select **AAA Server monitoring** to monitor a dedicated external RADIUS server and ensure its adoption resource availability.
This setting is disabled by default.
5. Select **Captive Portal External Server monitoring** to monitor externally hosted captive portal activity, and to set temporary and restrictive user access to the controller or service platform managed network.
This setting is disabled by default.

6. Refer to the **Adoption Monitoring** field to set the WLAN's adoption service monitoring configuration.

Enable	Select this option to verify access points' adoption status to their controllers or service platform. When the connection is lost, captive portal users are automatically migrated to the VLAN defined in the VLAN field. This option is disabled by default.
VLAN	Select the VLAN to which users are migrated when an access point's connection to its adopting controller or service platform is lost. The available range is from 1 to 4,094.

7. Refer to the **DHCP Server Monitoring** field to set the WLAN's adoption service monitoring configuration.

Enable	Select to enable monitoring of the configured DHCP server. When the connection to the monitored DHCP server is lost, all captive portal data users are automatically migrated to the VLAN defined in the VLAN field. Note: This option is disabled by default.
VLAN	Select the VLAN to which users are migrated when the configured DHCP server becomes available. The available range is from 1 to 4,094.
CRM Name	Enter the name of the DHCP server to monitor for availability. When this DHCP server resource becomes unavailable, the device falls back to the defined VLAN. This VLAN has a DHCP server configured that provides a pool of IP addresses and with a lease time less than the main DHCP server.

8. Refer to the **DNS Server Monitoring** field to set the WLAN's adoption service monitoring configuration.

Enable	Select to enable monitoring of the configured DNS server. When the connection to the monitored DNS server is lost, all captive portal data users are automatically migrated to the VLAN defined in the VLAN field. This option is disabled by default.
VLAN	Select the VLAN to which users are migrated when the configured DNS server becomes available. The available range is from 1 to 4,094.
CRM Name	Enter the name of the DNS server to monitor for availability. When this DNS server resource becomes unavailable, the device falls back to the defined VLAN. This VLAN has a DNS server configured that provides DNS address resolution until the primary DNS server becomes available.

9. Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

Configure Client Load-Balancing Settings

Client load balance settings can be defined generically for both the 2.4 GHz and 5.0 GHz bands, and specifically for either of the 2.4 GHz or 5.0 GHz bands.

To configure client load balancing settings on an access point managed WLAN:

1. Go to **Configuration** → **Wireless** → **Wireless LANs** to display a high-level display of the existing WLANs.
2. Click **Add** to create an additional WLAN, or click **Edit** to modify the properties of an existing WLAN.
3. Select **Client Load Balancing**.

Load Balancing Settings

Enforce Client Load Balancing

Band Discovery Interval Seconds (0 to 10,000)

Capability Ageout Time Hours (0 to 3)

Load Balancing Settings (2.4GHz)

Single Band Clients

Max Probe Requests (0 to 10,000)

Probe Request Interval Seconds (0 to 10,000)

Load Balancing Settings (5GHz)

Single Band Clients

Max Probe Requests (0 to 10,000)

Probe Request Interval Seconds (0 to 10,000)

OK Reset Exit

Figure 299: WLAN Policy Client Load Balancing Screen

- Refer to the **Load Balancing Settings** section to configure load balancing for the WLAN.

These settings are generic to both the 2.4 GHz and 5.0 GHz bands.

Enforce Client Load Balancing	Select this option to enforce a client load balance distribution on this WLAN's access point radios. Loads are balanced by ignoring association and probe requests. Probe and association requests are not responded to, forcing a client to associate with another access point radio. This setting is enabled by default..
Band Discovery Interval	Define a value in either seconds (0 - 10,000), minutes (0 -166) or hours (0 -2) the access point uses to discover a client's band capabilities before associating. The default setting is 10 seconds.
Capability Ageout Time	Define a value in either seconds (0 - 10,000), minutes (0 -166) or hours (0 -2) to ageout a client's capabilities from the internal table. The default is 1 hour.

- Refer to the **Load Balancing Settings (2.4GHz)** field to configure load balancing for the 2.4 GHz WLAN.

Single Band Clients	Select this option to enable association for single 2.4GHz clients, even if load balancing is available. This setting is enabled by default.
Max Probe Requests	Enter a value from 0 - 10,000 for the maximum number of probe requests for clients using the 2.4GHz frequency. The default value is 60.
Probe Request Interval	Enter a value in seconds from 0 - 10,000 to set an interval for client probe requests, beyond which association is allowed for clients on the 2.4 GHz frequency. The default is 10 seconds.

- Refer to the **Load Balancing Settings (5GHz)** field to configure load balancing for the 5GHz WLAN.

Single Band Clients	Select this option to enable the association of single 5GHz clients, even if load balancing is available. This setting is enabled by default.
Max Probe Requests	Enter a value from 0 - 10,000 for the maximum number of client associations on the 5.0 GHz frequency. The default value is 60.
Probe Request Interval	Enter a value in seconds from 0 - 10,000 to configure the interval for client probe requests. When exceeded, clients can associate in 5GHz. The default is 10 seconds.

- Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

Configure Advanced WLAN Settings

- Go to **Configuration → Wireless → Wireless LANs** to display a high-level display of the existing WLANs.

2. Click **Add** to create an additional WLAN, or click **Edit** to modify the properties of an existing WLAN.
3. Click **Advanced**.

The screenshot displays the 'Advanced RADIUS Configuration' screen, which is organized into several sections:

- Advanced RADIUS Configuration:** This section includes three fields: 'NAS Identifier' (text input), 'NAS Port' (text input), and 'RADIUS Dynamic Authorization' (checkbox, currently unchecked).
- Radio Rates:** This section contains two dropdown menus: 'Rates for 2.4 GHz WLAN' and 'Rates for 5 GHz WLAN', both currently set to 'default'. Each dropdown has a 'Select' button to its right.
- Transition:** This section includes two checkboxes: 'Fast BSS Transition' (unchecked) and 'Fast BSS Transition Over DS' (checked).
- HTTP Analysis:** This section includes an 'Enable' checkbox (unchecked) and a 'Filter' section with three checkboxes: 'Filter Out Images' (unchecked), 'Filter Post' (unchecked), and 'Strip Query String' (unchecked).
- Forward To Syslog Server:** This section includes an 'Enable' checkbox (unchecked), a 'Host' field (text input) with a 'Hostname' dropdown menu, a 'Port' field (spin box) set to 514, and a 'Proxy Mode' dropdown menu set to 'None'.

At the bottom of the screen, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 300: WLAN - Advanced Configuration Screen

4. Refer to the **Advanced RADIUS Configuration** field to set the WLAN's NAS configuration and RADIUS Dynamic Authorization.

NAS Identifier	Specify what is included in the RADIUS NAS-Identifier field for authentication and accounting packets. This is an optional setting, and defaults are used if no values are provided.
NAS Port	The profile database on the RADIUS server consists of user profiles for each connected <i>network access server</i> (NAS) port. Each profile is matched to a user name representing a physical port. When the access point authorizes users, it queries the user profile database using a user name representative of the physical NAS port making the connection.
RADIUS Dynamic Authorization	Select this check box to enable the RADIUS protocol to support unsolicited messages sent from the RADIUS server. These messages allow administrators to issue <i>change of authorization</i> (CoA) messages, which affect session authorization, or <i>Disconnect Messages</i> (DM), which cause a session to terminate immediately. This option is disabled by default.

5. Refer to the **Radio Rates** field to define selected data rates for both the 2.4 GHz and 5.0 GHz bands.

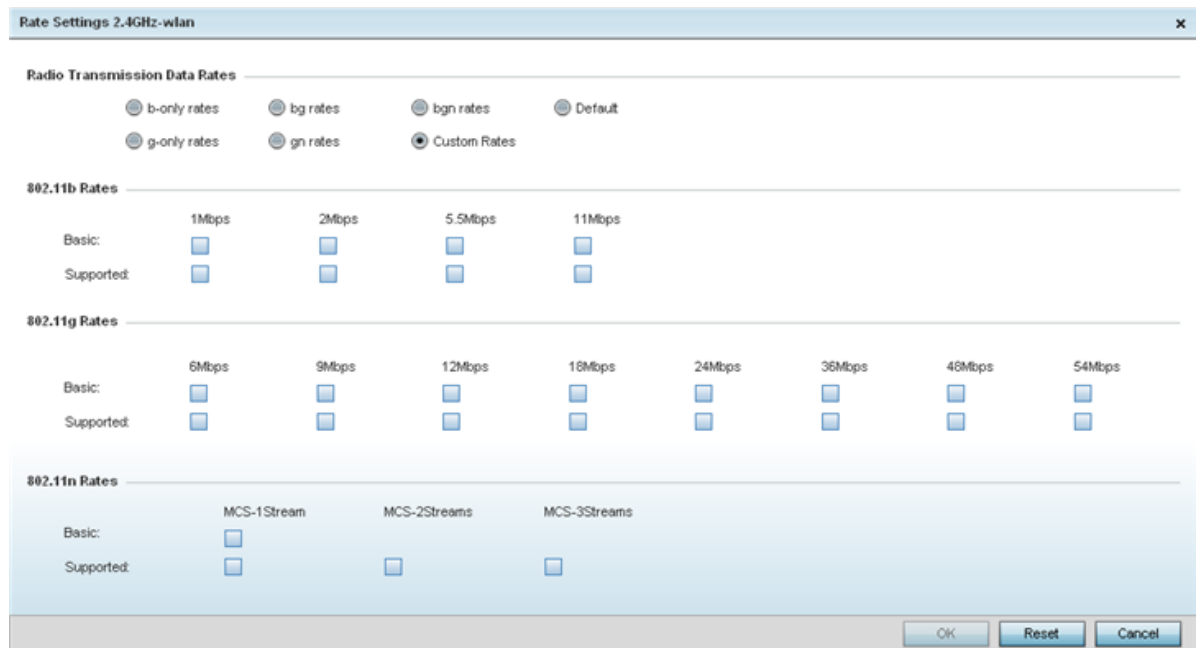


Figure 301: Advanced WLAN Rate Settings 2.4 GHz Screen

For 2.4 GHz WLAN radio transmission rate settings, define the minimum basic and supported rates in the **802.11b Rates**, **802.11g Rates** and **802.11n Rates** sections. These rates are applicable to client traffic associated with this WLAN only.

If supporting 802.11n, select a Supported MCS index. Set an MCS (modulation and coding scheme) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of 8 data rates,

bonded channels, multiple spatial streams, different guard intervals, and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).

Figure 302: Advanced WLAN Rate Settings 5 GHz Screen

For 5.0 GHz WLAN radio transmission rate settings, define the minimum basic and supported rates in the **802.11b Rates** and **802.11n Rates** sections. These rates are applicable to client traffic associated with this WLAN only.

If supporting 802.11n, select a Supported MCS index. Set an MCS (modulation and coding scheme) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of 8 data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).

802.11n MCS rates are defined as follows, both with and without short guard intervals (SGI):

Table 9: MCS-1 Stream

MCS Index	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	1	6.5	7.2	13.5	15
1	1	13	14.4	27	30
2	1	19.5	21.7	40.5	45
3	1	26	28.9	54	60
4	1	39	43.4	81	90
5	1	52	57.8	108	120

Table 9: MCS-1 Stream (continued)

MCS Index	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
6	1	58.5	65	121.5	135
7	1	65	72.2	135	150

Table 10: MCS-2 Stream

MCS-2Stream Index	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	2	13	14.4	27	30
1	2	26	28.9	54	60
2	2	39	43.4	81	90
3	2	52	57.8	108	120
4	2	78	86.7	162	180
5	2	104	115.6	216	240
6	2	117	130	243	270
7	2	130	144.4	270	300

Table 11: MCS-3 Stream

MCS-3Stream Index	Number of Streams	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI
0	3	19.5	21.7	40.5	45
1	3	39	43.3	81	90
2	3	58.5	65	121.5	135
3	3	78	86.7	162	180
4	3	117	130.7	243	270
5	3	156	173.3	324	360
6	3	175.5	195	364.5	405
7	3	195	216.7	405	450

802.11ac MCS rates are defined as follows, both with and without *short guard intervals* (SGI):

Table 12: MCS-802.11ac (Theoretical Throughput for Single Spatial Streams)

MCS Index	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI	80 MHz No SGI	80 MHz With SGI
0	6.5	7.2	13.5	15	29.3	32.5
1	13	14.4	27	30	58.5	65

**Table 12: MCS-802.11ac (Theoretical Throughput for Single Spatial Streams)
(continued)**

MCS Index	20 MHz No SGI	20 MHz With SGI	40 MHz No SGI	40 MHz With SGI	80 MHz No SGI	80 MHz With SGI
2	19.5	21.7	40.5	45	87.8	97.5
3	26	28.9	54	60	117	130
4	39	43.3	81	90	175.5	195
5	52	57.8	108	120	234	260
6	58.5	65	121.5	135	263.3	292.5
7	65	72.2	135	150	292.5	325
8	78	86.7	162	180	351	390
9	N/A	N/A	180	200	390	433.3

6. Set the following **Transition** options:

Fast BSS Transition	If needed, select Fast BSS Transition to enable 802.11r fast roaming on this WLAN. This setting is disabled by default. 802.11r is an attempt to undo the burden that security and QoS added to the handoff process, and restore it to an original four message exchange process. The central application for the 802.11r standard is VOIP using mobile phones within wireless Internet networks.
Fast BSS Transition Over DS	Optionally select Fast BSS Transition Over DS to enable 802.11r over DS fast roaming on this WLAN. This setting is enabled by default.

7. Enable **HTTP Analysis** for log file analysis on this WLAN.

This setting is disabled by default.

8. Set the following **Filter** settings for HTTP analysis on this WLAN:

Filter Out Images	Select this option to filter images out of this WLAN's log files. This setting is disabled by default.
Filter Post	Select this option to filter posts out of this WLAN's log files. This setting is disabled by default.
Strip Query String	Select this option to filter query strings out of this WLAN's log files. This setting is disabled by default.

9. Set the following **Forward to Syslog Server** settings for HTTP analysis on this WLAN:

Enable	Select the check box to forward any firewall HTTP analytics to a specified syslog server for this WLAN. This setting is disabled by default.
Host	Provide a Hostname or IP Address of the remote syslog server. Use the drop-down menu to select the type of host address.

Port	Specify the port number utilized by the syslog server. The default port is 514.
Proxy Mode	If a proxy is needed to connect to the syslog server, select a proxy mode of either Through RF Domain Manager or Through Wireless Controller . If no proxy is needed, select None .

10. Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

Configure Auto Shutdown Settings

Auto shutdown provides a mechanism to regulate the availability of a WLAN based on time. WLANs can be enabled or disabled depending on the day of the week and time of day.

A WLAN can be made available during a particular time of the day to prevent misuse and reduce the vulnerability of the wireless network. WLANs can be disabled when there are no users on the network, such as after hours or during the weekends/holidays. This enables the network administrator to have more time to manage the network as the mundane task of shutting down/staring up a WLAN is automated.

You can also use the Auto Shutdown screen to configure network parameters, which if not met, can force the WLAN to shut down. These parameters are:

- **Shutdown on Mesh Point Loss** – If an access point is a member in a meshed network and its connection to the mesh is lost, then all WLANs on the access point that have this option enabled are shut down.
- **Shutdown on Primary Port Link Loss** – When there is a loss of link on the primary wired link on the access point, all the WLANs on the access point that have this option enabled are shut down.
- **Shutdown on Critical Resource Down** – If critical resource monitoring is enabled on the access point and one or all of the monitored critical resource goes down, the all WLANs on the access point that have this option enabled are shut down.
- **Shutdown on Unadoption** – If the access point is unadopted from its wireless controller, then all WLANs on the access point that have this option enabled are shut down.

To configure auto shutdown for a WLAN:

1. Go to **Configuration → Wireless → Wireless LANs** to display a high-level display of the existing WLANs.
2. Click **Add** to create an additional WLAN, or click **Edit** to modify the properties of an existing WLAN.

3. Select **Auto Shutdown**.

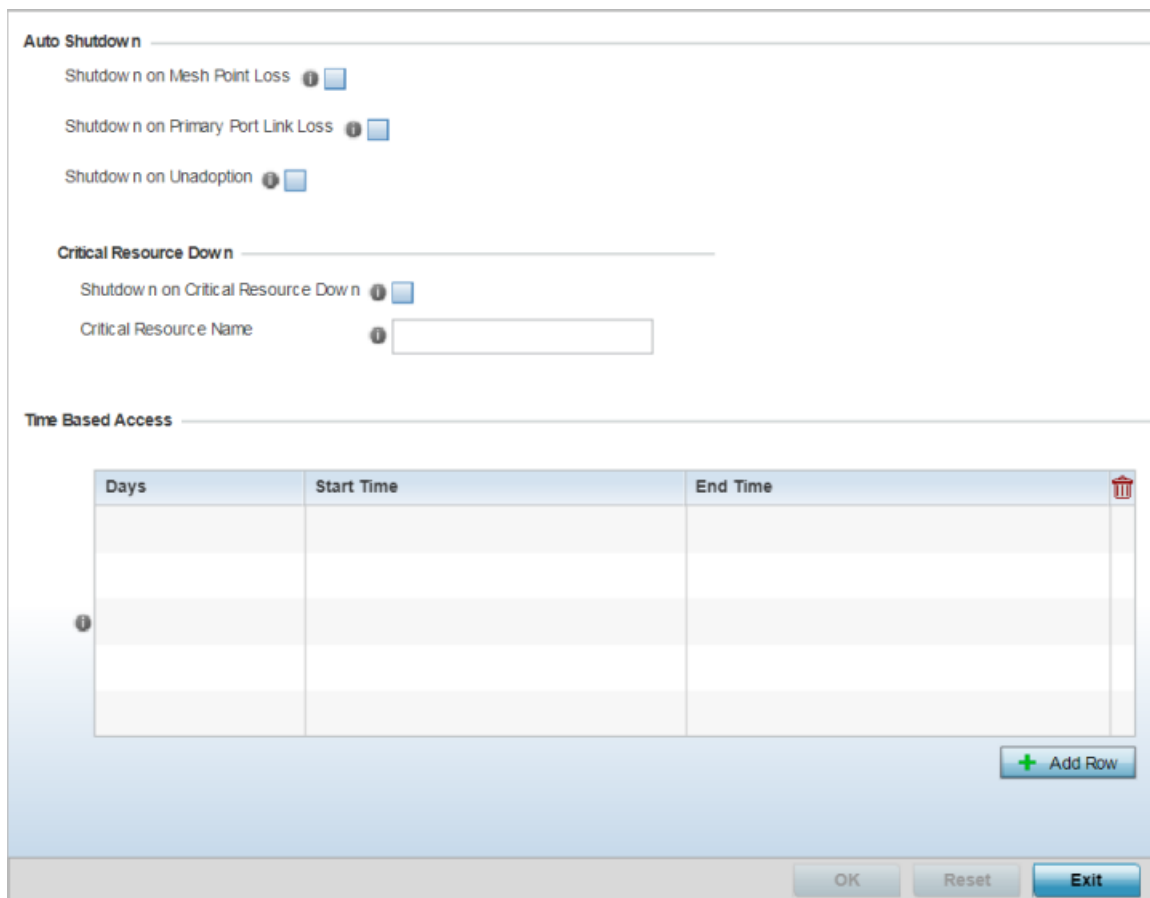


Figure 303: WLAN - Auto Shutdown Screen

4. Refer to the **Auto Shutdown** field to set the WLAN's shutdown criteria.

Shutdown on Mesh Point Loss	Select to enable the WLAN to shutdown if the access point's connection to the mesh network is lost. This setting is disabled by default.
Shutdown on Primary Port Link Loss	Select to enable the WLAN to shutdown if the access point's connection on its primary wired port is lost. This setting is disabled by default.
Shutdown on Unadoption	Select to enable the WLAN to shutdown if the access point is unadopted from its wireless controller. This setting is disabled by default.

5. Refer to the **Critical Resource Down** settings to determine whether a WLAN auto shutdown is enabled when a defined critical resource goes offline:

Shutdown on Critical Resource Down	Select this option to automatically disable the WLAN when a defined critical resource goes offline. This setting is disabled by default.
Critical Resource Name	When enabled, enter a 127-character maximum critical resource name. This is the resource that must remain online to keep the selected WLAN online.

6. To configure **Time Based Access** for this WLAN, click **+ Add Row** and configure each of the following options:

Days	Select a day of the week to apply this access policy. Selecting All will apply the policy every day. Selecting weekends will apply the policy on Saturdays and Sundays only. Selecting weekdays will apply the policy on Monday, Tuesday, Wednesday, Thursday and Friday only. Selecting individual days of the week will apply the policy only on the selected day(s).
Start Time	This value sets the starting time the WLAN is activated. Use the spinner controls to select the hour and minute, in a 12h time format. Then use the radio button to choose AM or PM .
End Time	This value sets the ending time of day(s) the WLAN is disabled. Use the spinner controls to select the hour and minute, in a 12h time format. Then use the radio button to choose AM or PM .

7. Click **OK** to save the changes.
Click **Reset** to revert the screen to its last saved configuration.

WLAN QoS Policies

Quality of service (QoS) provides a data traffic prioritization scheme. QoS reduces congestion from excessive traffic. If there is enough bandwidth for all users and applications (unlikely because excessive bandwidth comes at a very high cost), then applying QoS has very little value. QoS provides policy enforcement for mission-critical applications and/or users that have critical bandwidth requirements when bandwidth is shared by different users and applications.

QoS helps ensure each WLAN receives a fair share of the overall bandwidth, either equally or as per the proportion configured. Packets directed towards clients are classified into categories, for example Video, Voice, and Data. Packets within each category are processed based on the weights defined for each WLAN.

Each access point model supports up to 32 WLAN QoS policies.



Note

WLAN QoS configurations differ significantly from QoS policies configured for radios. WLAN QoS configurations are designed to support the data requirements of wireless clients, including the data types they support and their network permissions. Radio QoS policies are specific to the transmit and receive characteristics of the connected radios themselves, independent from the wireless clients the access point radios supported.

Configure a WLAN's QoS WMM Settings

Using *Wi-Fi Multimedia (WMM)*, end-user satisfaction is maintained in a wider variety of environments and traffic conditions. WMM makes it possible for both home networks and enterprises to decide which data streams are most important and assign them a higher traffic priority.

WMM's prioritization capabilities are based on the four access categories. The higher the access category, the higher the probability to transmit this kind of traffic over a controller, service platform or access point managed WLAN. Access categories were designed to correspond to 802.1d priorities to facilitate interoperability with QoS policy management mechanisms. WMM enabled controllers, service platforms and access points can coexist with legacy devices (not WMM-enabled).

Packets not assigned to a specific access category are categorized by default as having best effort priority. Applications assign each data packet to a given access category packets are then added to one of four independent transmit queues (one per access category - voice, video, best effort or background) in the client. The client has an internal collision resolution mechanism to address collision among different queues, which selects the frames with the highest priority to transmit.

The same mechanism deals with external collision, to determine which client(s) should be granted the TXOP (*opportunity to transmit*). The collision resolution algorithm responsible for traffic prioritization is probabilistic and depends on two timing parameters that vary for each access category.

- The minimum interframe space, or *Arbitrary Inter-Frame Space Number* (AIFSN)
- The contention window, sometimes referred to as the random backoff wait

Both values are smaller for high-priority traffic. The value of the contention window varies through time. Initially the contention window is set to a value that depends on the AC. As frames with the highest AC tend to have the lowest backoff values, they are more likely to get a TXOP.

After each collision the contention window is doubled until a maximum value (also dependent on the AC) is reached. After successful transmission, the contention window is reset to its initial, AC dependant value. The AC with the lowest backoff value gets the TXOP.

To configure a WMM configuration for a WLAN:

1. Go to **Configuration** → **Wireless** → **WLAN QoS Policy**.

2. Click **Add** button to create a new QoS policy or **Edit** to modify the properties of an existing WLAN QoS policy.

The **WMM** tab displays by default.

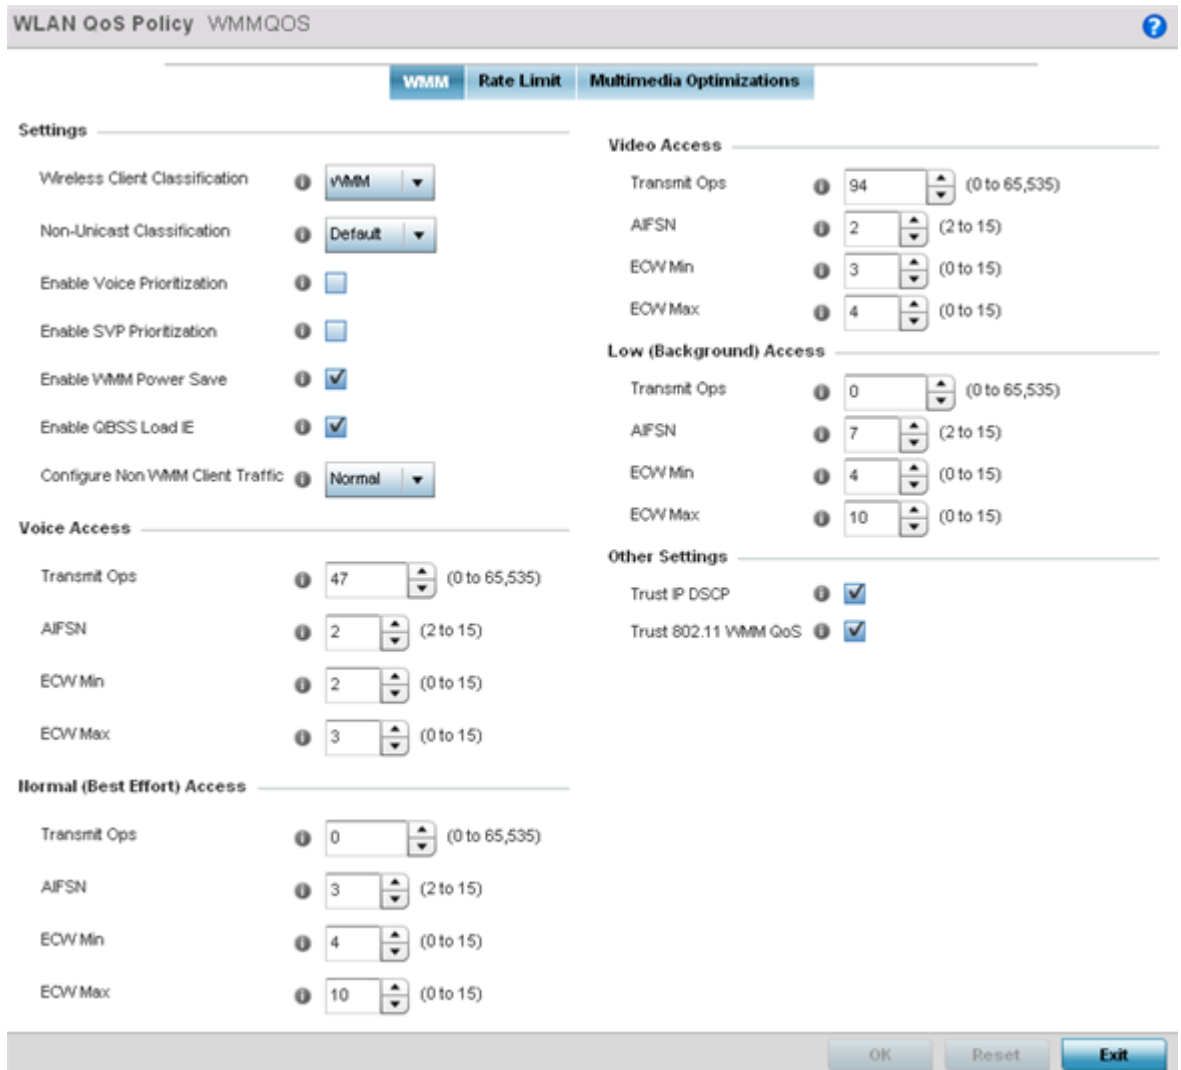


Figure 304: WLAN QoS Policy Screen - WMM Tab

3. Configure the following settings in respect to the WLAN's intended WMM radio traffic and user requirements:

Wireless Client Classification	<p>Use the drop-down menu to select the Wireless Client Classification for this WLAN's intended traffic type. The classification categories are the different WLAN-WMM options available to the radio. Classification types include:</p> <ul style="list-style-type: none"> • WMM – Implies Wi-Fi Multimedia QoS extensions are enabled on this radio. This allows different traffic streams between the wireless client and the access point to be prioritized according to the type of traffic (voice, video etc). WMM classification is required to support the high throughput data rates required of 802.11n device support. This is the default setting. • Voice– Optimized for voice traffic. Implies all traffic on this WLAN is prioritized as voice traffic on the radio. • Video – Optimized for video traffic. Implies all traffic on this WLAN is prioritized as video traffic on the radio. • Normal – Optimized for best effort traffic. Implies all traffic on this WLAN is prioritized as best effort traffic on the radio. • Low – Optimized for background traffic. Implies all traffic on this WLAN is low priority on the radio.
Non-Unicast Classification	<p>Use this drop-down menu to define how traffic matching multicast masks is classified relative to prioritization on the radio. Options include Video, Voice, Normal, Low, and Default. The default setting is Default.</p>
Enable Voice Prioritization	<p>Select this option if Voice traffic is prioritized on the WLAN. This gives priority to voice and voice management packets supported only on certain legacy VOIP phones. This feature is disabled by default.</p>
Enable SVP Prioritization	<p>Enabling <i>Spectralink Voice Prioritization (SVP)</i> allows the identification and prioritization of traffic from Spectralink/Polycomm phones. This gives priority to voice on certain legacy VOIP phones. If the wireless client classification is WMM, non WMM devices recognized as voice devices have their traffic transmitted at voice priority. Devices are classified as voice when they emit SIP, SCCP, or H323 traffic. Thus, selecting this option has no effect on devices supporting WMM. This feature is disabled by default.</p>
Enable WMM Power Save	<p>Enables support for the WMM based power-save mechanism, also known as <i>Unscheduled Automatic Power Save Delivery (U-APSD)</i>. This is primarily used by voice devices that are WMM capable. This feature is enabled by default.</p>

Enable QBSS Load IE	Check this option to enable a QBSS (<i>QoS Basis Service Set</i>) IE (<i>information element</i>) in beacons and probe response packets advertised by access point radios. This feature is enabled by default.
Configure Non WMM Client Traffic	Use the drop-down menu to specify how non-WMM client traffic is classified on this access point WLAN if the Wireless Client Classification is set to WMM. Options include Video , Voice , Normal , and Low . The default setting is Normal .

4. Set the following **Voice Access** settings for the WLAN's QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. The default value is 47.
AIFSN	Set the current <i>Arbitrary Inter-frame Space Number</i> (AIFSN) between 2 and 15. Higher-priority traffic voice categories should have lower AIFSNs than lower-priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 2.
ECW Min	The ECW Min is combined with the ECW Max to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 2.
ECW Max	The ECW Max is combined with the ECW Min to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 3.

5. Set the following **Video Access** settings for the WLAN's QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. The default values is 94.
AIFSN	Set the current <i>Arbitrary Inter-frame Space Number</i> (AIFSN) between 2 and 15. Higher-priority traffic video categories should have lower AIFSNs than lower-priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 2.

ECW Min	The ECW Min is combined with the ECW Max to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic (like video). The available range is from 0-15. The default value is 3.
ECW Max	The ECW Max is combined with the ECW Min to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic (like video). The available range is from 0-15. The default value is 4.

6. Set the following **Normal (Best Effort) Access** settings for the WLAN's QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. The default value is 0.
AIFSN	Set the current AIFSN between 2 and 15. Lower priority traffic categories should have higher AIFSNs than higher priority traffic categories. This will cause lower priority traffic to wait longer before attempting access. The default value is 3.
ECW Min	The ECW Min is combined with the ECW Max to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Higher values are used for lower priority traffic (like Normal). The available range is from 0-15. The default value is 4.
ECW Max	The ECW Max is combined with the ECW Min to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Higher values are used for lower priority traffic (like Normal). The available range is from 0-15. The default value is 10.

7. Set the following **Low (Background) Access** settings for the WLAN's QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. The default value is 0.
AIFSN	Set the current AIFSN between 2 and 15. Lower priority traffic categories should have higher AIFSNs than higher priority traffic categories. This will cause lower priority traffic to wait longer before attempting access. The default value is 7.

ECW Min	The ECW Min is combined with the ECW Max to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Higher values are used for lower priority traffic (like Normal). The available range is from 0-15. The default value is 4.
ECW Max	The ECW Max is combined with the ECW Min to create the contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Higher values are used for lower priority traffic (like Normal). The available range is from 0-15. The default value is 10.

8. Set the following **Other Settings** for the WLAN's QoS policy:

Trust IP DSCP	Select this option to trust (utilize) IP DSCP values for WLANs. The default value is enabled.
Trust 802.11 WMM QoS	Select this option to trust (utilize) 802.11 WMM QoS values for WLANs. The default value enabled.

9. Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

Configure a WLAN's QoS Rate Limit Settings

Excessive traffic can cause performance issues or bring down the network entirely. Excessive traffic can be caused by numerous sources including network loops, faulty devices or malicious software such as a worm or virus that has infected on one or more devices at the branch. Rate limiting limits the maximum rate sent to or received from the wireless network (and WLAN) per wireless client. It prevents any single user from overwhelming the wireless network. It can also provide differential service for service providers. The uplink and downlink rate limits are usually configured on a RADIUS server using vendor specific attributes. An administrator can set separate QoS rate limit configurations for data transmitted from the access point (upstream) and data transmitted from a WLAN's wireless clients back to their associated access point radios (downstream).

Before defining rate limit thresholds for WLAN upstream and downstream traffic, define the normal number of ARP, broadcast, multicast and unknown unicast packets that typically transmit and receive from each supported WMM access category. If thresholds are defined too low, normal network traffic (required by end-user devices) will be dropped resulting in intermittent outages and performance problems.

To configure a QoS rate limit configuration for a WLAN and its connected clients:

1. Go to **Configuration → Wireless → WLAN QoS Policy** .
2. Click **Add** button to create a new QoS policy or **Edit** to modify the properties of an existing WLAN QoS policy.

- 3. Select the Rate Limit tab.

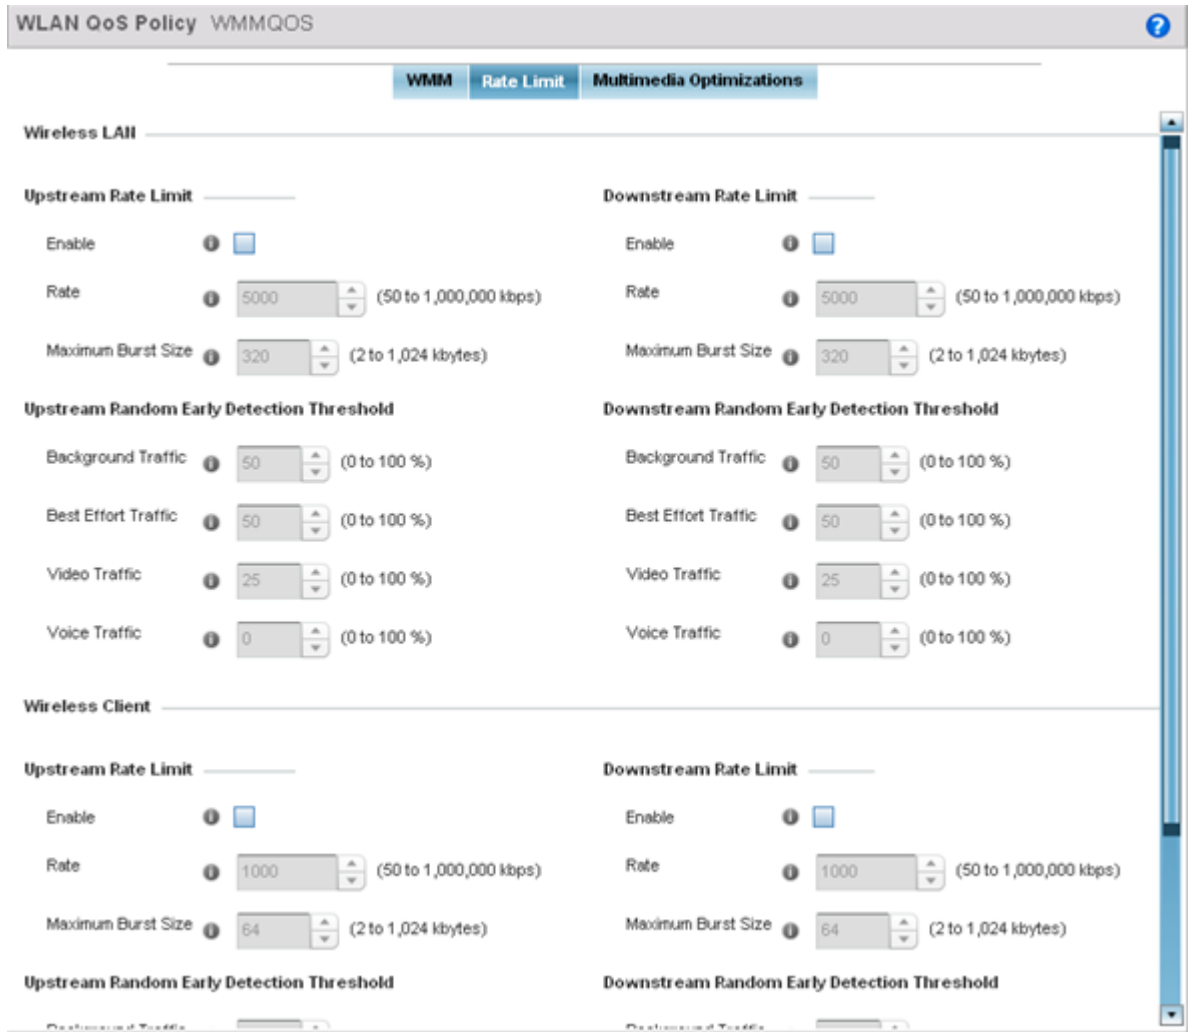


Figure 305: WLAN QoS Policy Screen - Rate Limit Tab

4. Configure the following parameters to define the **WLAN Upstream Rate Limit**.

Enable	Select this option to enable rate limiting for data transmitted from access point radios to associated clients on this WLAN. Enabling this option does not invoke rate limiting for data traffic in the downstream direction. This feature is disabled by default.
Rate	Define an upstream rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received over the WLAN (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 - 1024 kbytes. The smaller the burst, the less likely an upstream packet transmission will result in congestion for the WLAN's client traffic. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should add a 10% margin (minimally) to allow for traffic bursts. The default burst size is 320 kbytes.

5. Set the following **WLAN Upstream Random Early Detection Threshold** settings for each access category. An early random drop is done when a traffic stream falls below the set threshold.

Background Traffic	Set a percentage value for background traffic in the upstream direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the upstream direction. This is a percentage of the maximum burst size for normal priority traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.

Video Traffic	Set a percentage value for video traffic in the upstream direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the upstream direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%.

6. Configure the following parameters for the intended **WLAN Downstream Rate Limit**.

These values apply to traffic from wireless clients to associated access point radios.

Enable	Select this option to enable rate limiting for data transmitted from access point radios to associated wireless clients. Enabling this option does not invoke rate limiting for data traffic in the upstream direction. This feature is disabled by default.
Rate	Define an upstream rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received over the WLAN (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 - 1024 kbytes. The smaller the burst, the less likely the downstream packet transmission will result in congestion for the WLAN's client destinations. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should add a 10% margin (minimally) to allow for traffic bursts. The default burst size is 320 kbytes.

7. Set the following **WLAN Downstream Random Early Detection Threshold** settings for each access category. An early random drop is done when the amount of tokens for a traffic stream falls below the set threshold.

Background Traffic	Set a percentage value for background traffic in the downstream direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general downstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the downstream direction. This is a percentage of the maximum burst size for normal traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general downstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Video Traffic	Set a percentage value for video traffic in the downstream direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general downstream rate is known by the network administrator (using a time trend analysis). The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the downstream direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%. 0% means no early om drops will occur.

8. Configure the following parameters for the intended **Upstream Rate Limit** for wireless client traffic:

Enable	Select this option to enable rate limiting for data transmitted from access point radios to associated clients. Enabling this option does not invoke rate limiting for data traffic in the downstream direction. This feature is disabled by default.
Rate	Define an upstream rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received (from all access categories). Traffic that exceeds the defined rate is dropped by the client and a log message is generated. The default rate is 1,000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 - 1024 kbytes. The smaller the burst, the less likely the upstream packet transmission will result in congestion for the wireless client. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should then add a minimum of a 10% margin to allow for traffic bursts at the site. The default burst size is 64 kbytes.

9. Set the following **Upstream Random Early Detection Threshold** settings for each access category. An early random drop is conducted when the amount of tokens for a traffic stream falls below the set threshold for wireless client traffic.

Background Traffic	Set a percentage value for background traffic in the upstream direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped by the client and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the upstream direction. This is a percentage of the maximum burst size for normal traffic. Best effort traffic exceeding the defined threshold is dropped by the client and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value, once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.

Video Traffic	Set a percentage value for video traffic in the upstream direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped by the client and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the downstream direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped by the client and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%.0% implies no early random drops will occur.

10. Configure the following parameters for the **Downstream Rate Limit**.

These values apply to wireless client traffic.

Enable	Select this option to enable rate limiting for data transmitted from connected wireless clients. Enabling this option does not invoke rate limiting for data traffic in the upstream direction. This feature is disabled by default.
Rate	Define a downstream rate limit between 50 - 1,000,000 kbps. This limit constitutes a threshold for the maximum the number of packets transmitted or received by the client. Traffic that exceeds the defined rate is dropped and a log message is generated. The default rate is 1,000 kbytes.
Maximum Burst Size	Set a maximum burst size from 2 - 1024 kbytes. The smaller the burst, the less likely the downstream packet transmission will result in congestion for wireless client traffic. By trending the typical number of ARP, broadcast, multicast and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should then add a minimum of a 10% margin to allow for traffic bursts at the site. The default burst size is 64 kbytes.

11. Set the following **Downstream Random Early Detection Threshold** settings.

These settings apply to each access category. An early random drop is conducted when the amount of tokens for a traffic stream falls below the set threshold for wireless client traffic.

Background Traffic	Set a percentage value for background traffic in the downstream direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped by the client and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general downstream rate is known by the network administrator (using a time trend analysis). The default is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the downstream direction. This is a percentage of the maximum burst size for normal traffic. Best effort traffic exceeding the defined threshold is dropped by the client and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general downstream rate is known by the network administrator (using a time trend analysis). The default is 50%.
Video Traffic	Set a percentage value for video traffic in the downstream direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped by the client and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general downstream rate is known by the network administrator (using a time trend analysis). The default is 25%.
Voice Traffic	Set a percentage value for voice traffic in the downstream direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped by the client and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%. 0% means no early random drops will occur.

12. Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

Configure Multimedia Optimizations

To configure a QoS rate limit configuration for a WLAN:

1. Go to **Configuration** → **Wireless** → **WLAN QoS Policy**.
2. Click **Add** button to create a new QoS policy or **Edit** to modify the properties of an existing WLAN QoS policy.

3. Select the **Multimedia Optimizations** tab.

WLAN QoS Policy WMMQOS
?

WMM
Rate Limit
Multimedia Optimizations

Multicast Mask

Multicast Mask Primary ? /

Multicast Mask Secondary ? /

Accelerated Multicast

Disable Accelerated Multicast
 Automatically Detect Multicast Streams
 Manually Configure Multicast Addresses

Forwarding QoS Classification Trust QoS Values ▼

Multicast IP Address	Classification	
* <input style="width: 80%;" type="text" value=" . . ."/>	? Video	✖

+ Add Row

OK
Reset
Exit

Figure 306: WLAN QoS Policy Screen - Multimedia Optimizations Tab

4. Configure the following parameters for to the **Multicast Mask**:

Multicast Mask Primary	Configure the primary multicast mask defined for each listed QoS policy. Normally all multicast and broadcast packets are buffered until the periodic DTIM interval (indicated in the 802.11 beacon frame), when clients in power save mode wake to check for frames. However, for certain applications and traffic types, an administrator may want the frames transmitted immediately, without waiting for the DTIM interval. By configuring a primary and secondary multicast mask, an administrator can indicate which frames are transmitted immediately. Setting masks is optional and only needed if there are traffic types requiring special handling.
Multicast Mask Secondary	Set a secondary multicast mask for the WLAN QoS policy. Normally all multicast and broadcast packets are buffered until the periodic DTIM interval (indicated in the 802.11 beacon frame), when clients in power save mode wake to check for frames. However, for certain applications and traffic types, an administrator may want the frames transmitted immediately, without waiting for the DTIM interval. By configuring a primary and secondary multicast mask, an administrator can indicate which frames are transmitted immediately. Setting masks is optional and only needed if there are traffic types requiring special handling.

5. Set the following **Accelerated Multicast** settings:

Disable Multicast Streaming	Select this option to disable all accelerated multicast streaming on the WLAN.
Automatically Detect Multicast Streams	Select this option to have multicast packets converted to unicast to provide better overall airtime utilization and performance. The administrator can either have the system automatically detect multicast streams and convert all detected multicast streams to unicast, or specify which multicast streams are converted to unicast. When the stream is converted and queued for transmission, a number of classification mechanisms can be applied to the stream, and the administrator can select the desired classification type. Use the Forwarding QoS Classification drop-down list to select the classification to use.
Manually Configure Multicast Addresses	Select this option and specify a list of multicast addresses and classifications. Packets are accelerated when the destination addresses matches.

6. Click **OK** to save the changes.

Click **Reset** to revert the screen to its last saved configuration.

WLAN QoS Deployment Considerations

Before defining a QoS configuration on a controller, service platform or access point managed WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- WLAN QoS configurations differ significantly from QoS policies configured for associated radios. WLAN QoS configurations are designed to support the data requirements of wireless clients, including the data types they support and their network permissions. Radio QoS policies are specific to the transmit and receive characteristics of the connected radio's themselves, independent from the wireless clients the radios support.
- Enabling WMM support on a WLAN only advertises WMM capability to wireless clients. The wireless clients must also support WMM and use the parameters correctly while accessing the wireless network to truly benefit.
- Rate limiting is disabled by default on WLANs. To enable rate limiting, a threshold must be defined for WLAN.
- Before enabling rate limiting on a WLAN, a baseline for each traffic type should be performed. Once a baseline has been determined, a minimum 10% margin should be added to allow for traffic bursts.
- The bandwidth required for real-time applications such as voice and video are very fairly easy to calculate because the bandwidth requirements are consistent and can be realistically trended over time. Applications such as web, database, and email are harder to estimate because bandwidth usage varies depending on how the applications are used.

Manage Radio QoS Policies

Without a dedicated QoS policy, any wireless network operates on a best-effort delivery basis, meaning all traffic has equal priority and equal chance of being delivered in a timely manner. When congestion occurs, all traffic has an equal chance of being dropped!

When configuring a QoS policy for a radio, select specific network traffic, prioritize it, and use congestion-management and congestion-avoidance techniques to provide deployment customizations best suited to each QoS policy's intended wireless client base.

WiNG managed controllers and their associated access point radios and wireless clients support several *Quality of Service* (QoS) techniques enabling real-time applications (such as voice and video) to coexist with lower priority background applications (such as web, email, and file transfers). A well designed QoS policy should:

- Classify and mark data traffic to accurately prioritize and segregate it (by access category) throughout the network.
- Minimize the network delay and jitter for latency sensitive traffic.
- Ensure higher priority traffic has a better likelihood of delivery in the event of network congestion.
- Prevent the ineffective utilization of access points degrading session quality by configuring admission control mechanisms within each radio QoS policy.

In a wireless network, wireless clients supporting low and high priority traffic contend with one another for access and data resources. The IEEE 802.11e amendment has defined *Enhanced Distributed Channel Access* (EDCA) mechanisms stating high priority traffic can access the network sooner than lower priority traffic. The EDCA defines four traffic classes (or access categories): voice (highest), video (next highest), best effort, and background (lowest). The EDCA has defined a time interval for each traffic class, known as the *Transmit Opportunity* (TXOP). The TXOP prevents traffic of a higher priority from completely dominating the wireless medium, thus ensuring lower priority traffic is still supported by the controller or service platform, their associated access points and connected radios.

IEEE 802.11e includes an advanced power saving technique called *Unscheduled Automatic Power Save Delivery* (U-APSD) that provides a mechanism for wireless clients to retrieve packets buffered by an access point. U-APSD reduces the amount of signaling frames sent from a client to retrieve buffered data from an access point. U-APSD also allows access points to deliver buffered data frames as *bursts*, without backing-off between data frames. These improvements are useful for voice clients, as they provide improved battery life and call quality.

The Wi-Fi alliance has created *Wireless Multimedia* (WMM) and *WMM Power Save* (WMM-PS) certification programs to ensure interoperability between 802.11e WLAN infrastructure implementations and wireless clients. An access point managed wireless network supports both WMM and WMM-Power Save techniques. WMM and WMM-PS (U-APSD) are enabled by default in each WLAN profile.

Enabling WMM support on a WLAN just advertises the WLAN's WMM capability and radio configuration to wireless clients. The wireless clients must be also able to support WMM and use the values correctly while accessing the WLAN.

WMM includes advanced parameters (CWMin, CWMax, AIFSN and TXOP) specifying back-off duration and inter-frame spacing when accessing the network. These parameters apply to both connected access point radios and their wireless clients. Parameters that affect access point transmissions to their clients are controlled using per radio WMM settings, while parameters used by wireless clients are controlled by a WLAN's WMM settings.

Access points support static QoS mechanisms per WLAN to provide prioritization of WLAN traffic when legacy (non WMM) clients are deployed. An access point allows flexible WLAN mapping with a static WMM access control value. When enabled on a WLAN, traffic forwarded from to a client is prioritized and forwarded based on the WLAN's WMM access control setting.

**Note**

Statically setting a WLAN WMM access category value prioritizes traffic to the client, but does not prioritize traffic from the client.

Wireless network administrators can also assign weights to each WLAN in relation to user priority levels. The lower the weight, the lower the priority. Use a weighted round robin technique to achieve different QoS levels across WLANs.

You can rate-limit bandwidth for WLAN sessions. This form of per-user rate limiting enables administrators to define uplink and downlink bandwidth limits for users and clients. This sets the level of traffic a user or client can forward and receive over the WLAN. If the user or client exceeds the limit, excessive traffic is dropped.

Rate limits can be applied externally from a RADIUS server using Vendor Specific Attributes (VSAs). Rate limits can be applied to users authenticating using 802.1X, captive portal authentication and devices using MAC authentication.

Configure a Radio QoS Policy

To configure an access point radio's QoS policy:

1. Select **Configuration > Wireless > Radio QoS Policy** to display existing radio QoS policies.

Radio QoS Policy	Firewall detection traffic Enable (e.g., SIP)	Implicit TSPEC	Voice	Best Effort	Video	Background
default	✓	✓	✗	✗	✗	✗

Type to search in tables Row Count: 1

Figure 307: Radio QoS Policy Screen

The **Radio QoS Policy** screen lists those radio QoS policies created thus far. Any of these policies can be selected and applied.

2. Refer to the following information listed for each existing radio QoS policy:

Radio QoS Policy	Displays the name of each radio QoS policy. This is the name set for each listed policy when it was created and cannot be modified as part of the policy edit process.
Firewall detection traffic Enable (e.g., SIP)	A green check mark defines the policy as applying radio QoS settings to traffic detected by the Firewall. A red X defines the policy as having Firewall detection disabled. When enabled, the Firewall simulates the reception of frames for voice traffic when the voice traffic was originated via SIP or SCCP control traffic. If a client exceeds configured values, the call is stopped and/or received voice frames are forwarded at the next non admission controlled traffic class priority. This applies to clients that do not send TPSEC frames only.
Implicit TPSEC	A green check mark defines the policy as requiring wireless clients to send their traffic specifications before they can transmit or receive data. If enabled, this setting applies to just this radio's QoS policy. When enabled, the Access Point simulates the reception of frames for any traffic class by looking at the amount of traffic the client is receiving and sending. If the client sends more traffic than has been configured for an admission controlled traffic class, the traffic is forwarded at the priority of the next non admission controlled traffic class. This applies to clients that do not send TPSEC frames only.
Voice	A green check mark indicates that Voice prioritization QoS is enabled on the radio. A red X indicates that Voice prioritization QoS is disabled on the radio.
Best Effort	A green check mark indicates that Best Effort QoS is enabled on the radio. A red X indicates that Best Effort QoS is disabled on the radio.
Video	A green check mark indicates that Video prioritization QoS is enabled on the radio. A red X indicates that Video prioritization QoS is disabled on the radio.
Background	A green check mark indicates that Background prioritization QoS is enabled on the radio. A red X indicates that Background prioritization QoS is disabled on the radio.

- Click **Add** to create a new radio QoS policy, or select an existing policy and click **Edit** to modify its configuration.

Radio QoS Policy default

WMM | Admission Control | Multimedia Optimizations

Voice Access

Transmit Ops: 47 (0 to 65,535)

AIFSN: 1 (1 to 15)

ECW Min: 2 (0 to 15)

ECW Max: 3 (0 to 15)

Video Access

Transmit Ops: 94 (0 to 65,535)

AIFSN: 1 (1 to 15)

ECW Min: 3 (0 to 15)

ECW Max: 4 (0 to 15)

Normal (Best Effort) Access

Transmit Ops: 0 (0 to 65,535)

AIFSN: 3 (1 to 15)

ECW Min: 4 (0 to 15)

ECW Max: 6 (0 to 15)

Low (Background) Access

Transmit Ops: 0 (0 to 65,535)

AIFSN: 7 (1 to 15)

ECW Min: 4 (0 to 15)

ECW Max: 10 (0 to 15)

OK | Reset | Exit

Figure 308: Radio QoS Policy WMM Screen

The **Radio QoS Policy** screen displays the WMM tab by default. Use the WMM tab to define the access category configuration (CWMin, CWMax, AIFSN and TXOP values) in respect to the type of wireless data planned for this new or updated radio QoS policy.

4. Set the following **Voice Access** settings for the radio QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. When resources are shared between a Voice over IP (VoIP) call and a low priority file transfer, bandwidth is normally exploited by the file transfer, thus reducing call quality or even causing the call to disconnect. With voice QoS, a VoIP call (a realtime session), receives priority, maintaining a high level of voice quality. For higher-priority traffic categories (like voice), the Transmit Ops value should be set to a low number. The default value is 47.
AIFSN	Set the current AIFSN between 1-15. Higher priority traffic voice categories should have lower AIFSN values than lower priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 1.
ECW Min	The ECW Min is combined with the ECW Max to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 2.
ECW Max	The ECW Max is combined with the ECW Min to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 3.

5. Set the following **Normal (Best Effort) Access** settings for the radio QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. For higher-priority traffic categories, this value should be set to a low number. The default value is 0.
AIFSN	Set the current AIFSN between 1-15. Higher priority traffic voice categories should have lower AIFSN values than lower priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 3.
ECW Min	The ECW Min is combined with the ECW Max to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 4.
ECW Max	The ECW Max is combined with the ECW Min to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 6.

6. Set the following **Video Access** settings for the radio QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. For higher-priority traffic categories, this value should be set to a low number. The default value is 94.
AIFSN	Set the current AIFSN between 1-15. Higher priority traffic voice categories should have lower AIFSN values than lower priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 1.
ECW Min	The ECW Min is combined with the ECW Max to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 3.
ECW Max	The ECW Max is combined with the ECW Min to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 4.

7. Set the following **Low (Background) Access** settings for the radio QoS policy:

Transmit Ops	Use the slider to set the maximum duration a device can transmit after obtaining a transmit opportunity. For higher-priority traffic categories, this value should be set to a low number. The default value is 0.
AIFSN	Set the current AIFSN between 1-15. Higher priority traffic voice categories should have lower AIFSN values than lower priority traffic categories. This will cause lower-priority traffic to wait longer before attempting access. The default value is 7.
ECW Min	The ECW Min is combined with the ECW Max to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 4.
ECW Max	The ECW Max is combined with the ECW Min to create a contention value in the form of a numerical range. From this range, a random number is selected for the back off mechanism. Lower values are used for higher priority traffic. The available range is from 0-15. The default value is 10.

8. Click **OK** when completed to update the radio QoS settings for this policy.

Click **Reset** to revert the WMM screen to its last saved configuration.

9. Select the Admission Control tab to configure an admission control configuration for the selected radio QoS policy.

Admission control requires clients send their traffic specifications (TSPEC) to a controller or service platform managed Access Point before they can transmit or receive data.

The screenshot shows the 'Radio QoS Policy default' configuration window. The 'Admission Control' tab is active. The 'Settings' section includes 'Firewall detection traffic Enable (e.g., SIP)' (checked) and 'Implicit TSPEC' (checked). The 'Voice Access' section has 'Enable Voice' (unchecked) and numeric fields for 'Maximum Airtime' (75), 'Maximum Wireless Clients' (100), 'Maximum Roamed Wireless Clients' (10), and 'Reserved for Roam' (10). The 'Video Access' section has 'Enable Video' (unchecked) and identical numeric fields. The 'Normal (Best Effort) Access' and 'Low (Background) Access' sections each have 'Enable' checkboxes (unchecked) and the same set of numeric fields as the Voice and Video sections. The bottom of the window features 'OK', 'Reset', and 'Exit' buttons.

Figure 309: Radio QoS Policy Admission Control Screen

The name of the radio QoS policy for which the admission control settings apply displays in the banner of the **QoS Policy** screen.

10. Select the **Firewall detection traffic Enable (e.g, SIP)** check box to force admission control to traffic whose access category is detected by the firewall.

This feature is enabled by default.

11. Select the **Implicit TSPEC** check box to require wireless clients to send their traffic specifications to a controller or service platform managed access point before they can transmit or receive data.

If enabled, this setting applies to the QoS policy for this radio only. This feature is enabled by default.

12. Set the following **Voice Access** admission control settings for this radio QoS policy:

Enable Voice	Select the check box to enable admission control for this policy's voice traffic. Only voice traffic admission control is enabled, not any of the other access categories (each access category must be separately enabled and configured).
Maximum Airtime	Set the maximum airtime (in the form of a percentage of the radio's bandwidth) allotted to admission control for voice supported client traffic. The available percentage range is from 0-150%, with 150% being available to account for over-subscription. This value ensures the radio's bandwidth is available for high bandwidth voice traffic (if anticipated on the wireless medium) or other access category traffic if voice support is not prioritized. Voice traffic requires longer radio airtime to process, so set a longer airtime value if this radio QoS policy is intended to support voice. The default value is 75%.
Maximum Wireless Clients	Set the number of voice supported wireless clients allowed to exist (and consume bandwidth) within the radio's QoS policy. Select from an available range of 0-256 clients. Consider setting this value proportionally to the number of other QoS policies supporting the voice access category, as wireless clients supporting voice use a greater proportion of resources than lower bandwidth traffic (like low and best effort categories). The default value is 100 clients.
Maximum Roamed Wireless Clients	Set the number of voice supported wireless clients allowed to roam to a different radio. Select from a range of 0-256 clients. The default value is 10 roamed clients.
Reserved for Roam	Set the roam utilization (in the form of a percentage of the radio's bandwidth) allotted to admission control for voice supported clients who have roamed to a different radio. The available percentage range is from 0-150%, with 150% available to account for over-subscription. The default value is 10%.

13. Set the following **Normal (Best Effort) Access** admission control settings for this radio QoS policy:

Enable Best Effort	Select the check box to enable admission control for this policy's normal traffic. Only normal traffic admission control is enabled, not any of the other access categories (each access category must be separately enabled and configured).
Maximum Airtime	Set the maximum airtime (in the form of a percentage of the radio's bandwidth) allotted to admission control for normal best effort client traffic. The available percentage range is from 0-150%, with 150% being available to account for over-subscription. This value helps ensure the radio's bandwidth is available for lower bandwidth normal traffic (if anticipated to proliferate the wireless medium). Normal background traffic only needs a short radio airtime to process, so set an intermediate airtime value if this radio QoS policy is reserved for best effort data support. The default value is 75%.

Maximum Wireless Clients	Set the number of wireless clients supporting best effort traffic allowed to exist (and consume bandwidth) within the radio's QoS policy. Select from an available range of 0-256 clients. The default value is 100 clients.
Maximum Roamed Wireless Clients	Set the number of normal best effort supported wireless clients allowed to roam to a different radio. Select from a range of 0-256 clients. The default value is 10 roamed clients.
Reserved for Roam	Set the roam utilization (in the form of a percentage of the radio's bandwidth) allotted to admission control for normal best effort supported clients who have roamed to a different radio. The available percentage range is from 0-150%, with 150% available to account for over-subscription. The default value is 10%.

14. Set the following **Video Access** admission control settings for this radio QoS policy:

Enable Video	Select the check box to enable admission control for this policy's video traffic. Only video traffic admission control is enabled, not any of the other access categories (each access category must be separately enabled and configured). This feature is disabled by default.
Maximum Airtime	Set the maximum airtime (in the form of a percentage of the radio's bandwidth) allotted to admission control for video supported client traffic. The available percentage range is from 0-150%, with 150% being available to account for over-subscription. This value helps ensure the radio's bandwidth is available for high bandwidth video traffic (if anticipated on the wireless medium) or other access category traffic if video support is not prioritized. Video traffic requires longer radio airtime to process, so set a longer airtime value if this radio QoS policy is intended to support video. The default value is 75%.
Maximum Wireless Clients	Set the number of wireless clients supporting video traffic allowed to exist (and consume bandwidth) within the radio's QoS policy. Select from an available range of 0-256 clients. The default value is 100 clients.
Maximum Roamed Wireless Clients	Set the number of video supported wireless clients allowed to roam to a different radio. Select from a range of 0-256 clients. The default value is 10 roamed clients.
Reserved for Roam	Set the roam utilization (in the form of a percentage of the radio's bandwidth) allotted to admission control for video supported clients who have roamed to a different radio. The available percentage range is from 0-150%, with 150% available to account for over-subscription. The default value is 10%.

15. Set the following **Low (Background) Access** admission control settings for this radio QoS policy:

Enable Background	Select the check box to enable admission control for this policy's lower priority background traffic. Only low background traffic admission control is enabled, not any of the other access categories (each access category must be separately enabled and configured).
Maximum Airtime	Set the maximum airtime (in the form of a percentage of the radio's bandwidth) allotted to admission control for low background client traffic. The available percentage range is from 0-150%, with 150% being available to account for over-subscription. This value helps ensure the radio's bandwidth is available for lower bandwidth normal traffic (if anticipated to proliferate the wireless medium). Background traffic only needs a short radio airtime to process, so set an intermediate airtime value if this radio QoS policy is reserved for background data support. The default value is 75%.
Maximum Wireless Clients	Set the number of low and background supported wireless clients allowed to exist (and consume bandwidth) within the radio's QoS policy. Select from an available range of 0-256 clients. The default value is 100 clients.
Maximum Roamed Wireless Clients	Set the number of low and best effort supported wireless clients allowed to roam to a different radio. Select from a range of 0-256 clients. The default value is 10 roamed clients.
Reserved for Roam	Set the roam utilization (in the form of a percentage of the radio's bandwidth) allotted to admission control for normal background supported clients who have roamed to a different radio. The available percentage range is from 0-150%, with 150% available to account for over-subscription. The default value is 10%.

16. Select the Multimedia Optimizations tab to set the advanced multimedia QoS and Smart Aggregation configuration for selected radio QoS policy.

Figure 310: Radio QoS Policy Multimedia Optimizations Screen

17. Set the following **Accelerated Multicast** settings for this radio QoS policy:

Maximum multicast streams allowed	Specify the maximum number of multicast streams (between 0 and 256) permitted to use accelerated multicast. The default value is 25.
When wireless client count exceeds the above limit	When the wireless client count using accelerated multicast exceeds the maximum number, set the radio to either Reject new wireless clients or Revert existing clients to a non-accelerated state.
Maximum multicast streams per client	Specify the maximum number of multicast streams (between 1 and 4) wireless clients can use. The default value is 2.

Packets per second for multicast flow for it to be accelerated	Specify the threshold of multicast packets per second (between 1 and 500) that triggers acceleration for wireless clients. The default value is 25.
Timeout for wireless clients	Specify a timeout value in seconds (between 5 and 6,000) for wireless clients to revert to a non-accelerated state. The default value is 60.

18. Define the following **Smart Aggregation** settings:

Smart Aggregation enhances frame aggregation by dynamically selecting the time when the aggregated frame is transmitted. In a frame's typical aggregation, an aggregated frame is sent when it meets one of these conditions:

- A preconfigured number of aggregated frames is reached
- An administrator defined interval has elapsed since the first frame (of a set of frames to be aggregated) was received
- An administrator defined interval has elapsed since the last frame (not necessarily the final frame) of a set of frames to be aggregated was received

With this enhancement, an aggregation delay is set uniquely for each traffic class. For example, voice traffic might not be aggregated, but sent immediately. Whereas, background data traffic is set a delay for aggregating frames, and these aggregated frames are sent.

Smart Aggregation	Select to enable smart aggregation and dynamically define when an aggregated frame is transmitted. Smart aggregation is disabled by default.
Max Delay for Best Effort	Set the maximum time (in milliseconds) to delay best effort traffic. The default setting is 150 milliseconds.
Max Delay for Background	Set the maximum time (in milliseconds) to delay background traffic. The default setting is 250 milliseconds.
Max Delay for Streaming Video	Set the maximum time (in milliseconds) to delay streaming video traffic. The default setting is 150 milliseconds.
Max Delay for Video Conferencing	Set the maximum time (in milliseconds) to delay video conferencing traffic. The default setting is 40 milliseconds.
Max Delay for Voice	Set the maximum time (in milliseconds) to delay voice traffic. The default setting is 0 milliseconds.
Minimum frames per Aggregate limit	Set the minimum number of frames to aggregate in a frame before it is transmitted. The default setting is 8 frames.
Max Mesh Links	Set the maximum number of mesh hops for smart aggregation. The default setting is 3.

19. Click **OK** when completed to update the radio QOS settings for this policy.

Click **Reset** to revert to the last saved configuration.

Radio QoS Configuration and Deployment Considerations

Before defining a radio QoS policy, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- To support QoS, each multimedia application, wireless client and WLAN is required to support WMM.
- WMM enabled clients can coexist with non-WMM clients on the same WLAN. Non-WMM clients are always assigned a best effort access category.
- Use default WMM values for all deployments. Changing these values can lead to unexpected traffic blockages, and these blockages might be difficult to diagnose.
- Overloading an access point radio with too much high priority traffic (especially voice) degrades overall service quality for all of its users.
- TSPEC admission control is available only with newer voice over WLAN phones. Many legacy voice devices do not support TPSEC or even support WMM traffic prioritization.

Configure Association ACL

An association ACL is a policy-based ACL that either allows or denies clients from connecting to a controller, service platform or access point managed WLAN. An association ACL affords a system administrator the ability to restrict access by specifying a client MAC address or range of addresses to either include or exclude from WLAN connectivity.

Association ACLs are applied to WLANs as an additional access control mechanism. They can be applied to WLANs from within a WLAN Policy's **Advanced Configuration** screen. For more information on applying an existing association ACL to a WLAN, see [Configure Advanced WLAN Settings](#) on page 672.

Each supported access point model supports 32 association ACLs.

To define an association ACL deployable with a WLAN:

1. Select **Configuration** → **Wireless** → **Association ACL** to display existing association ACLs.

Any of the policies listed in the **Association Access Control List (ACL)** screen can be selected and applied.

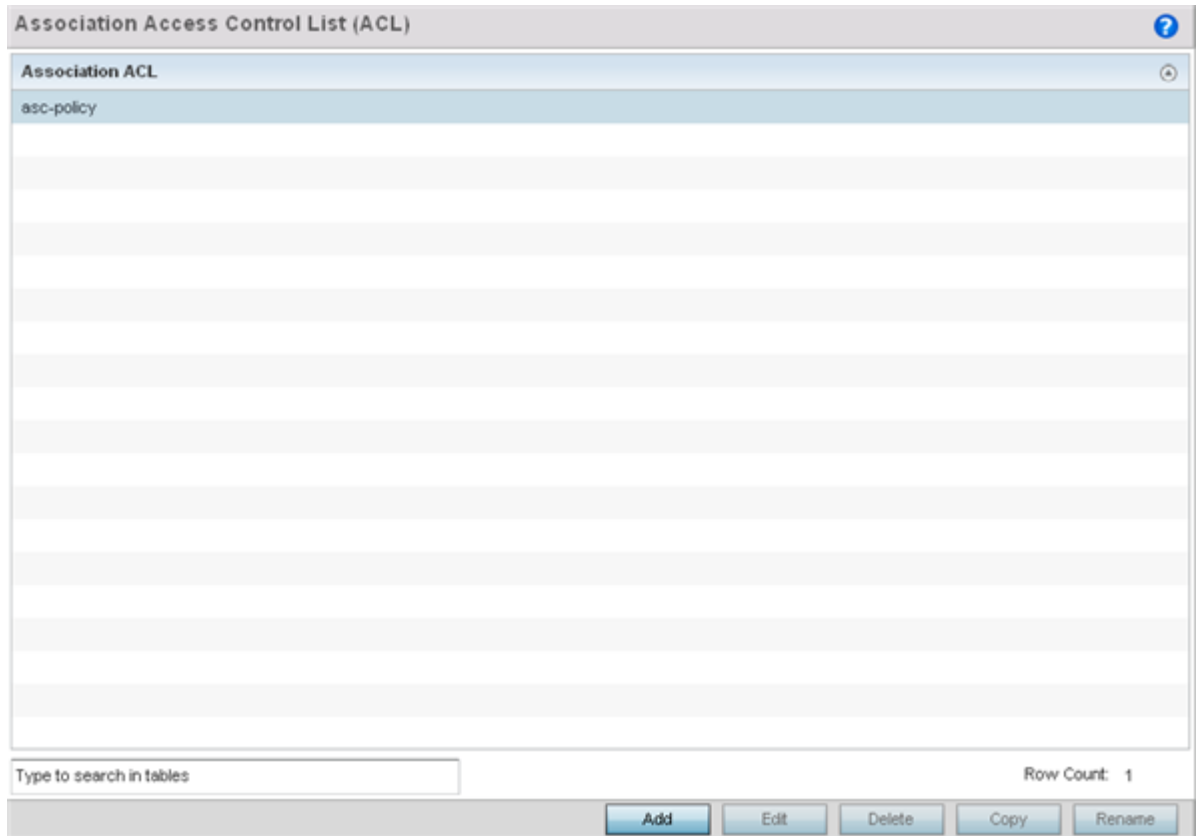


Figure 311: Association Access Control List (ACL) Screen

2. Review existing Association ACLs to determine if a new policy warrants creation or an existing policy warrants modification or deletion.

3. Select **Add** to define a new ACL configuration, **Edit** to modify an existing ACL configuration, or **Delete** to remove one. Select **Copy** to make a copy of an existing ACL for further modifications. Select **Rename** to rename an existing ACL.

An **Association ACL** screen displays.

Precedence	Starting MAC Address	Ending MAC Address	Allow Deny
1	18-3D-A2-97-40-D0	18-3D-A2-97-40-D0	Deny
1,000	19-3D-A2-97-40-D0	19-3D-A2-97-40-D0	Allow

Figure 312: Association ACL Screen

4. Select the **+ Add Row** button to add an association ACL template.
5. Set the following parameters to create or modify the association ACL:

Association ACL	If you are creating a new Association ACL, provide a name specific to its function. Avoid naming it after the WLAN it supports. The name cannot exceed 32 characters.
Precedence	The rules within a WLAN's ACL are applied to packets based on precedence. Every rule has a unique sequential precedence value you define. You cannot add two rules with the same precedence. The default precedence is 1, so be careful to prioritize ACLs accordingly as they are added.
Starting MAC Address	Provide a starting client MAC address for non unicast and multicast packet transmissions.

Ending MAC Address	Provide an ending client MAC address for non unicast and multicast packet transmissions.
Allow/Deny	Use the drop-down menu to Allow or Deny access if a MAC address matches this rule.

6. Select the **+ Add Row** button to add MAC address ranges and allow/deny designations.
7. Click **OK** to save the changes.
Click **Reset** to revert to the last saved configuration.

Association ACL Deployment Considerations

Before defining an association ACL configuration and applying it to a controller, service platform or access point managed WLAN, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Use the **Association ACL** screen strategically to name and configure ACL policies meeting the requirements of the particular WLANs to which they apply. Be careful, however, not to name ACLs after specific WLANs, because individual ACL policies can be used by more than one WLAN.
- You cannot apply more than one MAC based ACL to a Layer 2 interface. If a MAC ACL is already configured on a Layer 2 interface, and a new MAC ACL is applied to the interface, the new ACL replaces the previously configured one.

Smart RF Policies

Self Monitoring At Run Time RF Management (Smart RF) is an innovation designed to simplify RF configurations for new deployments, while (over time) providing on-going deployment optimization radio performance improvements.

A Smart RF policy can reduce deployment costs by scanning the RF environment to determine the best channel and transmit power for each managed radio.

Smart RF centralizes the decision process and makes intelligent RF configuration decisions using information obtained from the RF environment. Smart RF helps reduce ongoing management and maintenance costs through periodic re-calibration of the network. Recalibration can be initiated manually or can be automatically scheduled to ensure the RF configuration is optimized to factor for RF environment changes (such as new sources of interference, or neighboring access points).



Note

Unlike a controller or service platform, an access point utilizes a single Smart RF configuration it can use with other access points of the same model. However, the Smart RF policy needs to be activated from any one of the Smart RF screens. Numerous Smart RF policies cannot be defined on behalf of the access point.

Smart RF also provides self-healing functions by monitoring the network in real-time and provides automatic mitigation from potentially problematic events such as radio interference, non-WiFi interference (noise), external WiFi interference, coverage holes

and radio failures. Smart RF employs self-healing to enable a WLAN to better maintain wireless client performance and site coverage during dynamic RF environment changes, which typically require manual reconfiguration to resolve.

If a Smart RF managed radio is operating in WLAN mode on a channel requiring DFS, it will switch channels if radar is detected.

- If Smart RF is enabled, the radio picks a channel defined in the Smart RF policy.
- If Smart RF is disabled, but a Smart RF policy is mapped, the radio picks a channel specified in the Smart RF policy.
- If no Smart RF policy is mapped, the radio selects a random channel.

If the radio is a dedicated sensor, it stops termination on that channel if a neighboring access point detects radar. The access point attempts to come back to its original channel (statically configured or selected by Smart RF) after the channel evacuation period has expired.

Change this behavior using a **no dfs-rehome** command from the controller or service platform CLI. This keeps the radio on the newly selected channel and prevents the radio from coming back to the original channel, even after the channel evacuation period.

**Note**

RF planning must be performed to ensure overlapping coverage exists at a deployment site for Smart RF to be a viable network performance tool. Smart RF can only provide recovery when access points are deployed appropriately. Smart RF is not a solution, it's a temporary measure. Administrators need to determine the root cause of RF deterioration and fix it. Smart RF history/events can assist.

**Caution**

The access point's Smart RF feature is not able to detect a voice call in progress, and will switch to a different channel resulting in voice call reconnections and communication disruptions.

Configure Smart RF Basic Settings

To define a Smart RF policy:

1. Select the **Activate SMART RF Policy** check box to enable the parameters on the screen for configuration.

The configuration cannot be applied to the access point profile unless this setting is selected and remains enabled.

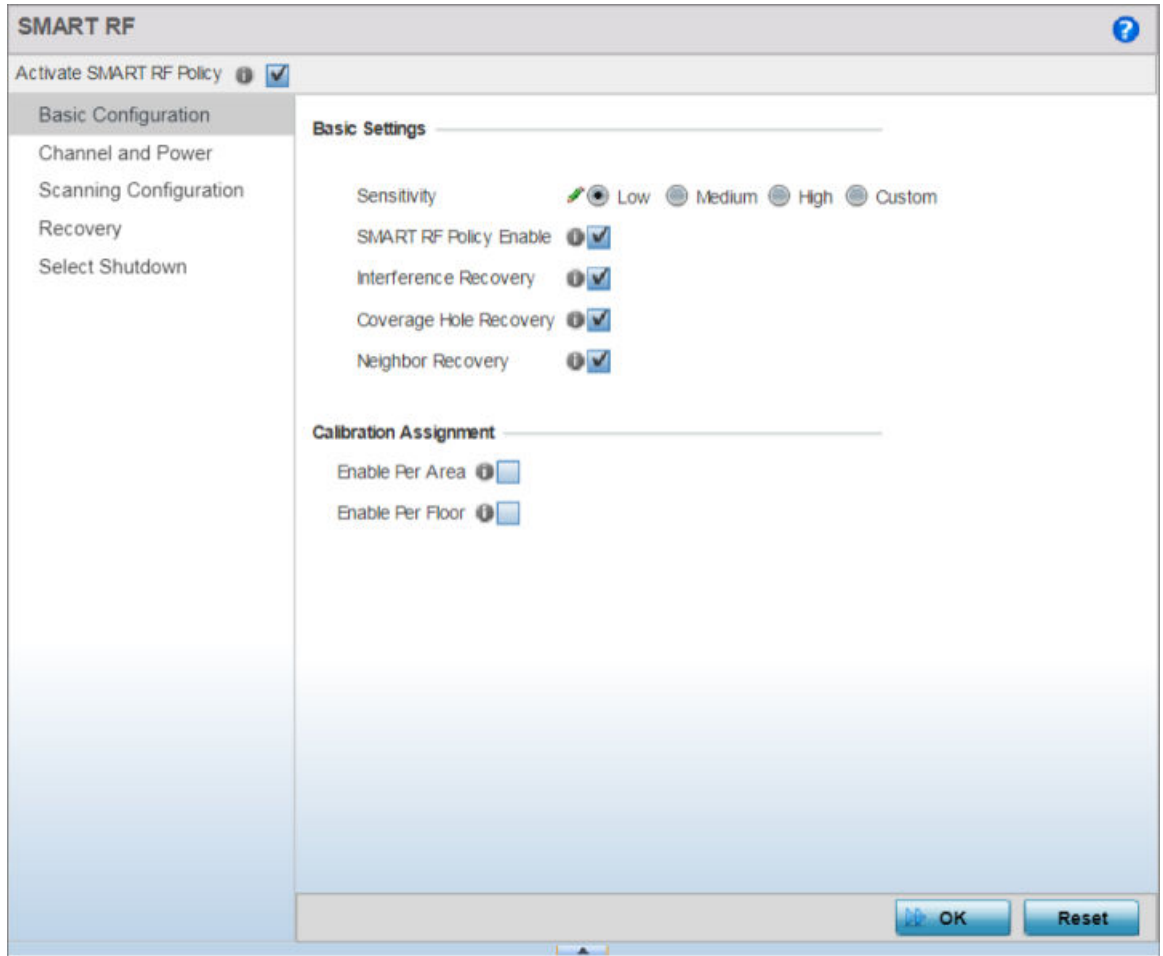


Figure 313: SMART RF - Basic Configuration Screen

2. Refer to the **Basic Settings** field to enable a Smart RF policy and define its sensitivity and detector status.

Sensitivity	Select a radio button corresponding to the desired Smart RF sensitivity. The options include , Medium , High , and Custom . Medium is the default setting. The Custom option allows an administrator to adjust the parameters and thresholds for Interference Recovery , Coverage Hole Recovery , and Neighbor Recovery . Using the Low , Medium (recommended), and High settings still allows these features to be utilized.
Smart RF Policy Enable	Select this option to enable Smart RF for immediate inclusion within an RF Domain. Smart RF is enabled by default.
Interference Recovery	Select this option to enable compensations from neighboring radios when radio interference is detected. When interference is detected, Smart RF first determines the power increase needed based on the signal to noise ratio for a client (as seen by the access point radio). If a client's signal to noise value is above the threshold, the transmit power is increased until the signal to noise rate falls below the threshold. This option is enabled by default.
Coverage Hole Recovery	Select this option to enable coverage compensation from neighboring radios when a radio coverage hole is detected within the Smart RF supported radio coverage area. When a coverage hole is detected, Smart RF first determines the power increase needed based on the signal-to-noise ratio for a client as seen by the access point radio. If a client's signal-to-noise value is above the threshold, the transmit power is increased until the signal-to-noise rate falls below the threshold. This option is enabled by default.
Neighbor Recovery	Select this option to enable Neighbor Recovery when a failed radio is detected within the Smart RF supported radio coverage area. Smart RF can provide automatic recovery by instructing neighboring APs to increase their transmit power to compensate for the coverage loss. Neighbor Recovery is enabled by default when the sensitivity setting is Medium .

3. Refer to the **Calibration Assignment** field to define whether Smart RF Calibration and radio grouping is conducted by area or floor.
Both options are disabled by default.
4. Refer to the **Smart Sensor** field to set parameters enabling auto-provisioning of APs as sensors.

In a typical WLAN, getting the right balance between the number of APs functioning as sensors and APs providing WLAN service is a serious challenge. The challenge increases exponentially with increase in the size of the deployment. Smart-sensor automates provisioning of APs as sensors without compromising network security.



Note

Currently Smart-sensor is supported only on tri-radio APs. Starting with WiNG 7.3.1, dual-radio APs can also be auto-provisioned as sensors.

Enable Smart Sensor	<p>Select to enable auto-provisioning of APs as sensors. When enabled, 1/3 of the deployed APs' sensor radios are turned on automatically.</p> <p>Note: This feature is supported on the following APs:</p> <ul style="list-style-type: none"> • Access points (tri-radio) — AP4xx, AP8533 • Access points (dual-radio) — AP505i, AP510i/e, AP8432 <p>With this enhancement, the following deployment scenarios are possible:</p> <ul style="list-style-type: none"> • Scenario 1: All dual-radio APs deployed: Selected APs will have both radios set to radio-share mode. • Scenario 2: All tri-radio APs deployed: Selected APs will operate as dedicated sensors. • Scenario 3: Mixed dual and tri-radio APs deployed: <ul style="list-style-type: none"> ◦ Selected dual-radio APs will operate in radio-share mode. ◦ Selected tri-radio APs will operate as dedicated sensor. <p>Note: By default, Smart RF selects and provisions <i>only</i> tri-radio APs as sensors. To enable Smart RF to select dual-radio APs as well, configure the Smart RF policy through the CLI and execute the <code>no > smart-sensor > tri-radio-only</code> command.</p>
Algorithm Cell Size	<p>Select this option to enable the use of an algorithmic function to identify the sensor APs.</p> <p>The WiNG Smart-sensor feature uses an algorithm to provision APs as sensor within a site (RF Domain). The algorithm creates a cluster of cells based on inputs from the Smart-RF neighbor table. Each cell in the cluster represents an AP and adjacent cells are the AP's neighbor. The algorithm then identifies APs with best coverage area and provisions them as sensors. However, the algorithmic calculations vary depending on the cell size. The current implementation provides two algorithms based on the cell size (dense/sparse). Select the algorithm best suited for your deployment.</p> <ul style="list-style-type: none"> • dense - Selects the algorithm best suited for dense deployments. In dense deployments, the cell-size is 'small', with APs deployed close to each other. • sparse - Selects the algorithm best suited for sparse deployments. In sparse deployments, the cell-size is 'big', with APs deployed far apart from each other. <p>Note: The Smart-sensor calibration is auto-triggered when Smart-sensor is enabled for the first time. In case a re-calibration is required, you will have to manually issue the <code>trigger-smart-sensor on <RF-DOMAIN-NAME></code> command through the CLI to trigger the algorithm. Re-calibration maybe needed if you change the number of APs deployed or the AP deployment pattern within the RF Domain.</p>

5. Click **OK** to update the Smart RF basic settings for this policy.

Click **Reset** to revert to the last saved configuration.

Configuring Smart RF Channel & Power Settings

To configure Smart RF Channel and Power settings:

1. Select **Channel and Power**.

Use the **Channel and Power** screen to refine Smart RF power settings over the 6 GHz, 5 GHz, and 2.4 GHz radio bands and select channel settings in respect to the access point's channel usage.



Note

The **Power Settings** and **Channel Settings** parameters are enabled only when **Custom** is selected as the **Sensitivity** setting from the **Basic Configuration** screen.

Power Settings

5 GHz Minimum Power (1 to 20 dBm)

5 GHz Maximum Power (1 to 20 dBm)

2.4 GHz Minimum Power (1 to 20 dBm)

2.4 GHz Maximum Power (1 to 20 dBm)

Channel Settings

5 GHz Channels

5 GHz Channel Width 20MHz 40MHz 80MHz Automatic

2.4 GHz Channels

2.4 GHz Channel Width 20MHz 40MHz Automatic

Area Based Channel Settings

Area	Band	Channel List	
			<input type="button" value="Delete"/>

Figure 314: SMART RF - Channel and Power Screen

2. Refer to the **Power Settings** field to define Smart RF recovery settings for the selected 6 GHz (802.11ax), 5 GHz (802.11a) or 2.4 GHz (802.11bg) radio.

2.4 GHz Minimum Power	Use the spinner control to select a 1 dBm to 20 dBm minimum power level for Smart RF to assign to a radio in the 2.4 GHz band. The default setting is 4 dBm.
2.4 GHz Maximum Power	Use the spinner control to select a 1 dBm to 20 dBm maximum power level for Smart RF to assign to a radio in the 2.4 GHz band. The default setting is 17 dBm.
5 GHz Minimum Power	Use the spinner control to select a 1 dBm to 20 dBm minimum power level for Smart RF to assign to a radio in the 5 GHz band. The default setting is 4 dBm.
5 GHz Maximum Power	Use the spinner control to select a 1 dBm to 20 dBm maximum power level for Smart RF to assign to a radio in the 5 GHz band. The default setting is 17 dBm.
6 GHz Minimum Power	Use the spinner control to select a 1 dBm to 20 dBm minimum power level for Smart RF to assign to a radio in the 6 GHz band. The default setting is 4 dBm.
6 GHz Maximum Power	Use the spinner control to select a 1 dBm to 20 dBm maximum power level for Smart RF to assign to a radio in the 6 GHz band. The default setting is 17 dBm.

3. Set the following **Channel Settings** for the 6 GHz, 5 GHz, and 2.4 GHz radios.

2.4 GHz Channels	Use the drop-down list box to define the 2.4 GHz channels used for Smart RF assignments.
2.4 GHz Channel Width	<p>20 MHz and 40 MHz channel widths are supported by the 802.11a radio. 20 MHz is the default setting for 2.4 GHz radios. 20 MHz or 40 MHz operation (the default setting for the 5 GHz radio) allows the access point to receive packets from clients using 20 MHz of bandwidth while transmitting a packet using 40 MHz bandwidth. This mode is supported for 11n users on both the 2.4 GHz and 5 GHz radios.</p> <p>If an 11n user selects two channels (a primary and secondary channel), the system is configured for dynamic 20 MHz or 40 MHz operation.</p> <p>When 20 MHz or 40 MHz is selected, clients can take advantage of wider channels. 802.11n clients experience improved throughput using 40 MHz while legacy clients (either 802.11a or 802.11b/g depending on the radio selected) can still be serviced without interruption using 20 MHz.</p> <p>Select Automatic to enable automatic assignment of channels to working radios to avoid channel overlap and avoid interference from external RF sources. Automatic is the default setting.</p>
5 GHz Channels	Use the drop-down list box to define the 5 GHz channels used for Smart RF assignments

5 GHz Channel Width	<p>20 MHz, 40 MHz, and 80 MHz channel widths are supported by the 802.11a radio. 40 MHz is the default setting for 5 GHz radios. 20 MHz, 40 MHz, or 80 MHz operation allows the access point to receive packets from clients using 20 MHz of bandwidth while transmitting a packet using 40 MHz bandwidth. This mode is supported for 11n users on both the 2.4 and 5 GHz radios.</p> <p>If an 11n user selects two channels (a primary and secondary channel), the system is configured for dynamic 20/40 operation.</p> <p>When 20, 40, 80 is selected, clients can take advantage of wider channels. 802.11n clients experience improved throughput using 40 MHz while legacy clients (either 802.11a or 802.11b/g depending on the radio selected) can still be serviced without interruption using 20 MHz.</p> <p>Select Automatic to enable automatic assignment of channels to working radios to avoid channel overlap and avoid interference from external RF sources. Automatic is the default setting.</p> <p>80 MHz channel is used for 802.11ac access points</p>
6 GHz Channels	Use the drop-down list box to define the 6 GHz channels used for Smart RF assignments.
6 GHz Channel Width	<p>20 MHz, 40 MHz, 80 MHz, and 160 MHz channel widths are supported by the 802.11ax radio. 40 MHz is the default setting for the 6 GHz radio. 20 MHz, 40 MHz, 80 MHz, and 160 MHz operation allows the access point to receive packets from clients using 20 MHz of bandwidth while transmitting a packet using 40 MHz bandwidth. This mode is supported for 11n users on both the 2.4 and 5 GHz radios.</p> <p>If an 11n user selects two channels (a primary and secondary channel), the system is configured for dynamic 20/40 operation.</p> <p>When 20, 40, 80 is selected, clients can take advantage of wider channels. 802.11n clients experience improved throughput using 40 MHz while legacy clients (either 802.11a or 802.11b/g depending on the radio selected) can still be serviced without interruption using 20 MHz.</p> <p>Select Automatic to enable automatic assignment of channels to working radios to avoid channel overlap and avoid interference from external RF sources. Automatic is the default setting.</p> <p>80 MHz channel is used for 802.11ac access points</p>

4. Select **+ Add Row** and set the following **Area Based Channel Settings** for the Smart RF policy:

Area	Use the text area to provide a name for the area being configured.
Band	Select the radio band, either 2.4 GHz , 5 GHz , or 6 GHz for the Smart RF policy assigned to the specified area.
Channel List	Select the channels associated with the Smart RF policy for the specified area and band.

- Click **OK** to update the Smart RF and Power settings for this policy.
Click **Reset** to revert to the last saved configuration.

The Smart RF policy can be invoked at any point in the configuration process by selecting **Activate SMART RF Policy** from the upper, left-hand portion of the access point user interface.

Configuring Smart RF Scanning Configuration

To configure the Smart RF scanning configuration:

- Select **Scanning Configuration**.

Ensure that **Activate SMART RF Policy** remains selected so that the screen's parameters can be updated. Additionally, the Smart RF configuration cannot be applied to the access point profile unless this setting remains selected.

Monitoring Configuration

Smart Monitoring Enable

OCS Monitoring Awareness

Threshold (10 to 10,000)

Index	Day	Start Time	End Time

Scanning Configuration for 5.0 GHz

Duration (20 to 150 milliseconds)

Frequency Seconds (1 to 120)

Extended Scan Frequency (0 to 50)

Sample Count (1 to 15)

Client Aware Scanning (1 to 255)

Power Save Aware Scanning Dynamic Strict Disable

Voice Aware Scanning Dynamic Strict Disable

Transmit Load Aware Scanning (1 to 100)

Scanning Configuration for 2.4 GHz

Duration (20 to 150 milliseconds)

Figure 315: SMART RF - Scanning Configuration Screen



Note

The monitoring and scanning parameters in the **Scanning Configuration** screen are enabled only when **Custom** is selected as the **Sensitivity** setting from the **Basic Configuration** screen.

2. Enable or disable **Smart Monitoring Enable**.

The feature is enabled by default. When it is enabled, detector radios monitor their coverage areas for potential failed peers or coverage area holes requiring transmission adjustments for coverage compensation.

3. Select **+ Add Row** and set **OCS Monitoring Awareness Settings** for the Smart RF policy:

Threshold	Select this option and specify a threshold from 10 - 10,000. When the threshold is reached awareness settings are overridden with the values specified in the table.
Index	Select an Index value from 1 - 3 for awareness overrides. The overrides are executed based on index, with the lowest index being executed first.
Day	Use the drop-down menu to select a day of the week to apply the override. Selecting All will apply the policy every day. Selecting weekends will apply the policy on Saturdays and Sundays only. Selecting weekdays will apply the policy on Monday, Tuesday, Wednesday, Thursday and Friday. Selecting individual days of the week will apply the policy only on the selected days.
Start Time	Set the starting time of day when the overrides will be activated. Use the spinner controls to select the hour and minute, in 12h time format. Then use the radio button to choose AM or PM .
End Time	Set the ending time of day when the overrides will be disabled. Use the spinner controls to select the hour and minute, in 12h time format. Then use the radio button to choose AM or PM .

4. Set the following **Scanning Configurations** for both the 2.4 and 5.0 GHz radio bands:

Duration	Set a channel scan duration (from 20 - 150 milliseconds) that access point radios use to monitor devices within the network and, if necessary, perform self healing and neighbor recovery to compensate for coverage area losses within an RF Domain. The default setting is 50 milliseconds for both 2.4 GHz and 5.0 GHz bands.
Frequency	Set the scan frequency using the drop-down menu. Set a scan frequency in either seconds (1 - 120) or minutes (0 - 2). The default setting is 6 seconds for both the 5 and 2.4 GHz bands.
Extended Scan Frequency	Use the spinner control to set an extended scan frequency between 0 - 50. This is the frequency on which radios scan channels on other than their peer radios. The default setting is 5 for both the 5 and 2.4 GHz bands.
Sample Count	Use the spinner control to set a sample scan count value between 1 - 15. This is the number of RF readings a radio gathers before it sends the data to the Smart RF master. The default setting is 5 for both the 5 and 2.4 GHz bands.

Client Aware Scanning	Set a client awareness count (1 - 255) during off channel scans for either the 2.4 or 5.0 GHz radio. The default setting is 1 for both radio bands.
Power Save Aware Scanning	Select either the Dynamic , Strict , or Disable radio button to define how power save scanning is set for Smart RF. Strict disables smart monitoring as long as a power save capable client is associated to a radio. Dynamic disables smart monitoring as long as there is data buffered for a power save client at the radio. The default setting is Dynamic for both the 5 and 2.4 GHz bands.
Voice Aware Scanning	Select either the Dynamic , Strict , or Disable radio button to define how voice aware recognition is set for Smart RF. Strict disables smart monitoring as long as a power save capable client is associated to a radio. Dynamic disables smart monitoring as long as there is data buffered for a voice client at the radio. The default setting is Dynamic for both the 5 and 2.4 GHz bands.
Transmit Load Aware Scanning	Select this option to set a transmit load percentage from 1 - 100 serving as a threshold before scanning is avoided for an access point's 2.4 GHz radio.

- Click **OK** to update the Smart RF Scanning Configuration settings for this policy.
Click **Reset** to revert to the last saved configuration.

Configuring Smart RF Neighbor Recovery Settings

To configure Smart RF recovery settings:

- Select **Recovery**.

The **Neighbor Recovery** tab displays by default. Use the Neighbor, Interference, and Coverage Hole recovery tabs to define how 2.4 and 5.0 GHz radios compensate for failed neighbor radios, interference, coverage holes, and loss of root path requiring intervention by neighbor radios.

- Use the **Power Hold Time** field to define the minimum time between two radio power changes during neighbor recovery.

Set the time in either seconds (0 - 3,600), minutes (0 - 60) or hours (0 - 1). The default setting is 0 seconds.

The screenshot displays the 'Neighbor Recovery' configuration screen. It features three tabs: 'Neighbor Recovery' (active), 'Interference Recovery', and 'Coverage Hole Recovery'. The 'Hold Time' section includes a 'Power Hold Time' field set to 0, with a unit dropdown set to 'Seconds' and a range of '(0 to 3,600)'. The 'Neighbor Recovery' section contains two power threshold fields: '5 GHz Neighbor Power Threshold' and '2.4 GHz Neighbor Power Threshold', both set to -70 dBm. The 'Dynamic Sample Recovery' section includes a 'Dynamic Sample Enabled' checkbox (checked), 'Dynamic Sample Retries' set to 3, and 'Dynamic Sample Threshold' set to 5. A yellow warning icon precedes a note about automatic configuration based on sensitivity settings. The bottom of the screen has 'OK', 'Reset', and 'Exit' buttons.

Figure 316: SMART RF - Advanced Configuration Screen - Neighbor Recovery Tab

- Set the following **Neighbor Recovery** parameters:



Note

The recovery parameters within the Neighbor Recovery, Interference and Coverage Hole Recovery tabs are enabled only when **Custom** is selected as the **Sensitivity** setting from the **Smart RF Basic Configuration** screen.

5 GHz Neighbor Power Threshold	Set the maximum power increase threshold (from -85 to -55 dBm) the access point's 5.0 GHz radio uses if it is required to increase its output power to compensate for a failed radio within the access point's radio coverage area. The default value is -70 dBm.
2.4 GHz Neighbor Power Threshold	Set the maximum power increase threshold (from -85 to -55 dBm) the access point's 2.4 GHz radio uses if it is required to increase its output power to compensate for a failed radio within the access point's radio coverage area. The default value is -70 dBm.

4. Set the following **Dynamic Sample Recovery** parameters:

Dynamic Sample Enabled	Select this option to enable dynamic sampling. Dynamic sampling enables an administrator to define how Smart RF adjustments are triggered by locking retry and threshold values. This option is disabled by default.
Dynamic Sample Retries	Set the number of retries (from 1 - 10) attempted before a power level adjustment is implemented to compensate for a potential coverage hole. The default setting is 3.
Dynamic Sample Threshold	Set the number of sample reports (1 - 30) used before dynamic sampling is invoked for a potential power change adjustment. The default setting is 5.

5. Click **OK** to update the Smart RF Neighbor Recovery settings for this policy.
Click **Reset** to revert to the last saved configuration.

Configuring Smart RF Interference Recovery Settings

To configure Smart RF Interference Recovery Settings:

1. Select **Interference Recovery**.

Neighbor Recovery **Interference Recovery** **Coverage Hole Recovery**

Interference Recovery

Interference

Noise

Noise Factor (1.0 - 3.0)

Channel Hold Time Minutes (0 to 1,440)

Client Threshold (1 to 255)

5 GHz Channel Switch Delta (5 to 35 dBm)

2.4 GHz Channel Switch Delta (5 to 35 dBm)

⚠ Note: The system automatically configures optimum values for certain fields, if you select the sensitivity option under 'Basic Settings' as 'Low', 'Medium' or 'High'. Some of the SMART RF parameters appear disabled in this case. Please choose the 'Custom' sensitivity option to enable the fields and manually enter each value.

OK Reset Exit

Figure 317: SMART RF - Advanced Configuration Screen - Interference Recovery Tab

2. Set the following **Interference Recovery** parameters:

Interference	Select this option to allow the Smart RF policy to scan for excess interference from supported radio devices. WLANs are susceptible to sources of interference, such as neighboring radios, cordless phones, microwave ovens and Bluetooth devices. When interference for WiFi sources is detected, Smart RF supported devices can change the channel and move to a cleaner channel. This feature is enabled by default.
Noise	Select this option to allow the Smart RF policy to scan for excess noise from WiFi devices. When detected, Smart RF supported access points can change their channel and move to a cleaner channel. This feature is enabled by default.
Noise Factor	Set the noise factor (level of network interference detected) taken into consideration by Smart RF during interference recovery calculations. Set a value from 1.0 - 3.0.
Channel Hold Time	Define the minimum time between channel changes during neighbor recovery. Set the time in either seconds (0 - 86,400), minutes (0 - 1,440), hours (0 - 24), or days (0 - 1). The default setting is 30 minutes.
Client Threshold	Set a client threshold for the Smart RF policy between 1 - 255. If the set threshold number of clients are connected to a radio, the radio does not change its channel, even though required, based on the interference recovery determination made by the smart master. The default setting is 50.
5 GHz Channel Switch Delta	Set a channel switch delta (interference delta), from 5 - 35 dBm, for the 5.0 GHz radio. This parameter is the difference between noise levels on the current channel and a prospective channel. If the difference is below the configured threshold, the channel will not change. The default setting is 20 dBm.
2.4 GHz Channel Switch Delta	Set a channel switch delta (interference delta), from 5 - 35 dBm, for the 2.4 GHz radio. This parameter is the difference between noise levels on the current channel and a prospective channel. If the difference is below the configured threshold, the channel will not change. The default setting is 20 dBm.

3. Click **OK** to update the Smart RF Interference Recovery settings for this policy.
Click **Reset** to revert to the last saved configuration.

Configuring Smart RF Coverage Hole Recovery Settings

1. Select **Coverage Hole Recovery**.

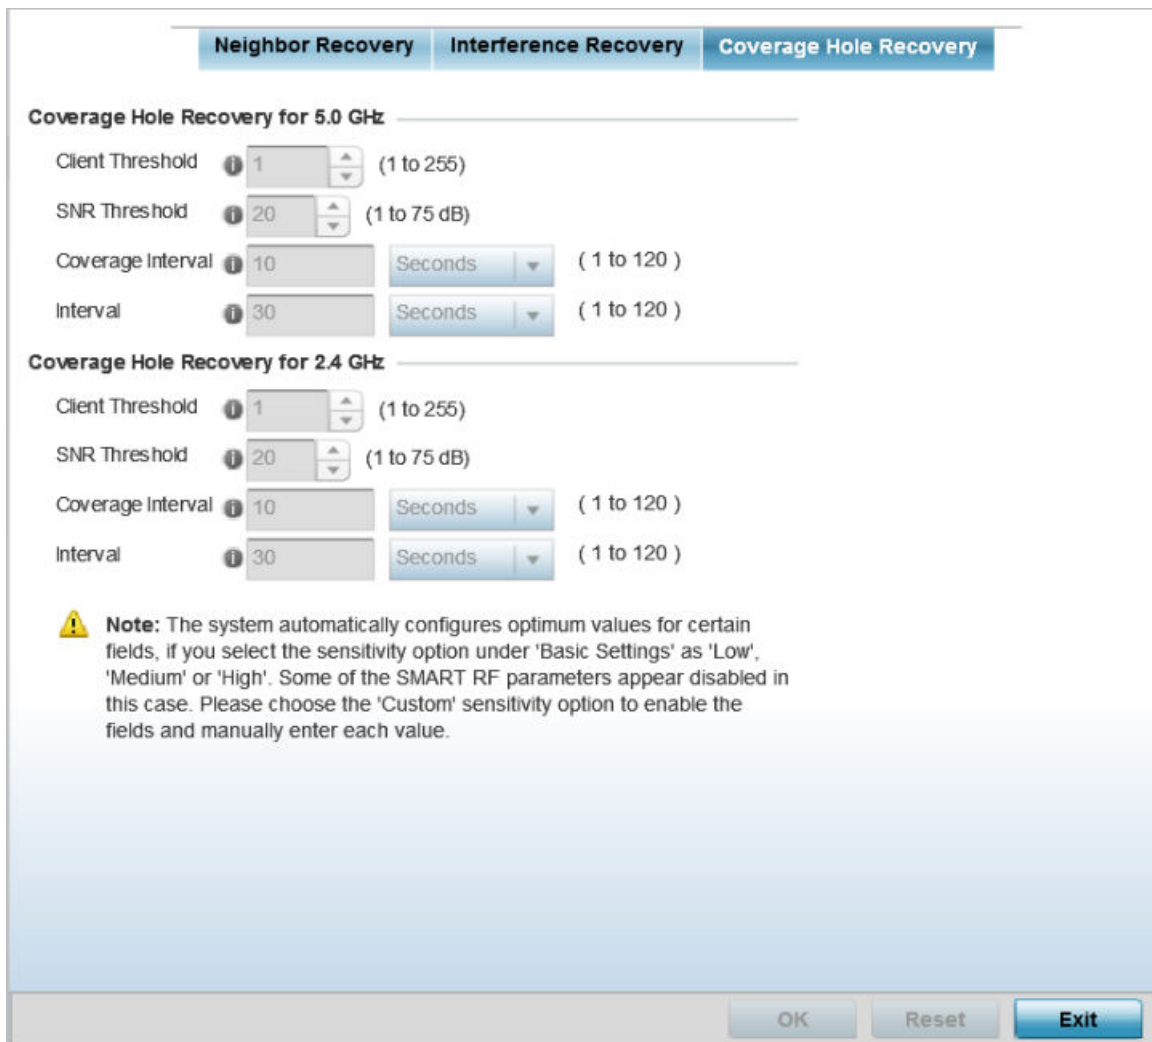


Figure 318: SMART RF - Advanced Configuration Screen - Coverage Hold Recovery Tab

2. Set the following **Coverage Hole Recovery for 2.4 GHz and 5.0 GHz** parameters:

Client Threshold	Use the spinner to set a client threshold for the Smart RF policy between 1 - 255. This is the minimum number of clients a radio should have associated in order for coverage hole recovery to trigger. AP 6522, AP6522M, AP 6532, AP 6562, AP 7161, and AP 8132 model access points can support up to 256 clients per access point or radio. The default setting is 1.
SNR Threshold	Set a <i>signal-to-noise</i> (SNR) threshold, between 1 - 75 dB. This is the signal-to-noise threshold for an associated client as seen by its associated access point radio. When exceeded, the radio increases its transmit power in order to increase coverage for the associated client. The default value is 20 dB.

Coverage Interval	Define the length of time after which coverage hole recovery should be initiated when a coverage hole is detected. The default is 10 seconds for both the 2.4 and 5.0 GHz radios.
Interval	Define the length of time coverage hole recovery should be conducted before a coverage hole is detected. The default is 30 seconds for both the 2.4 and 5.0 GHz radios.

3. Click **OK** to update the Smart RF Coverage Hole Recovery settings for this policy.
Click **Reset** to revert to the last saved configuration.

Configuring Smart RF Select Shutdown Settings

To enable Smart RF select and shutdown 2.4 GHz APs causing interference:

1. Select **Select Shutdown**,

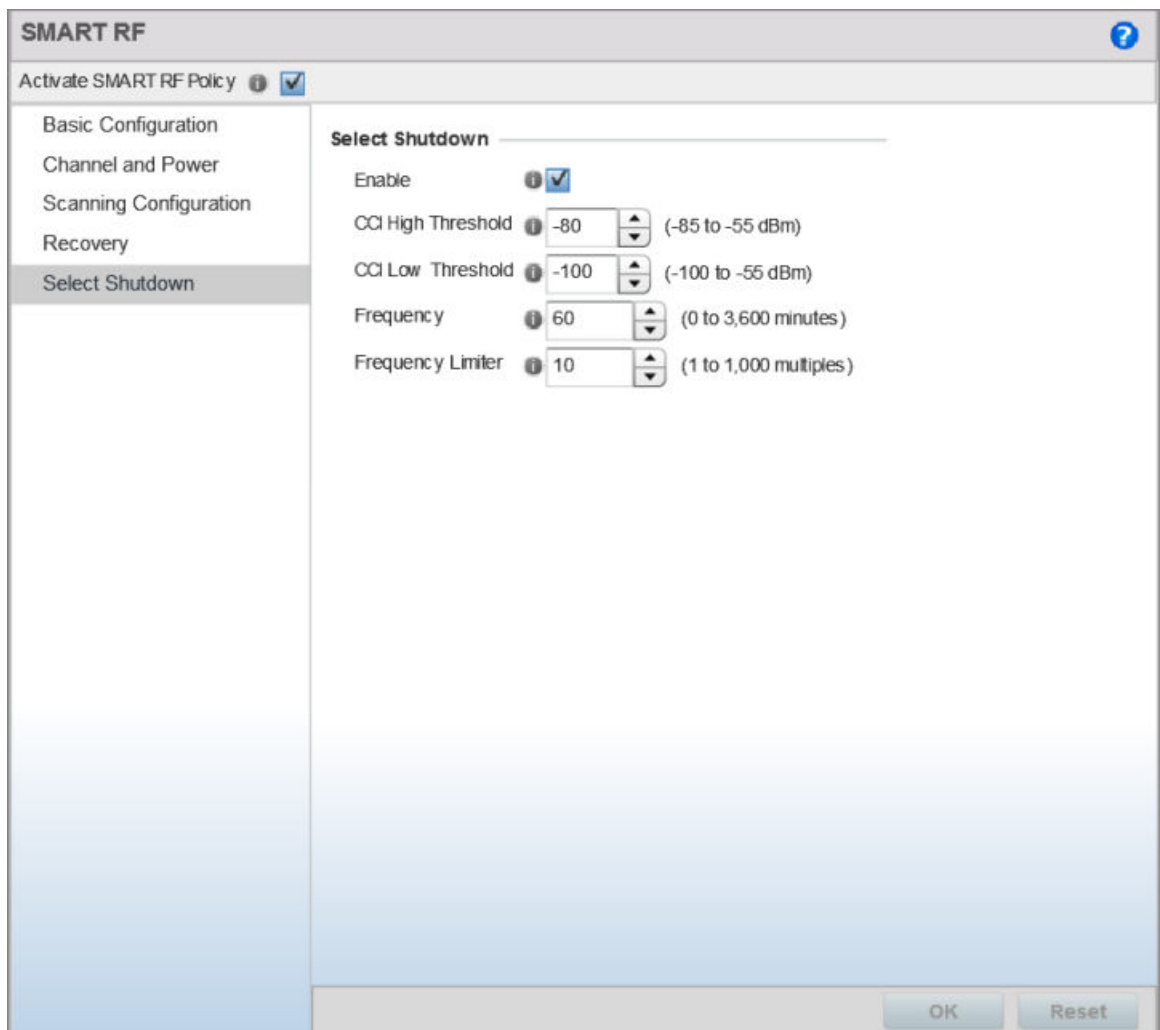


Figure 319: Smart RF Configuration - Select Shutdown screen

2. Configure the following parameters that will maintain CCI (*co-channel interference*) levels within specified limits.

Enable	<p>Select to enable auto-shutdown of radios causing interference within the Smart RF monitored network. Auto-shutdown of select 2.4 GHz radios, in dual-band networks, maintains CCI levels within specified limits. When enabled, Smart-RF monitors CCI levels to ensure that the deployment average CCI remains within specified minimum and maximum limits. If the deployment average CCI is found to exceed the maximum threshold, 2.4 GHz radios, causing neighbor interference, are shut down one-by-one until the deployment average CCI falls below the specified maximum threshold. The reverse process occurs when the deployment average CCI falls below the minimum threshold. In this scenario, previously disabled radios are enabled until the deployment average CCI reaches acceptable levels.</p> <p>Note: This feature is enabled by default.</p>
CCI High Threshold	<p>Specify the maximum CCI threshold from -85 to -55 dBm. The default value is -80 dBm.</p> <p>Note: If not specified, the system uses the default value as the upper limit for the deployment average CCI range.</p>
CCI Low Threshold	<p>Specify the minimum CCI threshold from -85 to -55 dBm. The default value is -100 dBm.</p> <p>Note: If not specified, the system uses the default value as the lower limit for the deployment average CCI range.</p>
Frequency	<p>Configure the interval, in minutes, at which 2.4 GHz radios are selected for shut down. when the deployment average CCI exceeds the specified maximum threshold, Smart RF shuts down 2.4 GHz radios until the CCI reaches acceptable levels. Use this option, to configure the interval between successive radio shut down. Specify the frequency from 0 - 3600 minutes. The default is 60 minutes.</p>
Frequency Limiter	<p>Configure the minimum multiple of Interference Recovery frequency that the select-shutdown frequency can be set to. Specify a value from 1 - 1000. The default value is 15.</p>

3. Click **OK** to update the Smart RF Select Shutdown settings for this policy.
Click **Reset** to revert to the last saved configuration.

Smart RF Configuration and Deployment Considerations

Before defining a Smart RF policy, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Smart RF cannot detect a voice call in progress, and will switch to a different channel resulting in voice call reconnection.

- The Smart RF calibration process impacts associated users and should not be run during business or production hours. The calibration process should be performed during scheduled maintenance intervals or non-business hours.
- For Smart RF to provide effective recovery, RF planning must be performed to ensure overlapping coverage exists at the deployment site. Smart RF can only provide recovery when access points are deployed appropriately. Smart RF is not a solution, it's a temporary measure. Administrators need to determine the root cause of RF deterioration and fix it. Smart RF history/events can assist.

Keep in mind, if a Smart RF managed radio is operating in WLAN mode on a channel requiring DFS, it will switch channels if radar is detected.

- If Smart RF is enabled, the radio picks a channel defined in the Smart RF policy.
- If Smart RF is disabled, but a Smart RF policy is mapped, the radio picks a channel specified in the Smart RF policy.
- If no Smart RF policy is mapped, the radio selects a random channel.

If the radio is a dedicated sensor, it stops termination on that channel if a neighboring access points detects radar. The access point attempts to come back to its original channel (statically configured or selected by Smart RF) after the channel evacuation period has expired.

Change this behavior using a **no dfs-rehome** command from the controller or service platform CLI. This keeps the radio on the newly selected channel and prevents the radio from coming back to the original channel, even after the channel evacuation period.

MeshConnex Policies

MeshConnex is a mesh networking technology that is comparable to the 802.11s mesh networking specification. MeshConnex meshing uses a hybrid proactive/on-demand path selection protocol, similar to *Ad hoc On Demand Distance Vector (AODV)* routing protocols. This allows it to form efficient paths using multiple attachment points to a distribution WAN, or form purely ad hoc peer-to-peer mesh networks in the absence of a WAN. Each device in the MeshConnex mesh proactively manages its own path to the distribution WAN, but can also form peer-to-peer paths on demand to improve forwarding efficiency. MeshConnex is not compatible with MiNT-based meshing, though the two technologies can be enabled simultaneously in certain circumstances.

MeshConnex is designed for large-scale, high-mobility outdoor mesh deployments. MeshConnex continually gathers data from beacons and transmission attempts to estimate the efficiency and throughput of each MP-to-MP link. MeshConnex uses this data to dynamically form and continually maintain paths for forwarding network frames.

In MeshConnex systems, a *mesh point* (MP) is a virtual mesh networking instance on a device, similar to a WLAN AP. On each device, up to 4 MPs can be created and 2 can be created per radio. MPs can be configured to use one or both radios in the device. If the MP is configured to use both radios, the path selection protocols will continually select the best radio to reach each destination. Each MP participates in a single Mesh

Network, defined by the MeshID. The MeshID is typically a descriptive network name, similar to the SSID of a WLAN. All MPs configured to use the same MeshID attempt to form a mesh and interoperate. The MeshID allows overlapping mesh networks to discriminate and disregard MPs belonging to different networks.



Note

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This feature will be supported in future releases.

Configuring a MeshConnex Policy

To define a MeshConnex policy:

1. Go to **Configuration > Wireless > MeshConnex Policy** to display existing MeshConnex policies.

Mesh Point	Mesh Id	Mesh Point Status	Descriptions	Control VLAN	Allowed VLANs	Security Mode	Mesh QoS Policy
policy1	101	✓ Enabled		1	2	None	default

Figure 320: MeshConnex Policy Screen

2. Refer to the following configuration data for existing MeshConnex policies:

Mesh Point Name	The names of all configured mesh points.
Mesh ID	The IDs (mesh identifiers) assigned to mesh points.
Mesh Point Status	The status of each configured mesh point, either Enabled or Disabled .
Description	Descriptive text provided by the administrator for each configured mesh point.
Control VLAN	The VLAN (virtual interface ID) for the control VLAN on each of the configured mesh points.
Allowed VLANs	The list of VLANs allowed on each configured mesh point.
Security Mode	The security assigned to each configured meshpoint – either None for no security or PSK for pre-shared key authentication.
Mesh QoS Policy	The mesh Quality of Service (QoS) policy associated with each configured mesh point.

3. Click **Add** to create a new MeshConnex policy, select an existing policy and click **Edit** to modify its configuration, or select an existing policy and click **Delete** to remove an obsolete policy.

Optionally, **Copy** or **Rename** MeshConnex policies as needed.

The **Configuration** screen displays by default for new or modified MeshConnex policies.

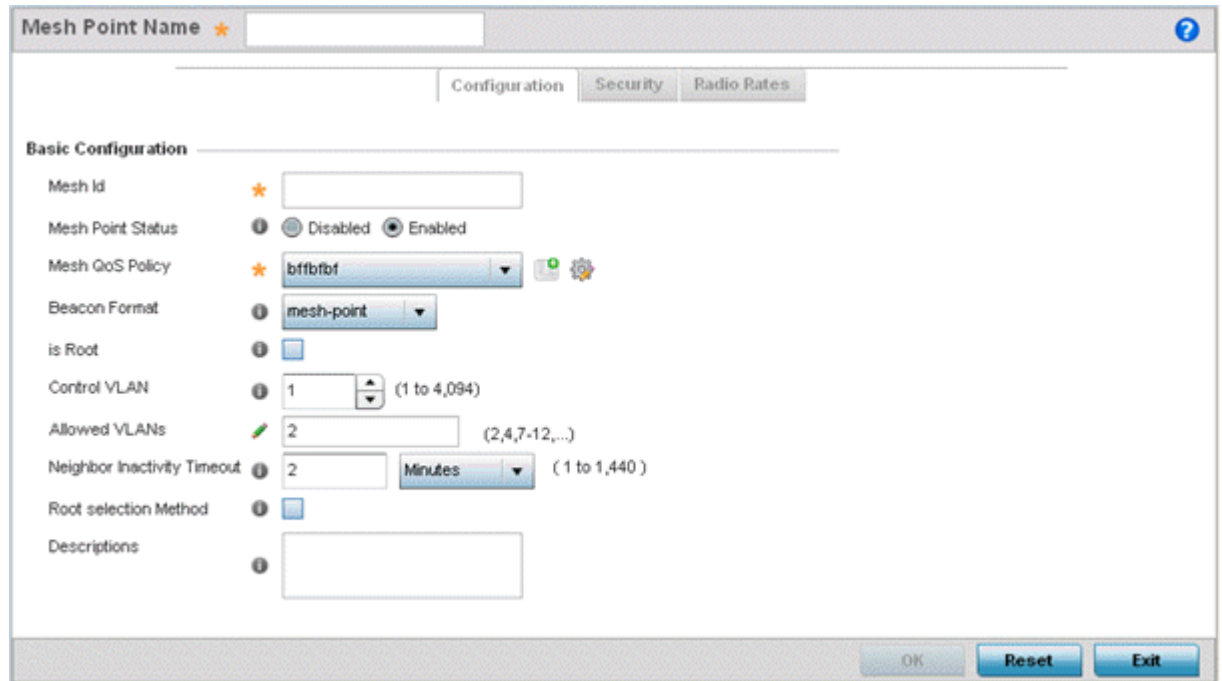


Figure 321: MeshConnex Configuration Screen

4. Refer to the **Basic Configuration** field to define a MeshConnex configuration:

Mesh Point Name	Specify a name for the new mesh point. The name should be descriptive to easily differentiate it from other mesh points. This field is mandatory.
Mesh ID	Specify a 32-character maximum mesh identifier for this mesh point. This field is optional.
Mesh Point Status	To enable this mesh point, click Enabled . To disable the mesh point, click Disabled . The default value is Enabled .
Mesh QoS Policy	Specify the mesh Quality of Service (QoS) policy to use on this mesh point. This value is mandatory. If no suitable mesh QoS policies exist, click the Create icon to create a new mesh QoS policy.
Beacon Format	Specify the format in which beacons from the mesh point are sent. To use access point style beacons, select access-point from the drop-down menu. To use mesh point style beacons, select mesh point . The default value is mesh point .

Is Root	Select this option to define the mesh point as a root in the mesh topology.
Control VLAN	Specify a VLAN to carry meshpoint control traffic. The valid range for control VLAN is between 1 and 4094. The default value is VLAN 1.
Allowed VLANs	Specify the VLANs that are allowed to pass traffic on the mesh point. Separate VLANs with commas. To specify a range of allowed VLANs, separate the starting VLAN and the ending VLAN with a hyphen. Aliases can be used to configure Allowed VLANs.
Neighbor Inactivity Timeout	Specify the amount of time allowed between frames received from a neighbor before their client privileges are revoked. Specify the timeout value in seconds, minutes, hours or days, up to a maximum of 1 day. The default value is 2 minutes.
Description	Enter a 64-character maximum description for the mesh point configuration.

5. Click **OK** to update the MeshConnex configuration settings for this policy.
Click **Reset** to revert to the last saved configuration.
6. Select **Security**.

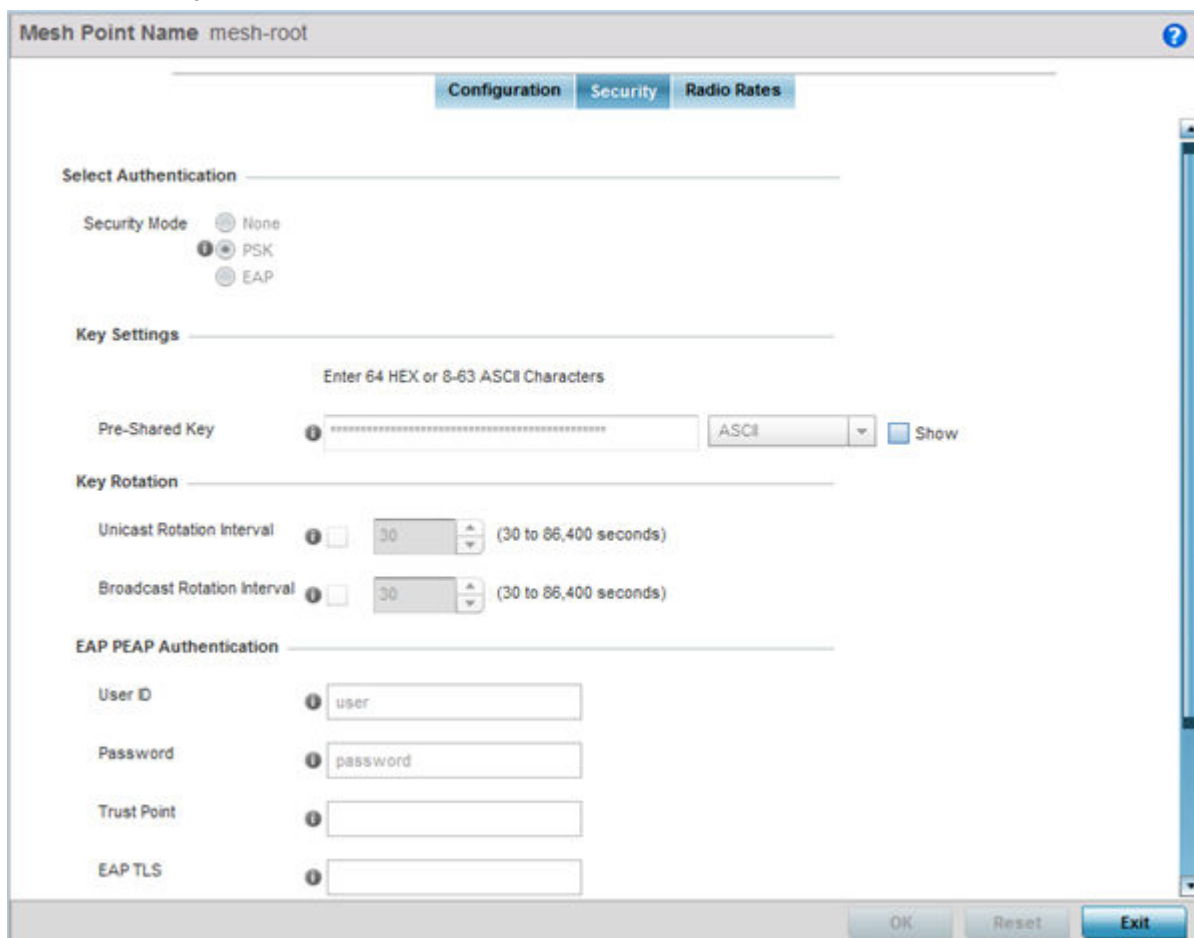


Figure 322: MeshConnex Security Screen

7. Refer to the **Select Authentication** field to define an authentication method for the mesh policy.

Security Mode	Select a security authentication mode for the mesh point. Select None to have no authentication for the mesh point. Select PSK to set a pre-shared key as the authentication for the mesh-point. If PSK is selected, enter a pre-shared key in the Key Settings field. The default setting is None .
---------------	---

8. Set the following **Key Settings** for the mesh point.

Pre-Shared Key	When the security mode is set as PSK , enter a 64 character HEX or an 8-63 ASCII character passphrase used for authentication on the mesh point.
----------------	---

9. Set the following **Key Rotation** settings for the mesh point.

Unicast Rotation Interval	Define an interval for unicast key transmission (30 -86,400 seconds). This option is disabled by default.
Broadcast Rotation Interval	When enabled, the key indices used for encrypting/decrypting broadcast traffic is alternatively rotated based on the defined interval. Define an interval for broadcast key transmission in seconds (30- 86,400). Key rotation enhances the broadcast traffic security on the WLAN. This option is disabled by default.

10. If you are using EAP to secure the mesh point, set the following **EAP PEAP Authentication** settings.

User ID	Create a 32-character maximum user name for a <i>peap-mschapv2</i> authentication credential exchange.
Password	Define a 32-character maximum password for the EAP PEAP user ID.
Trust Point	Provide the 64 character maximum name of the trustpoint used for installing the CA certificate and validating the server certificate.
EAP TLS	Provide the 64 character maximum name of the trustpoint used for installing the client certificate, client private key and CA certificate.
Type	Configure the EAP authentication method used by supplicants. The options are PEAP-MSCHAPv2 and TLS .
EAP Identity	Configure the EAP identity used during phase1 authentication. The value configured here need not the user's actual identity.
AAA Policy	Specify the AAA policy used with this EAP PEAP Authentication. Use the Create or Edit buttons to create a new AAA policy or edit and existing AAA policy.

11. Click **OK** to save the changes made to the configuration.

Click **Reset** to revert to the last saved configuration.

12. Select **Radio Rates**.

13. Set the following **Radio Rates** for both the 2.4 and 5 GHz radio bands:

2.4 GHz Mesh Point	<p>Click Select to configure radio rates for the 2.4 GHz band. Define both minimum Basic and optimal Supported rates as required for the 802.11b rates, 802.11g rates and 802.11n rates supported by the 2.4 GHz band.</p> <p>If you are supporting 802.11n, select a Supported MCS index. Set an MCS (<i>modulation and coding scheme</i>) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of eight data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Mesh points can communicate as long as they support the same basic MCS (as well as non-11n basic rates).</p> <p>The selected rates apply to associated client traffic within this mesh point only.</p>
5.0 GHz Mesh Point	<p>Click Select to configure radio rates for the 5.0 GHz band. Define both minimum Basic and optimal Supported rates as required for the 802.11b rates, 802.11g rates and 802.11n rates supported by the 5.0 GHz radio band.</p> <p>If you are supporting 802.11n, select a Supported MCS index. Set an MCS (<i>modulation and coding scheme</i>) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of eight data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Mesh points can communicate as long as they support the same basic MCS (as well as non-11n basic rates).</p> <p>The selected rates apply to associated client traffic within this mesh point only.</p>
6.0 GHz Mesh Point	<p>Use the drop-down menu to select radio rates for the 6.0 GHz band. Define both minimum and optimal rates as required for the 802.11b rates, 802.11g rates and 802.11n rates supported by the 6.0 GHz radio band. These are the rates at which wireless client traffic is supported within this mesh point.</p> <p>If you are supporting 802.11n, select a Supported MCS index. Set an MCS (modulation and coding scheme) with respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of eight data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Mesh points can communicate as long as they support the same basic MCS (as well as non-11n basic rates).</p> <p>The selected rates apply to associated client traffic within this mesh point only.</p>

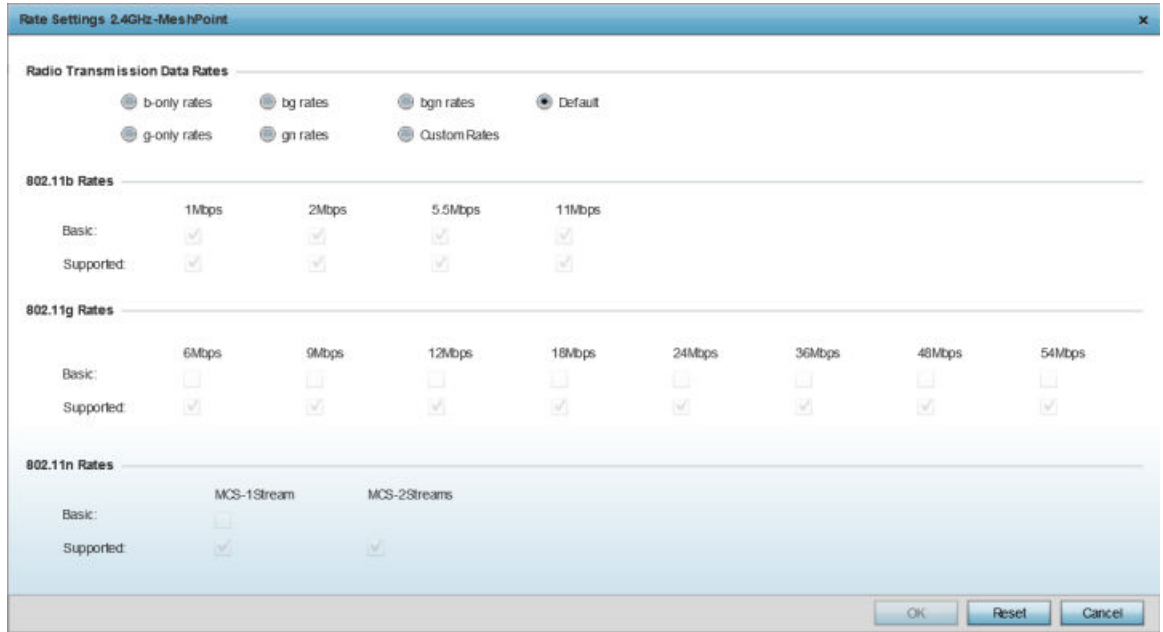


Figure 323: Advanced Rate Settings 2.4 GHz Screen



Figure 324: Advanced Rate Settings 5.0 GHz Screen

- Define both minimum **Basic** and optimal **Supported** rates as required for the 802.11b rates, 802.11g rates and 802.11n rates supported by the 2.4 GHz band and 802.11a and 802.11n rates supported by the 5.0 GHz radio band.

These are the rates wireless client traffic is supported within this mesh point.

If you are supporting 802.11n, select a Supported MCS index. Set an MCS (*modulation and coding scheme*) in respect to the radio's channel width and guard interval. An MCS defines (based on RF channel conditions) an optimal combination of eight data rates, bonded channels, multiple spatial streams, different guard intervals, and modulation types. Clients can associate as long as they support basic MCS (as well as non-11n basic rates).

15. Click **OK** to save the changes made to the configuration.

Click **Reset** to revert to the last saved configuration.

Mesh QoS Policy

Mesh Quality of Service (QoS) provides a data traffic prioritization scheme. QoS reduces congestion from excessive traffic. If there is enough bandwidth for all users and applications (unlikely because excessive bandwidth comes at a very high cost), then applying QoS has very little value. QoS provides policy enforcement for mission-critical applications and/or users that have critical bandwidth requirements when bandwidth is shared by different users and applications.

Mesh QoS ensures that each mesh point on the mesh network receives a fair share of the overall bandwidth, either equally or per the proportion configured. Packets directed to clients are classified into data types (video, voice, data, and so forth). Packets within each category are processed based on the weight (prioritization) set for each mesh point.

The **Quality of Service** screen displays a list of mesh QoS policies available to mesh points. Each mesh QoS policy can be selected to edit its properties. If none of the existing Mesh QoS policies supports an ideal QoS configuration for the intended data traffic of this mesh point, click **Add** to create a new policy. Select an existing mesh QoS policy and select **Edit** to change the properties of the mesh QoS policy.



Note

WiNG 7.1 release does not support MeshConnex on AP505i and AP510i model access points. This feature will be supported in future releases.

Configuring a Mesh QoS Policy

To define a mesh QoS policy:

1. Select **Configuration** → **Wireless** → **Mesh QoS Policy** to display existing mesh QoS policies.

The **Mesh Quality of Service (QoS)** screen displays.

Mesh QoS Policy	Mesh Tx Rate Limit	Mesh Rx Rate Limit	Neighbor Rx Rate Limit	Neighbor Tx Rate Limit	Classification
policy1	✓ Enabled	✓ Enabled	✓ Enabled	✓ Enabled	Trust

Figure 325: Mesh QoS Policy Screen

2. The following are descriptions of the column headings in the **Mesh Quality of Service (QoS)** screen:

Mesh QoS Policy	The names of each configured mesh QoS policy.
Mesh Tx Rate Limit	Whether a Mesh Tx Rate Limit is enabled for each mesh QoS policy. This indicates rate limiting is enabled or disabled for all data received from any mesh point in the mesh. A green check mark means the rate limit is enabled. A red X means the rate limit is disabled.
Mesh Rx Rate Limit	Whether a Mesh Rx Rate Limit is enabled for each mesh QoS policy. This indicates rate limiting is enabled or disabled for all data transmitted by the device to any mesh point in the mesh. A green check mark means the rate limit is enabled. A red X means the rate limit is disabled.
Neighbor Rx Rate Limit	Whether a Neighbor Rx Rate Limit is enabled for each mesh QoS policy. This indicates rate limiting is enabled for data transmitted from connected wireless clients. A green check mark means the rate limit is enabled. A red X means the rate limit is disabled.

Neighbor Tx Rate Limit	Whether a Neighbor Tx Rate Limit is enabled for each mesh QoS policy. This indicates rate limiting is enabled or disabled for data transmitted from the client to its associated access point radio and connected wireless controller. A green check mark means the rate limit is enabled. A red X means the rate limit is disabled.
Classification	The forwarding QoS classification for each Mesh QoS policy.

- Click **Add** to define a new mesh QoS policy, select an existing policy and click **Edit** to modify it, or select an existing policy and click **Delete** to remove obsolete policy. Optionally, **Copy** or **Rename** mesh QoS policies as needed. The **Rate Limit** screen displays by default for new or modified mesh QoS policies.

Figure 326: Mesh QoS Policy Rate Limit Screen

Excessive traffic can cause performance issues or bring down the network. Excessive traffic can be caused by network loops, faulty devices, or malicious software like a worm or virus that has infected one or more devices at the branch. By enabling rate limiting you can limit the maximum rate sent to or received from the wireless network (and mesh point) per neighbor. It prevents any single user from overwhelming the wireless network. It also provides differential service for service providers. You can set separate QoS rate limit configurations for data transmitted from the network and from a mesh point's neighbor back to their associated access point radios and managing controller or service platform.

Before you define rate limit thresholds for mesh point transmit and receive traffic, define the normal number of ARP, broadcast, multicast and unknown unicast packets that typically transmit and receive from each supported WMM access category. If thresholds are defined too low, normal network traffic (required by enduser devices) is dropped, resulting in intermittent outages and performance problems.

A connected neighbor can also have QoS rate limit settings defined in both the transmit and receive direction.

4. Configure the following parameters for the **From Air Upstream Rate Limit**, or traffic from the controller to associated access point radios and their associated neighbor:

Mesh Tx Rate Limit	Select this option to enable rate limiting for all data received from any mesh point in the mesh. This feature is disabled by default.
Rate	Define a receive rate limit between 50 and 1,000,000 kbps. This limit constitutes a threshold for the maximum number of packets transmitted or received over the mesh point (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5,000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 and 1024K bytes. The smaller the burst, the less likely the transmit packet transmission will result in congestion for the mesh point's client destinations. By trending the typical number of ARP, broadcast, multicast, and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should then add a 10% margin (minimally) to allow for traffic bursts at the site. The default burst size is 320K bytes.

5. Set the following **From Air Upstream Random Early Detection Threshold** settings, for each access category.

An early random drop occurs when a traffic stream falls below the set threshold.

Background Traffic	Set a percentage value for background traffic in the transmit direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the transmit direction. This is a percentage of the maximum burst size for normal priority traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.

Video Traffic	Set a percentage value for video traffic in the transmit direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the transmit direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%.

6. Configure the following parameters for the **To Air Upstream Rate Limit**, or traffic from neighbors to associated access point radios and the controller or service platform:

Mesh Rx Rate Limit	Select this option to enable rate limiting for all data transmitted by the device to any mesh point in the mesh. This feature is disabled by default.
Rate	Define a transmit rate limit between 50 and 1,000,000 kbps. This limit constitutes a threshold for the maximum number of packets transmitted or received over the mesh point (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5,000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 and 1024K bytes. The smaller the burst, the less likely the transmit packet transmission will result in congestion for the mesh point's wireless client destinations. By trending the typical number of ARP, broadcast, multicast, and unknown unicast packets over a period of time, the average rate for each access category can be obtained. Once a baseline is obtained, administrators should then add a 10% margin (minimally) to allow for traffic bursts at the site. The default burst size is 320K bytes.

7. Set the following **To Air Upstream Random Early Detection Threshold** settings, for each access category.

An early random drop occurs when the number of tokens for a traffic stream falls below the set threshold.

Background Traffic	Set a percentage value for background traffic in the receive direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. Background traffic consumes the least bandwidth of any access category, so this value can be set to a lower value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the receive direction. This is a percentage of the maximum burst size for normal priority traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. Best effort traffic consumes little bandwidth, so this value can be set to a lower value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 50%.
Video Traffic	Set a percentage value for video traffic in the receive direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. Video traffic consumes significant bandwidth, so this value can be set to a higher value once a general transmit rate is known by the network administrator (using a time trend analysis). The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the receive direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. Voice applications consume significant bandwidth, so this value can be set to a higher value once a general upstream rate is known by the network administrator (using a time trend analysis). The default threshold is 0%.

8. Configure the following settings for **From Air Upstream Rate Limit** in the **Neighbor Settings** field:

Neighbor Rx Rate Limit	Select this option to enable rate limiting for data transmitted from the client to its associated access point radio and connected controller or service platform. Enabling this option does not invoke client rate limiting for data traffic in the receive direction. This feature is disabled by default.
Rate	Define a transmit rate limit between 50 and 1,000,000 kbps. This limit constitutes a threshold for the maximum number of packets transmitted or received (from all access categories). Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 5,000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 and 1024K bytes. The smaller the burst, the less likely the transmit packet transmission will result in congestion for the wireless client. The default burst size is 320K bytes.

9. Configure the following settings for **From Air Upstream Random Early Detection Threshold** in the **Neighbor Settings** field:

Background Traffic	Set a percentage value for background traffic in the transmit direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the transmit direction. This is a percentage of the maximum burst size for normal priority traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 50%.
Video Traffic	Set a percentage value for video traffic in the transmit direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the transmit direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 0%, which implies that no early random drops will occur.

10. Configure the following settings for **To Air Upstream Rate Limit**, or traffic from a controller or service platform to associated access point radios and the wireless client:

Neighbor Tx Rate Limit	Select this option to enable rate limiting for data transmitted from connected wireless clients. Enabling this option does not invoke rate limiting for data traffic in the transmit direction. This feature is disabled by default.
Rate	Define a transmit rate limit between 50 and 1,000,000 kbps. This limit constitutes a threshold for the maximum number of packets transmitted or received by the client. Traffic that exceeds the defined rate is dropped and a log message is generated. The default setting is 1,000 kbps.
Maximum Burst Size	Set a maximum burst size between 2 and 1024K bytes. The smaller the burst, the less likely the receive packet transmission will result in congestion for the wireless client. The default burst size is 320K bytes.

11. Set the following **To Air Upstream Random Early Detection Threshold** settings for each access category:

Background Traffic	Set a percentage value for background traffic in the receive direction. This is a percentage of the maximum burst size for low priority traffic. Background traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 50%.
Best Effort Traffic	Set a percentage value for best effort traffic in the receive direction. This is a percentage of the maximum burst size for normal priority traffic. Best effort traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 50%.

Video Traffic	Set a percentage value for video traffic in the receive direction. This is a percentage of the maximum burst size for video traffic. Video traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 25%.
Voice Traffic	Set a percentage value for voice traffic in the receive direction. This is a percentage of the maximum burst size for voice traffic. Voice traffic exceeding the defined threshold is dropped and a log message is generated. The default threshold is 0%, which implies that no early random drops will occur.

12. Click **OK** to update this mesh QoS rate limit settings.

Click **Reset** to revert to the last saved configuration.

13. Select **Multimedia Optimizations**.

Mesh QoS Policy policy1

Rate Limit **Multimedia Optimizations**

Accelerated Multicast

Disable Multicast Streaming
 Automatically Detect Multicast Streams
 Manually Configure Multicast Addresses

Forwarding QoS Classification: Trust

Multicast IP Address	Classification	

+ Add Row

OK Reset Exit

Figure 327: Mesh QoS Policy Multimedia Optimizations Screen

14. Set the following **Accelerated Multicast** settings:

Disable Multicast Streaming	Select this option to disable all multicast streaming on the mesh point.
Automatically Detect Multicast Streams	Select this option to have bridged multicast packets converted to unicast to provide better overall airtime utilization and performance. The administrator can either have the system automatically detect multicast streams and convert all detected multicast streams to unicast, or specify which multicast streams are to be converted to unicast. When the stream is converted and being queued up for transmission, a number of classification mechanisms can be applied to the stream. The administrator can choose from the following classification types: Trust, Voice, Video, Best Effort, and Background.
Manually Configure Multicast Addresses	Select this option and specify a list of multicast addresses and classifications. Packets are accelerated when the destination addresses matches.

15. Click **OK** to update the Mesh Multimedia Optimizations settings.

Click **Reset** to revert to the last saved configuration.

Passpoint Policy

A *passpoint* policy provides a mechanism by which devices can select the correct network by querying for information from the available networks and then deciding which network to associate with. A passpoint policy is associated to a WLAN to enable the WLAN to provide hotspot services.

Passpoint makes connecting to Wi-Fi networks easier by authenticating the user with an account based on an existing relationship, such as the user's mobile carrier or broadband ISP.

A passpoint policy contains configuration that enables a client to query a network for information such as WAN metric, domain names and other relevant information. Only relevant information is presented to the client which enables it to decide with network to join.

To administrate and manage existing passpoint policies:

1. Select **Configuration** → **Wireless**.
2. Select **Passpoint Policy** from the Wireless node on the left-hand of the screen.

Passpoint Policy ?			
Name	Access Network Type	Operator Name	Venue Name
policy1	private-guest	lancelot	percival

Type to search in tables Row Count: 1

3. Refer to the following configuration data for existing passpoint policies:

Name	Displays the administrator assigned name of each passpoint policy.
Access Network Type	Displays the network access permissions the administrator has set for the passpoint policy.
Operator Name	Displays the unique name assigned to the administrator or operator responsible for the configuration and operation of the hotspot.
Venue Name	Displays the administrator assigned name of the venue or physical location of the deployed hotspot.

4. Select **Add** to define a new passpoint policy, or select an existing policy and select **Edit** to modify its configuration. Existing policies can be selected and deleted, copied, or renamed as needed.

Configuring a Passpoint Policy

To create and manage passpoint policies:

1. Select **Configuration > Wireless > Passpoint Policy** to display existing passpoint policies.

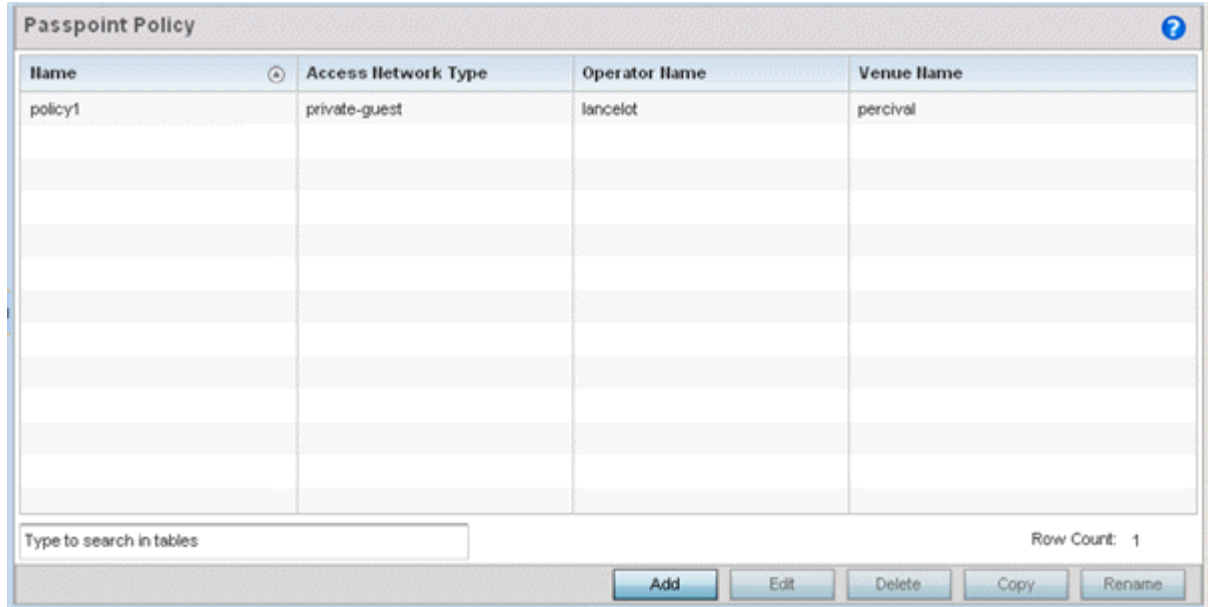


Figure 328: Passpoint Policy Screen

2. Refer to the following configuration data for existing passpoint policies:

Name	The names of each configured passpoint policy.
Access Network Type	The type of hotspot which is advertised to all clients.
Operator Name	The name of the operator who manages the hotspot.
Venue Name	Information about the venue (or physical location) hosting the hotspot.

- Click **Add** to define a new passpoint policy, select an existing policy and click **Edit** to modify its configuration, or select an existing policy and click **Delete** to remove an obsolete policy.

Optionally, **Copy** or **Rename** passpoint policies as needed.

The Configurations tab displays by default.

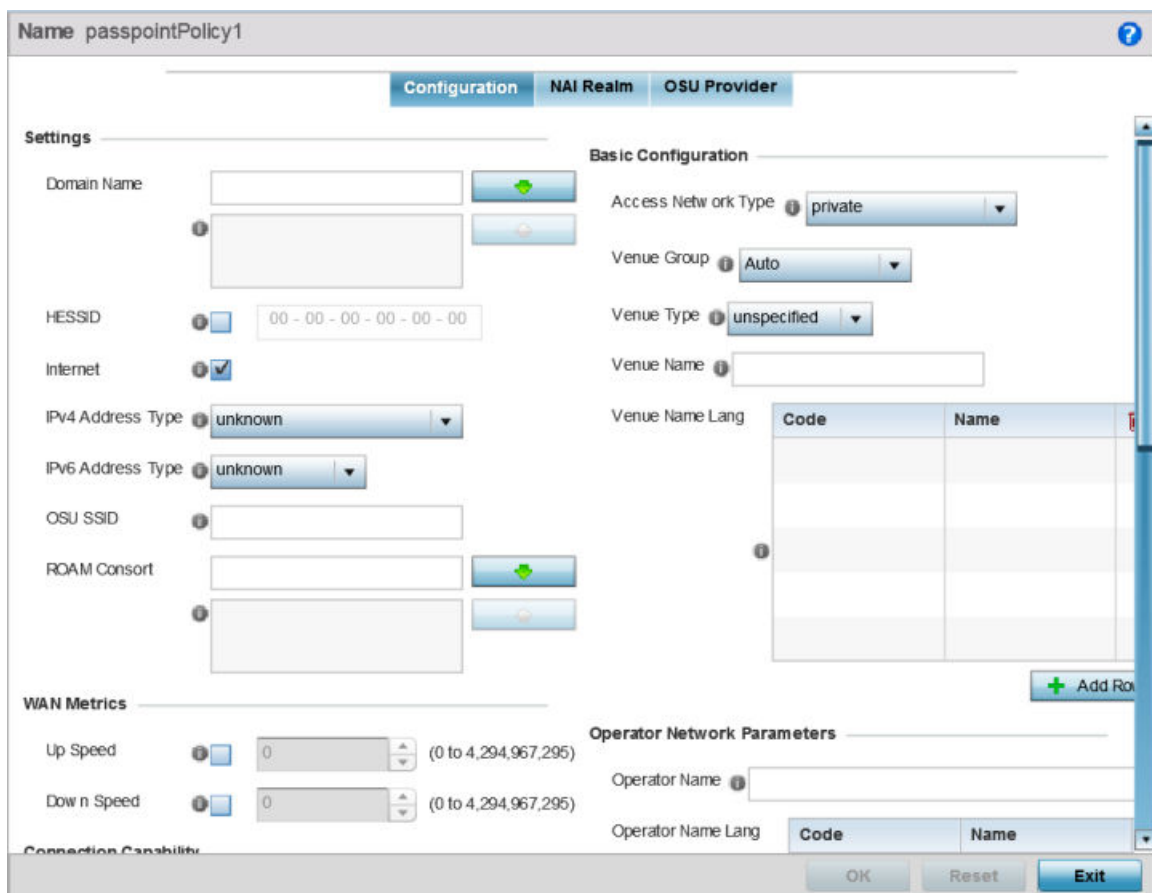


Figure 329: Passpoint Policy - Configuration Screen

- Configure the following **Settings** to define an Internet connection medium for the passpoint policy

Domain Name	Optionally, add a 255-character maximum domain name to the pool available to the passpoint policy.
HESSID	Select this option to apply a homogenous ESS ID. Leaving this option blank applies the BSSID instead. This option is disabled by default.
Internet	Select this option to enable Internet access to users of the passpoint hotspot. Internet access is enabled by default.

IPv4 Address Type	Select the IPv4 formatted address type for this passpoint policy. IPv4 is a connectionless protocol operating on a best effort delivery model. IPv4 does not guarantee delivery or assures proper sequencing or avoidance of duplicate delivery (unlike TCP). Options include not available , public , port-restricted , port-restricted-double-nat , single-nat , double-nat , port-restricted-single-nat , and unknown .
IPv6 Address Type	Select the IPv6 formatted address type for this passpoint policy. IPv6 is the latest revision of the Internet Protocol (IP) designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. Options include available , unavailable , and unknown .
OSU SSID	Optionally define a 32 character maximum sign-on ID that must be correctly provided to access the passpoint policy's hotspot resources.
ROAM Consort	Provide a 0 - 255 character roaming consortium number. A roaming consort ID is sent as roaming consortium information in a hotspot query response.

5. Set the following **WAN Metrics** for upstream and downstream bandwidth:

Up Speed	Enable this option to estimate the maximum upstream bandwidth from 0 - 4,294,967,295 Kbps.
Down Speed	Enable this option to estimate the maximum downstream bandwidth from 0 - 4,294,967,295 Kbps.

6. Set the following **Connection Capability** for the passpoint policy's FTP, HTTP, ICMP, IPsec VPN, PPTP VPN, SIP, SSH, and TLS VPN interfaces:
- Use the drop-down menu to define these interfaces as **open**, **closed**, or **unknown** for this passpoint policy configuration. Disabling unused interfaces is recommended to close unnecessary security holes.
7. Select **+ Add Row** to set a **Connection Capability Variable** to make specific virtual ports **open** or **closed** for Wi-Fi connection attempts and to set rules for how the user can connect with routing preference using this passpoint policy.
8. Select **+ Add Row** and set a **Network Authentication Type** to select how Wi-Fi connection attempts are authenticated and validated using a dedicated redirection URL resource.

9. Refer to the **Basic Configuration** field to set the following:

Access Network Type	<p>Select the network access method for this passpoint policy. Access network types include:</p> <p>private General access to a private network hotspot (default setting)</p> <p>private-guest Access to a private network hotspot with guest services</p> <p>chargeable-public Access to a public hotspot with billable services</p> <p>personal-device Access to a hotspot for personal devices such as wireless routers</p> <p>emergency services Dedicated network hotspot access for emergency services only</p>
Venue Group	<p>Passpoint is supported across a wide range of wireless network deployment scenarios and client devices. Select the group type best suited to the majority of hotspot requestors utilizing the passpoint policy's unique configuration.</p>
Venue Type	<p>Select the venue type best suited to the actual location passpoint requestors are located. If an adequate option cannot be applied, a numeric venue type can be utilized.</p>
Venue Name	<p>Enter the venue name and address. The operator can configure an access point to describe the location of the hotspot. This information typically includes the name and address of the deployment location where the hotspot is located. Enter the name and address configured for the access point hotspot. The name cannot exceed 252 characters.</p>
Venue Name Long	<p>Hotspot operators can list venue names in multiple languages. Select the + Add Row button to add venue name languages. Enter the two- or three-character ISO-14962-1997 encoded string that defines the language used in the Code field. Enter the name of the venue in the Name field. The name cannot exceed 252 characters.</p>

10. Refer to the **Operator Network Parameters** field to define the following:

Operator Name	Provide the unique name (in English) of the administrator or operator responsible for the configuration and management or the hotspot. The name cannot exceed 64 characters.
Operator Name Long	Operator names can be listed in multiple languages. Select the + Add Row button to add operator name languages. Enter the two- or three-character ISO-14962-1997 encoded string that defines the language used in the Code field. Enter the name of the operator in the Name field. The name cannot exceed 252 characters.
PLMNID	Operators providing mobile and Wi-Fi hotspot services have a unique <i>Public Land Mobile Network</i> (PLMN) ID. Select the + Add Row button to add PLMN information for operators responsible for the configuration and operation of the hotspot. Provide a description for the PLMN, not exceeding 64 characters. Enter a three-digit <i>Mobile Country Code</i> (MCC) and two-digit <i>Mobile Network Code</i> (MNC) for the PLMN ID. The MCC identifies the region and country where the hotspot is deployed. The MNC identifies the operator responsible for the configuration and management of the hotspot by PLMN ID and country. Both the MCC and MNC fields are mandatory.

11. Click **OK** to update the passpoint policy settings.

Click **Reset** to revert to the last saved configuration.

12. Select **NAI Realm**.

The Network Access Identifier (NAI) is the user identity submitted by the hotspot requesting client during authentication. The standard syntax is `user@realm`. NAI is frequently used when roaming, to identify the user and assist in routing an authentication request to the user's authentication server. The realm name is often the domain name of the service provider.

The **NAI Realm** screen displays those realms created thus far for utilization with a passpoint policy.

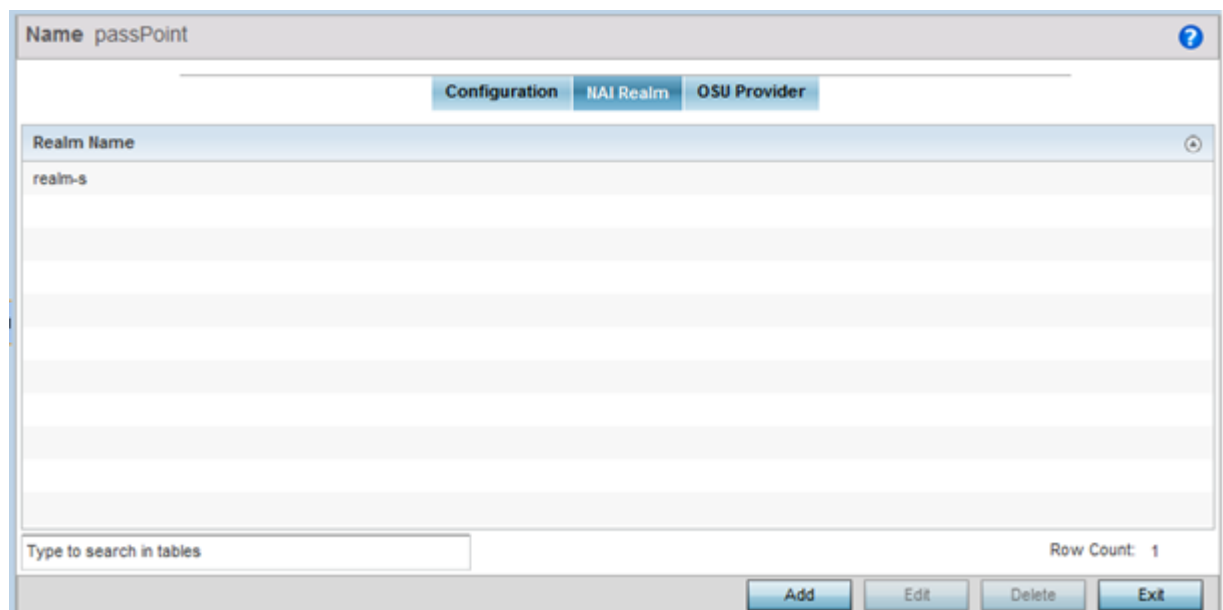


Figure 330: Passpoint Policy - NAI Realm Screen

13. Click **Add** to create a new NAI realm configuration for passpoint hotspot utilization, **Edit** to modify the attributes of an existing configuration, or **Delete** to remove a selected configuration from those available.

Provide a realm name or names (32 characters maximum), delimited by semicolons. Click **+ Add Row** to create an EAP Method configuration for the NAI realm.

Figure 331: Passpoint Policy - NAI Realm EAP Method Screen

14. Set the following **EAP Method** attributes to secure the NAI realm used by the passpoint policy:

Index	Select an EAP instance index from 1 - 10 to apply to this hotspot's EAP credential exchange and verification session. NAIs are often user identifiers in the EAP authentication protocol.
Method	Set an EAP method for the NAI realm. Options include identity , otp , gtc , rsa-public-key , tls , sim , ttls , peap , ms-auth , ms-authv2 , fast , psk , and ikev2 .
Authentication Type	Specify the EAP method authentication type. Options include expanded-eap , non-eap-inner , inner-eap , expanded-inner-eap , credential , tunn-eap-credential , and vendor .

Authentication Value	If you are setting the authentication type to either non-eap-inner , inner-eap , credential , or tunnel-eap-credential , define an authentication value that must be shared with the EAP credential validation server resource.
Authentication Vendor ID	If the authentication type is set to either expanded-eap or expanded-inner-eap , set a six-character authentication vendor ID. This ID must match the ID utilized by the EAP server resource.
Authentication Vendor Specific	If required, add 2 - 510 character vendor-specific authentication data required for the selected authentication type. Enter the value in an a- FA -F0-9 format.
Authentication Vendor Type	Set an eight-character authentication vendor type used exclusively for the expanded-eap or expanded-inner-eap authentication types.

15. Click **OK** to save the updates to the NAI realm.

Click **Reset** to revert to the last saved configuration.

16. Select **OSU Provider**.

WiNG managed clients can use *Online Sign-Up* (OSU) for registration and credential provisioning to obtain hotspot network access. Service providers have an OSU AAA server and certificate authority (CA). For a client and hotspot to trust one another, the OSU server holds a certificate signed by a CA whose root certificate is issued by a CA authorized by the Wi-Fi Alliance, and CA certificates are installed on the client device. A CA performs the following functions:

- Issues certificates (creates and signs)
- Maintains certificate status information and issues certificate revocation lists (CRLs)
- Publishes current (non-expired) certificates and CRLs
- Maintains status archives for the expired or revoked certificates it has issued

Passpoint certificates are governed by the Hotspot 2.0 OSU Certificate Policy Specification. An OSU server certificate should be obtained from any of the CAs authorized by the Wi-Fi Alliance. Once an OSU provider is selected, the client connects to the OSU WLAN. It then triggers an HTTPS connection to the OSU server, which was received with the OSU providers list. The client validates the server certificate to ensure it's a trusted OSU server. The client is prompted to complete an online registration through their browser. When the client has a valid credential for the hotspot 2.0 WLAN, it disassociates from the OSU WLAN and connects to the hotspot 2.0 WLAN.

The **OSU Provider** screen displays those provider configurations created thus far for use with a passpoint policy.

Name passPoint

Configuration NAI Realm OSU Provider

OSU ID	Name	Description	Server URL	NAI
osu	ssls	sadfsadf	https://123.org.in/	ssss

Type to search in tables

Row Count: 1

Add Edit Delete Exit

Figure 332: Passpoint Policy - OSU Provider Screen

- Click **Add** to create a new OSU provider configuration for passpoint hotspot utilization, **Edit** to modify the attributes of an existing configuration, or **Delete** to remove a selected configuration from those available.

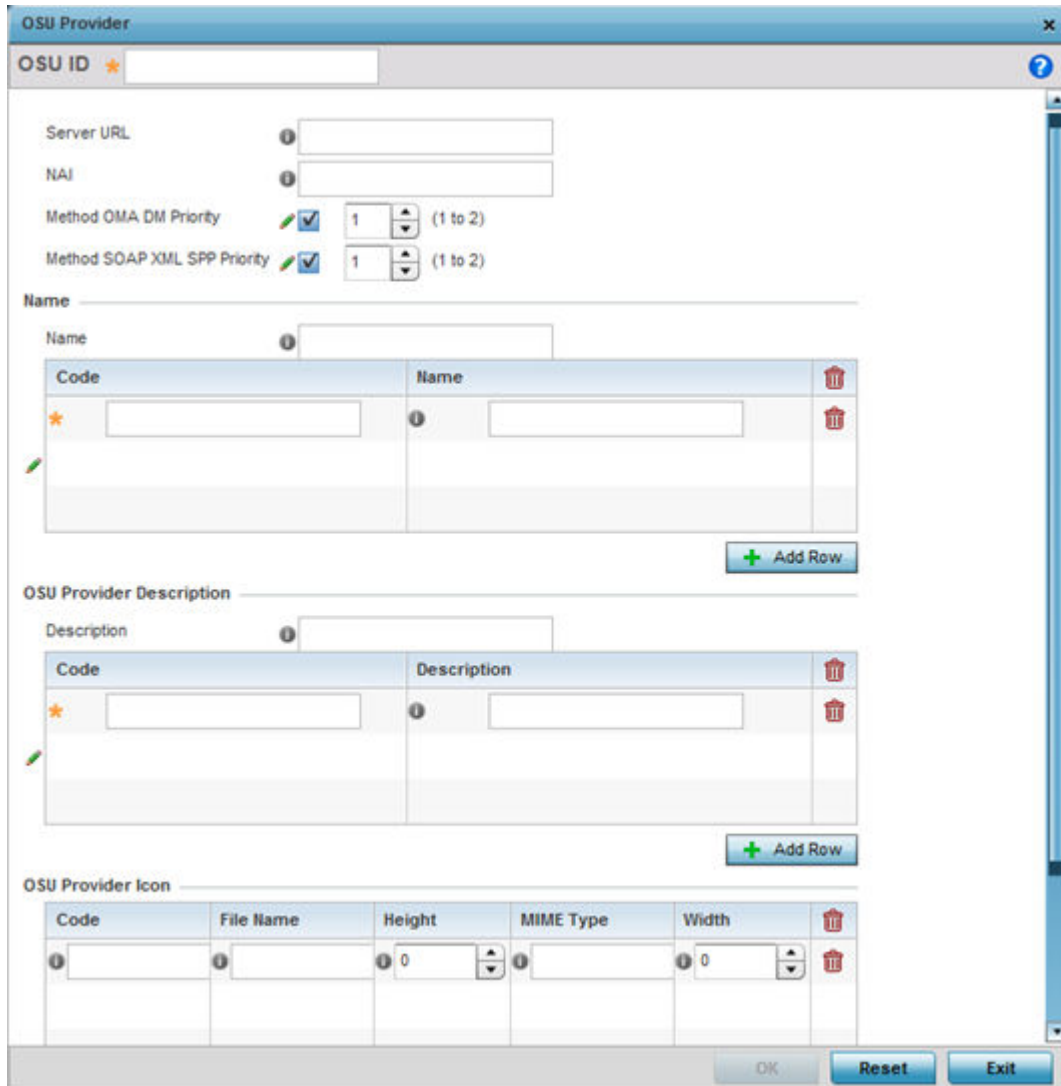


Figure 333: Passpoint Policy - OSU Provider - Add/Edit Screen

- If you are creating a new OSU provider configuration, provide it a 32-character maximum OSU ID that will serve as an online sign up identifier.
- Set the following attributes to secure the *Network Access Identifier* (NAI) submitted by the hotspot during OSU authentication:

Server URL	Provide a 255 character maximum sign up server URL for the OSU provider.
NAI	Enter a 255 character maximum NAI to identify the user and assist in routing an authentication request to the authentication server. The realm name is often the domain name of the service provider.

Method OMA DM Priority	Select this option to provide <i>Open Mobile Alliance</i> (OMA) device management priority. OMA is a standards body developing open standards for mobile clients. OMA is relevant to service providers working across countries (with different languages), operators and mobile terminals. Adherence to OMA is strictly voluntary. Use the drop-menu to specify the priority as 1 or 2.
Method SOAP XML SPP Priority	Select this option to apply a SOAP-XML subscription provisioning protocol priority of either 1 or 2. The <i>simple object access protocol</i> (SOAP) is a protocol for exchanging structured information in web services. SOAP uses XML as its message format and relies on other application layer protocols, like HTTP or SMTP, for message negotiation and transmission.

20. Refer to the **Name** field to optionally set a 252-character English language sign up name, then provide a 3-character maximum ISO-639 language code to apply the sign up name in a language other than English.

Apply a 252-character maximum hexadecimal online sign up name to encode in the ISO-639 language code applied to the sign up name.

21. Refer to the **OSU Provider Description** field to set an online sign up description in a language other than English.

Select **+ Add Row** and provide a 3-character maximum ISO-639 language code to apply the sign up name in a language other than English. Apply a 252-character maximum hexadecimal online sign up description to encode in the ISO-639 language code applied to the sign up name.

22. Optionally provide an **OSU Provider Icon** by selecting **+ Add Row**.

Apply the following configuration attributes to the icon.

Code	Enter a 3-character maximum ISO-639 language Code to define the language used in the OSU provider icon.
File Name	Provide a 255-character maximum icon name and directory path location for the icon file.
Height	Provide the icon's height in pixels from 0 - 65,535. The default setting is 0.
MIME Type	Set the icon's MIME file type from 0 - 64. The MIME associates filename extensions with a MIME type. A MIME enables a fallback on an extension and are frequently used by web servers.
Width	Provide the icon's width in pixels from 0 - 65,535. The default setting is 0.

23. Click **OK** to save the updates to the OSU Provider configuration.

Click **Reset** to revert to the last saved configuration.

Sensor Policy

Wireless Intrusion Protection System (WIPS) protects wireless client and access point radio traffic from attacks and unauthorized access. WIPS provides tools for standards compliance and around-the-clock wireless network security in a distributed environment. WIPS allows administrators to identify and accurately locate attacks, rogue devices and network vulnerabilities in real time and permits both a wired and wireless lockdown of wireless device connections upon acknowledgement of a threat.

In addition to dedicated AirDefense sensors, an access point radio can function as a sensor and upload information to a dedicated WIPS server (external to the access point). Unique WIPS server configurations can be used to ensure a WIPS server configuration is available to support the unique data protection needs of an RF Domain.

WIPS is not supported on a WLAN basis. Instead, sensor functionality is supported on the access point radio(s) available to each managed WLAN. When an access point radio is functioning as a WIPS sensor, it is able to scan in sensor mode across all legal channels within the 2.4 and 5.0 GHz band. Sensor support requires an AirDefense WIPS server on the network. Sensor functionality is not provided by the access point alone. The access point works in conjunction with a dedicated WIPS server.

In addition to WIPS support, sensor functionality has now been added for Extreme Networks' locating system (ExtremeLocation). The ExtremeLocation system for Wi-Fi locating includes WiNG controllers and access points functioning as sensors. Within the ExtremeLocation architecture, sensors scan for RSSI data on an administrator defined interval and send to a dedicated ExtremeLocation server resource, as opposed to an ADSP server. The ExtremeLocation server collects the RSSI data from WiNG sensor devices, and calculates the location of Wi-Fi devices.

Configuring a Sensor Policy

To define a sensor policy for use with an RF Domain:

1. Select **Configuration** → **Wireless** → **Sensor Policy** to display existing sensor policies.

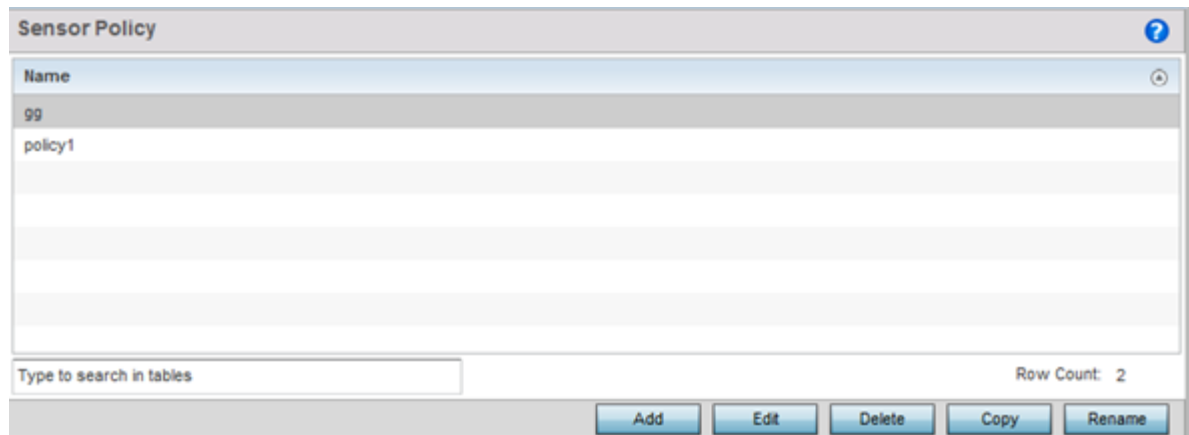


Figure 334: Sensor Policy Screen

- Click **Add** to define a new sensor policy, select an existing policy and click **Edit** to modify its configuration, or select an existing policy and click **Delete** to remove an obsolete policy.

Optionally, **Copy** or **Rename** sensor policies as needed.

When you are adding a new sensor policy, the **Add New Sensor Policy** screen displays:

Channel	Channel Width	Scan Weight
Ch 1(2.412) GHz	40MHz-Upper	1000
Ch 6(2.437) GHz	40MHz-Lower	1000
Ch 11(2.462) GHz	40MHz-Lower	1000
Ch 36(5.18) GHz	80MHz	1000
Ch 40(5.2) GHz	80MHz	1000
Ch 44(5.22) GHz	80MHz	1000
Ch 48(5.24) GHz	80MHz	1000

Figure 335: Wireless - Sensor Policy - Add New Sensor Policy Screen

- Provide a name for this sensor policy in the **Name** field.
Sensor policy name cannot exceed 32 characters and cannot contain spaces.
- Select **Continue** to create the sensor policy.
The **Sensor Policy Addition** screen displays with the **Scan Mode** set to **Default-Scan**. The user configurable parameters on this screen differ, depending on which **Scan Mode** is selected.
- Use the **RSSI Scan Interval** drop-down menu to set a scan interval from 1 - 60 seconds.

This is the scan period used by dedicated sensors (access point radios) for RSSI (signal strength) assessments. Once the sensor obtains the RSSI data, the sensor sends the data to a specified ExtremeLocation server resource (not an ADSP server) for calculating Wi-Fi device locations. The default is 1 second.

6. Set the following **Scan Mode** values.

The values you can select depend on whether you have selected **Default-Scan**, **Custom-Scan**, or **Channel-Lock** as the mode for scan operation.

Channel	<p>With Default-Scan selected: The list of available scan channels is fixed and defaulted in a spread pattern of 1, 6, 11, 36, 40, 44 and 48. You cannot change this channel pattern.</p> <p>With Custom-Scan selected: A list of unique channels in the 2.4, 4.9, 5 and 6 GHz band can be collectively or individually enabled for customized channel scans and RSSI reporting.</p> <p>With Channel-Lock selected: The Channel, Channel Width, and Scan Weight fields are replaced by a Lock Frequency drop-down menu. Use this menu to lock the RSSI scan to one specific channel.</p>
Channel Width	<p>With Default-Scan selected: Each channel's width is fixed and defaulted to either 40MHz-Upper (Ch 1), 40MHz-Lower (Ch 6 and CH 11) or 80MHz (CH 36, CH 40, CH 44 and CH 48).</p> <p>With Custom-Scan selected: You can define the width for each selected channel. Note that many channels have their width fixed at 20MHz. 802.11a radios support 20 and 40 MHz channel widths.</p> <p>With Channel-Lock selected: You cannot adjust the width between adjacent channels, because only one channel is locked.</p>
Scan Weight	<p>With Default-Scan selected: Each default channel's scan is of equal duration (1000) within the defined RSSI scan interval. No one channel receives scan priority within the defined RSSI scan interval.</p> <p>With Custom-Scan selected: Each selected channel can have its weight prioritized in respect to the amount of time a scan is permitted within the defined RSSI scan interval.</p> <p>With Channel-Lock selected: With one channel locked for an RSSI scan, you cannot adjust scan weights for other, unlocked channels.</p>

7. Click **OK** to save the updates to the sensor policy configuration.

Click **Reset** to revert to the last saved configuration.

8. To create a copy of a sensor policy, select the policy and click **Copy**.


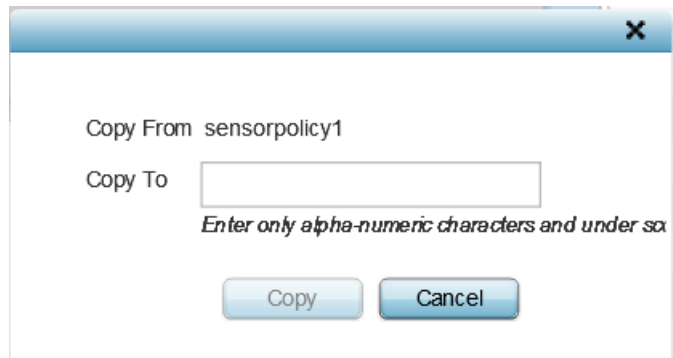


Figure 336: Wireless - Sensor Policy - Copy Policy Screen

Use the **Copy To** field to provide a name for the new sensor policy being created. The name of the new policy cannot be longer than 32 characters and cannot contain spaces.

- To rename an existing sensor policy, select the policy and click **Rename**.

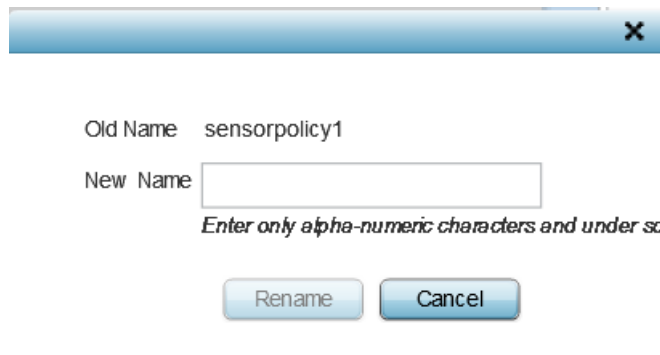

Old Name sensorpolicy1

New Name

Enter only alpha-numeric characters and under so

Rename Cancel

Figure 337: Wireless - Sensor Policy - Rename Policy Screen

Use the **New Name** field to provide a new name for the sensor policy. The new name cannot be longer than 32 characters and cannot contain spaces.

- To delete a sensor policy, select it and click **Delete**.

This removes the policy from the list of sensor policies.

Location Policy

ExtremeLocation is a scalable, enterprise grade, cloud-based location and analytics solution. It is a licensed product. WiNG customers having ExtremeLocation entitlement, can view sites (RF Domains) within the ExtremeLocation user interface. The site hierarchy details is propagated to the ExtremeLocation server by the WiNG, controllers.

Location policy provides the ExtremeLocation server hostname and the ExtremeLocation tenant's API key. Configure a location policy and apply on the site controller's self. When applied, the controller authenticates and authorizes with the ExtremeLocation server and exports tenant site hierarchy details to the server.



Note

For information on applying location policy to the virtual controller's self, see [Override Services Configuration](#) on page 566.



Note

For information on ExtremeLocation, refer to the ExtremeLocation user guide, available at <https://extremenetworks.com/documentation>.

To configure a location policy:

1. Go to **Configuration → Wireless → Location Policy**.

The **Location Policy** screen displays.

Name	Location Key	Enable
SanJose	10abdcv4545mn90xy	

Type to search in tables Row Count: 1

Figure 338: Configuration → Wireless → Location Policy

2. Review existing policies, to determine if a new policy warrants creation or an existing policy warrants modification.

Name	Displays the Location policy name.
Location Key	Displays the ExtremeLocation tenant's API key.
Enable	Displays whether the location policy is enabled or not.

Adding Location Policy

You can add a location policy or manage existing policies to match your requirements.

1. Click **Add** to create a new policy.



Note

To *edit, copy, rename, or replace* an existing policy, select the policy and click **Edit, Copy, Rename** or **Replace** respectively.

Figure 339: Configuration → Wireless → Add Location Policy Screen

2. If creating a new policy, enter a `name` in the **Name** field. The policy name should not exceed 32 characters in length and should uniquely identify it from other existing location policies.
3. Configure the following parameters:

Enable	By default the policy is enabled and the value displays as true .
Location Key	Enter your 64-bit ExtremeLocation tenant API key. This is the key the controller/virtual controller uses to authenticate with the ExtremeLocation server. Note: You can generate the API-Key from the ExtremeLocation UI. For more information, refer to the ExtremeLocation user guide, available at https://extremenetworks.com/documentation .

4. Click **Add Row**, in the **Server Host** table, and configure the following parameters:

Server ID

Set the server host ID number. Currently only one ExtremeLocation server can be configured.

Server IP

Configure the ExtremeLocation server's hostname or IP address.

**Note**

Specify the server hostname and not the IP address, as the IP address is likely to change periodically in order to balance load across multiple location server instances.

Server Port

Set the port on which the ExtremeLocation server is reachable. Select the port from 1 - 65535.

**Note**

By default the ExtremeLocation server is reachable on port 443.

5. Click **OK** to save your location policy configuration.
Click **Reset** to revert to the last saved configuration.



Network Configuration

- [Policy Based Routing \(PBR\) on page 765](#)
- [L2TP V3 Configuration on page 770](#)
- [Crypto CMP Policy on page 774](#)
- [AAA Policy on page 778](#)
- [Netflow Policy Configuration on page 789](#)
- [AAA TACACS Policy on page 792](#)
- [IPv6 Router Advertisement Policy on page 798](#)
- [Alias on page 801](#)
- [Application Policy on page 810](#)
- [Application on page 814](#)
- [Application Group on page 816](#)
- [Schedule Policy on page 819](#)
- [URL Filtering on page 820](#)
- [Web Filtering on page 824](#)
- [Network Deployment Considerations on page 825](#)

Controllers, platforms and Access Points allow packet routing customizations and unique network resources for deployment specific routing configurations.

For more information on the options available, refer to the topics listed above.

Policy Based Routing (PBR)

Define a policy based routing (PBR) configuration to direct packets to selective paths. PBR can optionally mark traffic for preferential services. PBR minimally provides the following:

- A means to use source address, protocol, application and traffic class as traffic routing criteria
- The ability to load balance multiple WAN uplinks
- A means to selectively mark traffic for QoS optimization

Since PBR is applied to incoming routed packets, a route-map is created containing a set of filters and associated actions. Based on the actions defined in the route-map, packets are forwarded to the next relevant hop. Routemaps are configurable under a global policy called routing-policy, and applied to profiles and devices.

Route-maps contain a set of filters which select traffic (match clauses) and associated actions (set clauses) for routing. A routemap consists of multiple entries, each carrying

a precedence value. An incoming packet is matched against the route-map with the highest precedence (lowest numerical value). If it matches, the routing decision is based on this route-map. If the packet does not match the route-map, the route-map entry with next highest precedence is matched. If the incoming packet does not match any of the route-map entries, it's subjected to typical destination based routing. Each route-map entry can optionally enable/disable logging.

The following criteria can optionally be used as traffic selection segregation criteria:

- IP Access List - A typical IP ACL can be used for traffic permissions. The mark and log actions in ACL rules however are neglected. Route-map entries have separate logging. Only one ACL can be configured per route map entry.
- IP DSCP - Packet filtering can be performed by traffic class, as determined from the IP DSCP field. One DSCP value is configurable per route map entry. If IP ACLs on a WLAN, ports or SVI mark the packet, the new/ marked DSCP value is used for matching.
- Incoming WLAN - Packets can be filtered by the incoming WLAN. There are two ways to match the WLAN:
 - If the device doing policy based routing has an onboard radio and a packet is received on a local WLAN, then this WLAN is used for selection.
 - If the device doing policy based routing does not have an onboard radio and a packet is received from an extended VLAN, then the device which received the packet passes the WLAN information in the MINT packet for the PBR router to use as match criteria.
- Client role - The client role can be used as match criteria, similar to a WLAN. Each device has to agree on a unique identifier for role definition and pass the same MINT tunneled packets.
- Incoming SVI - A source IP address qualifier in an ACL typically satisfies filter requirements. But if the host originating the packet is multiple hops away, the incoming SVI can be used as match criteria. In this context the SVI refers to the device interface performing policy based routing, and not the originating connected device.

Each route map entry has a set of match and set (action) clauses. ACL rules configured under route map entries merge to create a single ACL. Route map precedence values determine the prioritization of the rules in this merged ACL. An IP DSCP value is also added to the ACL rules.

Set (or action) clauses determine the routing function when a packet satisfies match criteria. If no set clauses are defined, the default is to fallback to destination based routing for packets satisfying the match criteria. If no set clause is configured and fallback to destination based routing is disabled, then the packet is dropped. The following can be defined within set clauses:

- Next hop - The IP address of the next hop or the outgoing interface through which the packet should be routed. Up to two next hops can be specified. The outgoing interface should be a PPP, a tunnel interface or a SVI which has DHCP client

configured. The first reachable hop should be used, but if all the next hops aren't reachable, typical destination based route lookup is performed.

- **Default next hop** - If a packet subjected to PBR does not have an explicit route to the destination, the configured default next hop is used. This can be either the IP address of the next hop or the outgoing interface. Only one default next hop can be defined. The difference between the next hop and the default next-hop is in case of former, PBR occurs first, then destination based routing. In case of the latter, the order is reversed. With both cases:
 - If a defined next hop is reachable, it's used. If fallback is configured refer to (b).
 - Do normal destination based route lookup. If a next hop is found its used, if not refer to (c).
 - If default next hop is configured and reachable, it's used. If not, drop the packet.
- **Fallback** - Fallback to destination based routing if none of the configured next hops are reachable (or not configured). This is enabled by default.
- **Mark IP DSCP** - Set IP DSCP bits for QoS using an ACL. The mark action of the route maps takes precedence over the mark action of an ACL.




Note

A packet should optimally satisfy all the match criteria, if no match clause is defined in a route-map, it would match everything. Packets not conforming to any of the match clauses are subjected to normal destination based routing.

To define a PBR configuration:

1. Select **Configuration** → **Network** → **Policy Based Routing**.

The **Policy Based Routing** screen displays.

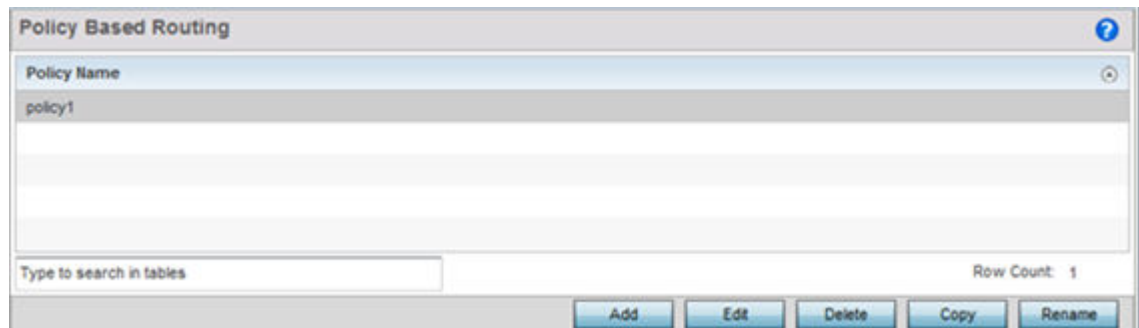

2. Select **Add** to create a new PBR configuration, **Edit** to modify the attributes of an existing PBR configuration, or **Delete** to remove a selected PBR configuration. Select **Copy** to copy the selected PBR configuration or **Rename** to rename the PBR configuration.

3. If creating a new PBR policy assign it a Policy **Name** up to 32 characters to distinguish this route map configuration from others with similar attributes. Select **Continue** to proceed to the **Policy Name** screen where route map configurations can be added, modified or removed. Select **Exit** to exit without creating a PBR policy.

Precedence	DSCP	Role Policy	User Role	Access Control List	WLAN	Incoming Interface
3	0	STORES	Role3	from_ipad_to_windo	RF1WLAN	vlan2


Type to search in tables Row Count: 1

Add Edit Delete Exit

4. Refer to the following to determine whether a new route-map configuration requires creation or an existing route-map requires modification or removal:

Precedence	Lists the numeric precedence (priority) assigned to each listed PBR configuration. A routemap consists of multiple entries, each carrying a precedence value. An incoming packet is matched against the route-map with the highest precedence (lowest numerical value).
DSCP	Displays each policy's DSCP value used as matching criteria for the route map. DSCP is the Differentiated Services Code Point field in an IP header and is for packet classification. Packets are filtered based on the traffic class defined in the IP DSCP field. One DSCP value can be configured per route map entry.
Role Policy	Lists each policy's role policy used as matching criteria.
User Role	Lists the user role defined in the Role Policy.
Access Control List	Displays each policy's IP ACL used as an access/deny filter criteria for the route map.
WLAN	Displays each policy's WLAN used as an access/deny filter for the route map.
Incoming Interface	Display the name of the Access Point WWAN or VLAN interface on which the packet is received for the listed PBR policy.

5. Select **Add** or **Edit** to create or modify a route-map configuration. Configurations can optionally be removed by selecting **Delete**.

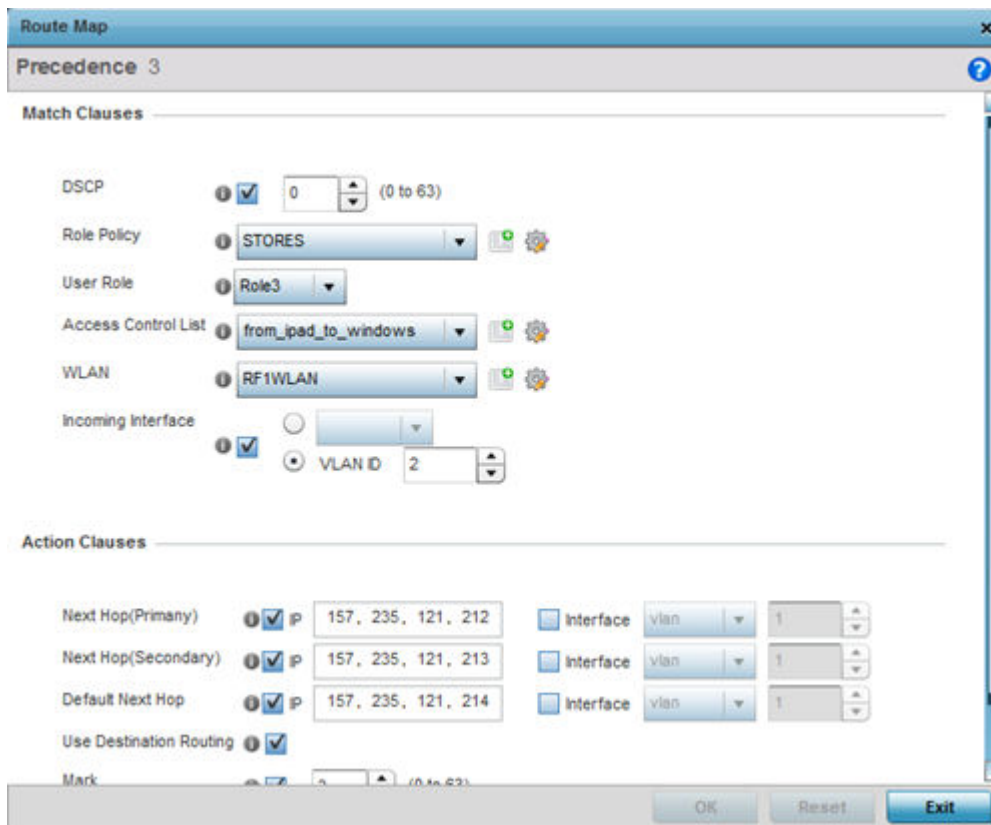

6. If adding a route map, use the spinner control to set a numeric Precedence (priority) for this route-map. An incoming packet is matched against the route-map with the highest precedence (lowest numerical value).
7. Refer to the Match Clauses field to define the following matching criteria for the route-map configuration:

DSCP	Select this option to enable a spinner control to define the DSCP value used as matching criteria for the route map. DSCP is the Differentiated Services Code Point field in an IP header and is for packet classification. Packets are filtered based on the traffic class defined in the IP DSCP field. One DSCP value can be configured per route map entry.
Role Policy	Use the drop-down to select a Role Policy to use with this route-map. Click the Create icon to create a new Role Policy. To view and modify an existing policy, click the Edit icon.
User Role	Use the drop-down menu to select a role defined in the selected Role Policy. This user role is used while deciding the routing.
Access Control List	Use the drop-down menu to select an IP based ACL used as matching criteria for this route-map. Click the Create icon to create a new ACL. To view and modify an existing ACL, click the Edit icon.

WLAN	Use the drop-down menu to select the Access Point WLAN used as matching criteria for this route-map. Click the Create icon to create a new WLAN. To view and modify an existing WLAN, click the Edit icon.
Incoming Interface	Select this option to enable radio buttons used to define the interfaces required to receive route-map packets. Use the drop-down menu to define either the Access Point's wwan1 or pppoe1 interface. Neither is selected by default. Or, select the VLAN ID option to define the Access Point VLAN to receive route-map-packets.

8. Set the following **Action Clauses** to determine the routing function performed when a packet satisfies match criteria. Optionally fallback to destination based routing if no hop resource is available.

Next Hop (Primary)	Define a first hop priority request. Set either the IP address of the virtual resource or select the Interface option and define either a wwan1, pppoe1 or a VLAN interface. In the simplest terms, if this primary hop resource is available, its used with no additional considerations.
Next Hop (Secondary)	If the primary hop request were unavailable, a second resource can be defined. Set either the IP address of the virtual resource or select the Interface option and define either a wwan1, pppoe1 or a VLAN interface.
Default Next Hop	If a packet subjected to PBR does not have an explicit route to the destination, the configured default next hop is used. This value is set as either the IP address of the next hop or the outgoing interface. Only one default next hop can be defined. The difference between the next hop and the default next-hop is in case of former, PBR occurs first, then destination based routing. In case of the latter, the order is reverse. Set either the next hop IP address or define either a wwan1, pppoe1 or a VLAN interface.
Use Destination Routing	It may be a good idea to select this option to default back to destination based routing if none of the defined hop resources are reachable. Packets are dropped if a next hop resource is unavailable and fallback to destination routing is disabled. This option is enabled by default.
Mark	Select this option and use the spinner control to set IP DSCP bits for QoS using an ACL. The mark action of the route maps takes precedence over the mark action of an ACL.

9. Select **OK** to save the updates to the route-map configuration. Select **Reset** to revert to the last saved configuration.

L2TP V3 Configuration

L2TP V3 is an IETF standard used for transporting different types of layer 2 frames in an IP network. L2TP V3 defines control and encapsulation protocols for tunneling layer 2 frames between two IP nodes.

Use L2TP V3 to create tunnels for transporting layer 2 frames. L2TP V3 enables WiNG supported controllers and access points to create tunnels for transporting Ethernet frames to and from bridge VLANs and physical ports. L2TP V3 tunnels can be defined between WiNG managed devices and other vendor devices supporting the L2TP V3 protocol.

Multiple pseudowires can be created within an L2TP V3 tunnel. WiNG managed access points support an Ethernet VLAN pseudowire type exclusively.

**Note**

A pseudowire is an emulation of a layer 2 point-to-point connection over a PSN (*packet-switching network*). A pseudowire was developed out of the necessity to encapsulate and tunnel layer 2 protocols across a layer 3 network.

Ethernet VLAN pseudowires transport Ethernet frames to and from a specified VLAN. One or more L2TP V3 tunnels can be defined between tunnel end points. Each tunnel can have one or more L2TP V3 sessions. Each tunnel session corresponds to one pseudowire. An L2TP V3 control connection (a L2TP V3 tunnel) needs to be established between the tunneling entities before creating a session.

For optimal pseudowire operation, both the L2TP V3 session originator and responder need to know the pseudowire type and identifier. These two parameters are communicated during L2TP V3 session establishment. An L2TP V3 session created within an L2TP V3 connection also specifies multiplexing parameters for identifying a pseudowire type and ID.

The working status of a pseudowire is reflected by the state of the L2TP V3 session. If a L2TP V3 session is down, the pseudowire associated with it must be shut down. The L2TP V3 control connection keep-alive mechanism can serve as a monitoring mechanism for the pseudowires associated with a control connection.

**Note**

If connecting an Ethernet port to another Ethernet port, the pseudowire type must be Ethernet port, if connecting an Ethernet VLAN to another Ethernet VLAN, the pseudowire type must be Ethernet VLAN.

To define an L2TP V3 tunnel configuration:

1. Select **Configuration** → **Network** → **L2TP V3**.

The **L2TP V3** screen opens and lists the policy configurations defined thus far.

Name	Cookie Size	Hello Interval	Reconnect Attempt	Reconnect Interval	Retry Count	Retry Time Out	Rx Window Size	Tx Window Size	Failover Delay	Force L2 Path Recovery
default	0	1m 0s	0	2m 0s	5	5s	10	10	5s	X

2. Refer to the following to determine whether a new L2TP V3 requires creation or modification:

Name	Lists the 31 character maximum name assigned to each listed L2TP V3 policy upon creation.
Cookie size	Displays the size of each policy's cookie field within each L2TP V3 data packet. L2TP V3 data packets contain a session cookie which identifies the session (pseudowire) corresponding to it. If using the CLI, the cookie size can't be configured per session, and are the same size for all sessions with in a tunnel.
Hello Interval	Displays each policy's interval between L2TP V3 hello keep alive messages exchanged within the L2TP V3 connection.
Reconnect Attempts	Lists each policy's maximum number of re-connection attempts to reestablish a tunnel between peers.
Reconnect Interval	Displays the duration set for each listed policy between two successive reconnection attempts.
Retry Count	Lists the number of retransmission attempts set for each listed policy before a target tunnel peer is defined as not reachable.
Retry Time Out	Lists the interval the interval (in seconds) set for each listed policy before the retransmission of a L2TP V3 signaling message.
Rx Window Size	Displays the number of packets that can be received without sending an acknowledgement.
Tx Window Size	Displays the number of packets that can be transmitted without receiving an acknowledgement.
Failover Delay	Lists the time (in either seconds or minutes) for establishing a tunnel after a failover (VRRP/RF Domain/Cluster).
Force L2 Path Recovery	Lists whether force L2 path recovery is enabled (as defined by a green checkmark) or disabled (as defined by a red X). Once a tunnel is established, enabling this setting forces server and gateway learning behind the L2TPv3 tunnel.

3. Select **Add** to create a new L2TP V3 policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available. Select **Copy** to copy the selected L2TPv3 policy or **Rename** to rename the L2TPv3 policy.

The screenshot shows a configuration window titled "Name default" with a help icon. Under "Policy Details", the following settings are visible:

- Cookie Size: 0
- Hello Interval: 1 Minutes (range: 1 to 60)
- Reconnect Attempt: 0 (range: 0 to 8)
- Reconnect Interval: 2 Minutes (range: 1 to 60)
- Retry Count: 5 (range: 1 to 10)
- Retry Time Out: 5 Seconds (range: 1 to 250)
- Rx Window Size: 10 (range: 1 to 15)
- Tx Window Size: 10 (range: 1 to 15)
- Fallover Delay: 5 Seconds (range: 5 to 60)
- Force L2 Path Recovery:

Buttons for OK, Reset, and Exit are located at the bottom right of the window.

4. If creating a new L2TP V3 policy assign it a **Name** up to 31 characters. Remember, a single L2TP V3 policy can be used by numerous L2TP V3 tunnels.
5. Define the following Policy Details to add a device to a list of devices sanctioned for network operation:

Cookie size	L2TP V3 data packets contain a session cookie which identifies the session (pseudowire) corresponding to it. Use the spinner control to set the size of the cookie field present within each L2TP V3 data packet. Options include 0, 4 and 8. The default setting is 0. If using the CLI, the cookie size can't be configured per session, and are the same size for all sessions with in a tunnel.
Hello Interval	Define an interval in <i>Seconds</i> (1 - 3,600), <i>Minutes</i> (1 -60) or <i>Hours</i> (1) between L2TP V3 hello keep alive messages exchanged within the L2TP V3 control connection. The default setting is 1 minute.
Reconnect Attempts	Use the spinner control to set a value (from 0 - 250) representing the maximum number of reconnection attempts to reestablish the tunnel. The default interval is 0.
Reconnect Interval	Define an interval in either <i>Seconds</i> (1 - 3,600), <i>Minutes</i> (1 -60) or <i>Hours</i> (1) between two successive reconnection attempts. The default setting is 2 minutes.
Retry Count	Use the spinner control to define how many retransmission attempts are made before determining a target tunnel peer is not reachable. The available range is from 1 - 10, with a default value of 5.

Retry Time Out	Use the spinner control to set the interval (in seconds) before initiating the retransmission of a L2TP V3 signaling message. The range is from 1 - 250, with a default of 5.
Rx Window Size	Specify the number of packets received without sending an acknowledgment. The range is from 1 - 15, with a default of 10.
Tx Window Size	Specify the number of packets transmitted without receiving an acknowledgment. The range is from 1 - 15, with a default of 10.
Failover Delay	Set the time in <i>Seconds</i> (5 - 60) or <i>Minutes</i> (1) for establishing a tunnel after a failover (VRRP/RF Domain/Cluster). The default is 5 seconds
Force L2 Path Recovery	Determine whether force L2 path recovery is <i>enabled</i> or <i>disabled</i> . Once a tunnel is established, enabling this setting forces server and gateway learning behind the L2TPv3 tunnel. The default setting is disabled.

6. Select **OK** to save the updates to the L2TP V3 policy. Select **Reset** to revert to the last saved configuration.

Crypto CMP Policy

Certificate Management Protocol (CMP) is an Internet protocol to obtain and manage digital certificates in a *Public Key Infrastructure* (PKI) network. A *Certificate Authority* (CA) issues the certificates using the defined CMP.


Using CMP, a device can communicate to a CMP supported CA server, initiate a certificate request and download the required certificates from the CA server. CMP supports multiple request options through for device communicating to a CMP supported CA server. The device can initiate a request for getting the certificates from the server. It can also auto update the certificates which are about to expire.

The CMP client on the controller, service platform or Access Point triggers a request for the configured CMS CA server. Once the certificate is validated and confirmed from the CA server it is saved on the device and becomes part of the trustpoint. During the creation of the CMP policy the trustpoint is assigned a name and client information. An administrator can use a manually created trustpoint for one service (like HTTPs) and use the CMP generated trustpoint for RADIUS EAP certificate based authentication.

To review, create or edit a Crypto CMP policy:

1. Select **Configuration** → **Network** → **Crypto CMP Policy**.

The **Crypto CMP Policy** screen lists the policy configuration defined thus far.

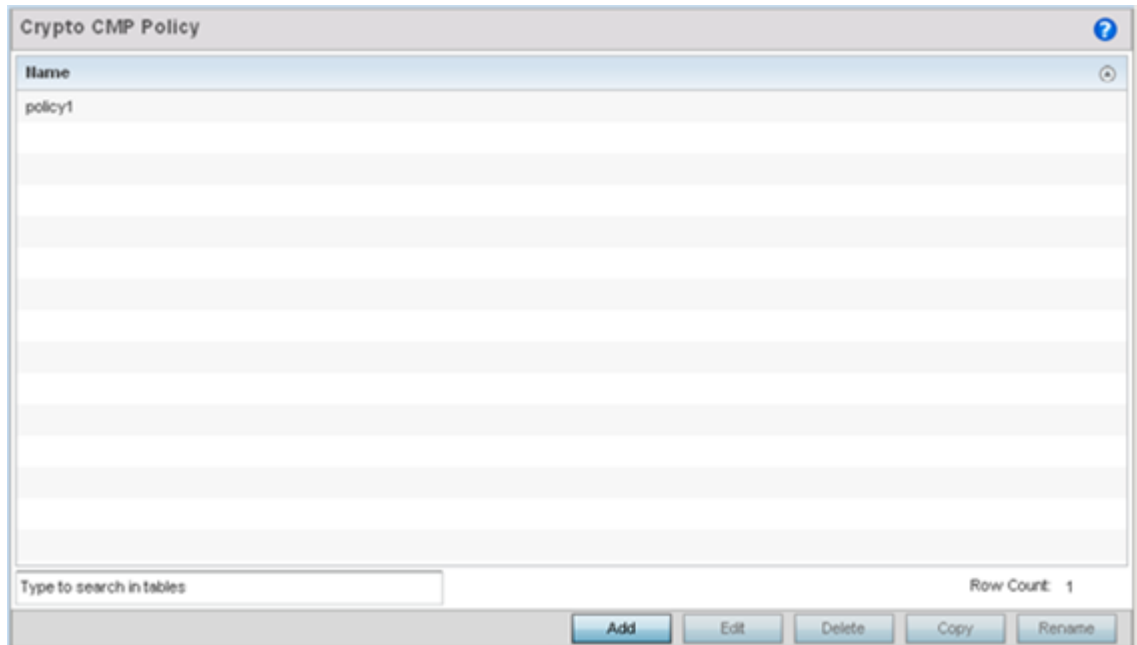

2. Select **Add** to create a new Crypto CMP policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available. Existing policies can be copied or renamed as needed.

Name *

Crypto CMP Policy Details

Certificate Renewal Timeout: 14 (1 to 60 days)

Certificate Update:

Certificate Validate:

Auto-gen Unique ID:

Certificate Key Size: 2048 (bits)

Hash Algorithm: sha1

CMS Server Configuration

Enable	IP	Path	Port	

+ Add Row

Trust Points

Name	Subject Name	Reference ID	Secret	Sender Name	Recipient Name	

+ Add Row

Subject Alt Name

SAN Type: *

SAN Value: *

OK Reset Exit

Figure 340: Crypto CMP Policy Creation Screen

3. If creating a new Crypto CMP policy assign it a **Name** up to 31 characters to help distinguish it.
4. Set the **Certificate Renewal Timeout** period to trigger a new certificate renewal request with the dedicated CMP server resource. The range is 1-60 days. The default is 14 days.

The expiration of the certificate is checked once a day. When a certificate is about to expire a certificate renewal is initiated with the server via an existing IPsec tunnel. If the tunnel is not established, the CMP renewal request is not sent. If a renewal succeeds the newly obtained certificate overwrites an existing certificate. If the renewal fails, an error is logged.

5. Select **Certificate Update** to update the renewal data of the certificate. This setting is enabled by default.
6. Select **Certificate Validate** to automatically validate the cross certificate with the factory certificate.

7. Select **Auto-gen Unique ID** to prepend the device's auto-generated unique ID in the subject and sender fields
8. Set the **Certificate Key Size** value. Set a value in the range 2,048 - 4,096 bits. The default value is 2048 bits. The larger the key size, the more secure the certificate.
9. Use the **Hash Algorithm** drop-down menu, to set the hashing algorithm as **sha1**, **sha256**, **sha384** or **sha512**. Hashing algorithms are mathematical functions that convert a string of characters (of indefinite length) to a fixed numerical value, much smaller than the original string. Hashing algorithms are used to sign digital certificates. The hash-algorithm type configured here is sent, in the request for certification (new or renewal), to the CA server. The CA uses the hash algorithm specified here to sign the digital certificate. The default setting is sha1.
The sha256, sha384 and sha512 hash functions belong to the SHA-2 family of algorithms.
10. Select **+ Add Row** and define the following **CMS Server Configuration** settings for the server resource:

Enable	Use the drop-down menu to set the CMS server as either the Primary (first choice) or Secondary (secondary option) CMP server resource.
IP	Define the IP address for the CMP CA server managing digital certificate requests. CMP certificates are encrypted with CA's public key and transmitted to the defined IP destination over a typical HTTP or TLS session.
Path	Provide a complete path to the CMP CA's trustpoint.
Port	Provide a CMP CA port number.

11. Set the following **Trust Points** settings. Use the **+ Add Row** button to add a row to this table. The trustpoint is used for various services as specifically set the controller, service platform or access point.

Name	Enter the 32 character maximum name assigned to the target trustpoint. A trustpoint represents a CA/identity pair containing the identity of the CA, CA specific configuration parameters, and an association with an enrolled identity certificate. This field is mandatory.
Subject Name	Provide a subject name of up to 512 characters for the certificate template example. This field is mandatory.
Reference ID	Set the user reference value for the CMP CA trust point message. The range is 0-256. This field is mandatory.
Secret	Specify the secret used for trustpoint authentication over the designated CMP server resource.
Sender Name	Enter a sender name up to 512 characters for the trustpoint request. This field is mandatory.
Recipient Name	Enter a recipient name value of up to 512 characters for the trustpoint request.

12. Set the following **Subject Alt Name** settings:

SAN Type	Use the drop-down menu to set the Subject Alt Name type as either IP Address, Distinguished Name, Email, String, or FQDN. This field is mandatory.
SAN Value	Provide a Subject Alt Name value of up to 128 characters for the certificate template example. The value provided depends on the Subject Alt Name type selected. This field is mandatory.

13. Select **OK** to save the updates to the Crypto CMP policy, **Reset** to revert to the last saved configuration, or **Exit** to close the screen.

AAA Policy

AAA (*Authentication, Authorization, and Accounting*) provides the mechanism network administrators define access control within the network.

A controller, service platform or access point can interoperate with external RADIUS and LDAP Servers (AAA Servers) to provide an additional user database and authentication resource. Each WLAN can maintain its own unique AAA configuration.

AAA provides a modular way of performing the following services:

Authentication — Authentication provides a means for identifying users, including login and password dialog, challenge and response, messaging support and (depending on the security protocol), encryption. Authentication is the technique by which a user is identified before allowed access to the network. Configure AAA authentication by defining a list of authentication methods, and then applying the list to various interfaces. The list defines the authentication schemes performed and their sequence. The list must be applied to an interface before the defined authentication technique is conducted.

Authorization — Authorization occurs immediately after authentication. Authorization is a method for remote access control, including authorization for services and individual user accounts and profiles. Authorization functions through the assembly of attribute sets describing what the user is authorized to perform. These attributes are compared to information contained in a database for a given user and the result is returned to AAA to determine the user's actual capabilities and restrictions. The database could be located locally or be hosted remotely on a RADIUS server. Remote RADIUS servers authorize users by associating *attribute-value* (AV) pairs with the appropriate user. Each authorization method must be defined through AAA. When AAA authorization is enabled it's applied equally to all interfaces.

Accounting — Accounting is the method for collecting and sending security server information for billing, auditing, and reporting user data; such as start and stop times, executed commands (such as PPP), number of packets, and number of bytes. Accounting enables wireless network administrators to track the services users are accessing and the network resources they are consuming. When accounting is enabled, the network access server reports user activity to a RADIUS security server in the form of accounting records. Each accounting record is comprised of AV pairs and is stored on the access control server. The data can be analyzed for network

management, client billing, and/or auditing. Accounting methods must be defined through AAA. When AAA accounting is activated, it's applied equally to all interfaces on the access servers.

To define unique controller, service platform or access point WLAN AAA configurations:

1. Select **Configuration** → **Network** → **AAA Policy**.

The **Authentication, Authorization, and Accounting (AAA)** screen displays. This screen lists AAA policies created thus far. Any of these policies can be selected and applied.

AAA Policy	Accounting Packet Type	Request Interval	NAC Policy	Server Pooling Mode
AAAPolicy1	Start/Stop	30m 0s		Failover
AAAPolicy2	Start/Stop	30m 0s		Failover
AAAPolicy3	Start/Interim/Stop	1m 0s		Failover
EXTERNAL-AAA-SERVERS	Start/Stop	30m 0s		Failover
INTERNAL-AAA-SERVER	Start/Stop	30m 0s		Failover

Type to search in tables Row Count: 5

Add Edit Delete Copy Rename

2. Refer to the following information listed for each existing AAA policy:

AAA Policy	Displays the name assigned to the AAA policy when it was initially created. The name cannot be edited within a listed profile.
Accounting Packet Type	Displays the accounting type set for the AAA policy. Options include: <ul style="list-style-type: none"> • <i>Start Only</i>— Sends a start accounting notice to initiate user accounting. • <i>Start/Stop</i>— Sends a start accounting notice at the beginning of a process and a stop notice at the end of a process. The start accounting record is sent in the background. The requested process begins regardless of whether the start accounting notice is received by the accounting server.
Request Interval	Lists each AAA policy's interval used to send a RADIUS accounting request to the RADIUS server.
NAC Policy	Lists the name <i>Network Access Control</i> (NAC) filter used to either include or exclude clients from access.
Server Pooling Mode	The server pooling mode controls how requests are transmitted across RADIUS servers. Selecting Failover results in working down the list of servers if a server is unresponsive and unavailable. The Load Balanced option uses all available servers transmitting requests in round robin.

3. To configure a new AAA policy, click **Add**. To modify an existing AAA configuration, select it from amongst those available and click **Edit**. Existing policies can be copied or renamed as needed.

Server Id	Server Type	Host	Port	Request Proxy Mode	Request Attempts	Request Timeout	DSCP	NAI Routing Enable	NAC Enable
1	Host	172.168.1.104	1,812	Through Wirele	3	3s	0	×	×
2	onboard-contr		1,812	None	3	3s	0	×	×

4. Refer to the following **RADIUS Authentication** details:

Server Id	Displays the numerical server index (1-6) for the accounting server when added to the list available to the access point.
Server Type	Displays the type of AAA server in use as either Host, onboard-self or onboard-controller.
Host	Displays the IP address or hostname of the RADIUS authentication server.
Port	Displays the port on which the RADIUS server listens to traffic within the access point managed network. The port range is 1 - 65,535. The default port is 1812.
Request Proxy Mode	Displays whether a request is transmitted directly through the server or proxied through the Virtual Controller AP or RF Domain manager.
Request Attempts	Displays the number of attempts a client can retransmit a missed frame to the RADIUS server before it times out of the authentication session. The available range is from 1 - 10. The default is 3.
Request Timeout	Displays the time (from 1 - 60) seconds for the re-transmission of request packets. The default is 3 seconds. If this time is exceeded, the authentication session is terminated.
DSCP	Displays the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification. The valid range is from 0 - 63 with a default of 46.

NAI Routing Enable	Displays NAI routing status. AAA servers identify clients using the NAI. The NAI is a character string in the format of an e-mail address as either user or user@ but it need not be a valid e-mail address or a fully qualified domain name. The NAI can be used either in a specific or generic form. The specific form, which must contain the user portion and may contain the @ portion, identifies a single user. The generic form allows all users to be configured on a single command line. Each user still needs a unique security association, but these associations can be stored on a AAA server. The original purpose of the NAI was to support roaming between dialup ISPs. Using NAI, each ISP need not have all the accounts for all of its roaming partners in a single RADIUS database. RADIUS servers can proxy requests to remote servers for each.
NAC Enable	A green check defines NAC as enabled, while a Red X defines NAC disabled with this AAA policy.

5. Select a configuration from the table and select **Edit**, or select **Add** to create a new RADIUS authentication server configuration. Optionally **Delete** a configuration as they become obsolete.

The screenshot shows the 'Authentication Server' configuration window. The 'Server Id' is set to 1. The 'Settings' section includes the following fields and values:

- Server Type: Host
- Host: (empty field) Hostname
- Port: 1812 (range: 1 to 65,535)
- Secret: (empty field) Show
- Request Proxy Mode: None
- Proxy Mint Host: (empty field)
- Request Attempts: 3 (range: 1 to 10)
- Request Timeout: 3 Seconds (range: 1 to 60)
- Retry Timeout Factor: 100 (range: 50 to 200)
- DSCP: 46 (range: 0 to 63)

Buttons for OK, Reset, and Exit are located at the bottom of the window.

6. Define the following settings to add or modify AAA RADIUS authentication server configuration:

Server Id	Define the numerical server index (1-6) for the authentication server to differentiate it from others available to the access point's AAA policy.
Server Type	Select the type of AAA server as either Host , onboard-self , onboard-controller or onboard-centralized-controller .
Host	Specify the IP address or hostname of the RADIUS authentication server. Hostnames cannot include an underscore character. Select Alias to define the hostname alias once and use the alias character set across different configuration items.
Port	Define or edit the port on which the RADIUS server listens to traffic within then access point managed network. The port range is 1 to 65,535. The default port is 1812.
Secret	Specify the secret used for authentication on the selected RADIUS server. By default the secret will be displayed as asterisks. To show the secret in plain text, check the Show box.
Request Proxy Mode	Select the method of proxy that browsers communicate with the RADIUS authentication server. The mode could either be None , Through Wireless Controller , through-centralized-controller , Through RF Domain Manager , or Through Mint Host .
Proxy Mint Host	Specify a 64 character maximum hostname (or Mint ID) of the Mint device used for proxying requests. Hostnames cannot include an underscore character.
Request Attempts	Specify the number of attempts a client can retransmit a missed frame to the RADIUS server before it times out of the authentication session. The available range is from 1 - 10. The default is 3.
Request Timeout	Specify the time from 1 - 60 seconds for the access point's re-transmission of request packets. If this time is exceeded, the authentication session is terminated. The default is 3 seconds.
Request Timeout Factor	Specify the time from 50 - 200 seconds between retry timeouts for the access points's re-transmission of request packets. The default is 100.
DSCP	Specify the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification. The valid range is between 0 and 63 with a default value of 46.

10. Refer to the following information for each existing AAA server policy to determine whether new RADIUS accounting policies require creation or existing policies require modification:

Server Id	Displays the numerical server index (1-6) for the accounting server assigned when added to the WiNG operating system.
Host	Displays the IP address or hostname of the RADIUS authentication server. Hostnames cannot include an underscore character.
Port	Displays the port on which the RADIUS server listens to traffic within the network. The port range is 1 to 65,535. The default port is 1813.
Server Type	Displays the type of AAA server in use either Host, onboard-self, or onboard-controller.
Request Attempts	Displays the number of attempts a client can retransmit a missed frame to the RADIUS server before it times out of the authentication session. The available range is between 1 and 10 attempts. The default is 3 attempts.
Request Timeout	Displays the time between 1 and 60 seconds for the wireless controller's re-transmission of request packets. If this time is exceeded, the authentication session is terminated.
DSCP	Displays the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification. The valid range is between 0 and 63 with a default value of 34.
Request Proxy Mode	Displays the method of proxy that browsers communicate with the RADIUS authentication server. The mode could either be None, Through Wireless Controller, or Through RF Domain Manager.
NAI Routing Enable	Displays NAI routing status. AAA servers identify clients using the NAI. The NAI is a character string in the format of an e-mail address as either user or user@ but it need not be a valid e-mail address or a fully qualified domain name. The NAI can be used either in a specific or generic form. The specific form, which must contain the user portion and may contain the @ portion, identifies a single user. The generic form allows all users to be configured on a single command line. Each user still needs a unique security association, but these associations can be stored on a AAA server. The original purpose of the NAI was to support roaming between dialup ISPs. Using NAI, each ISP need not have all the accounts for all of its roaming partners in a single RADIUS database. RADIUS servers can proxy requests to remote servers for each.

11. To edit an existing accounting profile, select the profile then **Edit**. To add a new Accounting server configuration select **Add**. Optionally **Delete** a configuration as they become obsolete.

12. Define the following settings to add or modify AAA RADIUS accounting server configuration:

Server Id	Displays the numerical server index (1-6) for the accounting server when added to the list available to the access point.
Host	Specify the IP address or hostname of the RADIUS accounting server. Hostnames cannot include an underscore character. Select Alias to define the hostname alias once and use the alias character set across different configuration items.
Server Type	Define or edit the port on which the RADIUS accounting server listens to traffic within the network. The port range is 1 to 65,535. The default port is 1813.
Secret	Specify the secret (password) used for authentication on the selected RADIUS server. By default the secret is displayed as asterisks. Select the Show option to display the entered secret.

Request Proxy Mode	Select the method of proxy that browsers communicate with the RADIUS authentication server. The mode could either be None , Through Wireless Controller , Through RF Domain Manager or Through Mint Host .
Proxy Mint Host	Specify a 64 character maximum hostname or the Mint ID of the Mint device used for proxying requests.
Request Attempts	Displays the number of attempts a client can retransmit a missed frame to the RADIUS accounting server before it times out of the authentication session. The available range is 1 - 10 attempts. The default is 3 attempts.
Request Timeout	Specify the time for the access point's re-transmission of request packets. The default is 5 seconds. If this time is exceeded, the authentication session is terminated.
Retry Timeout Factor	Specify the interval, in seconds, between two successive re-transmission attempts of request packets. Specify a value from 50 - 200 seconds. The default is 100 seconds.
DSCP	Displays the DSCP value as a 6-bit parameter in the header of every IP packet used for packet classification. The valid range is from 0 - 63 with a default value of 34.

13. Set the following **Network Access Identifier Routing** values for the accounting server:

NAI Routing Enable	Check to enable NAI routing. AAA servers identify clients using the NAI. The NAI is a character string in the format of an e-mail address as either user or user@ but it need not be a valid e-mail address or a fully qualified domain name. The NAI can be used either in a specific or generic form. The specific form, which must contain the user portion and may contain the @ portion, identifies a single user. The generic form allows all users in a given or without a to be configured on a single command line. Each user still needs a unique security association, but these associations can be stored on a AAA server. The original purpose of the NAI was to support roaming between dialup ISPs. Using NAI, each ISP need not have all the accounts for all of its roaming partners in a single RADIUS database. RADIUS accounting servers can proxy requests to remote servers for each.
Realm	Enter the realm name. The name cannot exceed 64 characters. When the access point's RADIUS server receives a request for a user name, the server references a table of user names. If the user name is known, the server proxies the request to the RADIUS server.
Realm Type	Specify whether the Prefix or Suffix of the username is matched to the realm.
Strip Realm	Check strip to remove information from the packet when NAI routing is enabled.

14. Select **Ok** to save the changes made to this window. Click **Exit** to close this window.

15. Select the **Settings** tab.

16. Set the following **RADIUS server** configuration parameters:

Protocol for MAC, Captive-Portal Authentication	Set the authentication protocol when the server is used for any non-EAP authentication. Options include <i>Password Authentication Protocol (PAP)</i> , <i>Challenge Handshake Authentication Protocol (CHAP)</i> , <i>MSPAP</i> and <i>MSCHAPV2</i> . The default setting is PAP.
Accounting Packet Type	Set the type of RADIUS Accounting Request packets generated. Options include Stop Only , Start/Stop and Start/Interim/Stop . The default setting is Start/Stop.
Request Interval	Set the periodicity of the interim accounting requests to 1 hour , 1 - 60 minutes or 60 - 3600 seconds. The default is 30 minutes.
Accounting Server Preference	Select the server preference for RADIUS accounting. The options include: <ul style="list-style-type: none"> • Prefer Same Authentication Server Host — Uses the authentication server host name as the host used for RADIUS accounting. This is the default setting. • Prefer Same Authentication Server Index — Uses the same index as the authentication server for RADIUS accounting. • Select Accounting Server Independently — Allows users to specify a RADIUS accounting server separate from the RADIUS authentication server.
Format	Select the format of the MAC address used in the RADIUS accounting packets.
Case	Lists whether the MAC address is sent using uppercase or lowercase letters. The default setting is uppercase.

Attributes	Lists whether the format specified applies only to the user name/password in mac-auth or for all attributes that include a MAC address, such as callingstation-id or called-station-id.
Server Pooling Mode	Controls how requests are transmitted across RADIUS servers. The options are: Failover and Load Balanced . Failover implies traversing the list of servers if any server is unresponsive. Load Balanced uses all servers in a round-robin fashion. The default setting is Failover.
Client Attempts	Defines the number of times (1 - 10) an EAP request is transmitted to a client before giving up. The default setting is 3.
Request Timeout	Set the amount of time after which an EAP request to a client is retried. The default setting is 3 seconds.
ID Request Timeout	Define the amount of time (1 - 60 seconds) after which an EAP ID Request to a client is retried. The default setting is 30 seconds
Retransmission Scale Factor	Set the scaling of the retransmission attempts. Timeout at each attempt is a function of the request timeout factor and client attempts number. 100 (default setting) implies a constant timeout at each retry; smaller values indicate more aggressive (shorter) timeouts, larger numbers set more conservative (longer) timeouts on each successive attempt.
Cisco VSA Audit Session Id	Set a <i>vendor specific attribute</i> (VSA) to allow CISCO's <i>Identity Services Engine</i> (ISE) to validate a requesting client's network compliance, such as the validity of virus definition files (antivirus software or definition files for an anti-spyware software application). This setting is disabled by default.
Accounting Delay Time	Select this option to enable the support of an accounting delay time attribute within accounting requests. This setting is disabled
Accounting Multi Session Id	Select this option to enable the support of an accounting multi session ID attribute. This setting is disabled by default.
Chargeable User Id	Select this option to enable the support of chargeable user identity. This setting is disabled by default.
Add Framed IP Address	Select this option to add an IP address attribute to access requests. This setting is disabled by default.
Framed MTU	Set the framed MTU attribute (from 100 - 1500) used in access requests. The default setting is 1400.
RFC5580 Location Information	Select a support option for the RFC5580 location attribute. Options include None , include-always and server-requested . The default setting is None.
RFC5580 Operator Name	Provide a 63 character maximum RFC5580 operator name.
Service-Type	Set the service type attribute value. Options include framed (default setting) and login.

NAS IPv6 Address	Select this option to provide support for NAS IPv6 formatted addresses when not proxying. This setting is disabled by default
Proxy NAS Identifier	Select a RADIUS attribute NAS identifier when proxying through the controller or RF Domain manager. Options include originator (default setting) or proxier .
Proxy NAS IPv6/IPv4 Address	Sets the RADIUS attribute NAS IP address and NAS IPv4 address behavior when proxying through the controller or RF Domain manager. Options include None and proxier (default setting).

17. Select **OK** to save the updates to the AAA configuration. Select **Reset** to revert to the last saved configuration.

Netflow Policy Configuration

Starting with the WiNG 7.3.0 release, 802.11ax APs will support *Internet Protocol Flow Information eXport* (IPFIX), an IEEE standard based on NetFlow version 9. NetFlow is a Cisco-proprietary protocol that collects IP flow data and exports it to a NetFlow Collector. IP flow data provides a highly granular insight of the network and facilitates fine-grained metering for highly flexible and detailed resource usage accounting.

IP flow data is exported using templates that contain supporting data record fields.

To enable IP flow data collection and export within your WiNG 7.3.0 managed network, create a NetFlow policy and apply locally on the AP or in the AP's profile context. The NetFlow policy identifies the NetFlow Collector host and specifies the interval at which templates are exported to the specified NetFlow Collector.




Note

NetFlow is only supported on the following 802.11ax APs: AP410i/e, AP460i/e, AP505i, AP510i/e, AP560i/h

To define a NetFlow Policy:

1. Navigate to **Configuration** → **Network** → **Netflow Policy**.

The **Netflow Policy** screen displays.

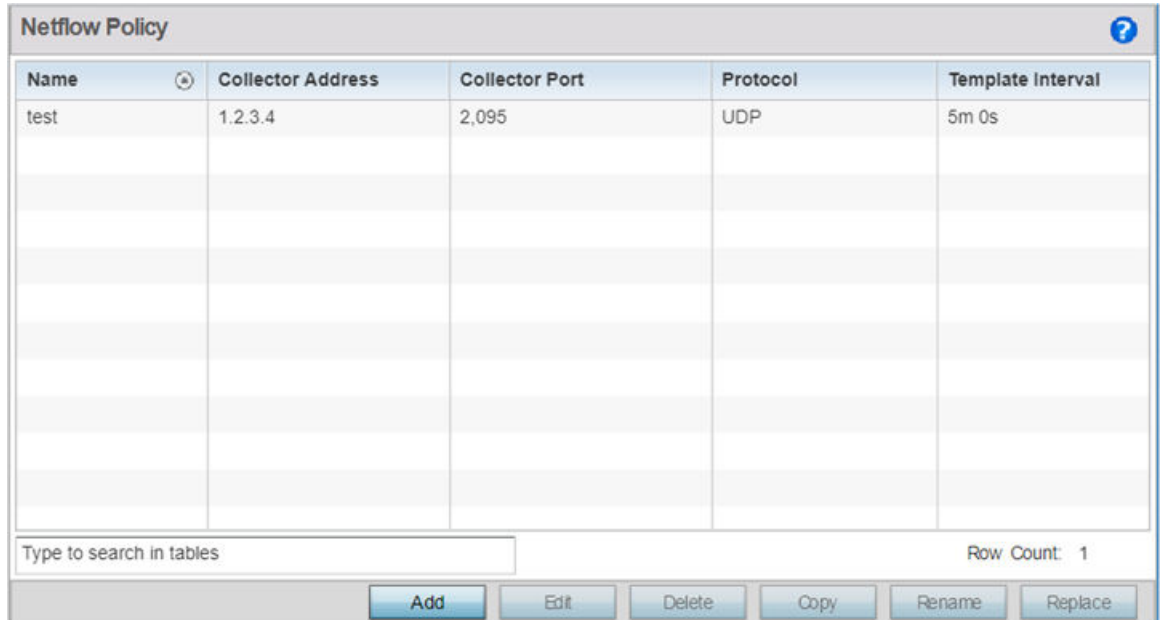

2. Review the existing NetFlow policy configurations to determine if a new policy warrants creation or an existing policy warrants deletion or modification.

Name	Lists the 32 character maximum name assigned to each listed Netflow Policy.
Collector Address	Lists the NetFlow Collector host's IPv4 address.
Collector Port	Lists the port at which the NetFlow Collector can be reached.
Protocol	Lists the protocol used to communicate with the Netflow Collector. Note: The current implementation only supports UDP protocol.
Template Interval	Lists the interval, in seconds, at which the AP (Exporter) exports NetFlow templates to the specified NetFlow Collector host.

3. Select **Add** to create a new policy.

To modify or delete an existing policy, select it and click **Edit** or **Delete** respectively. You can also **Copy**, **Rename** or **Replace** existing policies.

The NetFlow Policy Add screen displays.

4. If creating a new policy, assign it a **Name** not exceeding 32 characters in length.
5. Define the following parameters to enable IP flow data forwarding to the NetFlow Collector:

Collector Address	Specify the NetFlow Collector host's IPv4 address or hostname
Collector Port	Specify the port on which the NetFlow Collector host is reachable. Set a value from 1 - 65,535. Note: The default port value is 2095.
Protocol	Specify the protocol type used to communicate with the NetFlow Collector host. The options are TCP and UDP . Note: The current implementation only supports UDP protocol. The default value is UDP.
Interval Template	Specify the interval, in seconds, at which the AP (Exporter) exports NetFlow templates to the specified NetFlow Collector host. Set a value from 300 - 3600 seconds. Note: The default value is 300 seconds.

6. Select **OK** to save your changes.
Click **Reset** to revert to the last saved configuration.

Apply the Netflow policy locally on the AP or in the AP's profile context.



Note

For information see, [Profile Services Configuration](#) on page 290 and [Override Services Configuration](#) on page 566.

AAA TACACS Policy

TACACS (*Terminal Access Controller Access - Control System+*) is a protocol created by CISCO Systems which provides access control to network devices (routers, network access servers and other networked computing devices) using one or more centralized servers. TACACS provides separate authentication, authorization, and accounting services running on different servers.

TACACS controls user access to devices and network resources while providing separate accounting, authentication, and authorization services. Some of the services provided by TACACS are:

- Authorizing each command with the TACACS server before execution
- Accounting each session's logon and log off event
- Authenticating each user with the TACACS server before enabling access to network

To define a unique AAA TACACS configuration:

1. Select **Configuration** → **Network** → **AAA TACACS Policy**.

The **Authentication, Authorization, and Accounting (AAA) TACACS** screen lists existing AAA policies. Any of these policies can be selected and applied to a controller, service platform or Access Point.

Authentication, Authorization, and Accounting (AAA) TACACS			
AAA TACACS Policy	Accounting Access Method	Authentication Access Method	Authorization Access Method
new	All	All	Telnet

Type to search in tables Row Count: 1


2. Refer to the following information for each existing AAA TACACS policy:

AAA TACACS Policy	Displays the name assigned to the AAA TACACS policy when it was initially created. The name cannot be edited within a listed profile.
Accounting Access Method	Displays the connection method used to access the AAA TACACS accounting server. Options include All, SSH, Console, or Telnet.

Authentication Access Method	Displays the method used to access the AAA TACACS authentication server. Options include All, SSH, Console, Telnet, or Web.
Authorization Access Method	Displays the method used to access the AAA TACACS authorization server. Options include All, SSH, Console, or Telnet.

3. Select **Add** to configure a new AAA TACACS policy. Select an existing policy and use the **Edit** button to edit the policy or use the **Delete** button to delete it.
4. Provide a name for the AAA TACACS policy in the AAA TACACS Policy field. The name can be up to 32 characters long. Click **Continue**. Click **OK** to proceed.

The Server Info tab displays by default.

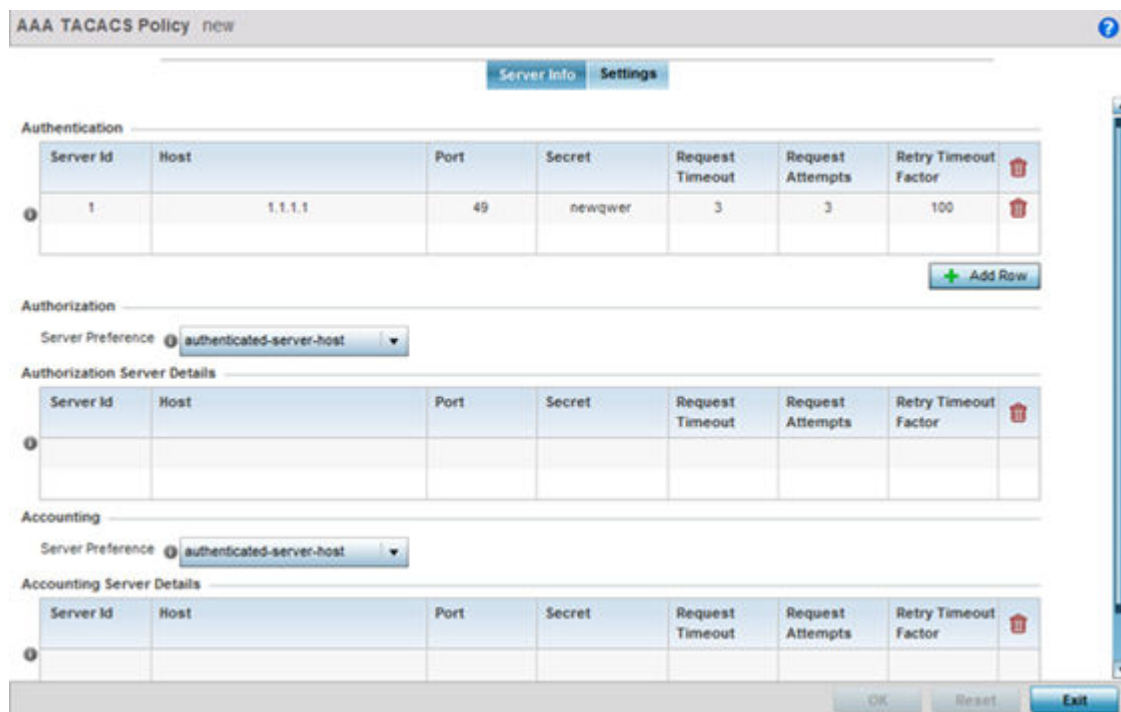

5. Under the **Authentication** table, select **+ Add Row**.

The screenshot shows a dialog box titled "Add Row" with a close button (X) in the top right corner. Below the title bar is a "Settings" section with the following fields:

- Server Id:** A numeric spinner set to 1, with a range of (1 to 2).
- Host:** A text input field with a "Hostname" dropdown menu.
- Port:** A numeric spinner set to 49, with a range of (1 to 65,535).
- Secret:** A text input field with a "Show" checkbox.
- Request Attempts:** A numeric spinner set to 3, with a range of (1 to 10).
- Request Timeout:** A numeric spinner set to 3, with a "Seconds" dropdown menu and a range of (3 to 60).
- Retry Timeout Factor:** A numeric spinner set to 100, with a range of (50 to 200).

At the bottom of the dialog are "OK" and "Exit" buttons.

6. Set the following **Authentication** settings:

Server Id	Set numerical server index (1-2) for the authentication server when added to the list of available TACACS authentication server resources.
Host	Specify the IP address or hostname of the AAA TACACS server.
Port	Define or edit the port on which the AAA TACACS server listens to traffic. The port range is 1 - 65,535. The default port is 49.
Secret	Specify (and confirm) the secret (password) used for authentication between the selected AAA TACACS server and the controller, service platform or access point. By default the secret is displayed as asterisks. To see the secret being entered, select the Show option.
Request Attempts	Set the number of connection request attempts to the TACACS server before it times out of the authentication session. The available range is from 1 - 10. The default is 3.
Request Timeout	Specify the time for the re-transmission of request packets after an unsuccessful attempt. The default is 3 seconds. If the set time is exceeded, the authentication session is terminated.
Retry Timeout Factor	Set the scaling of retransmission attempts from 50 - 200 seconds. The timeout at each attempt is the function of the retry timeout factor and the attempt number. 100 (the default value) implies a constant timeout on each retry. Smaller values indicate more aggressive (shorter) timeouts. Larger numbers define more conservative (larger) timeouts on each successive attempt. The default is 100.

7. Select **OK** to save the changes or **Exit** to close the screen.
8. Set the **Server Preference**, within the **Authorization** field, to specify which server, in the pool of servers, is selected to receive authorization requests. Options include None, authenticated-server-host, and authenticatedserver- number. If selecting None or authenticated-server-number select **+ Add Row** and set the server's ID, host, port, password and connection attempt parameters.
9. Set the following **Authorization Server** details:

Server Id	Lists the numerical server index (1-2) for each authentication server when added to the list available to the controller, service platform or access point.
Host	Displays the IP address or hostname set for the AAA TACACS authentication server.
Port	Displays the port the TACACS authentication server listens to traffic. The port range is 1 - 65,535. The default port is 49.
Secret	Specify (and confirm) the secret (password) used for authentication between the selected AAA TACACS server and the controller, service platform or access point. By default the secret is displayed as asterisks. To see the secret being entered, select the Show option.
Request Attempts	Displays the number of connection attempts before the controller, service platform or access point times out of the authentication session. The available range is from 1 - 10. The default is 3.
Request Timeout	Specify the time for the re-transmission of request packets after an unsuccessful attempt. The default is 3 seconds. If the set time is exceeded, the authentication session is terminated.
Retry Timeout Factor	Set the scaling of retransmission attempts from 50 - 200 seconds. The timeout at each attempt is the function of the retry timeout factor and the attempt number. 100 (the default value) implies a constant timeout on each retry. Smaller values indicate more aggressive (shorter) timeouts. Larger numbers define more conservative (larger) timeouts on each successive attempt. The default is 100.

10. Click **OK** to save the changes, **Reset** to revert to the last saved configuration or **Exit** to close the screen.
11. Set the **Server Preference**, within the **Accounting** field, to select the accounting server, from the pool of servers, to receive accounting requests. Options include None, authenticated-server-host, authenticated-server-number, authorized-server-host and authorized-server-number. The default is authenticated-server-host. If selecting None, authenticated-server-number or authorized-server-number select **+ Add Row** and set the server's ID, host, port, password and connection attempt parameters.


12. Set the following **Accounting Server** details:

Server Id	Lists the numerical server index (1-2) for each authentication server when added to the list available to the controller, service platform or Access Point.
Host	Displays the IP address or hostname set for the AAA TACACS authentication server.

Port	Displays the port the TACACS authentication server listens to traffic. The port range is 1 - 65,535. The default port
Secret	Specify (and confirm) the secret (password) used for authentication between the selected AAA TACACS server and the controller, service platform or Access Point. By default the secret is displayed as asterisks. To show the secret in plain text, select
Request Attempts	Displays the number of connection attempts before the controller, service platform or Access Point times out of the authentication session. The available range is from 1 - 10. The
Request Timeout	Specify the time for the re-transmission of request packets after an unsuccessful attempt. The default is 3 seconds. If the set time is exceeded, the authentication session is terminated
Retry Timeout Factor	Set the scaling of retransmission attempts from 50 - 200 seconds. The timeout at each attempt is the function of the retry timeout factor and the attempt number. 100 (the default value) implies a constant timeout on each retry. Smaller values indicate more aggressive (shorter) timeouts. Larger numbers define more conservative (larger) timeouts on each successive attempt. The default is 100

13. Select **OK** to save the changes, **Reset** to revert to the last saved configuration or **Exit** to close the screen.

14. Select the **Settings** tab.

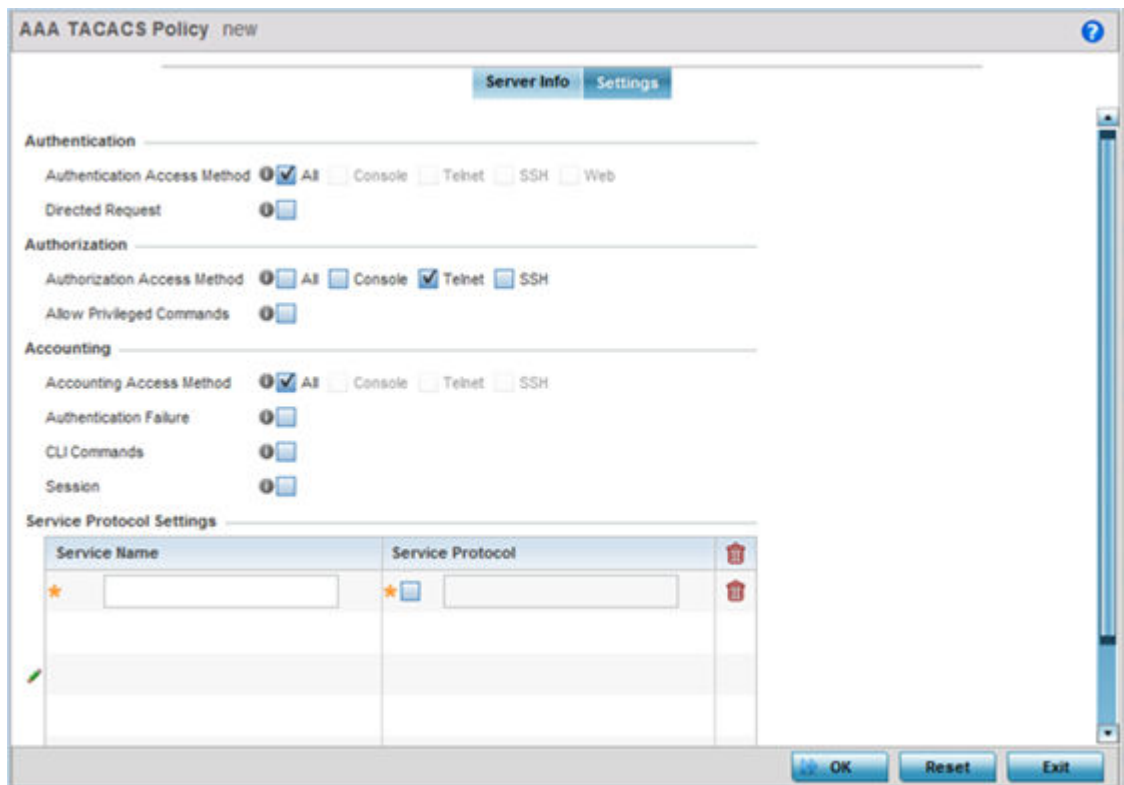

15. Set the following AAA TACACS **Authentication** server configuration parameters:

Authentication Access Method	Specify the connection method(s) for authentication requests. <ul style="list-style-type: none"> • All – Authentication is performed for all types of access without prioritization. • Console – Authentication is performed only for console access. • Telnet – Authentication is performed only for access through Telnet. • SSH – Authentication is performed only for access through SSH. • Web – Authentication is performed only for access through the Web interface.
Directed Request	Select to enable the AAA TACACS authentication server to be used with the '@<server name>' nomenclature. The specified server must be present in the list of defined Authentication servers.

16. Set the following AAA TACACS **Authorization** server configuration parameters:

Authorization Access Method	Specify the connection method(s) for authorization requests. <ul style="list-style-type: none"> • All – Authorization is performed for all types of access without prioritization. • Console – Authorization is performed only for console access. • Telnet – Authorization is performed only for access through Telnet. • SSH – Authorization is performed only for access through SSH.
Allow Privileged Commands	Select this option to enable privileged commands executed without command authorization. Privileged commands are commands that can alter/ change the authorization server configuration.

17. Set the following AAA TACACS **Accounting** server configuration parameters:

Accounting Access Method	Specify the connection method(s) for accounting requests. <ul style="list-style-type: none"> • All – Accounting is performed for all types of access without prioritization. • Console – Accounting is performed only for console access. • Telnet – Accounting is performed only for access through Telnet. • SSH – Accounting is performed only for access through SSH.
Authentication Failure	Select the option to enable accounting upon authentication failures. This setting is disabled by default.
CLI Commands	Select this option to enable accounting for CLI commands. This setting is disabled by default.
Session	Select this option to enable accounting for session start and session stop events. This setting is disabled by default.

18. Select **+ Add Row** and set the following **Service Protocol Settings** parameters:

Service Name	Provide a 30 character maximum shell service for user authorization.
Service Protocol	Enter a protocol for user authentication using the service.



Note

A maximum of 5 entries can be made in the **Service Protocol Settings** table.

19. Select **OK** to save the updates to the AAA TACACS policy. Select **Reset** to revert to the last saved configuration.

IPv6 Router Advertisement Policy

An IPv6 router policy allows routers to advertise their presence in response to solicitation messages. After receiving a neighbor solicitation message, the destination node sends an advertisement message, which includes the link layer address of the source node. After receiving the advertisement, the destination device replies with a neighbor advertisement message on the local link. After the source receives the advertisement it can communicate with other devices.

Advertisement messages are also sent to indicate a change in link layer address for a node on the local link. With such a change, the multicast address becomes the destination address for advertisement messages.

To define a IPv6 router advertisement policy:


1. Select **Configuration > Network > IPv6 Router Advertisement Policy**.

IPv6 RA Policy Name	RA Interval	Suppress RA	Default Router Lifetime	Router Preference	Advertise MTU	Advertise Hop Count
default	5m 0s	✓	25m 0s	Medium	✗	✗

Type to search in tables Row Count: 1

2. Select **Add** to create a new IPv6 router advertisement policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available. Existing policies can be copied or renamed as needed. Provide a 32 character maximum name for the policy in the **IPv6 RA Policy Name** field. Select OK to proceed.

The **IPv6 RA Policy Name** screen displays.

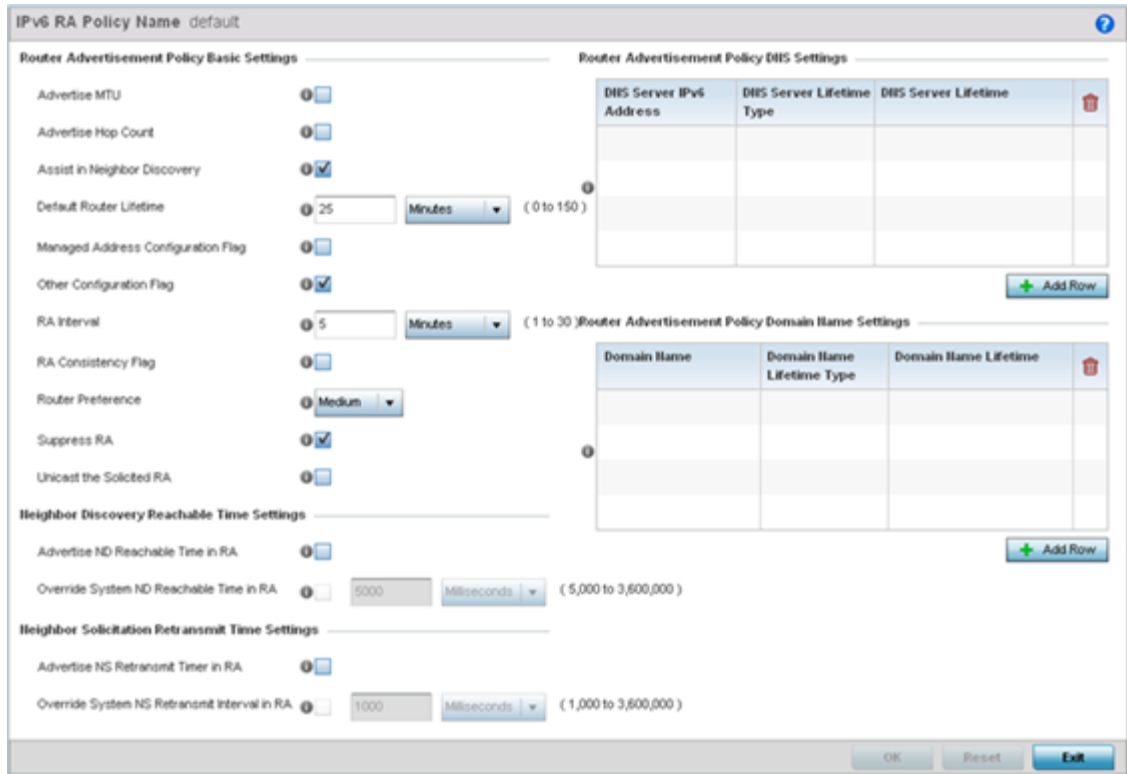

3. Set the following **Router Advertisement Policy Basic Settings**:

Advertise MTU	Select this option to include the Maximum Transmission Unit (MTU) in the router advertisements. The default setting is disabled
Advertise Hop Count	Select this option to include the hop count in the header of outgoing IPv6 packets. The default setting is disabled.
Assist in Neighbor Discovery	Select this option to send the source link layer address in a router advertisement to assist in neighbor discovery. The default setting is enabled.
Default Router Lifetime	Set the default router lifetime availability for IPv6 router advertisements. A lifetime of 0 indicates that the router is not a default router. The router advertisement interval range is 0 - 9000 Seconds, 0 - 150 Minutes, or 0 - 2.5 Hours. The default is 30

Managed Address Configuration Flag	Select this option to send the managed address configuration flag in router advertisements. When set, the flag indicates that the addresses are available via DHCP v6. The default setting is disabled
Other Configuration Flag	Select this option to send the other configuration flag in router advertisements. When set, the flag indicates other configuration information (DNS related information, information on other servers within the network) is available via DHCP v6. The default
RA Interval	Set the interval for unsolicited IPv6 router assignments. The router advertisement interval range is 3 - 1800 seconds or 0 - 150 minutes. The default is 5 minutes.
RA Consistency Flag	Select this option to check if parameters advertised by other routers on the local link are in conflict with those router advertisements by this controller, service platform or Access Point. This option is disabled.
Router Preference	Set a High, Medium or Low preference designation on this router versus other router resource that may be available to the controller, service platform or Access Point. The default setting is medium.
Suppress RA	Use this setting to enable or diable the transmission of a router advertisement within the IPv6 packet. This setting is enabled by default.
Unicast the Solicited RA	Select this option to enable the unicast (single destination) transmission of a router advertisement within the IPv6 packet. This setting is disabled by default.

4. Set the following **Neighbor Discovery Reachable Time Settings**:

Advertise ND Reachable Time in RA	Select this option not specify the neighbor reachable time in the router advertisements. When unspecified, the neighbor reachable time configured for the system is advertised. The default setting is disabled.
Override System ND Reachable Time in RA	Set the period for sending neighbor reachable time in the router advertisements. When unspecified, the neighbor reachable time configured for the system is advertised. The interval range is from 5,000 - 3,600,000 milliseconds. The default is 5000 milliseconds.

5. Set the following **Neighbor Solicitation Retransmit Time Settings**:

Advertise NS Retransmit Timer in RA	Select this option to not specify the neighbor solicitation retransmit timer value in router advertisements. The default setting is disabled.
Override System NS Retransmit Interval in RA	Set the period for sending the neighbor solicitation retransmit timer in router advertisements. When unspecified, the setting configured for the system is advertised. The interval range is from 1000 - 3,600,000 milliseconds. The default is 1000 milliseconds.

6. Select **+ Add Row** under the **Router Advertisement Policy DNS Settings** table and set the following:

DNS Server IPv6 Address	Use a DNS server to resolve host names to IPv6 addresses. When an IPv6 host is configured with the address of a DNS server, the host sends DNS name queries to the server for resolution. This field is mandatory
DNS Server Lifetime Type	Set the lifetime afforded to the DNS server resource. Options include expired, External (fixed), and infinite. The default is External (fixed).
DNS Server Lifetime	Set the maximum time the DNS server is available for name resolution. The interval range is from 1000 - 3,600,000 milliseconds. The default is 10 minutes.

7. Select **+ Add Row** under the **Router Advertisement Policy Domain Name Settings** table and define the following settings:

Domain Name	Enter a fully qualified domain name (FQDN) is an unambiguous domain name available a router advertisement resource. To distinguish an FQDN from a regular domain name, a trailing period is added. For example, somehost.example.com. This field is mandatory.
Domain Name Lifetime Type	Set the DNS Server Lifetime Type. Options include expired, External (fixed), and infinite. The default is External (fixed).
Domain Name Lifetime	Set the maximum time the DNS domain name is available as a name resolution resource. The default is 10 minutes.

8. Select **OK** to save the changes, **Reset** to revert to the last saved configuration or **Exit** to close the screen.

Alias

With large deployments, the configuration of remote sites utilizes a set of shared attributes, of which a small set of attributes are unique for each location. For such deployments, maintaining separate configuration (WLANs, profiles, policies and

ACLs) for each remote site is complex. Migrating any global change to a particular configuration item to all the remote sites is a complex and time consuming operation.

Also, this practice does not scale gracefully for quick growing deployments.

An alias enables an administrator to define a configuration item, such as a hostname, as an alias once and use the defined alias across different configuration items such as multiple ACLs.

Once a configuration item, such as an ACL, is utilized across remote locations, the Alias used in the configuration item (ACL) is modified to meet local deployment requirement. Any other ACL or other configuration items using the modified alias also get modified, simplifying maintenance at the remote deployment.

Aliases have scope depending on where the Alias is defined. Alias are defined with the following scopes:

- *Global aliases* are defined from the **Configuration → Network → Alias** screen. Global aliases are available for use globally across all devices, profiles and RF Domains in the system.
- *Profiles aliases* are defined from the **Configuration → Devices → System Profile → Network → Alias** screen. Profile aliases are available for use to a specific group of wireless controllers or access points. Alias values defined in a profile override the alias values defined within global aliases.
- *RF Domain aliases* are defined from the **Configuration → Devices → RF Domain → Alias** screen. RF Domain aliases are available for use for a site as a RF Domain is site specific. RF Domain alias values override alias values defined in a global alias or a profile alias configuration.
- *Device aliases* are defined from the **Configuration → Devices → Device Overrides → Network → Alias** screen. Device aliases are utilized by a singular device only. Device alias values override global, profile or RF Domain alias configurations.

Using an alias, configuration changes made at a remote location override any updates at the management center. For example, if a network alias defines a network range as 192.168.10.0/24 for the entire network, and at a remote deployment location, the local network range is 172.16.10.0/24, the network alias can be overridden at the deployment location to suit the local requirement. For the remote deployment location, the network alias work with the 172.16.10.0/24 network. Existing ACLs using this network alias need not be modified and will work with the local network for the deployment location. This simplifies ACL definition and management while taking care of specific local deployment requirements.

Refer to the procedures in this chapter to configure a network alias.

Network Basic Alias Configuration


A *basic alias* is a set of configurations consisting of *VLAN*, *Host*, *Network* and *Address Range* alias configurations. A VLAN alias is a configuration for optimal VLAN re-use and management for local and remote deployments. A host alias configuration is for a particular host device's IP address. A network alias configuration is utilized for an IP

address on a particular network. An address range alias is a configuration for a range of IP addresses.

To set a network basic alias configuration:

1. Select **Configuration** → **Network** from the Web UI.
2. Select **Alias** from the **Network** menu options on the left-hand side of the UI.

The Alias screen displays with the **Basic Alias** tab displayed by default.

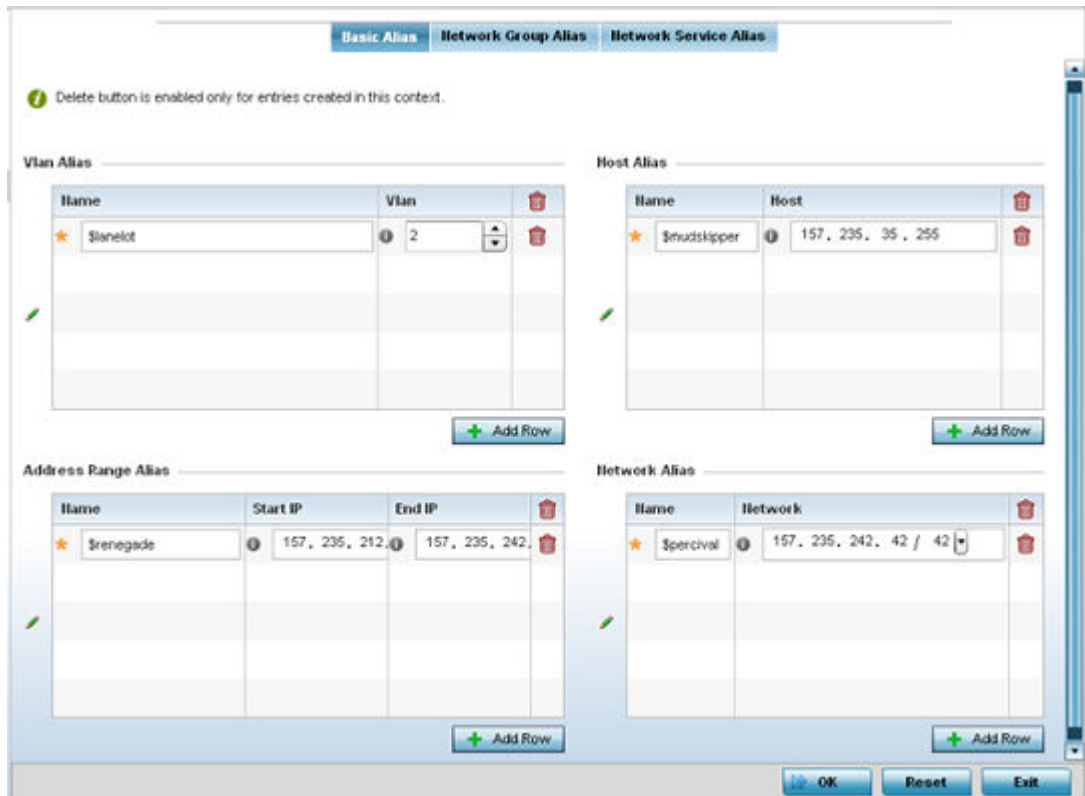

3. Select **+ Add Row** to define **VLAN Alias** settings:

Use the **Vlan Alias** field to create unique aliases for VLANs that can be utilized at different deployments. For example, if a VLAN ID is set as 10 for the central network, and the VLAN is set as 26 at a remote location, the VLAN can be overridden at the remote location using an alias. At the remote location, the network is functional with an ID of 26, but utilizes the name defined at the central local network. A new VLAN need not be created specifically at the remote location.

Name	If adding a new <i>VLAN Alias</i> , provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Vlan	Use the spinner control to set a numeric VLAN ID from 1 - 4094.

4. Select **+ Add Row** to define **Address Range Alias** settings:

Use the **Address Range Alias** field to create aliases for IP address ranges that can be utilized at different deployments. For example, if an ACL defines a pool of network

addresses as 192.168.10.10 through 192.168.10.100 for an entire network, and a remote location's network range is 172.16.13.20 through 172.16.13.110, the remote location's ACL can be overridden using an alias. At the remote location, the ACL works with the 172.16.13.20-110 address range. A new ACL need not be created specifically for the remote deployment location.

Name	If adding a new <i>Address Alias</i> , provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Start IP	Set a starting IP address used with a range of addresses utilized with the address range alias.
End IP	Set an ending IP address used with a range of addresses utilized with the address range alias.

5. Select **+ Add Row** to define **Host Alias** settings:

Use the **Host Alias** field to create aliases for hosts that can be utilized at different deployments. For example, if a central network DNS server is set a static IP address, and a remote location's local DNS server is defined, this host can be overridden at the remote location. At the remote location, the network is functional with a local DNS server, but uses the name set at the central network. A new host need not be created at the remote location. This simplifies creating and managing hosts and allows an administrator to better manage specific local requirements.

Name	If adding a new <i>Host Alias</i> , provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Host	Set the numeric IP address set for the host.

6. Select **+ Add Row** to define **Network Alias** settings:

Use the **Network Alias** field to create aliases for IP networks that can be utilized at different deployments. For example, if a central network ACL defines a network as 192.168.10.0/24, and a remote location's network range is 172.16.10.0/24, the ACL can be overridden at the remote location to suit their local (but remote) requirement. At the remote location, the ACL functions with the 172.16.10.0/24 network. A new ACL need not be created specifically for the remote deployment. This simplifies ACL definition and allows an administrator to better manage specific local requirements.

Name	If adding a new <i>Network Alias</i> , provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Network	Provide a network address in the form of host/mask.

7. Select **+ Add Row** to define **String Alias** settings:

Use the **String Alias** field to create aliases for strings that can be utilized at different deployments. For example, if the main domain at a remote location is called loc1.domain.com and at another deployment location it is called loc2.domain.com, the alias can be overridden at the remote location to suit the local (but remote)

requirement. At one remote location, the alias functions with the loc1.domain.com domain and at the other with the loc2.domain.com domain.

Name	If adding a new String Alias, provide it a distinguishing name up to 32 characters. The alias name always starts with a dollar sign (\$).
Value	Provide a string value to use in the alias.

8. Select **OK** when completed to update the set of basic alias rules. Select **Reset** to revert the screen back to its last saved configuration.

Network Group Alias Configuration

A *network group alias* is a set of configurations consisting of host and network configurations. Network configurations are complete networks in the form of 192.168.10.0/24 or an IP address range in the form of 192.168.10.10-192.168.10.20. Host configurations are in the form of a single IP address, 192.168.10.23.

A network group alias can contain multiple definitions for a host, network, and IP address range. A maximum of eight (8) Host entries, eight (8) network entries and eight (8) IP addresses range entries can be configured inside a network group alias. A maximum of 32 network group alias entries can be created.

To set a network group alias configuration for an IP firewall:

1. Select **Configuration** → **Network** from the Web UI.
2. Select **Alias** from the **Network** menu options on the left-hand side of the UI.
3. Select the **Network Group Alias** tab.

Adding and Editing Network Group Aliases

You can add a new network group alias configuration or edit an existing configuration.

1. Select **Add** to create a new alias, **Edit** to modify the attributes of an existing alias, or **Delete** to remove obsolete aliases.
Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

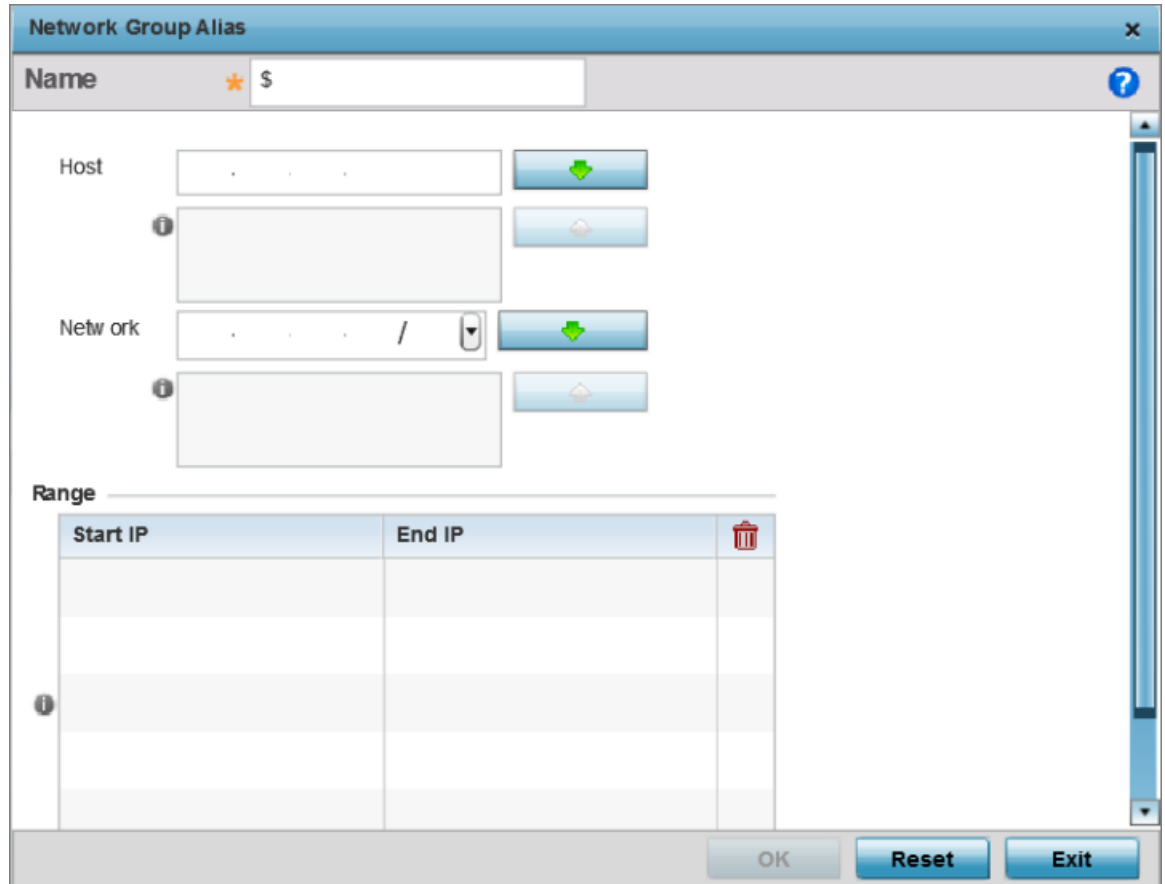


Figure 341: Network Group Alias - Add/Edit Screen

2. If you are adding a new network alias rule, provide a name up to 32 characters. The network group alias name always starts with a dollar sign (\$).
3. Define the following network group alias parameters:

Host	Specify the Host IP address for up to eight IP addresses supporting network aliasing. Select the down arrow to add the IP address to the table.
Network	Specify the netmask for up to eight IP addresses supporting network aliasing. Subnets can improve network security and performance by organizing hosts into logical groups. Applying the subnet mask to an IP address separates the address into a host address and an extended network address. Select the down arrow to add the mask to the table.

4. Select **+ Add Row**, in the **Range** table to specify the **Start IP** address and **End IP** address for the alias range, or double-click on an existing alias range entry to edit it.

5. Select **OK** when completed to update the network group alias settings.
Select **Reset** to revert the screen to its last saved configuration.


Network Service Alias Configuration

A *network service alias* is a set of configurations that consist of protocol and port mappings. Both source and destination ports are configurable. For each protocol, up to 2 source port ranges and up to 2 destination port ranges can be configured. A maximum of 4 protocol entries can be configured per network service alias.

Use a service alias to associate more than one IP address to a network interface, providing multiple connections to a network from a single IP node.

To define a service alias configuration:

1. Select **Configuration** → **Network** from the Web UI.
2. Select **Alias** from the **Network** menu options on the left-hand side of the UI.
3. Select the **Network Service Alias** tab. The screen displays existing network service alias configurations.

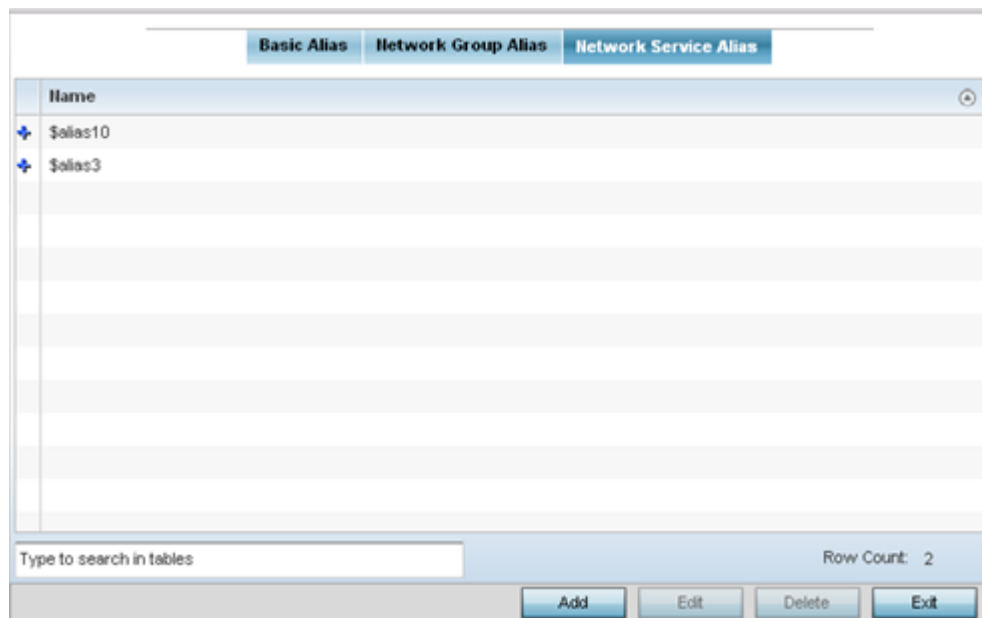

Adding and Editing Network Service Alias

You can add a new network service alias configuration or edit an existing configuration.

1. Select **Add** to create a new network service alias.

Select an existing network service alias and click **Edit** to modify it. Select **Delete** to remove an existing network service alias from those available in the list.

Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

Protocol	Source Port(Low and High)	Destination Port(Low and High)	
* EIGRP	88	Enter Ran	Enter Ran

+ Add Row

OK Reset Exit

Figure 342: Network Alias - Network Service Alias Add screen

2. If you are adding a new Network Service Alias, give it a Name up to 32 characters to distinguish this alias configuration from others with similar attributes.



Note

The Network Service Alias name always starts with a dollar sign (\$).

3. Select **+ Add Row**, in the **Entry** table and specify the following parameters:

Protocol	Specify the protocol for which the alias is created. Use the drop down to select the protocol from eigrp, gre, icmp, igmp, ip, vrrp, igmp, ospf, tcp and udp . Select other if the protocol is not listed. When a protocol is selected, its protocol number is automatically selected.
Source Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the source ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) ranges can be specified.
Destination Port (Low and High)	This field is relevant only if the protocol is <i>tcp</i> or <i>udp</i> . Specify the destination ports for this protocol entry. A range of ports can be specified. Select the Enter Range button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.

4. Select **OK** when completed to update the network service alias rules.

Select **Reset** to revert the screen back to its last saved configuration.

Application Policy

When an application is recognized and classified by the WiNG application recognition engine, administrator defined actions can be applied to that specific application. An application policy defines the rules or actions executed on recognized applications (for example, Facebook) or application-categories (for example, socialnetworking). The following are the rules/actions that can be applied in an application policy:

- Allow - Allow packets for a specific application or application category
- Deny - Deny packets for a specific application or application category
- Mark - Mark packets with DSCP/8021p value for a specific application or application category
- Rate-limit - Rate limit packets from specific application types

For each rule defined, a precedence is assigned to resolve conflicting rules for applications and categories. A deny rule is exclusive, as no other action can be combined with a deny. An allow rule is redundant with other actions, since the default action is allow. An allow rule is useful when wanting to deny packets for a category, but wanting to allow a few applications in the same category to proceed. In such a cases, add an allow rule for applications with a higher precedence then a deny rule for that category.

Mark actions mark packets for a recognized application and category with DSCP/8021p values used for QoS. Ratelimits create a rate-limiter applied to packets recognized for an application and category. Ingress and egress rates need to be specified for the

rate-limiter, but both are not required. Mark and rate-limit are the only two actions that can be combined for an application and category. All other combinations are invalid.



Note

The WiNG 7.1 release does not support DPI on the AP505i and AP510i model access points. This feature will be supported in future releases.

To define an application policy configuration:

1. Select **Configuration** → **Network** → **Application Policy**.


The screen lists the application policy configurations defined thus far.

Name	Description
policy2	Weekends

2. Refer to the following to determine whether a new application policy requires creation, modification or deletion:

Name	Lists the 32 character maximum name assigned to each listed application policy, designated upon creation.
Description	Displays the 80 character maximum description assigned to each listed application policy, as a means of further distinguishing policies with similar configurations.

3. Select **Add** to create a new application policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available. Existing policies can be copied or renamed as needed.

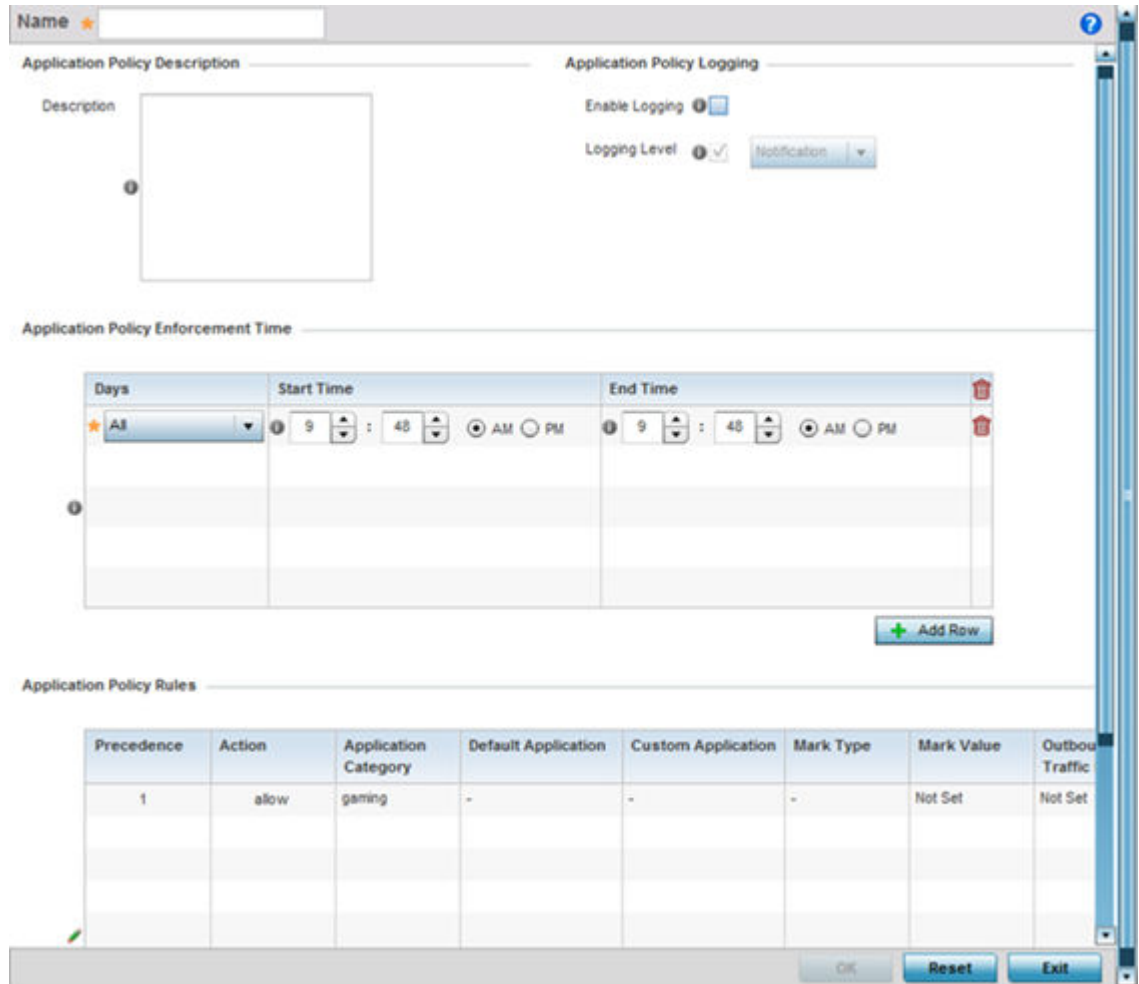

4. If creating a new application policy, assign it a **Name** up to 32 characters.
5. Provide this application policy an 80 character maximum **Description** to highlight its application and category filters and differentiate it from other policies with similar configurations.
6. Define the following **Application Policy Logging** options to enable and filter logging for application specific packet flows:

<p>Enable Logging</p>	<p>Enables the log functionality, where each new flow is shown with the corresponding matched application, the action taken and the policy name. When enabled, logging just shows what applications are getting recognized.</p>
<p>Logging Level</p>	<p>Select this option to log application events by severity. Severity levels include Emergency, Alert, Critical, Errors, Warning, Notification, Information and Debug. The default logging level is Notification.</p>

7. Refer to the **Application Policy Enforcement Time** table configure time periods for policy activation for each policy.

Select **+ Add Row** to populate the table with an enforcement time configuration to activate application policies based on the current local time. The option to configure a time activation period is applicable for a single application policy. Configure the days and time period when the application policy is enforced. If no time enforcement configuration is set, the policy is continually in effect without restriction.

8. Refer to the **Application Policy Rules** table assess existing policy rules, their precedence (implementation priority), their actions (allow, deny etc.), application category and schedule policy enforcement restrictions.
9. Select **+ Add Row** to launch a screen to create a new policy rule.

The screenshot shows the 'Add Row' dialog box with the following configuration:

- Precedence:** 1 (range 1 to 256)
- Action:** allow
- Application:** Select a Category to filter Applications or [Create Application](#)
- App-Category:** all
- Application:** All
- Schedule Policy:** Monday

At the bottom of the dialog are 'OK' and 'Exit' buttons.

10. Assign the following attributes to the new application rule policy:

Precedence	Set the priority (from 1 - 256) for the application policy rule. The lower the value, the higher the priority assigned to this rule's enforcement action and the category and application assigned. A precedence also helps resolve conflicting rules for applications and categories.
Action	Set the action executed on the selected application category and application. The default setting is Allow.
Application	From the App-Category table, select the category for which the application rule applies. Selecting All auto-selects All within the Application table. Select All from the Application table to list all application category statistics, or specify a particular category name to display its statistics only.

11. Use the **Schedule Policy** drop-down menu to select an existing schedule policy to strategically enforce application filter policy rules for specific intervals. This provides stricter, time and schedule based, access or restriction to specific applications and their parent categories. If an existing policy does not meet requirements, either select the **Create** icon to configure a new policy or the **Edit** icon to modify an existing policy. For more information on configuring schedule policies, see [Schedule Policy](#) on page 819
12. Select **OK** to save the updates to the application policy.
Select **Reset** to revert to the last saved configuration.

Application

Use the **Application** screen to create custom application configurations.



Note

The WiNG 7.1 release does not support DPI on the AP505i and AP510i model access points. This feature will be supported in future releases.

To create a user-defined application:

1. Select **Configuration** → **Network** → **Application**.

The **Application** screen displays. This screen lists the application configurations defined thus far.

Name	Category	Application Description
mudkipper	audio	Custom Audio Skipper

Type to search in tables

Row Count: 1

Add Edit Delete

2. Refer to the following to determine whether a application requires creation, modification or deletion:

Name	Displays the name of each user-defined application created using this application interface.
Category	Lists the category to which each listed user-defined application belongs.
Application Description	Lists the 80 character maximum description administratively assigned to each listed user-defined application.

3. Select **Add** to create a new application configuration, **Edit** to modify the attributes of a selected application or **Delete** to remove obsolete applications from the list of those available.

The screenshot displays a configuration window for a user-defined application. At the top, there is a text input field labeled 'Name' with a star icon. Below this, the 'Basic Configuration' section includes a 'Category' dropdown menu and an 'Application Description' text area. The 'Application Definition' section features three buttons: 'Network Service', 'URL List', and 'HTTPS'. The 'Network Service' dropdown is currently set to '<none>'. To the right of the 'Network Service' dropdown are several icons, including a green plus sign, a gear, and a green arrow. At the bottom of the window, there are three buttons: 'OK', 'Reset', and 'Exit'.

4. If creating a new user-defined application type, assign it a **Name** up to 32 characters. Ensure you do not create confusion by naming a user-defined application with the same name as an existing application appearing the **Application Policy** screen.
5. Use the **Category** list to classify the application. Select the appropriate pre-defined category or select **custom** to create a custom classification for the application.
6. Provide an 80 character maximum **Application Description** to each new user-defined application to further differentiate it from existing applications.

7. Refer to the **Application Definition** field to assign either a network service alias, predefined URL list or set of HTTPS parameters to the user-defined application.

Network Service	Use the drop-down menu to select an existing network service alias for the user-defined application. If there are no existing network service alias suited to this new user-defined application, select the Create icon to define a new alias or the Edit icon to modify an existing one. Provide or modify a 32 character maximum name, along with a protocol type or number and source and destination port value. Up to four (4) service aliases can be supported.
URL List	defined application. URL lists are utilized for whitelisting and blacklisting Web application URLs from being launched and consuming bandwidth within the WiNG managed network. If no URL list suits this new user-defined application, select the Create icon to define a new list or the Edit icon to modify an existing URL list.
HTTPS	Select the + Add Row button to populate the table with configurable rows for HTTPS parameter type, attribute type, match criteria for the HTTPS server name and 64 character maximum server name attribute used in the HTTPS server message exchange.

8. Select **OK** to save the updates to the user-defined application configuration.
Select **Reset** to revert to the last saved configuration.

Application Group

An application group is a heterogeneous, user-defined collection of system-provided and/or user-defined applications and application categories. It consists of multiple applications grouped together to form a collection. Use this option to review/edit existing application groups and create new application groups.




Note

The WiNG 7.1 release does not support DPI on the AP505i and AP510i model access points. This feature will be supported in future releases. This feature will be supported in future releases.

To review an application group:

1. Select **Configuration → Network → Application Group**.

The screen lists the existing application group configurations. You can edit and existing application group or create a new application group.

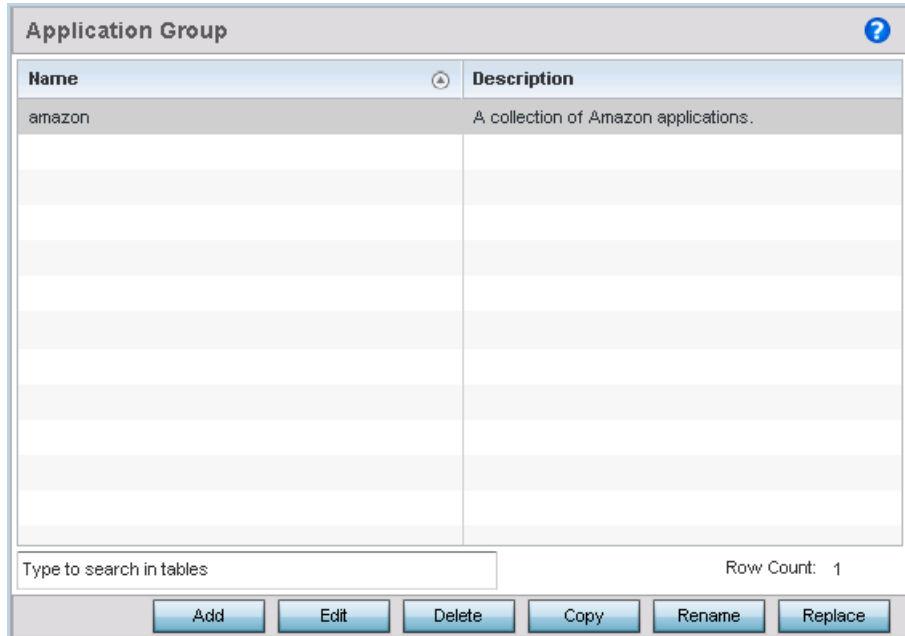

2. Refer to the following to determine whether an application group requires creation, modification or deletion:

Name	Displays the name of each user-defined application group
Description	Displays the description assigned to each listed user-defined application group.

3. Select **Add** to create a new application group configuration, **Edit** to modify the attributes of a selected application group or **Delete** to remove obsolete application groups from the list of those available.

The screenshot shows the configuration window for an application group named "amazon". At the top, the "Name" field is set to "amazon". Below it, the "Description" field contains the text "A collection of Amazon applications." and has a small edit icon. A search box contains the text "amaz" with the placeholder text "*Enter Application name to search". Below the search box are two lists: "All Applications" and "Selected Applications". The "All Applications" list contains various application names, with "amazon cloud web" selected. The "Selected Applications" list contains "amazon-prime-music", "amazon-prime-video", and "amazon cloud". There are also "Add" and "Remove" buttons between the two lists.

4. If creating a new application group, assign a **Name** not exceeding 32 characters in length. Ensure that the name uniquely differentiates it from existing application groups.
5. Provide an 80 character maximum Description to further differentiate the new group from existing application groups
6. Refer to the All Applications field. This field lists available applications - system-provided and user-defined. The WiNG software has 299 built-in applications, in addition to the user-defined ones. To facilitate your search, enter a string value in the ***Enter Application name to search** field. Based on the search string provided, the **All Applications** list is updated to display applications containing the specified string.
7. Select the applications to be included in the application group and move to the **Selected Applications** list.
8. Select **OK** to save the updates to the application group configuration.
Select **Reset** to revert to the last saved configuration.

Schedule Policy

Define schedule policies to strategically enforce application filter policy rules for specific intervals. This provides stricter, time and schedule based, access or restriction to specific applications and their parent categories. To review existing schedule policies and assess whether new ones require creation or modification:

1. Select **Configuration** → **Network** → **Schedule Policy**.

Name	Description	Time Rule
Policy1	Limited Access	Weekends(06:00-17:00)

Type to search in tables Row Count: 1

2. Select **Add** to create a new schedule policy time rule, or select an existing policy then **Edit** to modify the duration of an existing time rule. Schedule policies can be **Deleted** as they become obsolete. **Copy** or **Rename** a schedule policy as needed.

Name Policy1

Description Limited Access

Time Rule

Days	Start Time	End Time
weekends	06:00 am	5:00 pm
<input checked="" type="radio"/> All	<input type="text" value="0"/> : <input type="text" value="0"/>	<input type="text" value="0"/> : <input type="text" value="0"/>

3. If creating a new schedule policy time rule configuration, enter a 32 character maximum **Name** relevant to its specific permissions objective.
4. Provide this schedule policy an 80 character maximum Description to differentiate it from other policies with similar time rule configurations.

5. Define the following **Time Rule** settings:

Days	Use the drop-down menu to select a day of the week to apply this schedule policy time rule. Selecting All applies the schedule policy every day (no enforcement rule restrictions). Selecting weekends applies the policy on Saturdays and Sundays only. Selecting weekdays applies the policy on Monday, Tuesday, Wednesday, Thursday and Friday only. Selecting individual days of the week applies the policy only on just selected day.
Start Time	Set the start when the schedule policy time rule applies. Use the spinner controls to select the hour and minute, in a 12h time format. Then use the radio button to choose AM or PM.
End Time	Set the ending time when the time rule is no longer enforced. Use the spinner controls to select the hour and minute, in a 12h time format. Then use the radio button to choose AM or PM.


6. Select **OK** to save the updates to the schedule policy time rule configuration. Select **Reset** to revert to the last saved configuration.

URL Filtering

A URL filter is Web content filter. A URL filter is comprised of several filter rules. To construct a filter rule, either whitelist or blacklist a filter level, category type, category or a custom category. A whitelist bans all sites except the categories and URL lists defined in the whitelist. The blacklist allows all sites except the categories and URL lists defined in the blacklist.

To review existing URL filter rules and assess whether new ones require creation or modification:


1. Select **Configuration → Network → URL Filter**.

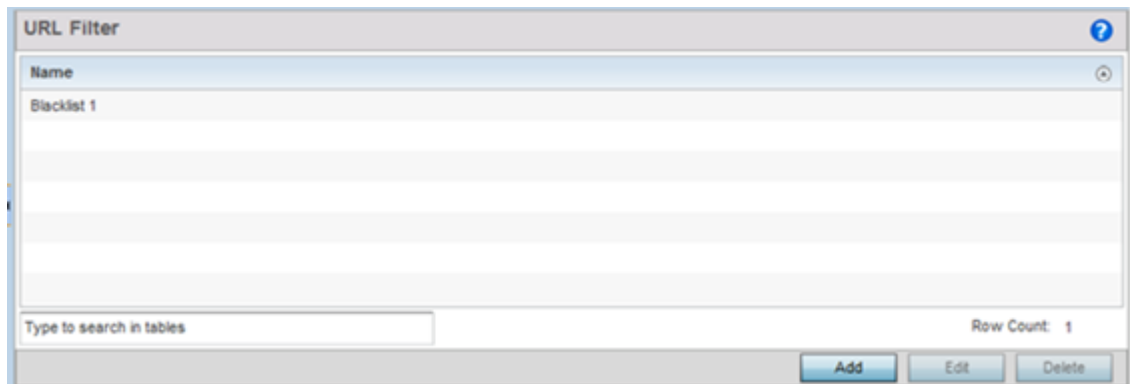

2. Select **Add** to create a new URL Filter, **Edit** to modify the attributes of a selected URL Filter or **Delete** to remove obsolete filters from the list of those available.

- If creating a new URL Filter, assign it a Name up to 32 characters to distinguish this URL Filter from others with similar attributes. Select **Continue** to proceed to the URL Filter screen where Web filter rules and URL error page messages can be added, modified or removed. Select **Exit** to exit without creating a new URL Filter.


The URL Filter screen displays, with the **Web Filter Rules** tab selected by default.

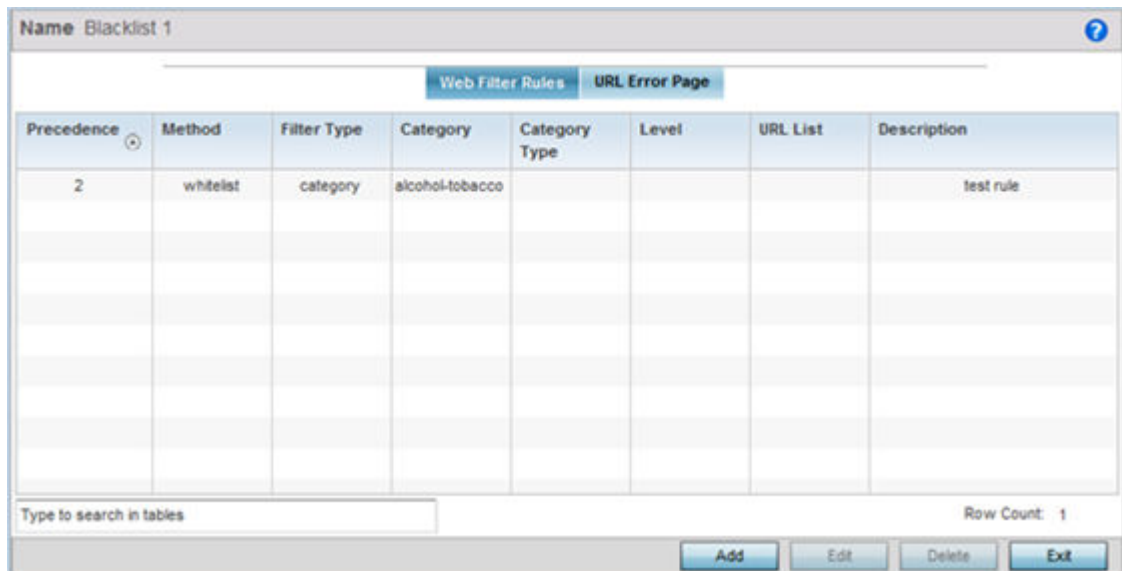

The screenshot shows a window titled "Name Blacklist 1" with a help icon. It has two tabs: "Web Filter Rules" (selected) and "URL Error Page". Below the tabs is a table with the following columns: Precedence, Method, Filter Type, Category, Category Type, Level, URL List, and Description. The table contains one row with the following values: Precedence: 2, Method: whitelist, Filter Type: category, Category: alcohol-tobacco, Category Type: (empty), Level: (empty), URL List: (empty), and Description: test rule. At the bottom of the table, there is a search box labeled "Type to search in tables" and a "Row Count: 1" indicator. Below the table are four buttons: "Add", "Edit", "Delete", and "Exit".

Precedence	Method	Filter Type	Category	Category Type	Level	URL List	Description
2	whitelist	category	alcohol-tobacco				test rule

- Select **Add** to create a new Web filter rule configuration, or select an existing configuration then **Edit** to modify the attributes of an existing Web filter rule.

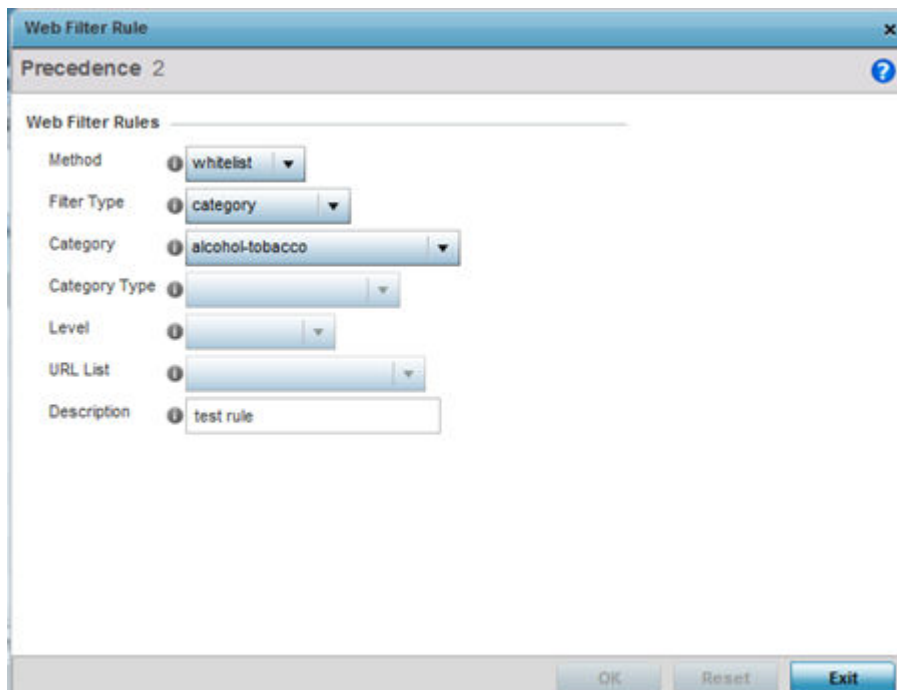

The screenshot shows a dialog box titled "Web Filter Rule" with a close button (X) in the top right corner. The "Precedence" is set to 2. Below the title bar, there is a section labeled "Web Filter Rules" with the following fields:

- Method: dropdown menu with "whitelist" selected.
- Filter Type: dropdown menu with "category" selected.
- Category: dropdown menu with "alcohol-tobacco" selected.
- Category Type: dropdown menu (empty).
- Level: dropdown menu (empty).
- URL List: dropdown menu (empty).
- Description: text input field with "test rule" entered.

At the bottom of the dialog box are three buttons: "OK", "Reset", and "Exit".

5. Define the following Web Filter Rule settings:

Precedence	Set a precedence (priority) from 1 - 500 for the filter rule's utilization versus other Web filter rules. 1 is the highest priority and 500 the lowest.
Method	Select either whitelist or Blacklist to specify whether the rule is for inclusion or exclusion. A whitelist bans all sites except the categories and URL lists defined in the whitelist. The blacklist allows all sites except the categories and URL lists defined in the blacklist.
Filter Type	If the Filter Type is set to category, use the drop down menu to select from a list of predefined categories to align with the whitelist or blacklist Method designation and the precedence assigned.
Category	A category is a pre-defined URL list available in the WiNG software. If category is selected as the Filter Type, the Category drop-down menu becomes enabled for the selection of an existing URL type or whitelist or blacklist. Categories are based on an external database, and cannot be modified or removed. Custom categories can be created with the URL List and added to the database.
Category Type	When category_type is selected as the Filter Type, select an existing category type (adult-content, security-risk etc.) and either blacklist or whitelist the URLs in that category type. There are 12 category types available.
Level	Basic, Low, Medium, medium-high and High filter levels are available. Each level is pre-configured to use a set of category types. The user cannot change the categories in the category types used for these pre-configured filter-level settings, and add/modify/remove the category types mapped to the filter-level setting.
URL List	URL lists are customized categories included in the custom filter-level setting. URL lists enable an administrator to blacklist or whitelist URLs in addition to the built-in categories.
Description	Enter a 80 character maximum description for this Web filter rule to help differentiate it from others with similar category include or exclude rule configurations.

6. Select **OK** to save the changes to the Web Filter Rule. Select **Exit** to close the screen without saving the updates.

7. Select the **URL Error Page** tab to define the configuration and layout of a URL error page launched when a Web filter rule is invoked and an error page needs to be displayed to a user instead of their expected Web page.

The screenshot shows the configuration interface for a URL Error Page. The window title is "Name Blacklist 1". There are two tabs: "Web Filter Rules" and "URL Error Page". The "URL Error Page" tab is selected. The configuration fields are as follows:

- Name:** Blacklist 1
- Description:** (empty)
- Page Path:** Internal (selected), External
- External Page URL:** (empty)
- Internal Page Configuration:**
 - Internal Page Title:** This URL may have been filtered.
 - Internal Page Header:** The requested URL could not be retrieved.
 - Internal Page Content:** The site you have attempted to reach may be considered inappropriate for access.
 - Internal Page Footer:** If you have any questions please contact your IT department.

Buttons for "OK", "Reset", and "Exit" are located at the bottom right of the window.

8. Set the following URL Error Page display properties:

Name	Provide a 32 character maximum name for the title of the blocking page. The name should help convey that this page is launched to prevent the client's requested page from displaying.
Description	Provide a 80 character maximum description of the page to help differentiate it from other pages with similar page restriction properties.
Page Path	Set the path to the page sent back to the client browser explaining the reason for blocking the client's requested URL. It can be generated internally at the time the page is sent, or be a URL to an External Web server if the administrator chooses to utilize a customized page. The default setting is Internal, requiring the administrator to define the page configuration within the fields in the Internal Page Configuration portion of the screen.
External Page URL	If External is selected as the Page Path, provide a 511 character maximum External Page URL used as the Web link designation of the externally hosted blocking page.
Internal Page Title	Either enter a 255 character maximum title for the URL blocking page or use the existing default text (This URL may have been filtered).

Internal Page Header	Either enter a 255 character maximum header for the top of the URL blocking page or use the existing default text (The requested URL could not be retrieved).
Internal Page Content	Enter a 255 character maximum set of text used as the main body (middle portion) of the blocking page. Optionally use the default message (The site you have attempted to reach may be considered inappropriate for access).
Internal Page Footer	Either enter a 255 character maximum footer for the bottom of the URL blocking page or use the existing default text (If you have any questions contact your IT department).
Internal Page Org Name	Enter a 255 character maximum organizational name responsible for the URL blocking page. The default organizational name (Your Organizational Name) is not very practical, and is just a guideline for customization.
Internal Page Org Structure	Enter a 255 character maximum organizational signature responsible for the URL blocking page. The default organizational signature (Your Organizational Name, All Rights Reserved) is not very practical, and is just a guideline for customization.
Internal Page Logo 1	Provide the location and filename of a small graphic image displayed in the blocking page.
Internal Page Logo 2	Provide the location and filename of a main graphic image displayed in the blocking page.

9. Select **OK** to save the updates to the URL filter configuration. Select **Reset** to revert to the last saved configuration.

Web Filtering

A Web filter policy is a means of managing the number of records and time cached URLs are retained. When configured and applied, the policy also determines whether to filter access to a cached URL when a categorization server is unreachable or is unable to classify request types. To review existing Web filter policies and assess whether new ones require creation, modification or deletion:

1. Select **Configuration** → **Network** → **Web Filtering**.

Name	Maximum Cached Records	Time Validity for Cached URL	Access To Unreachable Server	Access To Uncategorized URL
Large Cache	100,001 records	60 secs	pass	pass


Type to search in tables

Row Count: 1

Add Edit Delete

2. Select **Add** to create a new Web filter policy, or select an existing policy and **Edit** to modify its attributes. Obsolete policies can be selected and **Deleted** as needed.

- If creating a new Web Filtering Policy, assign it a **Name** up to 32 characters to distinguish this policy from others with similar attributes. Modify the new Web Filtering Policy parameters and click **OK** to save the policy, **Reset** to revert back to default settings or **Exit** to exit without creating a new Web Filtering Policy.

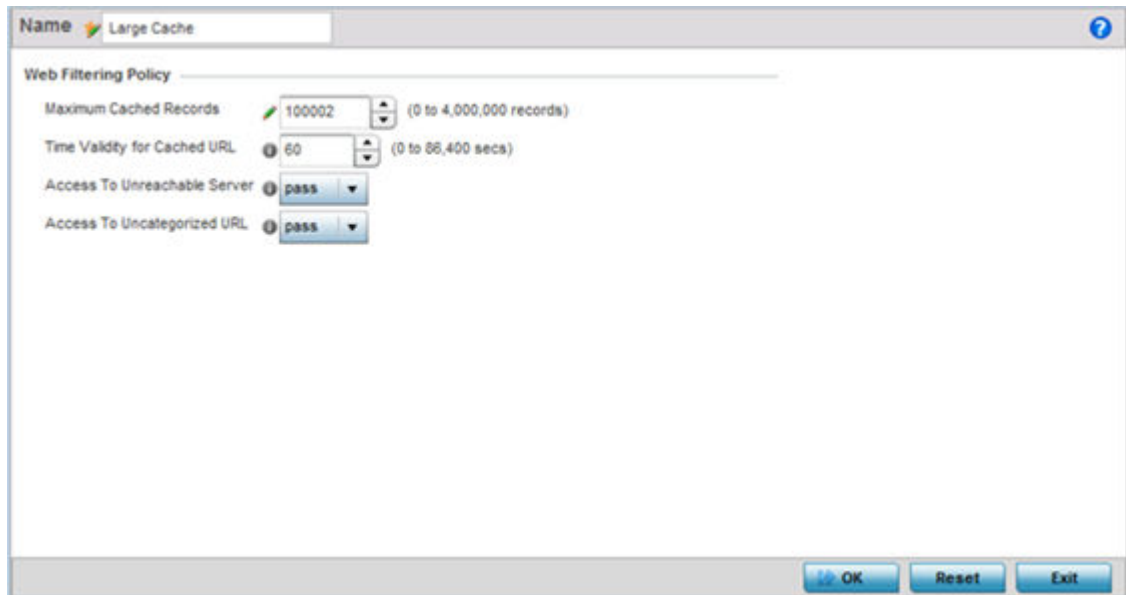

- Set the following **Web Filtering Policy** settings:

Maximum Cached Records	Set the maximum number of records (from 0 - 4,000,000) for Web content cached locally on this controller or service platform. The default setting is 100,000 records.
Time Validity for Cached URL	Set the maximum amount of a time, from 0 - 86,400 seconds, a URL is valid in the controller or service platform cache. Consider the bandwidth depletion if caching a large number of records over the maximum permissible time validity.
Access to Unreachable Server	Either pass or block (filter) access to a cached URL when the categorization server is unreachable. Access is allowed by default.
Access to Uncategorized URL	Either pass or block (filter) access to a cached URL when the categorization server fails to classify a request type. Access is allowed by default.

- Select **OK** to save the changes to the Web filter policy. Select **Exit** to close the screen without saving the updates.

Network Deployment Considerations

Before defining a L2TPV3 configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- In respect to L2TP V3, data transfers on the pseudowire can start as soon as session establishment corresponding to the pseudowire is complete.
- In respect to L2TP V3, the control connection keep-alive mechanism of L2TP V3 can serve as a monitoring mechanism for the pseudowires associated with a control connection.



Security Configuration

- [Wireless Firewall](#) on page 826
- [Configuring IP Firewall Rules](#) on page 841
- [Wireless Client Roles](#) on page 850
- [Device Fingerprinting](#) on page 867
- [Configuring MAC Firewall Rules](#) on page 874
- [Wireless IPS \(WIPS\)](#) on page 877
- [Device Categorization](#) on page 888
- [Security Deployment Considerations](#) on page 891

When taking precautions to secure wireless traffic between a client and an access point, the network administrator should not lose sight of the security solution in its entirety, because the network's chain is as weak as its weakest link. A WiNG-managed wireless network provides seamless data protection and user validation to protect and secure data at each vulnerable point in the network.

WiNG-managed wireless devices support a Layer 2 wired/wireless firewall and *Wireless Intrusion Protection System* (WIPS) capabilities at the WLAN. They are additionally strengthened with a premium multi-vendor overlay security solution from Air Defense with 24x7 dedicated protection. This security is offered at the most granular level, with role-and location-based secure access available to users based on identity and on the security posture of the client device.

When addressing the security of a WiNG-managed wireless network, consider the information provided in the sections listed above.

Wireless Firewall

A Firewall enforces access control and is considered a first line of defense in protecting proprietary information within the access-point managed network. The means by which this is accomplished varies, but in principle, a Firewall can be thought of as mechanisms both *blocking* and *permitting* data traffic in the network. Because firewalls implement uniquely defined access control policies, they are of little value unless you have a clear idea of what kind of access to allow or deny. In such an instance, in fact, a firewall could provide a false sense of security.

With WiNG access points, firewalls are configured to protect against unauthenticated logins from outside the network. This helps prevent hackers from accessing managed wireless clients. Well designed firewalls block traffic from outside the network while permitting authorized users to communicate freely outside the network.

Firewalls can be implemented in both hardware and software, or a combination of both. All traffic entering or leaving a controller, service platform, or access point passes through the firewall, which examines each message and blocks those that do not meet the security criteria (rules) defined.

Firewall rules define the traffic permitted or denied within the network. Rules are processed by a firewall supported device from first to last. When a rule matches the network traffic that a controller, service platform, or access point is processing, the firewall uses that rule's action to determine whether to allow or deny the traffic.

Rules have two parts:

- A *condition* describes a traffic packet stream. It defines constraints on source and destination devices, the service (protocols and ports), and the incoming interface.
- An *action* describes what happens to packets matching the conditions that have been set. For example, if the packet stream meets all conditions, then traffic is permitted, authenticated, and sent to the destination device.

Additionally, IP and MAC rule-based firewall filtering can be deployed to apply firewall policies to traffic bridged by centrally managed radios. IP and MAC filtering permits or restricts traffic exchanged between hosts, hosts residing on separate WLANs, or hosts forwarding traffic to wired devices.

Defining a Firewall Configuration

The **Wireless Firewall** screen has Denial of Service, Storm Control, and Advanced Settings tabs used to create the single firewall policy used by the access point and its connected devices. The Denial of Service tab displays by default.

A *denial of service* (DoS) attack is an attempt to make a computer or network resource unavailable to its intended users. Although the means to carry out a DoS attack will vary, it generally consists of a concerted effort of one or more persons attempting to prevent a device, site or service from functioning temporarily or indefinitely.

Most DoS attacks involve saturating the target device with external communications requests so it cannot respond to legitimate traffic or respond so slowly the device becomes unavailable in respect to its defined data rate. DoS attacks are implemented by either forcing targeted devices to reset or consuming the device's resources so it can no longer provide service.

To configure a firewall:

1. Got o **Configuration** → **Security** → **Wireless Firewall** .

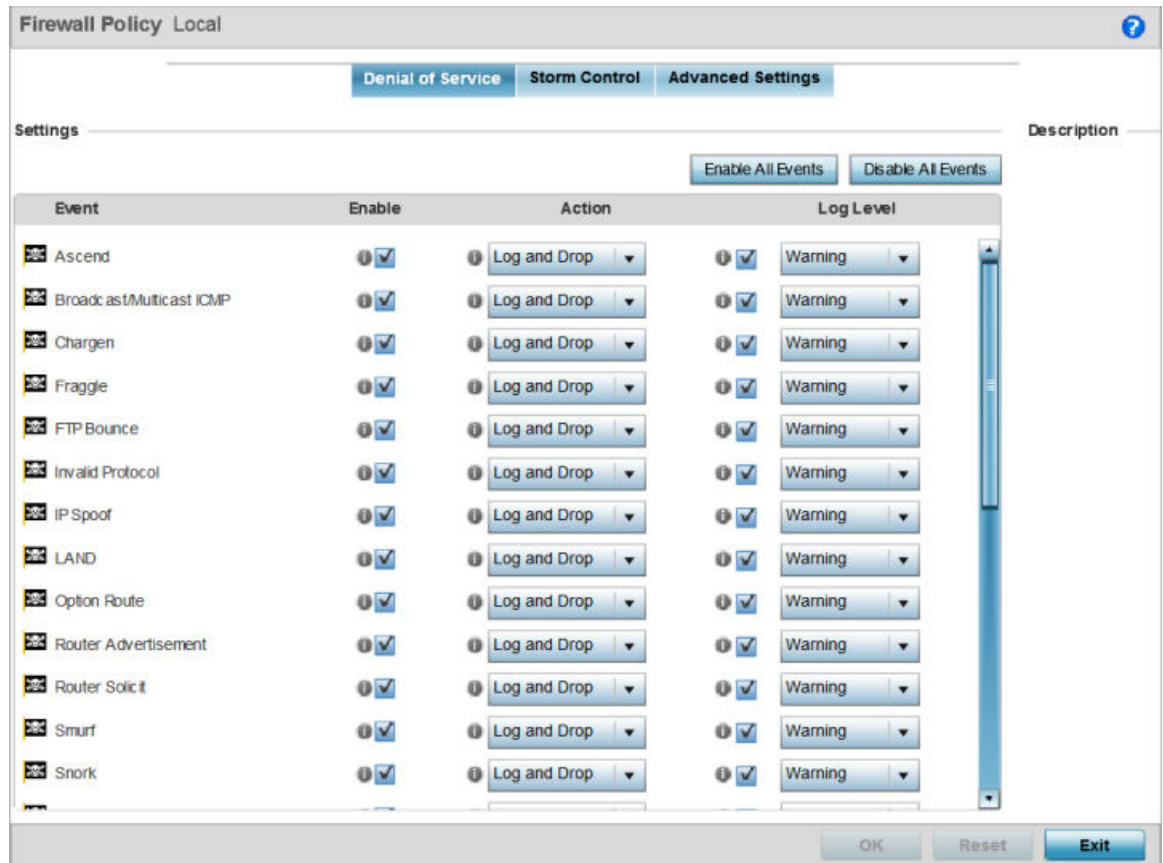


Figure 343: Wireless Firewall Screen - Denial of Service Tab

2. Select the **Activate Firewall Policy** option on the upper left-hand side of the screen to enable the screen's parameters for configuration.

Ensure that this option stays selected to apply the configuration to the access point profile.

The **Settings** field lists all of the DoS attacks for which the firewall has filters. Each DoS filter contains the following four items:

Event	Lists the name of each DoS attack.
Enable	Select Enable to set the firewall to filter the associated DoS attack based on the selection in the Action column.

Action	<p>If a DoS filter is enabled, choose an action from the drop-down menu to determine how the firewall policy treats the associated DoS attack.</p> <ul style="list-style-type: none"> • Log and Drop - An entry for the associated DoS attack is added to the log and then the packets are dropped. • Log Only - An entry for the associated DoS attack is added to the log. No further action is taken. • Drop Only - The DoS packets are dropped. No further action is taken.
Log Level	Select this option to enable logging to the system log. Then select a standard Syslog level from the Log Level drop-down menu.

3. The following **Events** can be filtered on behalf of the firewall:

Ascend	The Ascend DoS attacks are a series of attacks that target known vulnerabilities in various versions of Ascend routers.
Broadcast/Multicast ICMP	Broadcast or Multicast ICMP DoS attacks are a series of attacks that take advantage of ICMP behavior in response to echo replies. These usually involve spoofing the source address of the target and sending ICMP broadcast or multicast echo requests to the rest of the network and in the process flooding the target machine with replies.
Chargen	The Chargen attack establishes a Telnet connection to port 19 and attempts to use the character generator service to create a string of characters which is then directed to the DNS service on port 53 to disrupt DNS services.
Fraggle	The Fraggle DoS attack uses a list of broadcast addresses to send spoofed UDP packets to each broadcast address' echo port (port 7). Each of those addresses that have port 7 open will respond to the request generating a lot of traffic on the network. For those that do not have port 7 open they will send an unreachable message back to the originator, further clogging the network with more traffic.
FTP Bounce	The FTP Bounce DoS attack uses a vulnerability in the FTP "PORT" command as a way to scan ports on a target machine by using another machine in the middle.
Invalid Protocol	Attackers may use vulnerability in the endpoint implementation by sending invalid protocol fields, or may misuse the misinterpretation of endpoint software. This can lead to inadvertent leakage of sensitive network topology information, called hijacking, or a DoS attack.
IP Spoof	IP Spoof is a category of DoS attack that sends IP packets with forged source addresses. This can hide the identity of the attacker.

LAND	The LAND DoS attack sends spoofed packets containing the SYN flag to the target destination using the target port and IP address as both the source and destination. This will either crash the target system or result in high resource utilization slowing down all other processes.
Option Route	Enables the IP Option Route denial of service check in the firewall.
Router Advertisement	In this attack, the attacker uses ICMP to redirect the network router function to some other host. If that host can not provide router services, a DoS of network communications occurs as routing stops. This can also be modified to single out a specific system, so that only that system is subject to attack (because only that system sees the 'false' router). By providing router services from a compromised host, the attacker can also place themselves in a man-in-the-middle situation and take control of any open channel at will (as mentioned earlier, this is often used with TCP packet forgery and spoofing to intercept and change open TELNET sessions).
Router Solicit	The ICMP Router Solicitation scan is used to actively find routers on a network. Of course, a hacker could set up a protocol analyzer to detect routers as they broadcast routing information on the network. In some instances, however, routers may not send updates. For example, if the local network does not have other routers, the router may be configured to not send routing information packets onto the local network. ICMP offers a method for router discovery. Clients send ICMP router solicitation multicasts onto the network, and routers must respond (as defined in RFC 1122). By sending ICMP router solicitation packets (ICMP type 9) on the network and listening for ICMP router discovery replies (ICMP type 10), hackers can build a list of all of the routers that exist on a network segment. Hackers often use this scan to locate routers that do not reply to ICMP echo requests.
Smurf	The Smurf DoS Attack sends ICMP echo requests to a list of broadcast addresses in a row, and then repeats the requests, thus flooding the network.
Snork	The Snork DoS attack uses UDP packet broadcasts to consume network and system resources.
TCP Bad Sequence	Enables a TCP Bad Sequence denial of service check in the firewall.

TCP FIN Scan	<p>Hackers use the TCP FIN scan to identify listening TCP port numbers based on how the target device reacts to a transaction close request for a TCP port (even though no connection may exist before these close requests are made). This type of scan can get through basic firewalls and boundary routers that filter on incoming TCP packets with the Finish (FIN) and ACK flag combination. The TCP packets used in this scan include only the TCP FIN flag setting.</p> <p>If the target device's TCP port is closed, the target device sends a TCP RST packet in reply. If the target device's TCP port is open, the target device discards the FIN and sends no reply.</p>
TCP Intercept	<p>A SYN-flooding attack occurs when a hacker floods a server with a barrage of requests for connection. Because these messages have unreachable return addresses, the connections cannot be established. The resulting volume of unresolved open connections eventually overwhelms the server and can cause it to deny service to valid requests, thereby preventing legitimate users from connecting to a Web site, accessing email, using FTP service, and so on.</p> <p>The TCP intercept feature helps prevent SYN-flooding attacks by intercepting and validating TCP connection requests. In intercept mode, the TCP intercept software intercepts TCP synchronization (SYN) packets from clients to servers that match an extended access list. The software establishes a connection with the client on behalf of the destination server, and if successful, establishes the connection with the server on behalf of the client and knits the two half-connections together transparently. Thus, connection attempts from unreachable hosts will never reach the server. The software continues to intercept and forward packets throughout the duration of the connection. The number of SYNs per second and the number of concurrent connections proxied depends on the platform, memory, processor, and other factors. In the case of illegitimate requests, the software's aggressive timeouts on half-open connections and its thresholds on TCP connection requests protect destination servers while still allowing valid requests.</p> <p>When establishing a security policy using TCP intercept, you can choose to intercept all requests or only those coming from specific networks or destined for specific servers. You can also configure the connection rate and threshold of outstanding connections. Optionally operate TCP intercept in watch mode, as opposed to intercept mode. In watch mode, the software passively watches the connection requests flowing through the router. If a connection fails to get established in a configurable interval, the software intervenes and terminates the connection attempt.</p>

TCP/IP TTL Zero	The TCP IP TTL Zero DoS attack sends spoofed multicast packets onto the network which have a Time To Live (TTL) of 0. This causes packets to loop back to the spoofed originating machine, and can cause the network to overload.
TCP Null Scan	Hackers use the TCP NULL scan to identify listening TCP ports. This scan also uses a series of strangely configured TCP packets, which contain a sequence number of 0 and no flags. Again, this type of scan can get through some firewalls and boundary routers that filter incoming TCP packets with standard flag settings. If the target device's TCP port is closed, the target device sends a TCP RST packet in reply. If the target device's TCP port is open, the target discards the TCP NULL scan, sending no reply.
TCP Post SYN	A remote attacker may be attempting to avoid detection by sending a SYN frame with a different sequence number than the original SYN. This can cause an Intrusion Detection System (IDS) to become unsynchronized with the data in a connection. Subsequent frames sent during the connection are ignored by the IDS.
TCP Packet Sequence	An attempt to predict the sequence number used to identify packets in a TCP connection, which can be used to counterfeit packets. The attacker hopes to correctly guess the sequence number used by the sending host. If successful, they can send counterfeit packets to the receiving host which will seem to originate from the sending host, even though the counterfeit packets may originate from some third host controlled by the attacker.
TCP XMAS Scan	The TCP XMAS Scan floods the target system with TCP packets including the FIN, URG, and PUSH flags. This is used to determine details about the target system and can crash a system.
TCP Header Fragment	Enables the TCP Header Fragment denial of service check in the firewall.
Twinge	The Twinge DoS attack sends ICMP packets and cycles through using all ICMP types and codes. This can crash some Windows systems.
UDP Short Header	Enables the UDP Short Header denial of service check in the firewall.
WINNUKE	The WINNUKE DoS attack sends a large amount of data to UDP port 137 to crash the NETBIOS service on windows and can also result on high CPU utilization on the target machine.
Hop Limit Zero	Enables the check for Hop Limit in IPv6 packets. If the value is zero, it is considered a DoS and is blocked.

Multicast ICMPv6	The Multicast ICMPv6 attack sends multicast ICMPv6 packets. This is applicable to only ICMPv6 Echo request/reply packets.
TCP Intercept Mobility	Enables the detection of IPv6 TCP packets with mobility option Home- Address-Option (HAO) or RH (Routing Header) type two and does not generate TCP syn cookies for these packets.

4. Select **OK** to update the Denial of Service settings.

Select **Reset** to revert to the last saved configuration. The firewall policy can be invoked at any point in the configuration process by selecting **Activate Firewall Policy** from the upper left-hand side of the access point user interface.

Firewall Policy Storm Control

The firewall maintains a facility to control packet storms. Storms are packet bombardments that exceed the high threshold value configured for an interface. During a storm, packets are throttled until the rate falls below the configured rate, severely impacting performance for the RF Domain manager interface. Thresholds are configured in terms of packets per second.

To define a storm control configuration for a Firewall policy:

1. Select the Storm Control tab from the **Firewall Policy** configuration page.

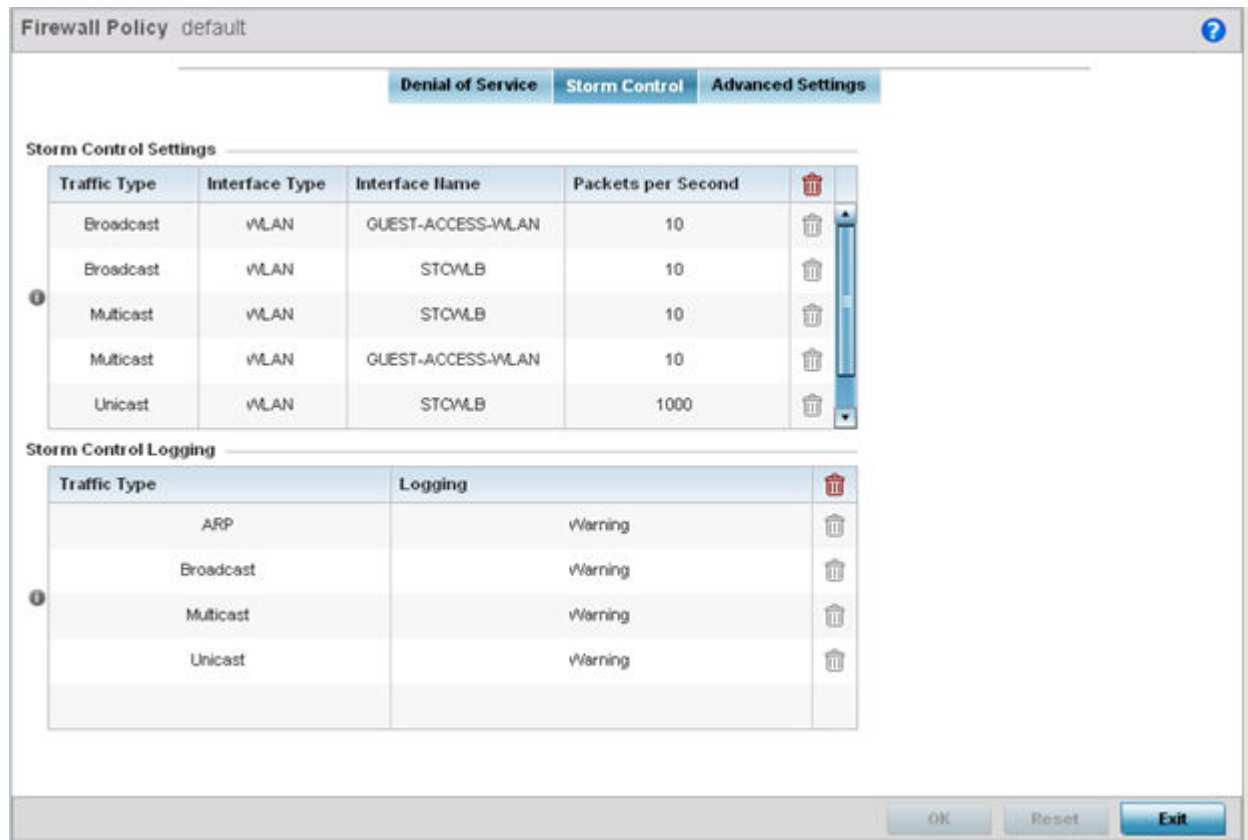


Figure 344: Wireless Firewall - Add/Edit - Storm Control Screen

2. Refer to the **Storm Control Settings** field to set the following:

Traffic Type	Use the drop-down menu to define the traffic type for which the Storm Control configuration applies. Options include ARP, Broadcast, Multicast and Unicast.
Interface Type	Use the drop-down menu to define the interface for which the Storm Control configuration is applied. Only the specified interface uses the defined filtering criteria. Options include Ethernet, WLAN and Port Channel.
Interface Name	Use the drop-down menu to refine the interface selection to a specific WLAN or physical port. This helps with threshold configuration for potentially impacted interfaces.
Packets per Second	Select the check box to activate the spinner control used for specifying the packets per second threshold for activating the Storm Control mechanism.

3. Select **+ Add Row** as needed to add additional Storm Control configurations for other traffic types or interfaces.

Select the **Delete** icon as required to remove selected rows.

4. Refer to the **Storm Control Logging** field to define how storm events are logged.

Traffic Type	Use the drop-down menu to define the traffic type for which the Storm Control logging configuration applies. Options include ARP, Broadcast, Multicast and Unicast.
Logging	Select the check box to activate the spinner control used for specifying the standard log level used if a Storm Control attack is detected. The default log level is Warning.

5. Select **+ Add Row** as needed to add additional Storm Control log entries for other interfaces.

Select the **Delete** icon as required to remove selected rows.

6. Select **OK** to update the Storm Control settings.

Select **Reset** to revert to the last saved configuration.

Firewall Policy Advanced Settings

IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery (ND) protocol via ICMPv6 router discovery messages. These hosts require firewall packet protection unique to IPv6 traffic, as IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet Layer configuration parameters. Use the Advanced Settings tab to define common IPv4 settings and settings unique to an IPv6 firewall.

To define a firewall policy advanced settings:

1. Select the **Advanced Settings** tab.

The **Common** tab is displayed by default.


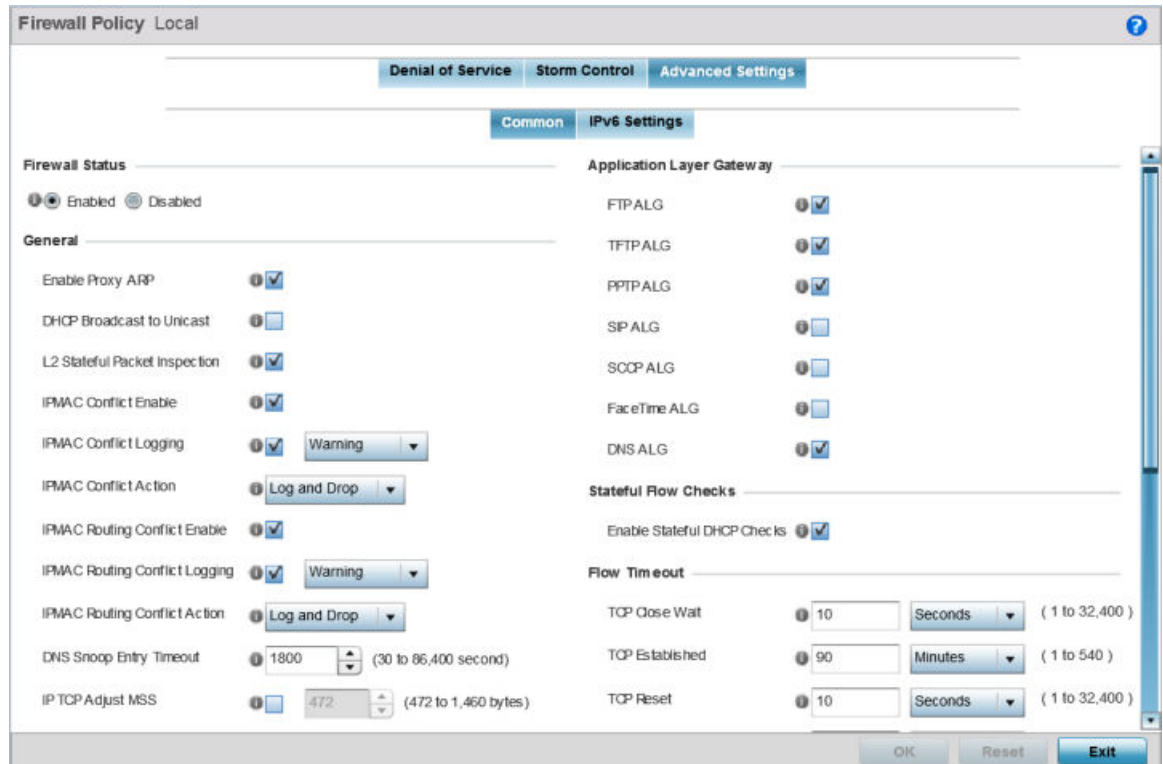


Figure 345: Wireless Firewall - Add/Edit - Advanced Settings - Common Tab

2. Use the **Firewall Status** radio buttons to either enable or disable the firewall policy. The firewall is enabled by default.

If you disable the firewall, the following message is displayed:

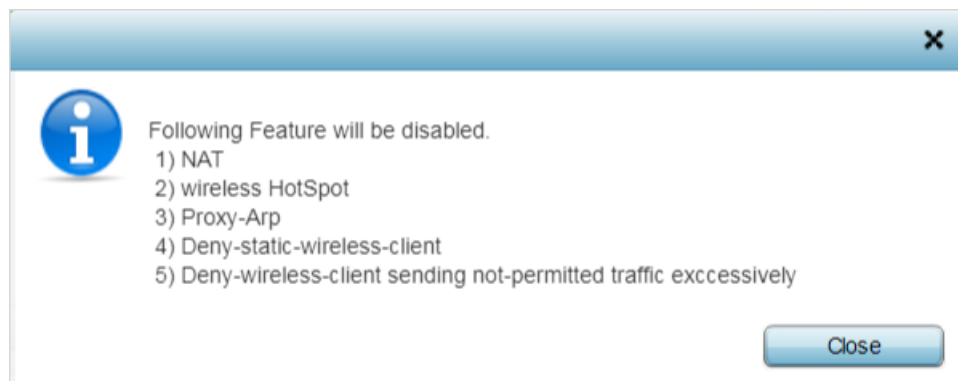

3. Refer to the **General** field to enable or disable the following firewall configuration parameters:

Enable Proxy ARP	Select this check box to allow the Firewall Policy to use Proxy ARP responses for this policy on behalf of another device. Proxy ARP allows the firewall to handle ARP routing requests for devices behind the firewall. This feature is enabled by default.
DHCP Broadcast to Unicast	Select this check box to enable the conversion of broadcast DHCP offers to unicast. Converting DHCP broadcast traffic to unicast traffic can help reduce network traffic loads. This feature is disabled by default.
L2 Stateful Packet Inspection	Select the check box to enable stateful packet inspection for RF Domain manager routed interfaces within the Layer 2 firewall. This feature is disabled by default.
IPMAC Conflict Enable	When multiple devices on the network have the same IP or MAC address this can create routing issues for traffic being passed through the firewall. To avoid these issues, enable Conflict Detection to enable IP and MAC conflict detection. This feature is disabled by default.
IPMAC Conflict Logging	Select this option to enable logging for IP and MAC address conflict detection. This feature is disabled by default.
IPMAC Conflict Action	Use the drop-down menu to set the action taken when an attack is detected. Options include Log Only, Drop Only or Log and Drop. The default setting is Log and Drop.
IPMAC Routing Conflict Enable	Select this option to enable IPMAC Routing Conflict detection. This is also known as a Hole-196 attack in the network. This feature helps to detect if the client is sending routed packets to the correct router-mac-address.
IPMAC Routing Conflict Logging	Select enable logging for IPMAC Routing Conflict detection. This feature is disabled by default.
IPMAC Routing Conflict Action	Use the drop-down menu to set the action taken when an attack is detected. Options include Log Only, Drop Only or Log and Drop. The default setting is Log and Drop.
DNS Snoop Entry Timeout	Select this option and set a timeout, in seconds, for DNS Snoop Entry. DNS Snoop Entry stores information such as Client to IP Address and Client to Default Gateway(s) and uses this information to detect if the client is sending routed packets to a wrong MAC address.
IP TCP Adjust MSS	Select this option and adjust the value for the maximum segment size (MSS) for TCP segments on the router. Set a value between 472 bytes and 1,460 bytes to adjust the MSS segment size. The default value is 472 bytes.
TCP MSS Clamping	Select this option to enable TCP MSS Clamping. TCP MSS Clamping allows for the configuration of the maximum segment size of packets at a global level.

Max Fragments/Datagram	Set a value for the maximum number of fragments (between 2 and 8,129) allowed in a datagram before it is dropped. The default value is 140 fragments.
Max Defragmentations/Host	Set a value for the maximum number of defragmentations, between 1 and 16,384 allowed per host before it is dropped. The default value is 8.
Min Length Required	Select this option and set a minimum length, between 8 bytes and 1,500 bytes, to enforce a minimum packet size before being subject to fragment based attack prevention.
Virtual Defragmentation	Select this option to enable IPv4 and IPv6 virtual defragmentation to help prevent fragment based attacks, such as tiny fragments or large number of fragments.
Virtual Defragmentation Timeout	Set a virtual defragmentation timeout from 1- 60 seconds applicable to both IPv4 and IPv6 packets.

4. Refer to the **Firewall Enhanced Logging** field to set the following parameters:

Log Dropped ICMP Packets	Use the drop-down menu to define how dropped ICMP packets are logged. Logging can be rate limited for one log instance every 20 seconds. Options include Rate Limited, All or None. The default setting is None.
Log Dropped Malformed Packets	Use the drop-down menu to define how dropped malformed packets are logged. Logging can be rate limited for one log instance every 20 seconds. Options include Rate Limited, All or None. The default setting is None.
Enable Verbose Logging	Check this box to enable verbose logging mode for the firewall.

5. The firewall policy allows traffic filtering at the application layer using the Application Layer Gateway feature.

The Application Layer Gateway provides filters for the following common protocols:

FTP ALG	Select this option to allow FTP traffic through the firewall using its default ports. This feature is enabled by default.
TFTP ALG	Select this option to allow TFTP traffic through the firewall using its default ports. This feature is enabled by default.
PPTP ALG	Select this option to allow PPTP traffic through the firewall using its default ports. The <i>Point-to-Point Tunneling Protocol</i> (PPTP) is a network protocol that enables the secure transfer of data from a remote client to an enterprise server by creating a VPN across TCP/IP-based data networks. PPTP encapsulates PPP packets into IP datagrams for transmission over the Internet or other public TCP/IP-based networks. This feature is enabled by default.
SIP ALG	Select this option to allow SIP traffic through the firewall using its default ports. This feature is enabled by default.

SCCP ALG	Select this option to allow SCCP traffic through the firewall using its default ports. This feature is enabled by default.
Facetime ALG	Select this option to allow Facetime traffic through the firewall using its default ports. This feature is enabled by default.
DNS ALG	Select this option to allow DNS traffic through the firewall using its default ports. This feature is enabled by default.

6. Select the **Enable Stateful DHCP Checks** check box to enable the stateful checks of DHCP packet traffic through the firewall.

The default setting is enabled. When enabled, all DHCP traffic flows are inspected.

7. Define **Flow Timeout** intervals for the following flow types impacting the firewall:

TCP Close Wait	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 10 seconds.
TCP Established	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 90 minutes.
TCP Reset	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 10 seconds.
TCP Setup	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 10 seconds.
Stateless TCP Flow	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 90 seconds.
Stateless FIN/RESET Flow	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 10 seconds.
ICMP	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 30 seconds.
UDP	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 30 seconds.
Any Other Flow	Define a flow timeout value in either Seconds (1 - 32,400), Minutes (1 - 540) or Hours (1 - 9). The default setting is 30 seconds.

8. Refer to the **TCP Protocol Checks** field to set the following parameters:

Check TCP states where a SYN packet tears down the flow	Select the check box to allow a SYN packet to delete an old flow in TCP_FIN_FIN_STATE and TCP_CLOSED_STATE and create a new flow. The default setting is enabled.
Check unnecessary resends of TCP packets	Select the check box to enable the checking of unnecessary resends of TCP packets. The default setting is enabled.

Check Sequence Number in ICMP Unreachable error packets	Select the check box to enable sequence number checks in ICMP unreachable error packets when an established TCP flow is aborted. The default setting is enabled.
Check Acknowledgment Number in RST packets	Select the check box to enable the checking of the acknowledgment number in RST packets which aborts a TCP flow in the SYN state. The default setting is enabled.
Check Sequence Number in RST packets	Select the check box to check the sequence number in RST packets which abort an established TCP flow. The default setting is enabled.

9. Select **OK** to update the firewall policy's advanced common settings.
 Select **Reset** to revert to the last saved configuration.

Firewall Policy IPv6 Settings

Use the **Advanced Settings → IPv6 Settings** tab to define settings unique to an IPv6 firewall.

1. Select the **IPv6 Settings** tab.

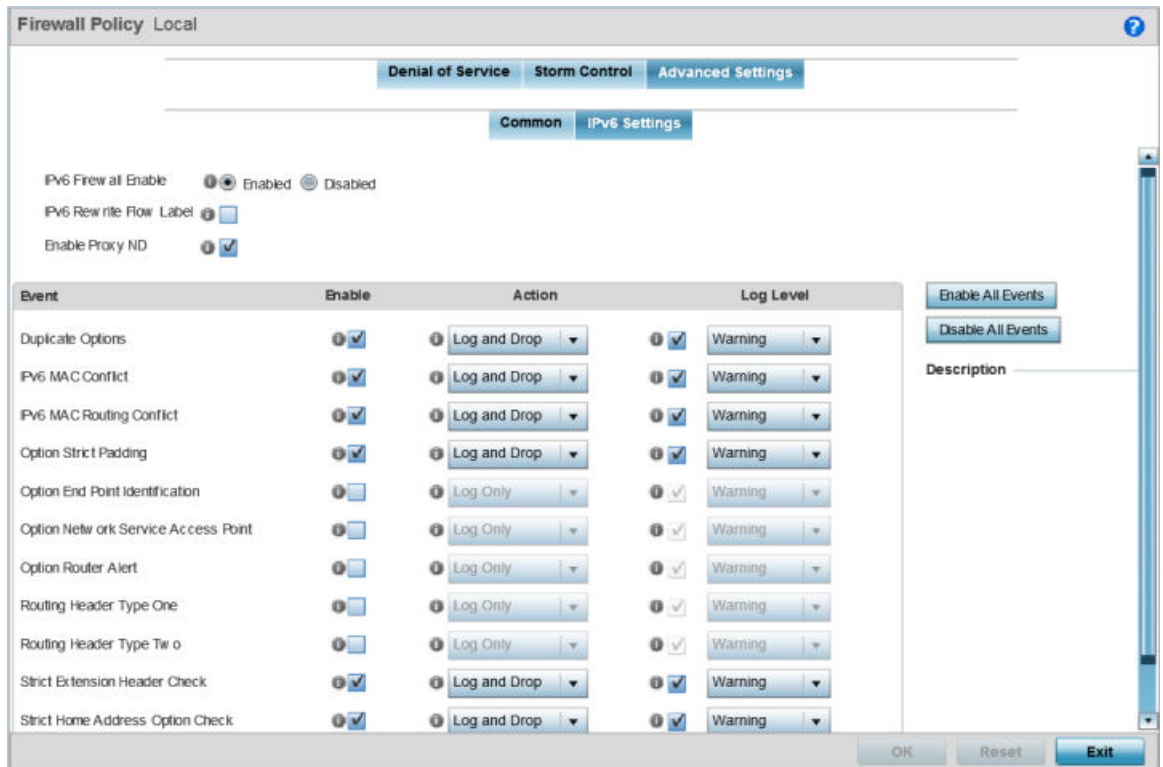


Figure 346: Wireless Firewall - Add/Edit - Advanced Settings - IPv6 Settings Tab

2. Refer to the **IPv6 Firewall Enable** option to provide firewall support to IPv6 packet streams.

This setting is enabled by default. Disabling IPv6 firewall support also disables proxy neighbor discovery.

IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery (ND) protocol via ICMPv6 router discovery messages. These hosts require firewall packet protection unique to IPv6 traffic, as IPv6 addresses are composed uniquely of eight groups of four hexadecimal digits separated by colons.

3. Select **IPv6 Rewrite Flow Label** to provide flow label rewrites for each IPv6 packet.

A flow is a sequence of packets from a particular source to a particular (unicast or multicast) destination. The flow label helps keep packet streams from looking like one massive flow. Flow label rewrites are disabled by default and must be manually enabled.

Flow label re-writes enable the re-classification of packets belonging to a specific flow. The flow label does nothing to eliminate the need for packet filtering. This setting is disabled by default.

4. Select **Enable Proxy ND** to generate neighbor discovery responses on behalf of another controller, service platform or Access Point managed device.

When enabled, any IPv6 packet received on an interface is parsed to see whether it is known to be a neighbor solicitation. This setting is enabled by default.

5. Use the **Event** table to enable individual IPv6 unique events.

IPv6 events can be individually enabled or collectively enabled/disabled using the **Enable All Events** and **Disable All Events** buttons. The **Description** area displays a brief description of the selected event.

Event	The Event column lists the name of each IPv6 specific event subject to logging.
Enable	Checking Enable sets the firewall policy to filter the associated IPv6 event based on the selection in the Action column.
Action	If a filter is enabled, chose an action from the drop-down menu to determine how the firewall treats the associated IPv6 event. <ul style="list-style-type: none"> • Log and Drop - An entry for the associated IPv6 event is added to the log and then the packets are dropped. • Log Only - An entry for the associated IPv6 event is added to the log. No further action is taken. • Drop Only - The packet is dropped. No further action is taken.
Log Level	To enable logging to the system log, check the box in the Log Level column. Then select a standard Syslog level from the Log Level drop-down menu.

6. Select **OK** to update the firewall policy's advanced IPv6 settings.

Select **Reset** to revert to the last saved configuration.

Configuring IP Firewall Rules

IP-based firewalls function like *Access Control Lists* (ACLs) to filter or mark packets, as opposed to filtering packets on Layer 2 ports.

IP-based Firewall rules are specific to *source* and *destination* IP addresses and the unique *rules* and *precedence* definitions assigned. Both IP and non-IP traffic on the same Layer 2 interface can be filtered by applying an IP ACL. Firewall rules are processed by a firewall supported device from first to last. When a rule matches the network traffic a controller or service platform is processing, the firewall uses that rule's action to determine whether traffic is allowed or denied.



Note

Once defined, a set of IP firewall rules must be applied to an interface to be a functional filtering tool.

There are separate policy creation mechanisms for IPv4 and IPv6 traffic. With both IPv4 and IPv6, if you intend to deny specific types of packets, we recommend that you create access rules for traffic entering a controller, service platform, or access point interface before the controller, service platform, or access point spends time processing them. This is because access rules are processed before other types of firewall rules.

IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.

For more information, see:

- [Setting an IPv4 or IPv6 Firewall Policy](#) on page 841
- [Setting an IP SNMP ACL Policy](#) on page 846
- [Setting a Network Group Alias](#) on page 847
- [Setting a Network Service Alias](#) on page 849

Setting an IPv4 or IPv6 Firewall Policy

Before defining a firewall configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective.

To add or edit an IP based Firewall Rule policy:

1. Select **Configuration > Security**.

2. Select **IPv4 ACL** or **IPv6 ACL** to display existing IP firewall policies.

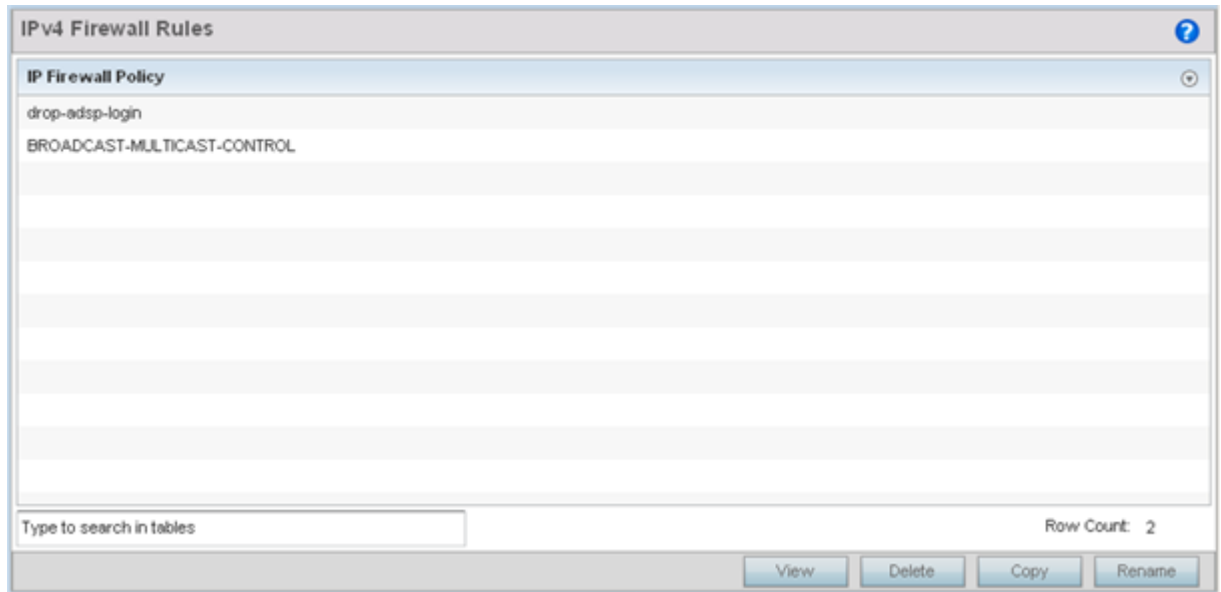


Figure 347: IP Firewall Policy Screen

3. Select **Add** to create a new IPv4 or IPv6 firewall rule.
Select an existing policy and click **Edit** to modify the attributes of that policy's configuration.
4. Select the added row to expand it into configurable parameters for a new rule.

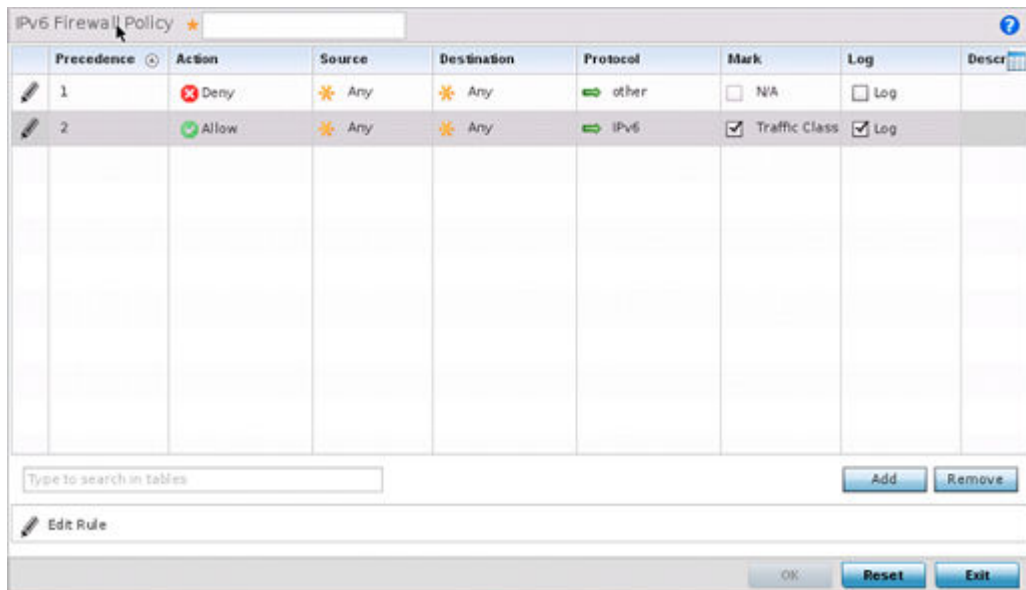


Figure 348: IP Firewall Rules Screen - Adding a New Rule

If adding a new rule, enter a name up to 32 characters.

5. Select **Add** to add a new firewall rule.

IP firewall configurations can either be modified as a collective group of variables or selected and updated individually as their filtering attributes require a more refined update.

- a. Select the **Edit Rule** icon to the left of a particular IP firewall rule configuration to update its parameters collectively.

The screenshot displays the 'Edit Rule' configuration window. At the top, the 'Precedence' is set to 20. Below it, the 'Allow' radio button is unselected, and the 'Deny' radio button is selected. The 'Source' and 'Destination' fields are both set to 'network' with the IP address '0.0.0.0 / 0'. The 'Network Service Alias' field contains a dollar sign '\$'. The 'Protocol' is set to 'UDP' with a port number of '17'. The 'Source Port' and 'Destination Port' are both set to a 'range' with 'Low' values of 137 and 'High' values of 138. A 'Show More Options' checkbox is located at the bottom left of the window.

Figure 349: WLAN Security - IP Firewall Rules - Edit Rule Screen

- b. Click the icon within the **Description** column (top right-hand side of the screen) and select IP filter values as needed to add criteria into the configuration of the IP ACL.

The screenshot shows a 'Select columns' dialog box. The dialog has a title bar with three tabs: 'Log', 'Enable', and 'Description'. The 'Description' tab is selected. The dialog contains a list of criteria with checkboxes: 'Source' (checked), 'Destination Name' (checked), 'Network Service Alias' (checked), 'Source Port' (unchecked), 'Destination Port' (unchecked), 'ICMP Type' (unchecked), 'ICMP Code' (unchecked), and 'Start Vlan' (unchecked). The dialog also has a close button (X) in the top right corner.

Figure 350: WLAN Security - IP Firewall Rules - Add Criteria Pop-up

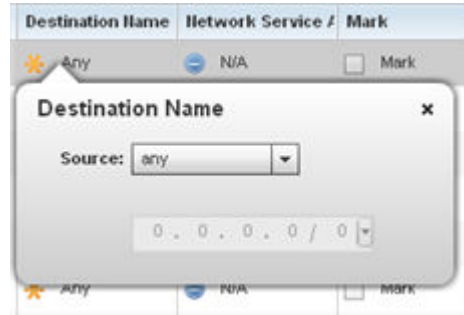


Figure 351: IWLAN Security - IP Firewall Rules - Add/Edit Specific Criteria Pop-up



Note

Only those selected IP ACL filter attributes display. Each value can have its current setting adjusted by selecting that IP ACL's column to display a pop-up to adjust that one value.

6. Define the following IP firewall rule settings as required:

Precedence	Specify or modify a precedence for this IP policy between 1-5000. Rules with lower precedence are always applied to packets first. If modifying a precedence to apply a higher integer, it will move down the table to reflect its lower priority.
Action	Every IP Firewall rule is made up of matching criteria rules. The action defines the packet's disposition if it matches the specified criteria. The following actions are supported: <ul style="list-style-type: none"> Deny - Instructs the firewall to restrict a packet from proceeding to its destination. Permit - Instructs the firewall to allow a packet to proceed to its destination.
Source	Select the source for creating the ACL. Source options include: <ul style="list-style-type: none"> Any - Indicates any host device in any network. Network – Indicates all hosts in a particular network. Subnet mask information has to be provided for filtering based on network. Host – Indicates a single host with a specific IP address. Alias – Indicates a collection of IP addresses or hostnames or IP address ranges which are configured as a single unit. This is for ease of configuration of ACLs. When selected, all IP addresses or hostnames or IP address ranges are used in this ACL.

Destination	<p>Select the destination for creating the ACL. Destination options include:</p> <ul style="list-style-type: none"> • Any - Indicates any host device in any network. • Network – Indicates all hosts in a particular network. Subnet mask information has to be provided for filtering based on network. • Host – Indicates a single host with a specific IP address. • Alias – Indicates a collection of IP addresses or hostnames or IP address ranges which are configured as a single unit. This is for ease of configuration of ACLs. When selected, all IP addresses or hostnames or IP address ranges are used in this ACL.
Protocol	<p>Set a service alias as a set of configurations consisting of protocol and port mappings. Both source and destination ports are configurable. Set an alphanumeric service alias (beginning with a \$) and include the protocol as relevant.</p>
Network Service Alias	<p>The service alias is a set of configurations consisting of protocol and port mappings. Both source and destination ports are configurable. Set an alphanumeric service alias (beginning with a \$ character and containing one special character) and include the protocol as relevant. Selecting either tcp or udp displays an additional set of specific TCP/UDP source and destinations port options.</p>
Source Port	<p>If using either tcp or udp as the protocol, define whether the source port for incoming IP ACL rule application is any, equals or an administrator defined range. If not using tcp or udp, this setting displays as N/A. This is the data local origination virtual port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for Low and High numeric range settings. A source port cannot be a destination port.</p>
Destination Port	<p>If using either tcp or udp as the protocol, define whether the destination port for incoming IP ACL rule application is any, equals or an administrator defined range. If not using tcp or udp, this setting displays as N/A. This is the data local origination virtual port designated by the administrator. Selecting equals invokes a spinner control for setting a single numeric port. Selecting range displays spinner controls for Low and High numeric range settings.</p>
ICMP Type	<p>Selecting ICMP as the protocol for the IP rule displays an additional set of ICMP specific options for ICMP type and code. The Internet Control Message Protocol (ICMP) uses messages identified by numeric type. ICMP messages are used for packet flow control or generated in IP error responses. ICMP errors are directed to the source IP address of the originating packet. Assign an ICMP type from 1-10.</p>
ICMP Code	<p>Selecting ICMP as the protocol for the IP rule displays an additional set of ICMP specific options for ICMP type and code. Many ICMP types have a corresponding code, helpful for troubleshooting network issues (0 - Net Unreachable, 1- Host Unreachable, 2 - Protocol Unreachable etc.).</p>
Start VLAN	<p>Select a Start VLAN icon within a table row to set (apply) a start VLAN range for this IP ACL filter. The Start VLAN represents the virtual LAN beginning numeric identifier arriving packets must adhere to in order to have the IP ACL rules apply.</p>

End VLAN	Select an End VLAN icon within a table row to set (apply) an end VLAN range for this IP ACL filter. The End VLAN represents the virtual LAN end numeric identifier arriving packets must adhere to in order to have the IP ACL rules apply.
Protocol	Select the protocol to filter for this ACL. Use the drop down to select from a list of predefined protocol or use the spinner control to set a particular protocol number.
Mark	Select this option to mark certain fields inside a packet before allowing them. Mark is applicable only for Allow rules. Mark sets the rule's 802.1p or dscp level (from 0 - 7).
Log	Select this option to create a log entry that a firewall rule has allowed a packet to be either denied or allowed.
Enable	Select this option to enable or disable this particular IP Firewall rule in this rule set.
Description	Lists the administrator assigned description applied to the IP ACL rule. Select a description within the table to modify its character string as filtering changes warrant. Select the icon within the Description table header to launch a Select Columns screen used to add or remove IP ACL criteria from the table.

7. Select **Add** to add additional IP firewall rule configurations.
Select **Remove** to remove selected IP firewall rules.
8. Select **OK** when completed to update the IP firewall rules.
Select **Reset** to revert to the last saved configuration.

Setting an IP SNMP ACL Policy

SNMP performs network management functions using a data structure called a *Management Information Base (MIB)*. SNMP is widely implemented but not very secure, because it uses only text community strings for accessing controller or service platform configuration files.

Use SNMP ACLs to help reduce SNMP's vulnerabilities, as SNMP traffic can be exploited to produce a denial of service (DoS).

To create an IP SNMP ACL:

1. Select **Configuration > Security > IP Firewall**.

2. Expand the **IP Firewall** menu item and select **IP SNMP ACL**.

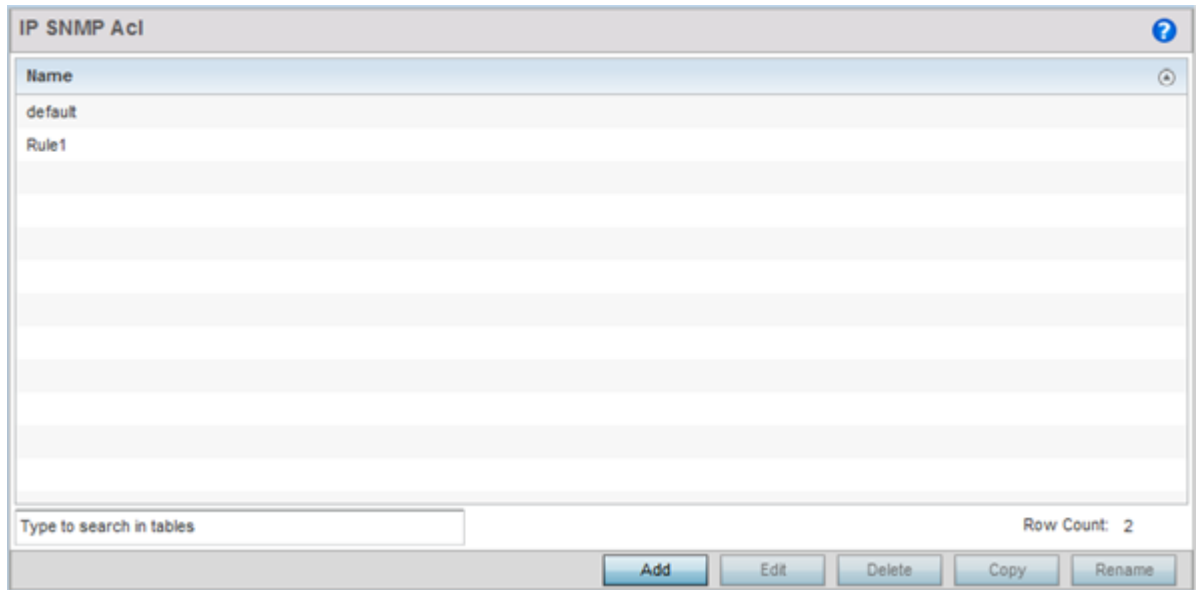


Figure 352: IP SNMP ACL Screen

Setting a Network Group Alias

A *network group alias* is a set of configurations consisting of host and network configurations. Network configurations are complete networks in the form of 192.168.10.0/24 or an IP address range in the form of 192.168.10.10-192.168.10.20. Host configurations are in the form of a single IP address, 192.168.10.23.

A network group alias can contain multiple definitions for a host, network, and IP address range. A maximum of eight (8) Host entries, eight (8) network entries and eight (8) IP addresses range entries can be configured inside a network group alias. A maximum of 32 network group alias entries can be created.

To set a network group alias configuration for an IP firewall:

1. Select **Configuration > Security**.

- Expand the **IP Firewall** menu item and select **Network Group Alias**.

Name	Host	Network
SNGA_IP_FW_HostList	10.233.89.93	10.233.88.0/24

Type to search in tables Row Count: 1

Figure 353: IP Firewall Network Group Alias Screen

- Click **Add** to create a new network group alias.
Select an existing network group alias and click **Edit** to modify it.
- If you are creating a new network group alias, assign it a **Name** up to 32 characters to distinguish this alias configuration from others with similar attributes.

The network group alias name always starts with a dollar sign (\$). Select **Reset** to revert to the last saved configuration. Select **Exit** to exit without creating a network group alias.

Name Stowidowsserverhost

Host:

Network: / 24

Range

Start IP	End IP	
<input type="text" value="*"/> <input type="text" value="."/> <input type="text" value="."/> <input type="text" value="."/>	<input type="text" value="."/> <input type="text" value="."/> <input type="text" value="."/>	<input type="button" value="🗑️"/>
		<input type="button" value="🗑️"/>

Figure 354: Network Group Alias Add Screen

5. Define the following network group alias parameters:

Host	Specify the Host IP address for up to eight IP addresses supporting network aliasing. Select the down arrow to add the IP address to the table.
Network	Specify the netmask for up to eight IP addresses supporting network aliasing. Subnets can improve network security and performance by organizing hosts into logical groups. Applying the subnet mask to an IP address separates the address into a host address and an extended network address. Select the down arrow to add the mask to the table.

6. Within the **Range** table, use the **+ Add Row** button to specify the **Start IP** address and **End IP** address for the alias range, or double-click on an existing alias range entry to edit it.
7. Select **OK** when completed to update the network group alias settings.
Select **Reset** to revert the screen to its last saved configuration.

Setting a Network Service Alias

A *network service alias* is a set of configurations that consist of protocol and port mappings. Both source and destination ports are configurable. For each protocol, up to two source port ranges and up to two destination port ranges can be configured. A maximum of four protocol entries can be configured per network service alias.

Use a service alias to associate more than one IP address to a network interface, providing multiple connections to a network from a single IP node.

To define a service alias configuration for an IP firewall:

1. Select **Configuration > Security > IP Firewall > Network Service Alias** from the Web UI.

The **Network Service Alias** screen displays.

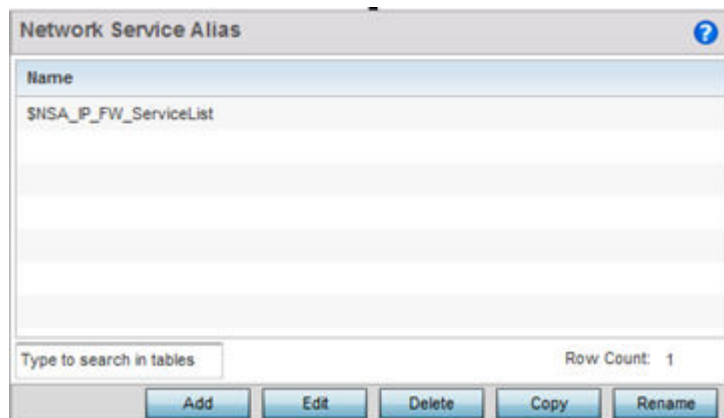


Figure 355: IP Firewall Network Service Alias Screen

2. Select **Add** to create a new network service alias.

Select an existing network service alias and click **Edit** to modify it. Select **Delete** to remove an existing network service alias from those available in the list.

Use **Copy** to create a copy of the selected policy and modify it for further use. Use **Rename** to rename the selected policy.

3. If you are adding a new **Network Service Alias**, give it a **Name** up to 32 characters to distinguish this alias configuration from others with similar attributes.

The network group alias name always starts with a dollar sign (\$).

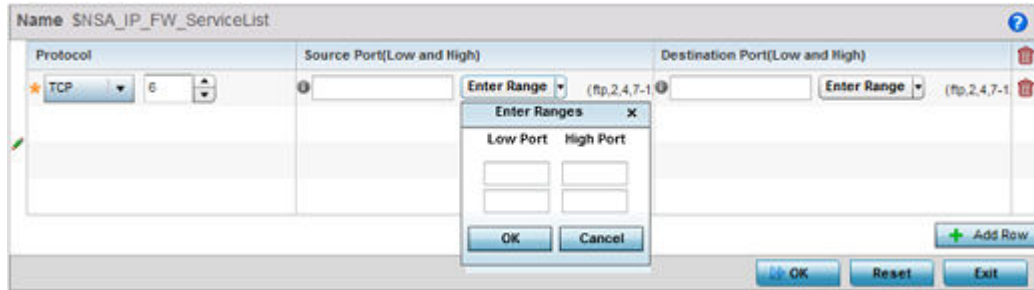


Figure 356: IP Firewall Network Service Alias - Add/Edit Screen

Select **Reset** to revert to the last saved configuration. Select **Exit** to exit without creating a network service alias.

4. Select **+ Add Row** and provide the following configuration parameters:

Protocol	Specify the protocol for which the alias is created. Use the drop down to select the protocol from eigrp, gre, icmp, igmp, ip, vrrp, igp, ospf, tcp and udp. Select other if the protocol is not listed. When a protocol is selected, its protocol number is automatically selected.
Source Port (Low and High)	This field is relevant only if the protocol is tcp or udp. Specify the source ports for this protocol entry. A range of ports can be specified. Select the Enter Ranges button next to the field to enter a lower and higher port range value. Up to eight (8) ranges can be specified.
Destination Port (Low and High)	This field is relevant only if the protocol is tcp or udp. Specify the destination ports for this protocol entry. A range of ports can be specified. Select the Enter Ranges button next to the field to enter a lower and higher port range value. Up to eight (8) such ranges can be specified.

5. In the **Range** field, use the **+ Add Row** button to specify the Start IP address and End IP address for the service alias range, or double-click on an existing service alias range entry to edit it.
6. Select **OK** when completed to update the network service alias settings.
Select **Reset** to revert the screen to its last saved configuration.

Wireless Client Roles

Define wireless client roles to filter clients from based on matching policies. Matching policies (much like ACLs) are sequential collections of *permit* and *deny* conditions that

apply to packets received from connected clients. When a packet is received from a client, the controller, service platform or access point compares the packet fields against applied matching policy rules to verify the packet has the required permissions to be forwarded. If a packet does not meet any of the criteria specified, the packet is dropped.

Additionally, wireless client connections are also managed by granting or restricting access by specifying a range of IP or MAC addresses to include or exclude from connectivity. These MAC or IP access control mechanisms are configured as Firewall Rules to further refine client filter and matching criteria.

Configuring a Client's Role Policy

To configure a wireless client's role policy and matching criteria:

1. Go to **Configuration** → **Security** → **Wireless Client Roles**.

The **Wireless Client Roles** screen displays the name of those client role policies created thus far.

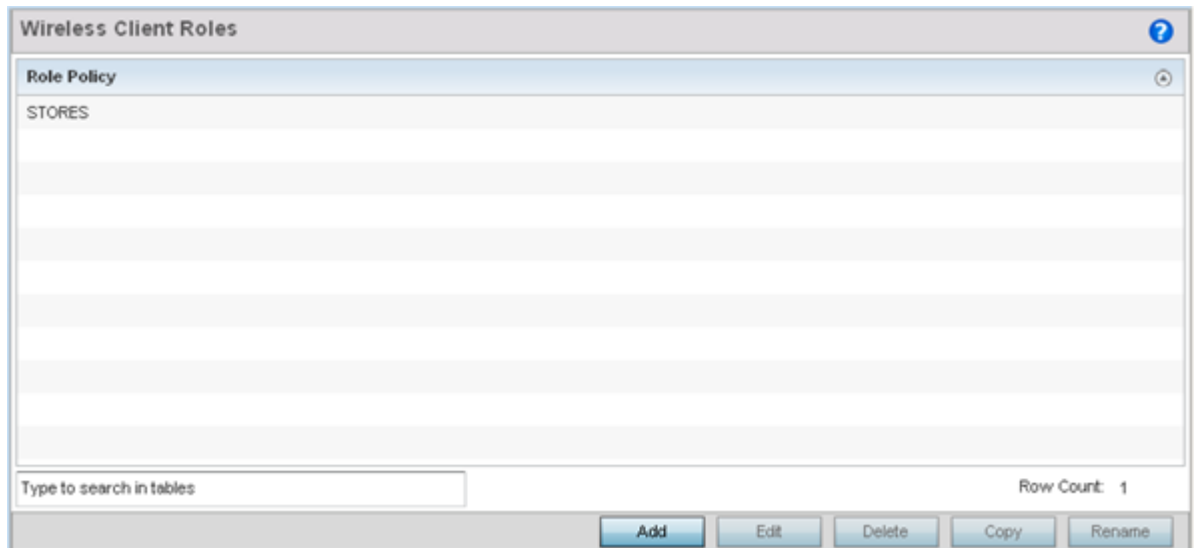


Figure 357: Wireless Client Roles Screen

2. Select **Add** to create a new Wireless Client Role policy, **Edit** to modify an existing policy or **Delete** to remove a policy.

The **LDAP Settings** tab displays by default.

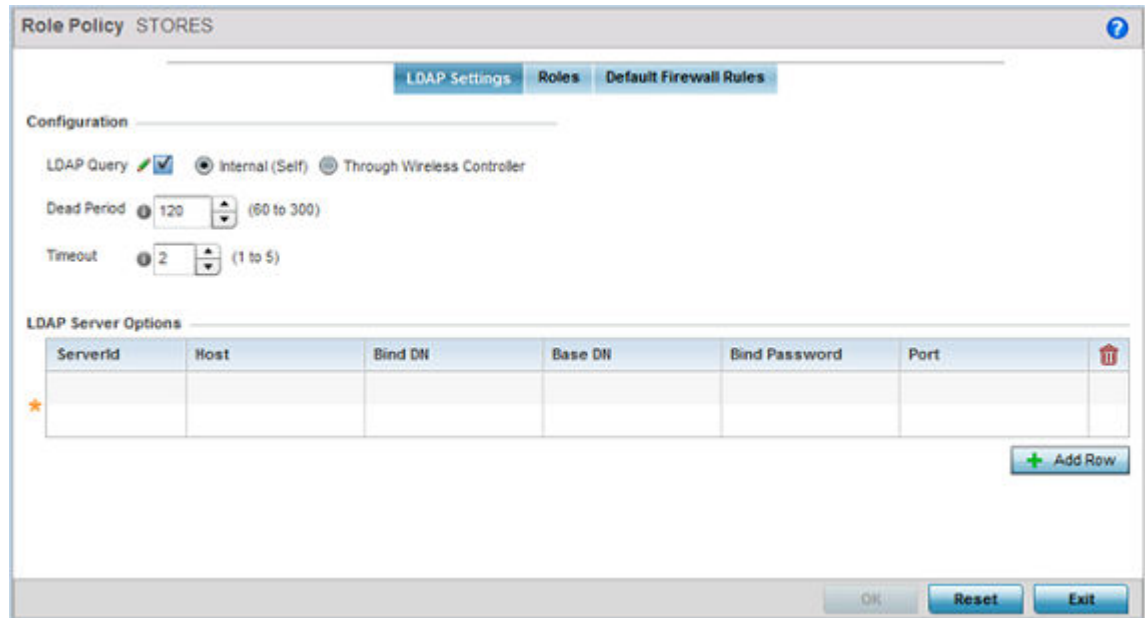


Figure 358: Wireless Client Roles - Add/Edit - LDAP Settings Tab

3. In the Configuration section, define the following LDAP server parameters:

LDAP Query	If LDAP attributes are enabled for the selected wireless client role policy, select an LDAP query mode of either Internal (Self) or Through Wireless Controller. Select Internal (Self) to use local LDAP server resources configured in the LDAP Server Options.
Dead Period	When using an external LDAP server, select the Dead Period between 60 and 300 seconds. The Dead Period is the timeout value before the system will attempt to rebind with the LDAP server.
Timeout	When using an external LDAP server, select a Timeout value to specify how long of a delay between request and responses before LDAP bind and queries will be timed out.

4. In the **LDAP Server Options** section, use the **+ Add Row** button to add an LDAP server to the list or double-click on an existing LDAP server entry to edit it.

When adding or editing the LDAP server options, define the following parameters:

ServerId	When adding or editing an LDAP server entry, enter the LDAP server ID as either 1 or 2.
Host	When adding or editing an LDAP server entry, enter the LDAP server's fully qualified domain name or IP address in the Host field.

Bind DN	When adding or editing an LDAP server entry, enter the LDAP server's bind distinguished name in the Bind DN field.
Base DN	When adding or editing an LDAP server entry, enter the LDAP server's base distinguished name in the Base DN field.
Bind Password	When adding or editing an LDAP server entry, enter the password for bind. Click the Show button to display the password.
Port	When adding or editing an LDAP server entry, enter the LDAP server port number. To select from a list of frequently used services and their corresponding port numbers, use the drop-down menu and select a service.

5. Click on the **Roles** tab.

If no policies have been created, a default wireless client role policy can be applied. The **Roles** screen lists existing policies. Any of these existing policies can be selected and edited or a new role can be added.

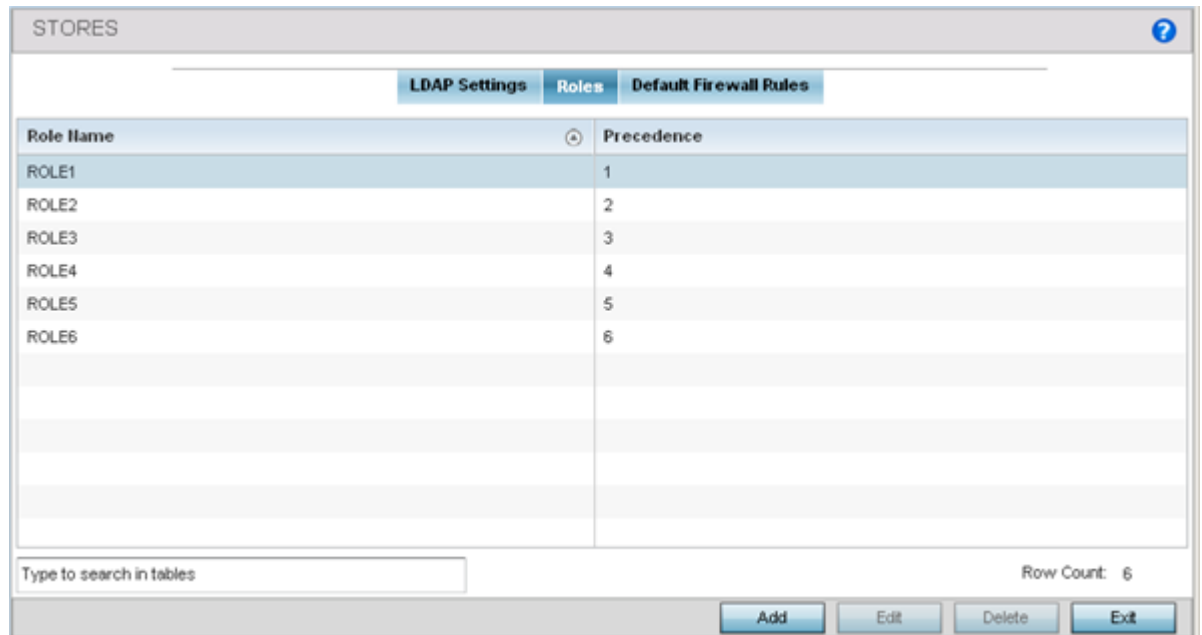


Figure 359: Wireless Client Roles - Add/Edit - Roles Tab

6. Refer to the following configuration data for existing roles:

Role Name	Displays the name assigned to the client role policy when it was initially created.
Precedence	Displays the precedence number associated with each role. Precedence numbers determine the order a role is applied. Roles with lower numbers are applied before those with higher numbers. Precedence numbers are assigned when a role is created or modified, and two or more roles can share the same precedence.

7. Select **Add** to create a new wireless client role policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available.

The **Role Policy Roles** screen displays with the Settings tab displayed by default.

The screenshot shows the 'Role Policy Roles' configuration window with the 'Settings' tab selected. The 'Role Name' is 'CAT1'. The configuration is organized into several sections:

- Information:** A note states 'To configure LDAP attributes in the Role, the LDAP Settings should be configured first.'
- Role Precedence:** A spinner control for 'Precedence' is set to 1, with a range of (1 to 10,000).
- Bonjour Gateway:** A dropdown for 'Discovery Policy' is set to 'Any'.
- Client Identity:** A dropdown for 'Client Identity Name' is set to 'Any', with a green arrow icon to its right.
- Match Expressions:** Four rows for 'AP Location', 'SSID Configuration', 'Group Configuration', and 'Radius User', each with a dropdown set to 'Any' and an adjacent empty text input field.
- Wireless Client Filter:** A text field for 'Wireless Client MAC/MAC Mask' contains '00 - 00 - 00 - 00 - 00 - 00' with a radio button for 'Any' selected.
- Captive Portal Connection:** Radio buttons for 'Authentication State' are set to 'Any'.
- Authentication / Encryption:** A dropdown for 'Authentication Type' is set to 'Any', with checkboxes for 'EAP', 'Kerberos', 'MAC Authentication', and 'None'.

At the bottom, there are 'OK', 'Reset', and 'Exit' buttons.

Figure 360: Wireless Client Roles - Add/Edit - Roles - Settings Tab

8. If you are creating a new role, assign it a **Role Name** to help differentiate it from others that may have a similar configuration.

The role policy name cannot exceed 64 characters. The name cannot be modified as part of the edit process.

9. In the **Role Precedence** field, use the spinner control to set a numerical precedence value between 1 - 10,000.

Precedence determines the order a role is applied. Roles with lower numbers are applied before those with higher numbers. While there's no default precedence for a role, two or more roles can share the same precedence.

10. Use the **Discovery Policy** drop-down menu to specify the **Bonjour Gateway**.

Bonjour provides a method to discover services on a LAN. Bonjour allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour only works within a single broadcast domain. However, with a special DNS configuration, it can be extended to find services across broadcast domains.



Note

The WiNG 7.1 release does not provide support for Bonjour feature on AP505 and AP510 model access points. This feature will be supported in future releases.

11. In the **Client Identity** field, define the client type (Android etc.) used as matching criteria within the client role policy.

Create new client identity types or edit existing ones as required.

12. Refer to the **Match Expressions** field to create filter rules based on AP locations, SSIDs and RADIUS group memberships.

<p>AP Location</p>	<p>Use the drop-down menu to specify the location of an access point matched in an RF domain or the access point's resident configuration. Select one of the following filter options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only to access points with the exact location string specified in the role. • Contains - The role is applied only to access points whose location contains the location string specified in the role. • Does Not Contain - The role is applied only to access points whose location does not contain the location string specified in the role. • Any - The role is applied to any access point location. This is the default setting.
<p>SSID Configuration</p>	<p>Use the drop-down menu to define a wireless client filter option based on how the SSID is specified in a WLAN. Select one of the following options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only when the exact SSID string is specified in the role. • Contains - The role is applied only when the SSID contains the string specified in the role. • Does Not Contain - The role is applied when the SSID does not contain the string specified in the role. • Any - The role is applied to any SSID Location. This is the default setting.

<p>Group Configuration</p>	<p>Use the drop-down menu to define a wireless client filter option based on how the RADIUS group name matches the provided expression. Select one of the following options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only when the exact RADIUS Group Name string is specified in the role.. • Contains - The role is applied when the RADIUS Group Name contains the string specified in the role. • Does Not Contain - The role is applied when the RADIUS Group Name does not contain the string specified in the role. • Any - The role is applied to any RADIUS Group Name. This is the default setting.
<p>RADIUS User</p>	<p>Use the drop-down menu to define a filter option based on how the RADIUS user name (1-255 characters in length) matches the provided expression. Select one of the following options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only when the exact RADIUS user string is specified in the role.. • Contains - The role is applied when the RADIUS user starts with the string specified in the role. • Does Not Contain - The role is applied when the RADIUS user does not contain the string specified in the role. • Any - The role is applied to any RADIUS user name. This is the default setting.

13. Use the **Wireless Client Filter** parameter to define a wireless client MAC address filter that is applied to each role.

Select the **Any** radio button to use any MAC address. The default is **Any**.

14. Refer to the **Captive Portal Connection** parameter to define when wireless clients are authenticated when making a captive portal authentication request.

Secure guest access is referred to as captive portal. A captive portal is guest access policy for providing temporary and restrictive access to the wireless network. Existing captive portal policies can be applied to a WLAN to provide secure guest access.

15. Select the **Pre-Login** check box to conduct captive portal client authentication before the client is logged.

Select **Post-Login** to have the client share authentication credentials after it has logged into the network. Selecting **Any** (the default setting) makes no distinction on whether authentication is conducted before or after the client has logged in.

16. Use the **Authentication / Encryption** field to set the authentication and encryption filters applied to this wireless client role.

The options for both authentication and encryption are:

Equals

The role is applied only when the authentication and encryption type matches the exact method(s) specified by the radio button selections.

Not Equals

The role is applied only when the authentication and encryption type does not match the exact method(s) specified by the radio button selections.

Any

The role is applied to any type. This is the default setting for both authentication and encryption.

17. Use the + (plus sign) to the left of the LDAP Attributes label to expand it.

Set the following LDAP Attributes for the role policy: The following filter criteria apply to each LDAP attribute:

Exact

The role is applied only when the exact string is specified in the role.

Contains

The role is applied when the LDAP attribute contains the string specified in the role.

Does Not Contain

The role is applied when the LDAP attribute does not contain the string specified in the role.

Any

The role is applied to any LDAP attribute. This is the default setting.

City	Enter a 2-31 character name of the city filtered in the role.
Company	Enter a 2-31 character name of the organizational company filtered in the role.
Country	Enter a 2-31 character name of the country (co) filtered in the role.
Department	Enter a 2-31 character name of the organizational department filtered in the role.
Email	Enter a 2-31 character name of the Email address filtered in the role.
Employee Id	Enter a 2-31 character name of the employee ID filtered in the role.
State	Enter a 2-31 character name of the state filtered in the role.
Title	Enter a 2-31 character name of the job or organizational title filtered in the role.
Member Of	Provide a 64 character maximum description of the group membership in the role.

18. Select **OK** to update the **Settings** screen.

Select **Reset** to revert to the last saved configuration.

19. Select the **Firewall Rules** tab to set default Firewall rules for Inbound and Outbound IP and MAC Firewall rules.

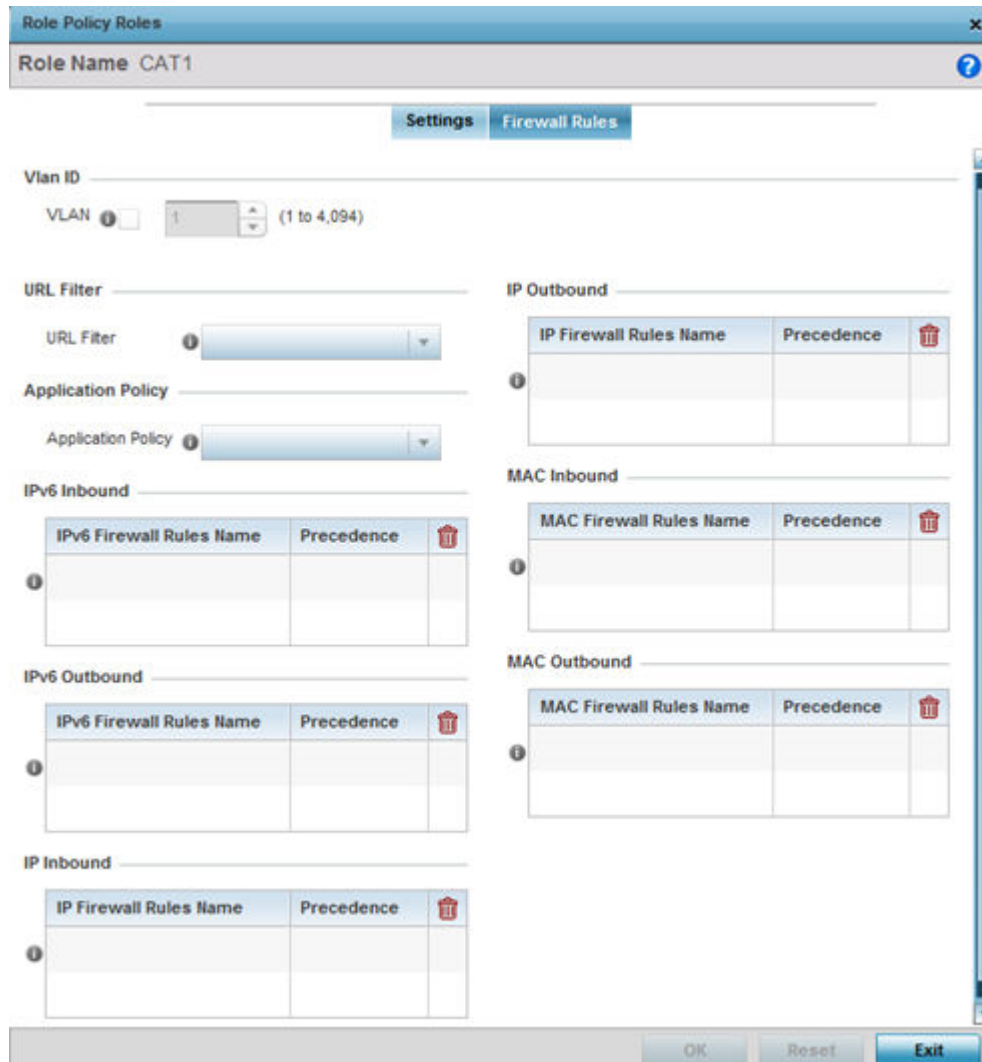


Figure 361: Wireless Client Roles - Add/Edit - Roles - Firewall Rules Tab

A firewall is a mechanism enforcing access control, and is considered a first line of defense in protecting proprietary information within the network. The means by which this is accomplished varies, but in principle, a firewall can be thought of as mechanisms both blocking and permitting data traffic based on inbound and outbound IP and MAC rules.

IP-based firewall rules are specific to source and destination IP addresses and the unique rules and precedence orders assigned. Both IP and non-IP traffic on the same Layer 2 interface can be filtered by applying both an IP ACL and a MAC.

Additionally, administrators can filter Layer 2 traffic on a physical Layer 2 interface using MAC addresses. A MAC firewall rule uses source and destination MAC addresses for matching operations, where the result is a typical allow, deny, or mark designation to packet traffic.

20. Set the **Vlan ID** (from 1 - 4094) for the virtual LAN used by clients matching the IP or MAC inbound and outbound rules of this policy.
21. Use the drop-down to select the appropriate **Application Policy** to use with this firewall rule.

An application policy defines the rules or actions executed on recognized HTTP (Facebook), enterprise (Webex), and peer-to-peer (gaming) applications or application-categories.
22. Specify an **IPv6 Inbound** or **IPv6 Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.

Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove IPv6 firewall rules. If no IPv6 Inbound or Outbound firewall ACL exist create the IPv6 firewall ACL and use here.
23. Specify an **IP Inbound** or **IP Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.

Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove IP firewall rules. If no IP Inbound or Outbound firewall ACL exist create the IP firewall ACL and use here.
24. Specify an **MAC Inbound** or **MAC Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.

Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove MAC firewall rules. If no MAC Inbound or Outbound firewall ACL exist create the MAC firewall ACL and use here.
25. Select **OK** to save the Firewall Rules updates.

Select **Reset** to revert to the last saved configuration.

Wireless Client Roles

To review existing wireless client roles and create roles:

1. Click on the **Roles** tab. The screen displays user roles that have been created thus far. Click on each role to view configuration details. **Edit** or **Delete** roles as per you requirement.

Role Name	Precedence
ROLE1	1
ROLE2	2
ROLE3	3
ROLE4	4
ROLE5	5
ROLE6	6

Figure 362: Wireless Client Roles - Add/Edit - Roles Tab

2. Refer to the following configuration data for existing roles:

Role Name	Displays the name assigned to the client role policy when it was initially created.
Precedence	Displays the precedence number associated with each role. Precedence numbers determine the order a role is applied. Roles with lower numbers are applied before those with higher numbers. Precedence numbers are assigned when a role is created or modified, and two or more roles can share the same precedence.

Add Client Role Settings

To add a new wireless client role policy:

1. Select **Add** to create a new wireless client role policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available.

The **Role Policy Roles** screen displays with the Settings tab displayed by default.

Figure 363: Wireless Client Roles - Add/Edit - Roles - Settings Tab

2. If you are creating a new role, assign it a **Role Name** to help differentiate it from others that may have a similar configuration.

The role policy name cannot exceed 64 characters. The name cannot be modified as part of the edit process.

- In the **Role Precedence** field, use the spinner control to set a numerical precedence value between 1 - 10,000.

Precedence determines the order a role is applied. Roles with lower numbers are applied before those with higher numbers. While there's no default precedence for a role, two or more roles can share the same precedence.

- Use the **Discovery Policy** drop-down menu to specify the **Bonjour Gateway**.

Bonjour provides a method to discover services on a LAN. Bonjour allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour only works within a single broadcast domain. However, with a special DNS configuration, it can be extended to find services across broadcast domains.



Note

The WiNG 7.1 release does not provide support for Bonjour feature on AP505 and AP510 model access points. This feature will be supported in future releases.

- In the **Client Identity** field, define the client type (Android etc.) used as matching criteria within the client role policy.

Create new client identity types or edit existing ones as required.

- Refer to the **Match Expressions** field to create filter rules based on AP locations, SSIDs and RADIUS group memberships.

AP Location	<p>Use the drop-down menu to specify the location of an access point matched in an RF domain or the access point's resident configuration. Select one of the following filter options:</p> <ul style="list-style-type: none"> Exact - The role is applied only to access points with the exact location string specified in the role. Contains - The role is applied only to access points whose location contains the location string specified in the role. Does Not Contain - The role is applied only to access points whose location does not contain the location string specified in the role. Any - The role is applied to any access point location. This is the default setting.
SSID Configuration	<p>Use the drop-down menu to define a wireless client filter option based on how the SSID is specified in a WLAN. Select one of the following options:</p> <ul style="list-style-type: none"> Exact - The role is applied only when the exact SSID string is specified in the role.. Contains - The role is applied only when the SSID contains the string specified in the role. Does Not Contain - The role is applied when the SSID does not contain the string specified in the role. Any - The role is applied to any SSID Location. This is the default setting.

Group Configuration	<p>Use the drop-down menu to define a wireless client filter option based on how the RADIUS group name matches the provided expression. Select one of the following options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only when the exact RADIUS Group Name string is specified in the role.. • Contains - The role is applied when the RADIUS Group Name contains the string specified in the role. • Does Not Contain - The role is applied when the RADIUS Group Name does not contain the string specified in the role. • Any - The role is applied to any RADIUS Group Name. This is the default setting.
RADIUS User	<p>Use the drop-down menu to define a filter option based on how the RADIUS user name (1-255 characters in length) matches the provided expression. Select one of the following options:</p> <ul style="list-style-type: none"> • Exact - The role is applied only when the exact RADIUS user string is specified in the role.. • Contains - The role is applied when the RADIUS user starts with the string specified in the role. • Does Not Contain - The role is applied when the RADIUS user does not contain the string specified in the role. • Any - The role is applied to any RADIUS user name. This is the default setting.

7. Use the **Wireless Client Filter** parameter to define a wireless client MAC address filter that is applied to each role.

Select the **Any** radio button to use any MAC address. The default is **Any**.

8. Refer to the **Captive Portal Connection** parameter to define when wireless clients are authenticated when making a captive portal authentication request.

Secure guest access is referred to as captive portal. A captive portal is guest access policy for providing temporary and restrictive access to the wireless network. Existing captive portal policies can be applied to a WLAN to provide secure guest access.

9. Select the **Pre-Login** check box to conduct captive portal client authentication before the client is logged.

Select **Post-Login** to have the client share authentication credentials after it has logged into the network. Selecting **Any** (the default setting) makes no distinction on whether authentication is conducted before or after the client has logged in.

10. Use the **Authentication / Encryption** field to set the authentication and encryption filters applied to this wireless client role.

The options for both authentication and encryption are:

Equals

The role is applied only when the authentication and encryption type matches the exact method(s) specified by the radio button selections.

Not Equals

The role is applied only when the authentication and encryption type does not match the exact method(s) specified by the radio button selections.

Any

The role is applied to any type. This is the default setting for both authentication and encryption.

11. Use the + (plus sign) to the left of the LDAP Attributes label to expand it. Set the following LDAP Attributes for the role policy: The following filter criteria apply to each LDAP attribute:

Exact

The role is applied only when the exact string is specified in the role.

Contains

The role is applied when the LDAP attribute contains the string specified in the role.

Does Not Contain

The role is applied when the LDAP attribute does not contain the string specified in the role.

Any

The role is applied to any LDAP attribute. This is the default setting.

City	Enter a 2-31 character name of the city filtered in the role.
Company	Enter a 2-31 character name of the organizational company filtered in the role.
Country	Enter a 2-31 character name of the country (co) filtered in the role.
Department	Enter a 2-31 character name of the organizational department filtered in the role.
Email	Enter a 2-31 character name of the Email address filtered in the role.
Employee Id	Enter a 2-31 character name of the employee ID filtered in the role.
State	Enter a 2-31 character name of the state filtered in the role.
Title	Enter a 2-31 character name of the job or organizational title filtered in the role.
Member Of	Provide a 64 character maximum description of the group membership in the role.

12. Select **OK** to update the **Settings** screen.
Select **Reset** to revert to the last saved configuration.

Add Client Role Firewall Rules

A firewall is a mechanism enforcing access control, and is considered a first line of defense in protecting proprietary information within the network. The means by which

this is accomplished varies, but in principle, a firewall can be thought of as mechanisms both blocking and permitting data traffic based on inbound and outbound IP and MAC rules.

IP-based firewall rules are specific to source and destination IP addresses and the unique rules and precedence orders assigned. Both IP and non-IP traffic on the same Layer 2 interface can be filtered by applying both an IP ACL and a MAC.

Additionally, administrators can filter Layer 2 traffic on a physical Layer 2 interface using MAC addresses. A MAC firewall rule uses source and destination MAC addresses for matching operations, where the result is a typical allow, deny, or mark designation to packet traffic.

To apply firewall rules to a wireless client role:

1. Select the **Firewall Rules** tab to set default Firewall rules for Inbound and Outbound IP and MAC Firewall rules.

The screenshot shows the 'Role Policy Roles' configuration window for role 'CAT1'. The 'Firewall Rules' tab is active. The configuration includes:

- VLAN ID:** A dropdown menu showing 'VLAN 1' with a range of '(1 to 4,094)'.
- URL Filter:** A dropdown menu for selecting a URL filter.
- Application Policy:** A dropdown menu for selecting an application policy.
- IPv6 Inbound:** A table with columns 'IPv6 Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.
- IPv6 Outbound:** A table with columns 'IPv6 Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.
- IP Inbound:** A table with columns 'IP Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.
- IP Outbound:** A table with columns 'IP Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.
- MAC Inbound:** A table with columns 'MAC Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.
- MAC Outbound:** A table with columns 'MAC Firewall Rules Name', 'Precedence', and a delete icon. It is currently empty.

At the bottom of the window, there are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 364: Wireless Client Roles - Add/Edit - Roles - Firewall Rules Tab

2. Set the **Vlan ID** (from 1 - 4094) for the virtual LAN used by clients matching the IP or MAC inbound and outbound rules of this policy.
3. Use the drop-down to select the appropriate **Application Policy** to use with this firewall rule.

An application policy defines the rules or actions executed on recognized HTTP (Facebook), enterprise (Webex), and peer-to-peer (gaming) applications or application-categories (layer-7 traffic).

**Note**

The WiNG 7.1.X release does not support third-party DPI engine on the AP5XX model access points. WiNG 7.1.2 supports *ExtremeAnalytics* (Purview™) DPI engine on the WiNG 7.1.X APs. For more information, refer the WiNG 7.1.2 CLI Reference guide, available at <https://extremenetworks.com/documentation>.

4. Specify an **IPv6 Inbound** or **IPv6 Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.
Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove IPv6 firewall rules. If no IPv6 Inbound or Outbound firewall ACL exist create the IPv6 firewall ACL and use here.
5. Specify an **IP Inbound** or **IP Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.
Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove IP firewall rules. If no IP Inbound or Outbound firewall ACL exist create the IP firewall ACL and use here.
6. Specify an **MAC Inbound** or **MAC Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.
Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove MAC firewall rules. If no MAC Inbound or Outbound firewall ACL exist create the MAC firewall ACL and use here.
7. Select **OK** to save the Firewall Rules updates.
Select **Reset** to revert to the last saved configuration.

Add Default Firewall Rules

Use this screen to define default firewall rules. These firewalls are applied if no role-specific firewall rules have been specified.

To add default firewall rules:

1. Select the **Default Firewall Rules** tab.
2. Specify an **IP Inbound** or **IP Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.
Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove IP firewall rules. If no IP Inbound or Outbound firewall ACL exist create the IP firewall ACL and use here.

- Specify an **MAC Inbound** or **MAC Outbound** firewall rule by selecting a rule from the drop-down menu and use the spinner control to assign the rule Precedence.
Rules with lower precedence are always applied first to packets. Select the **+ Add Row** button or **Delete** icon as needed to add or remove MAC firewall rules. If no MAC Inbound or Outbound firewall ACL exist create the MAC firewall ACL and use here.
- Select **OK** to save your changes.
Select **Reset** to revert to the last saved configuration.

Device Fingerprinting

With an increase in *Bring Your Own Device* (BYOD) corporate networks, there's a parallel increase in the number of possible attack scenarios within the network. BYOD devices are inherently unsafe, as the organization's security mechanisms do not extend to these personal devices deployed in the corporate wireless network. Organizations can protect their networks by limiting how and what these BYODs can access on and through the corporate network.

Device fingerprinting enables administrators to control how BYOD devices access the network and to control their access permissions.



Note

Ensure that DHCP is enabled on the WLAN on which device fingerprinting is to be enabled.



Note

The WiNG 7.1 release does not support device fingerprinting on AP505 and AP510 model access points. This feature will be supported in future releases.

To configure device fingerprinting:

- Go to **Configuration → Security → Device Fingerprinting** .
The **Client Identity** screen displays.

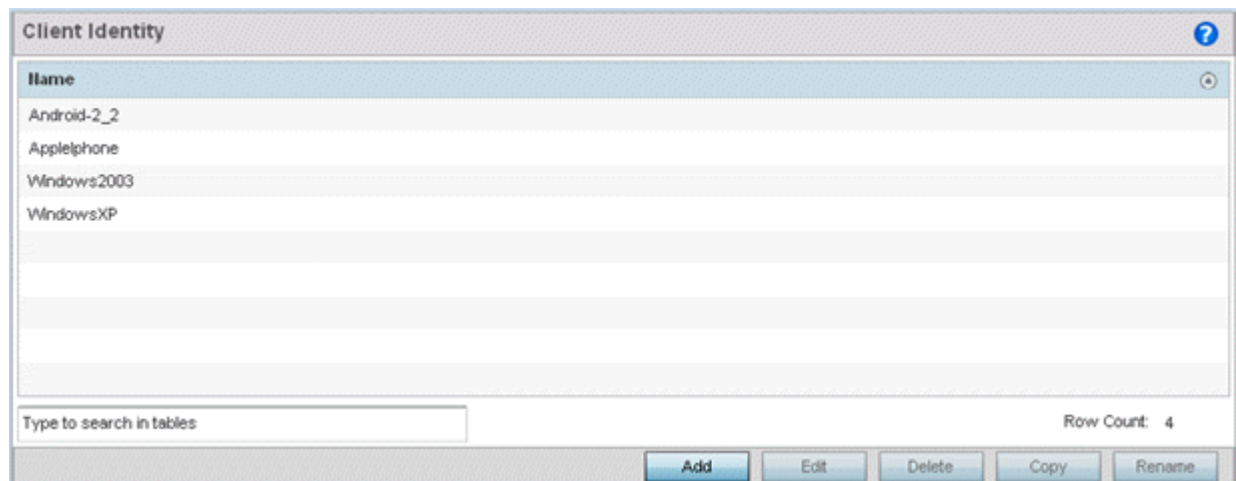


Figure 365: Security - Device Fingerprinting - Client Identity Screen

2. Select **Add** to create a new client identity policy.

Client identity policies configure the signatures used to identify clients and then use these signatures to classify and assign permissions to them. A set of pre-defined client identities are included.

Click **Edit** to modify a selected policy, or **Delete** to remove obsolete policies from the list of those available.

The screenshot shows a configuration window for a new client identity policy. At the top, there is a 'Name' field with a star icon, a radio button for 'Predefined', a dropdown menu currently showing 'Please Select', and another radio button for 'Custom'. Below the name field is a section titled 'DHCP Match Criteria' which contains a table with the following columns: Index, Message Type, Match Option, Match Type, Value Format, and Option Value. The table is currently empty. To the right of the table is a trash can icon. Below the table is a '+ Add Row' button. Underneath the table is a 'Settings' section with a label 'DHCP Match Message Type' and a dropdown menu currently set to 'Request'. At the bottom of the window are three buttons: 'OK', 'Reset', and 'Exit'.

Figure 366: Security - Device Fingerprinting - New Client Identity Screen

3. Select **Pre-defined** and use the drop-down menu to select from a list of pre-defined client identities.

Once a client identity is selected from the drop-down menu, the **DHCP Match Criteria** field is populated with the fingerprints for the selected client identity

The screenshot displays the configuration interface for a pre-defined client identity. The 'Name' field is set to 'Predefined' and the dropdown menu shows 'Android-4'. The 'DHCP Match Criteria' table is populated with the following data:

Index	Message Type	Match Option	Match Type	Value Format	Option Value
8	Request	55	Exact	Hex String	012103061c333a3b
9	Request	60	Starts With	ASCII	dhcpcd-5.2.10
10	Request	60	Starts With	ASCII	dhcpcd-5.2.10:Linux-3

Below the table, the 'Settings' section shows 'DHCP Match Message Type' set to 'Request'. At the bottom of the screen, there are 'OK', 'Reset', and 'Exit' buttons.

Figure 367: Security - Device Fingerprinting - New Client Identity - Pr-Defined Identity Screen

4. To create a custom client identity, select **Custom** and provide a name in the adjacent field.

Click the **OK** button at the bottom of the screen.

5. From the **DHCP Match Message Type** drop-down menu, select the message type to match.

The available options are **request**, **discover**, **any**, and **all**. Use this option to select the message type on which the fingerprint is matched.

request

Indicates the fingerprint is only checked with any DHCP request message received from any device.

discover

Indicates the fingerprint is only checked with any DHCP discover message received from any device.

any

Indicates the fingerprint is checked with either the DHCP request or the DHCP discover message.

all

Indicates the fingerprint is checked with both the DHCP request and DHCP discover message.

6. Click **Add Row** to add a new signature to include in the client identity.

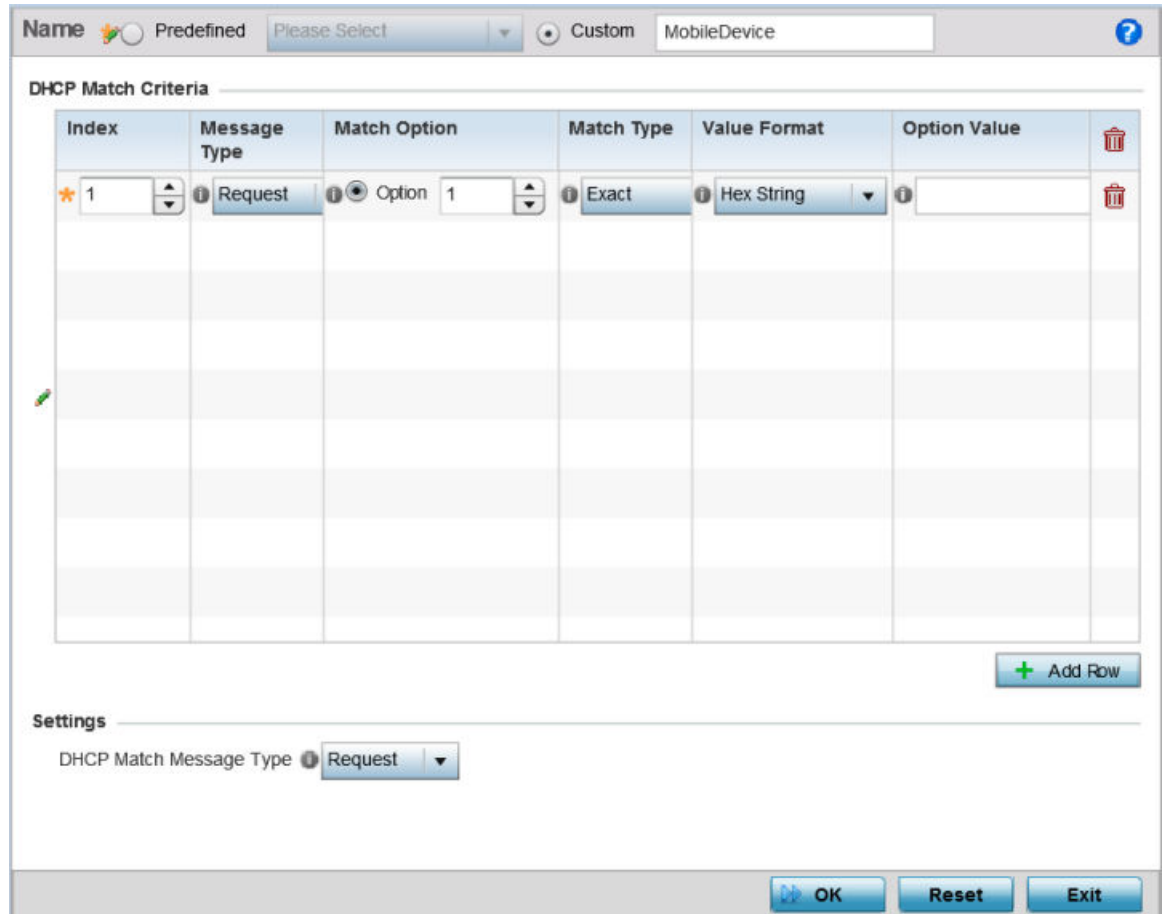


Figure 368: Security - Device Fingerprinting - Client Signature Screen

7. Provide the following information for each device signature:

Index	Use the spinner control to assign an index for this signature. A maximum of 16 signatures can be created in each client identity.
Message Type	Use the drop-down menu to designate the DHCP message in which to look for the signatures. <ul style="list-style-type: none"> • Request – Looks for a signature in DHCP request messages. • Discover – Looks for a signature in DHCP discover messages.

Match Option	<p>The Match Option field contains the following options:</p> <ul style="list-style-type: none"> Option Codes – Indicates that the Option Codes passed in the DHCP request/discover message are used for matching. <p>Options are passed in the DHCP discover/request messages as Option Code, Option Type, Option Value sets. When Option Codes is selected, all the Option Code passed in the DHCP discover/request are extracted and a fingerprint is derived. This derived fingerprint is used to identify the device.</p> <ul style="list-style-type: none"> Option – Indicates that a specific DHCP Option is used to identify the device. When this option is selected, a text box is enabled to input the DHCP Option that is used for fingerprinting.
Match Type	<p>Use the drop-down menu to select how the signatures are matched. Available options include:</p> <ul style="list-style-type: none"> Exact – The complete signature string matches the string specified in the Option Value field. Starts With – The signature is checked if it starts with the string specified in the Option Value field. Contains – The signature is checked if it contains the string specified in the Option Value field.
Value Format	<p>Use the drop-down menu to select the character format of the value that is being checked. The value can be either ASCII or Hexa String.</p>
Option Value	<p>Use this text box to set the 64-character maximum DHCP option value to match.</p>

8. Click **OK** to save the changes.

Select **Reset** to revert all changes made to this screen.

Click **Exit** to close the **Client Identity** screen.

9. From the main menu on the left, select **Client Identity Group**.

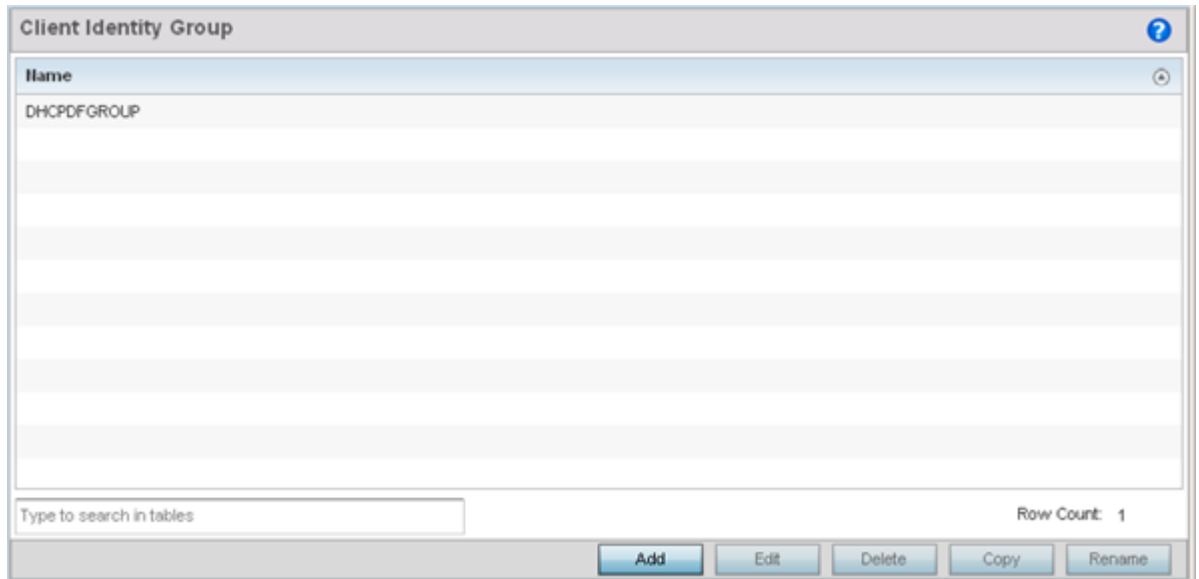


Figure 369: Security - Device Fingerprinting - Client Identity Group

A *Client identity group* is a collection of client identities. Each client identity included in a client identity group is set a priority value that indicates the priority for that identity when device fingerprinting.

Device fingerprinting relies on specific information sent by a client when acquiring an IP address and configuration information from a DHCP server. Device fingerprinting uses the DHCP options sent by the wireless client in DHCP request or discover packets to derive a unique signature specific to a device class. For example, Apple devices have a different signature from Android devices. This unique signature is used to classify the devices and assign permissions and restrictions on each class.

10. Select **Add** to create a new Client Identity Group policy.

Client Identity Group policies configure the signatures used to identify clients and then use these signatures to classify and assign permissions to them.

Click **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available.

The screenshot shows a configuration window titled "Name" with a search icon. Below the title bar is a section for "DHCP Match Criteria" containing a table with columns "Client Identity", "Precedence", and a delete icon. The table is currently empty. Below the table is an "Add Row" button. At the bottom of the window, there is a "Load Default Fingerprints" section with a checked checkbox and an information icon. The bottom of the window features "OK", "Reset", and "Exit" buttons.

Figure 370: Security - Device Fingerprinting - Client Identity Group - New Client Identity Group

11. Provide a name in the **Name** field for the new client identity and click **OK** at the bottom of the screen.

12. Click **Add Row** to add a new signature included in the client identity.

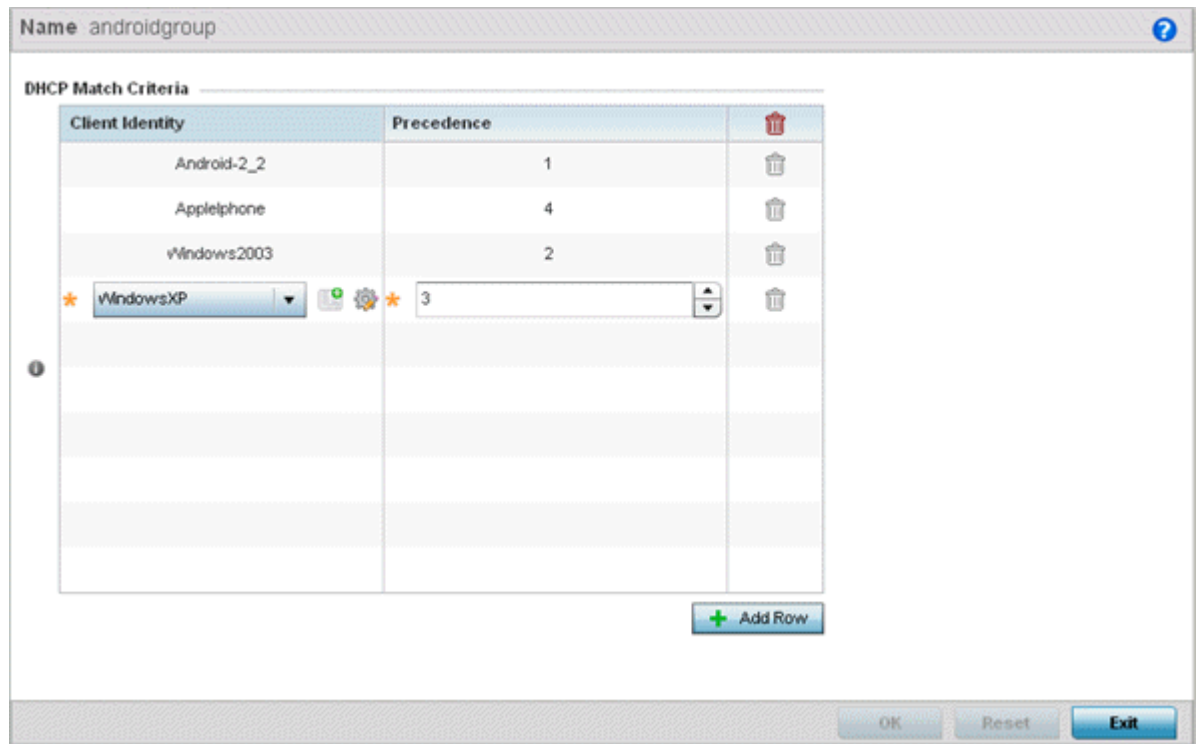


Figure 371: Security - Device Fingerprinting - Client Identity Group - New Client Identity Group

13. From the drop-down, select the **Client Identity Policy** to include in this group.
Use the buttons next to the drop-down to manage and create new Client Identity policies.
14. Use the **Precedence** control to set the precedence for the Client Identity.
This index sets the sequence the client identity in this Client Identity Group is checked or matched.
15. Click **OK** to save changes.
Click **Reset** to revert all changes made to this screen.
Click **Exit** to close the **Client Identity Group** screen.

Configuring MAC Firewall Rules

Access points can use MAC based firewalls like Access Control Lists (ACLs) to filter and mark packets based on the IP from which they arrive, as opposed to filtering packets on Layer 2 ports.

Optionally, filter Layer 2 traffic on a physical Layer 2 interface using MAC addresses. A MAC firewall rule uses source and destination MAC addresses for matching operations, where the result is a typical allow, deny or mark designation to packet traffic.

**Note**

Once defined, a set of MAC firewall rules must be applied to an interface to be a functional filtering tool.

To add or edit a MAC based firewall rule policy:

1. Select **Configuration > Security > Wireless Firewall > MAC Firewall Rules** to display existing IP firewall rule policies.

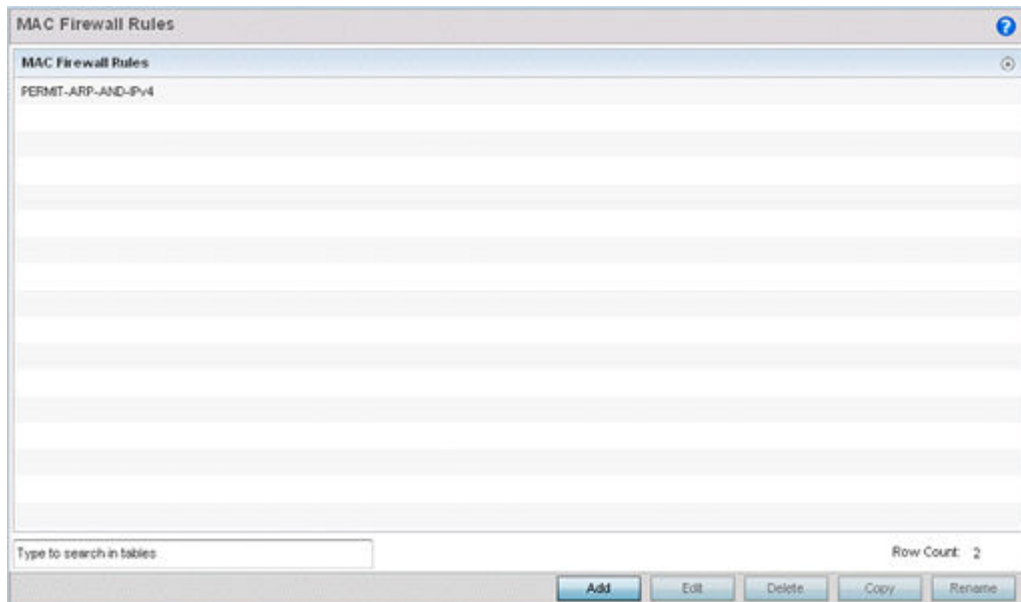


Figure 372: MAC Firewall Rules Screen

2. Select **Add** to create a new MAC firewall rule.
Select an existing policy and click **Edit** to modify the attributes of that rule's configuration.

3. Select the added row to expand it into configurable parameters for defining the MAC-based firewall rule.

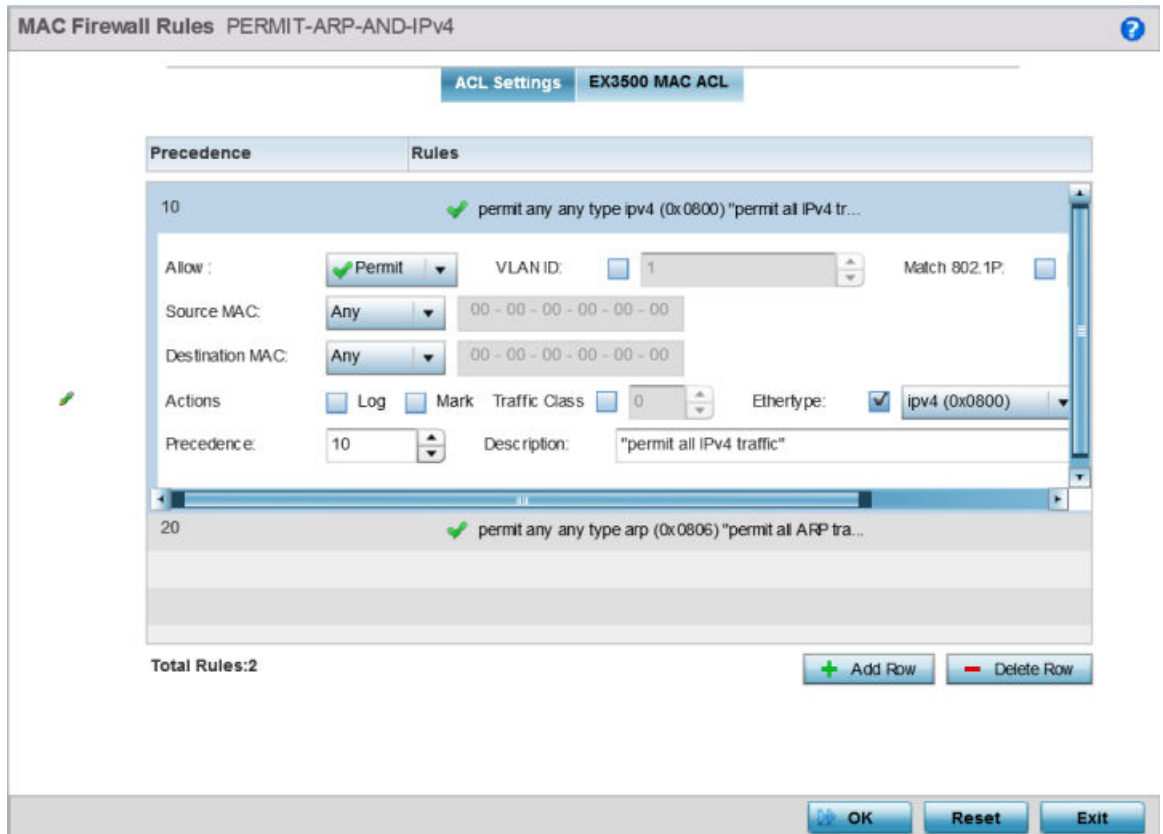


Figure 373: MAC Firewall Rules Screen - Adding a New Rule

4. If you are adding a new **MAC Firewall Rule**, provide a name up to 32 characters to help describe its filtering configuration.
5. Define the following parameters for the MAC firewall rule:

Allow	<p>Every MAC firewall rule is made up of matching criteria rules. The action defines what to do with the packet if it matches the specified criteria. The following actions are supported:</p> <ul style="list-style-type: none"> • Deny - Instructs the firewall to prevent a packet from proceeding to its destination. • Permit - Instructs the firewall to allow a packet to proceed to its destination.
Source and Destination MAC	<p>Enter both source and destination MAC addresses. Access points use the source IP address, destination MAC address as basic matching criteria. Provide a subnet mask if using a mask.</p>

Action	The following actions are supported: <ul style="list-style-type: none"> Log - Events are logged for archive and analysis. Mark - Modifies certain fields inside the packet and then permits them. Therefore, mark is an action with an implicit permit. <ul style="list-style-type: none"> VLAN 802.1p priority. DSCP bits in the IP header. Mark, Log - Conducts both mark and log functions.
Precedence	Use the spinner control to specify a precedence for this MAC firewall rule between 1 - 1500. Rules with lower precedence are always applied first to packets.
VLAN ID	Enter a VLAN ID representative of the shared SSID each user employs to interoperate within the network (once authenticated by the local RADIUS server). The VLAN ID can be from 1 - 4094.
Traffic Class	Select this option to enable filtering using Traffic Class. Use the spinner control to specify a traffic class. Traffic class can be from 1 - 10.
Match 802.1P	Configures IP DSCP to 802.1p priority mapping for untagged frames. Use the spinner control to define a setting between 0 - 7.
Ethertype	Use the drop-down menu to specify an Ethertype of either other, ipv4, arp, rarp, appletalk, aarp, mint, wisp, ipx, 802.1q and ipv6. An Ethertype is a twooctet field within an Ethernet frame. It is used to indicate which protocol is encapsulated in the payload of an Ethernet frame.
Description	Provide a description (up to 64 characters) for the rule to help differentiate it from others with similar configurations.

6. Select **+ Add Row** as needed to add additional MAC firewall rule configurations.
Select the **- Delete Row** icon as required to remove selected MAC firewall rules.
7. Select **OK** when completed to update the MAC firewall rules.
Select **Reset** to revert to its last saved configuration.

Wireless IPS (WIPS)

The access point supports *Wireless Intrusion Protection Systems* (WIPS) to provide continuous protection against wireless threats and act as an additional layer of security complementing wireless VPNs and encryption and authentication policies. An access point supports WIPS through the use of dedicated sensor devices designed to actively detect and locate unauthorized AP devices. After detection, they use mitigation techniques to block the devices by manual termination, air lockdown, or port suppression.

Unauthorized APs are untrusted and unsanctioned access points connected to a LAN that accept client associations. They can be deployed for illegal wireless access to a corporate network, implanted with malicious intent by an attacker, or could just be misconfigured access points that do not adhere to corporate policies. An attacker can install an unauthorized AP with the same ESSID as the authorized WLAN, causing a nearby client to associate to it. The unauthorized AP can then steal user credentials

from the client, launch a man-in-the middle attack or take control of wireless clients to launch denial-of-service attacks.

A WIPS server can be deployed as a dedicated solution within a separate enclosure. When used with associated access point radios, a WIPS deployment provides the following enterprise class security management features:

- *Threat Detection* - Threat detection is central to a wireless security solution. Threat detection must be robust enough to correctly detect threats and swiftly help protect the wireless network.
- *Rogue Detection and Segregation* - A WIPS supported network distinguishes itself by both identifying and categorizing nearby access points. WIPS identifies threatening versus non-threatening access points by segregating access points attached to the network (unauthorized APs) from those not attached to the network (neighboring access points). The correct classification of potential threats is critical for administrators to act promptly against rogues and not invest in a manual search of thousands of neighboring access points.
- *Locationing* - Administrators can define the location of wireless clients as they move throughout a site. This allows for the removal of potential rogues through the identification and removal of their connected access points.
- *WEP Cloaking* - WEP Cloaking protects organizations using the Wired Equivalent Privacy (WEP) security standard to protect networks from common attempts used to crack encryption keys.

To define an access point's WIPS configuration:

1. Select the Configuration tab from the Web user interface. 2 3
2. Select **Security**.

3. Select **Wireless IPS** to display existing Wireless Intrusion Protection policies. The **Wireless IPS** screen displays the Settings tab by default.

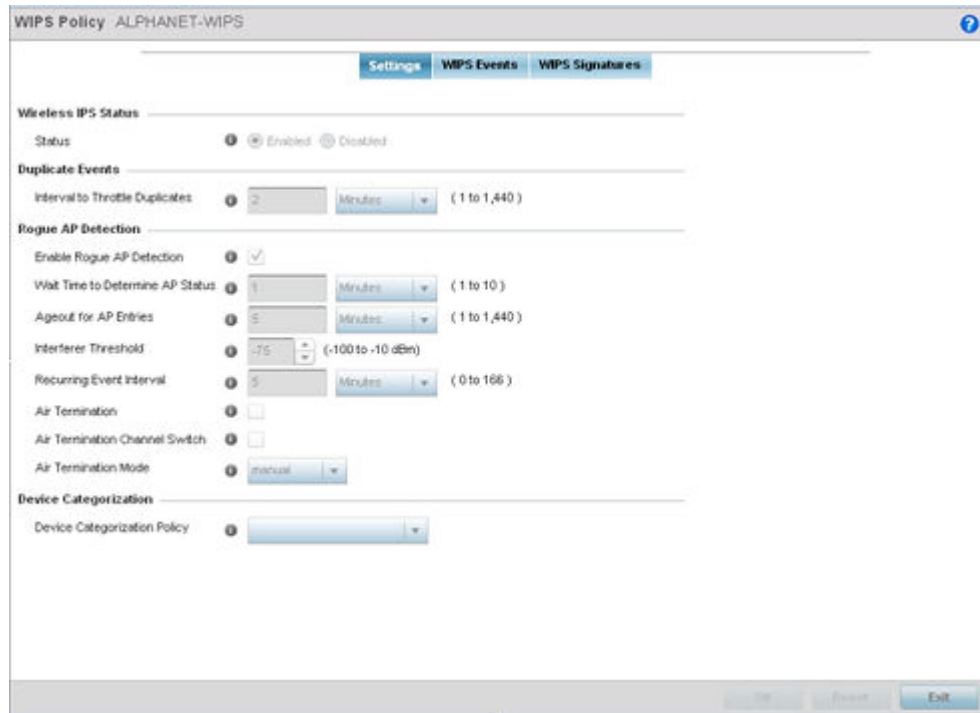


Figure 374: Wireless IPS Screen - Settings Tab

4. Select the **Activate Wireless IPS Policy** option on the upper left-hand side of the screen to enable the screen's parameters for configuration.

Ensure that this option stays selected to apply the configuration to the access point profile.
5. In the **Wireless IPS Status** field, select either **Enabled** or **Disabled** to activate or deactivate WIPS.

The default setting is **Enabled**.
6. Enter an **Interval to Throttle Duplicates** in either Seconds (1 - 86,400), Minutes (1 - 1,400), Hours (1 - 24) or Days (1).

This interval represents the duration event duplicates are not stored in history. The default setting is 120 seconds.
7. Refer to the **Rogue AP Detection** field to define the following detection settings for this WIPS policy:

Enable Rogue AP Detection	Select the check box to enable the detection of unsanctioned APs from this WIPS policy. The default setting is disabled.
Wait Time to Determine AP Status	Define a wait time in either Seconds (10 - 600) or Minutes (0 - 10) before a detected AP is interpreted as a rogue (unsanctioned) device, and potentially removed. The default interval is 1 minute.
Ageout for AP Entries	Set the interval the WIPS policy uses to ageout rogue devices. Set the policy in either Seconds (30 - 86,400), Minutes (0- 1,440), Hours (1 - 24) or Days (1). The default setting is 5 minutes.

Interferer Threshold	Specify a RSSI threshold (from -100 to -10 dBm) after which a detected access point is classified as an interferer (rogue device).
Recurring Event Interval	Set an interval that, when exceeded, duplicates a rogue AP event if the rogue devices is still active (detected) in the network. The default setting is 5 minutes.
Air Termination	Select this option to enable the termination of detected rogue AP devices. Air termination lets you terminate the connection between your wireless LAN and any access point or client associated with it. If the device is an access point, all clients dis-associated with the access point. If the device is a client, its connection with the access point is terminated. This setting is disabled by default.
Air Termination Channel Switch	Select this option to allow neighboring access point to switch channels for rogue AP termination. This setting is disabled by default.
Air Termination Mode	If termination is enabled, use the drop-down menu to specify the termination mode used on detected rogue devices. The default setting is manual.

8. Refer to the **Device Categorization** field to associate a Device Categorization Policy with this Wireless IPS policy.

Select the **Add** icon to create a new Device Categorization policy, or select the **Edit** icon to modify an existing Device Categorization policy. For more information on Device Categorization, see [Device Categorization](#) on page 888.

9. Select **OK** to update the settings.

Select **Reset** to revert to the last saved configuration. The WIPS policy can be invoked at any point in the configuration process by selecting **Activate Wireless IPS Policy** from the upper, left-hand side, of the access point user interface.

10. Select the WIPS Events tab.

Ensure that the **Activate Wireless IPS Policy** option remains selected to enable the screen's configuration parameters. This option needs to remain selected to apply the WIPS configuration to the access point profile.

The Excessive tab displays by default, with additional MU Anomaly and AP Anomaly tabs also available.

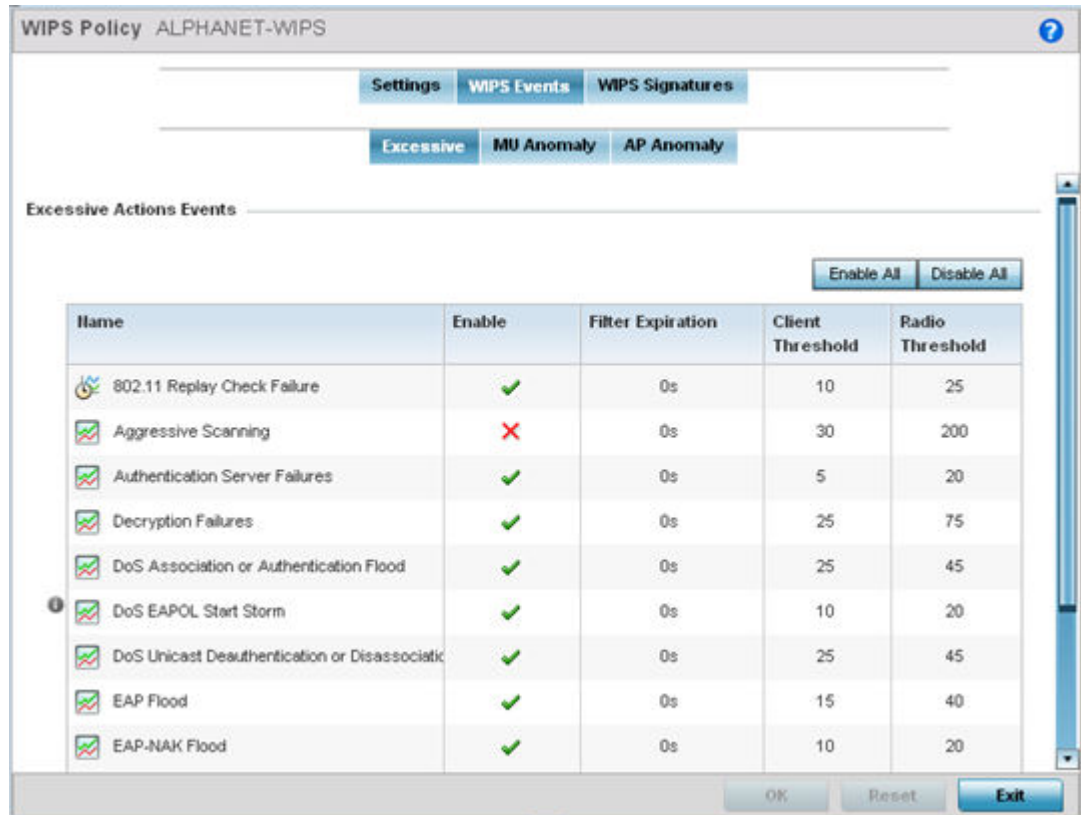


Figure 375: Wireless IPS Screen - WIPS Events - Excessive Tab

The Excessive tab lists events with the potential of impacting network performance. An administrator can enable or disable event filtering and set the thresholds for the generation of the event notification and filtering action.

An Excessive Action Event is an event where an action is performed repetitively and continuously. DoS attacks come under this category. Use the **Excessive Actions Events** table to select and configure the action taken when events are triggered.

11. Set the following **Excessive Action Event** configurations:

Name	Displays the name of the excessive action event representing a potential threat to the network. This column lists the event being tracked against the defined thresholds set for interpreting the event as excessive or permitted.
Enable	Displays whether tracking is enabled for each event. Use the drop-down menu to enable/disable events as required. A green checkmark defines the event as enabled for tracking against its threshold values. A red "X" defines the event as disabled and not tracked by the WIPS policy. Each event is disabled by default.
Filter Expiration	Set the duration an event generating client is filtered. This creates a special ACL entry, and frames coming from the client are dropped. The default setting is 0 seconds. This value is applicable across the RF Domain. If a station is detected performing an attack and is filtered by an access point, the information is passed to the domain controller. The domain controller then propagates this information to all the access points in the RF Domain.
Client Threshold	Set the client threshold after which the filter is triggered and an event generated.
Radio Threshold	Set the radio threshold after which an event is recorded to the event history.

Use the **Enable All** button to enable all Excessive Action Events. Use **Disable All** to disable all Excessive Action Events.

12. Select **OK** to save the updates to the to Excessive Actions configuration used by the WIPS policy.

Select **Reset** to revert to the last saved configuration. The WIPS policy can be invoked at any point in the configuration process by selecting **Activate Wireless IPS Policy** from the upper left-hand side of the access point user interface.

13. Select the MU Anomaly tab.

Ensure that the **Activate Wireless IPS Policy** option remains selected to enable the screen's configuration parameters.

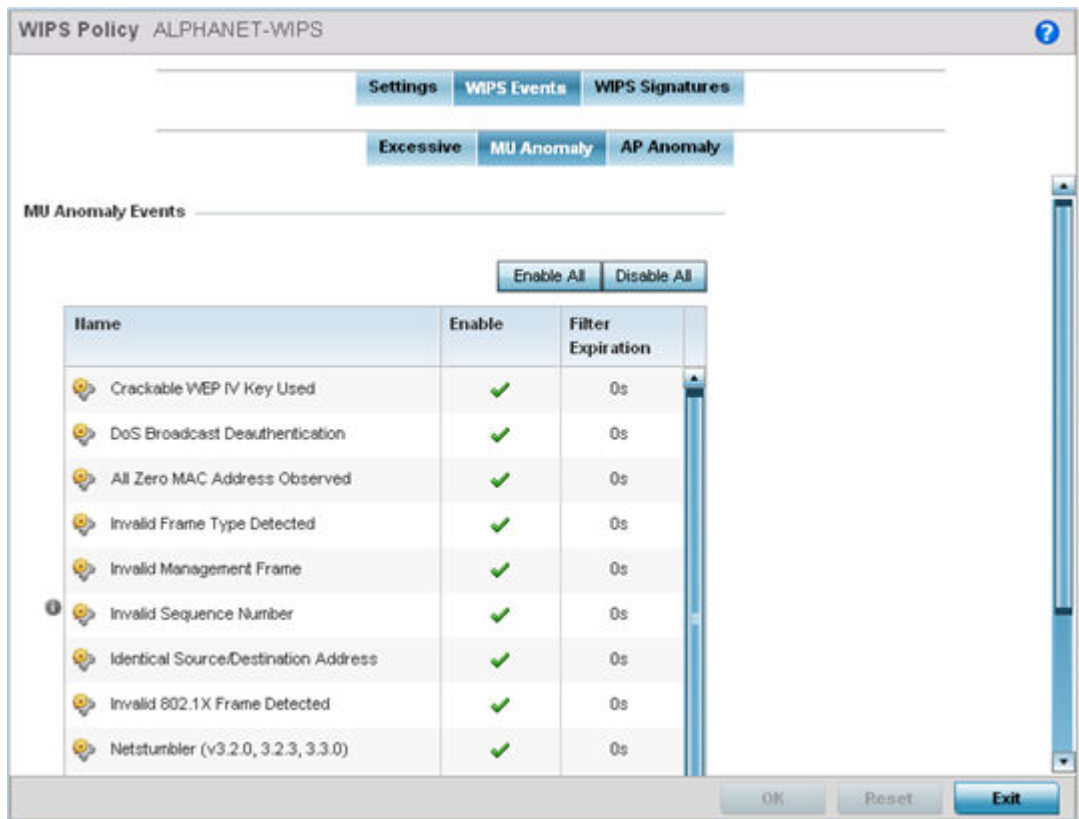


Figure 376: Wireless IPS Screen - WIPS Events - MU Anomaly Tab

MU Anomaly events are suspicious events by wireless clients that can compromise the security and stability of the network. Use the **MU Anomaly** screen to set the intervals clients can be filtered upon the generation of each event.

14. Set the following **MU Anomaly Event** configurations:

Name	Displays the name of the excessive action event representing a potential threat to the network. This column lists the event being tracked against the defined thresholds set for interpreting the event as excessive or permitted.
Enable	Displays whether tracking is enabled for each MU Anomaly event. Use the drop-down menu to enable/disable events as required. A green checkmark defines the event as enabled for tracking against its threshold. A red "X" defines the event as disabled, and not tracked by the WIPS policy. Each event is disabled by default.
Filter Expiration	Set the duration a client is filtered. This creates a special ACL entry, and frames coming from the client are silently dropped. The default setting is 0 seconds. For each violation, define a time to filter value (in seconds) which determines how long received packets are ignored from an attacking device once a violation has been triggered. Ignoring frames from an attacking device minimizes the effectiveness of the attack and the impact to the site until permanent mitigation can be performed.

Use the **Enable All** button to enable all MU Anomaly rules. Use **Disable All** to disable all MU Anomaly rules.

15. Select **OK** to save the updates to the MU Anomaly configuration used by the WIPS policy.

Select **Reset** to revert to the last saved configuration. The WIPS policy can be invoked at any point in the configuration process by selecting **Activate Wireless IPS Policy** from the upper left-hand side of the access point user interface.

16. Select the AP Anomaly tab.

Ensure that the **Activate Wireless IPS Policy** option remains selected to enable the screen's configuration parameters.

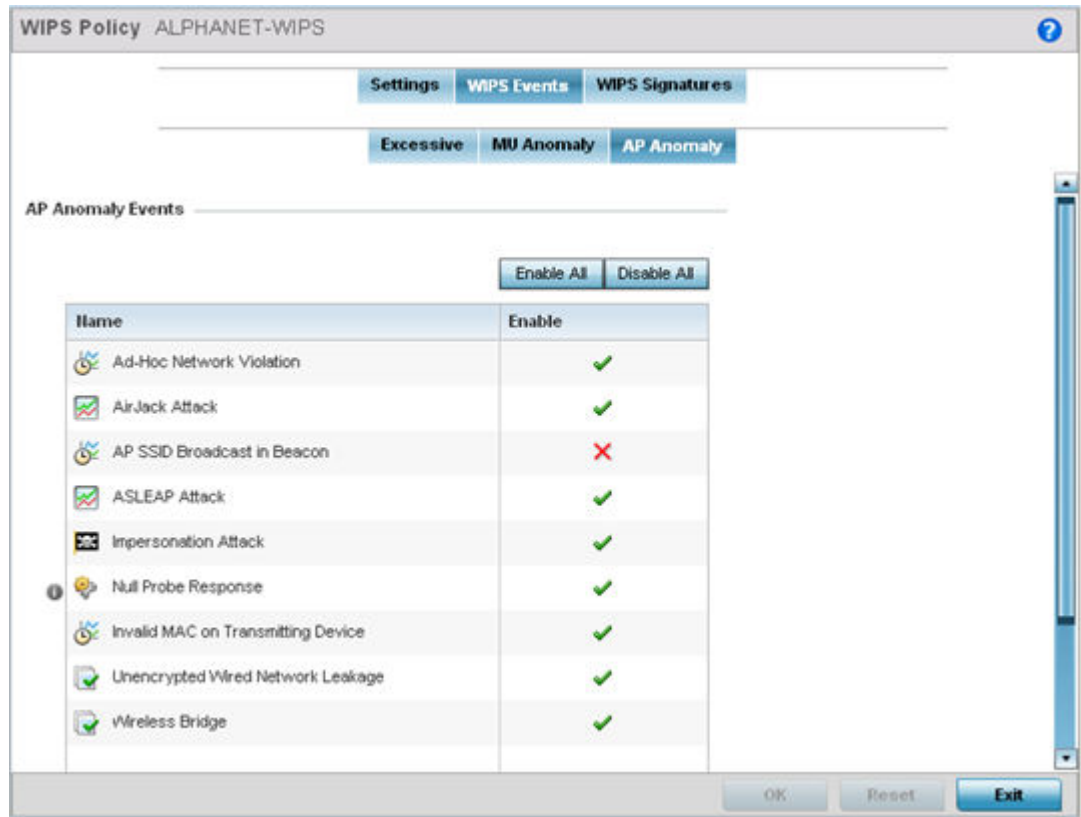


Figure 377: Wireless IPS Screen - WIPS Events - AP Anomaly Tab

AP Anomaly events are suspicious frames sent by neighboring APs. Use the AP Anomaly tab to enable or disable an event.

17. Enable or disable the following **AP Anomaly Events**:

Name	Displays the name of the excessive action event representing a potential threat to the network. This column lists the event being tracked against the defined thresholds set for interpreting the event as excessive or permitted.
Enable	Displays whether tracking is enabled for each AP Anomaly event. Use the drop-down menu to enable/disable events as required. A green check mark defines the event as enabled for tracking against its threshold values. A red "X" defines the event as disabled and not tracked by the WIPS policy. Each event is disabled by default.

Use the **Enable All** button to enable all AP Anomaly events. Use **Disable All** to disable all AP Anomaly events.

18. Select **OK** to save the updates to the AP Anomaly configuration used by the WIPS policy.

Select **Reset** to revert to the last saved configuration. The WIPS policy can be invoked at any point in the configuration process by selecting **Activate Wireless IPS Policy** from the upper left-hand side of the access point user interface.

19. Select the WIPS Signatures tab.

Ensure that the **Activate Wireless IPS Policy** option remains selected to enable the screen's configuration parameters.

A WIPS signature is the set or parameters, or pattern, used by WIPS to identify and categorize particular sets of attack behaviors in order to classify them.

Name	Signature	BSSID MAC	Source MAC	Destination MAC	Frame Type to Match	Match on SSID
signature 1	✓	Not Set	Not Set	Not Set	All	Not Set
signature 2	✓	Not Set	Not Set	Not Set	Association	Not Set

Figure 378: Wireless IPS Screen - WIPS Signatures Tab

20. The WIPS Signatures tab displays the following read-only configuration data:

Name	Lists the name assigned to each signature when it was created. A signature name cannot be modified as part of the edit process.
Signature	Displays whether the signature is enabled. A green checkmark defines the signature as enabled. A red "X" defines the signature as disabled. Each signature is disabled by default.
BSSID MAC	Displays each BSS ID MAC address used for matching purposes.
Source MAC	Displays each source packet MAC address for matching purposes.
Destination MAC	Displays each destination packet MAC address for matching purposes.
Frame Type to Match	Lists the frame types specified for matching with the WIPS signature.
Match on SSID	Lists each SSID used for matching purposes.

21. Select **Add** to create a new WIPS signature, **Edit** to modify the attributes of a selected WIPS signature, or **Delete** to remove obsolete signatures from the list of those available.

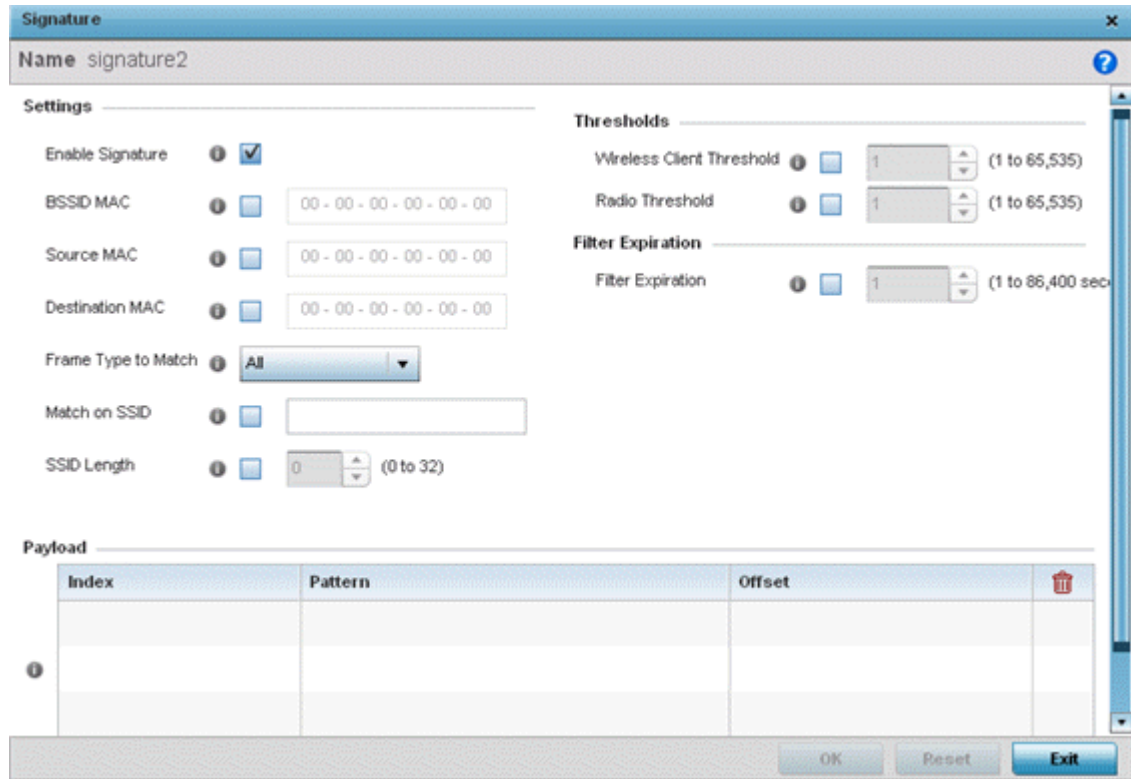


Figure 379: Wireless Signature Configuration Screen

22. If you are adding a new WIPS signature, define a **Name** to distinguish it from others with similar configurations.

The name cannot exceed 64 characters.

23. Set the following network address information for a new or modified WIPS Signature:

Enable Signature	Select the radio button to enable the WIPS signature for use with the profile. The default signature is enabled.
BSSID MAC	Define a BSS ID MAC address used for matching and filtering with the signature.
Source MAC	Define a source MAC address for the packet examined for matching, filtering and potential device exclusion using the signature.
Destination MAC	Set a destination MAC address for a packet examined for matching, filtering and potential device exclusion using the signature.
Frame Type to Match	Use the drop-down menu to select a frame type for matching with the WIPS signature.

Match on SSID	Sets the SSID used for matching. Ensure it is specified properly or the SSID won't be properly filtered.
SSID Length	Set the character length of the SSID used for matching purposes. The maximum length is 32 characters.

24. Refer to the **Thresholds** field to set the thresholds used as filtering criteria.

Wireless Client Threshold	Specify the threshold limit per client that, when exceeded, signals the event. The configurable range is from 1 - 65,535.
Radio Threshold	Specify the threshold limit per radio that, when exceeded, signals the event. The configurable range is from 1 - 65,535.

25. Set a **Filter Expiration** from 1 - 86,400 seconds that specifies the duration a client is excluded from radio association when responsible for triggering a WIPS event.

26. Refer to the **Payload** table to set a numerical index and offset for the WIPS signature.

27. Select **OK** to save the updates to the WIPS Signature configuration.

Select **Reset** to revert to the last saved configuration. The WIPS policy can be invoked and applied to the access point profile by selecting **Activate Wireless IPS Policy** from the upper left-hand side of the access point user interface.

Device Categorization

A proper classification and categorization of access points and clients can help suppress unnecessary unauthorized access point alarms, and allow an administrator to focus on alarms on devices actually behaving in a suspicious manner. An intruder with a device erroneously authorized could potentially perform activities that harm your organization.

Authorized access points and clients are generally known to you and conform with your organization's security policies. Unauthorized devices are those detected as interoperating within the network, but have not been approved. These devices should be filtered to avoid jeopardizing the data managed by the access point and its connected clients. Use the Device Categorization screen to apply neighboring and sanctioned (approved) filters on peer access points operating in this access point's radio coverage area. Detected client MAC addresses can also be filtered based on their classification in this access point's coverage area.

To categorize access points and clients as authorized or unauthorized:

1. Select **Configuration > Security > Device Configuration** to display existing device categorization policies.

The **Device Categorization** screen lists the device authorizations defined thus far.

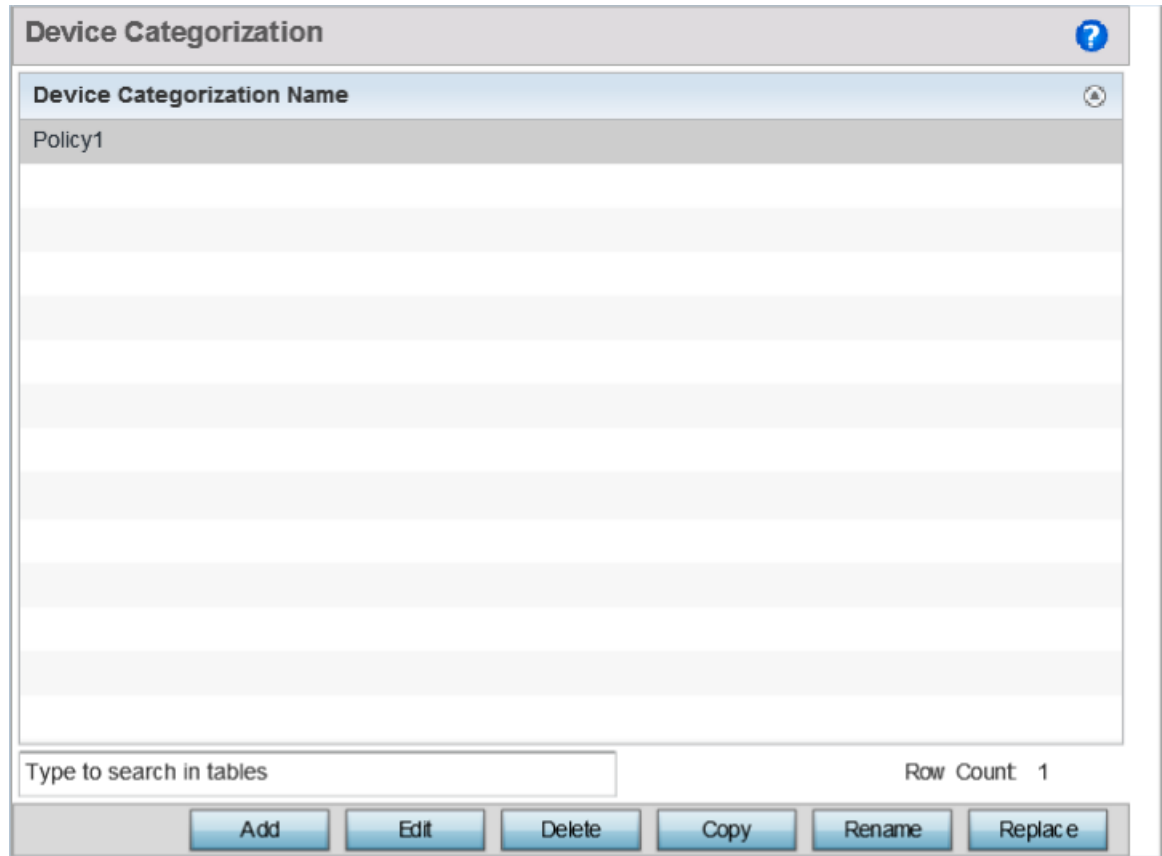


Figure 380: Device Categorization screen

2. Select **Add** to create a new Device Categorization policy, **Edit** to modify the attributes of a selected policy or **Delete** to remove obsolete policies from the list of those available.

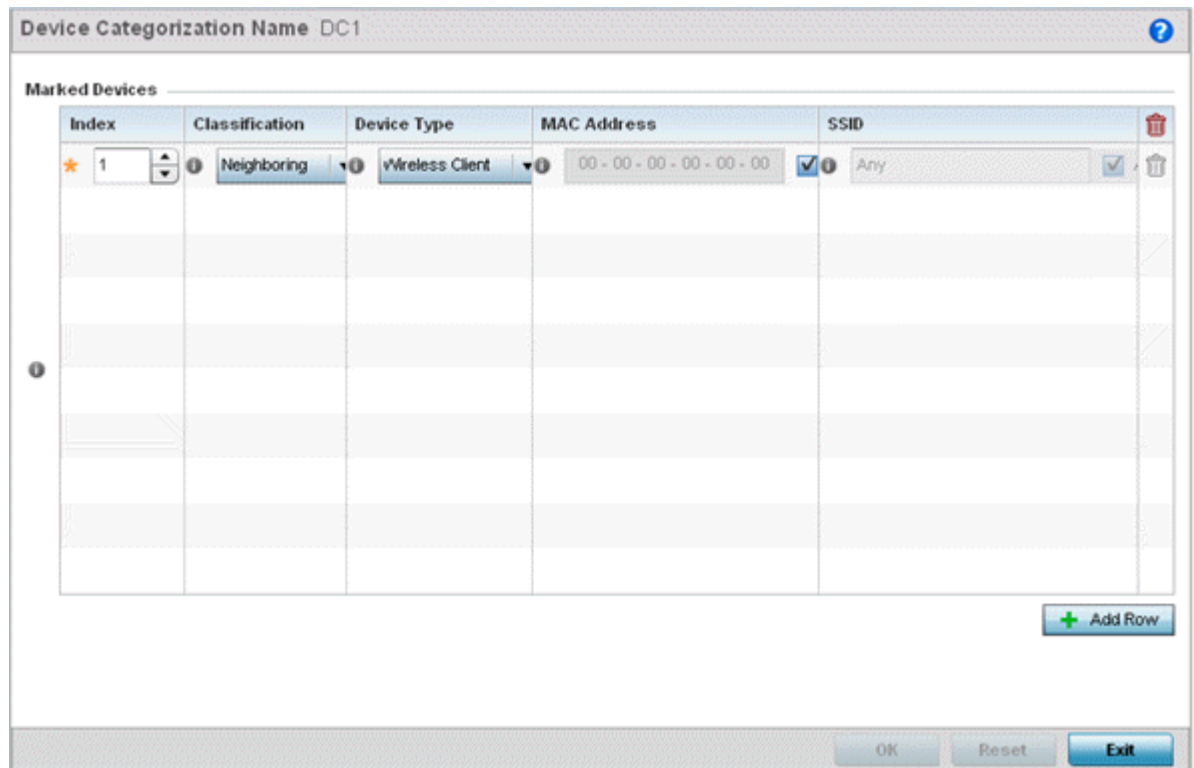


Figure 381: Device Categorization Screen - Marked Devices

3. If you are creating a new Device Categorization filter, give it a **Name** (up to 32 characters).
Select **OK** to save the name and enable the remaining device categorization parameters.
4. Select **+ Add Row** to populate the **Marked Devices** field with parameters for classifying an access point or client and defining the target device's MAC address and SSID.
Select the red **(-) Delete Row** icon as needed to remove an individual table entry.
5. Refer to Thresholds field to set the thresholds used as filtering criteria.

Index	Use the spinner control to designate a index value to this entry. Use a value in the range 1 - 1000.
Classification	Use the drop-down menu to designate the target device as either Sanctioned or Neighboring .
Device Type	Use the drop-down menu to designate the target device as either an access point or client.

MAC Address	Enter the factory coded MAC address of the target device. This address is hard coded by the device manufacturer and cannot be modified. This MAC address is defined as authorized or unauthorized as part of the device categorization process.
SSID	Enter the SSID of the target device requiring categorization. The SSID cannot exceed 32 characters.

6. Select **OK** to save the updates to the **Marked Devices** list.
Select **Reset** to revert to the last saved configuration.

Security Deployment Considerations

Before defining a firewall supported configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Firewalls implement access control policies. So if you do not have an idea of what kind of access to allow or deny, a firewall is of little value.
- It's important to recognize the firewall's configuration is a mechanism for enforcing a network access policy.
- A role based firewall requires an advanced security license to apply inbound and outbound firewall policies to users and devices.
- Firewalls cannot protect against tunneling over application protocols to poorly secured wireless clients.
- Firewalls should be deployed on WLANs implementing weak encryption to minimize access to trusted networks and hosts in the event the WLAN is compromised.
- Firewalls should be enabled when providing Captive Portal guest access. Firewalls should be applied to Captive Portal enabled WLANs to prevent guest user traffic from being routed to trusted networks and hosts.
- Before configuring WIPS support, refer to the following deployment guidelines to ensure the configuration is optimally effective:
- WIPS is best utilized when deployed in conjunction with a corporate or enterprise wireless security policy. Since an organization's security goals vary, the security policy should document site specific concerns. The WIPS system can then be modified to support and enforce these additional security policies
- WIPS reporting tools can minimize dedicated administration time. Vulnerability and activity reports should automatically run and be distributed to the appropriate administrators. These reports should highlight areas to be investigated and minimize the need for network monitoring.
- It is important to keep your WIPS system firmware and software up to date. A quarterly system audit can ensure firmware and software versions are current.
- Only a trained wireless network administrator can determine the criteria used to authorize or ignore devices. You may want to consider your organization's overall security policy and your tolerance for risk versus users' need for network access. Some questions that may be useful in deciding how to classify a device are:
- Does the device conform to any vendor requirements you have?
- What is the signal strength of the device? Is it likely the device is outside your physical radio coverage area?

- Is the detected access point properly configured according to your organization's security policies?
- Trusted and known access points should be added to an sanctioned AP list. This will minimize the number of unsanctioned AP alarms received.



Services Configuration

- [Captive Portal Policy](#) on page 893
- [Setting the DNS Whitelist Configuration](#) on page 908
- [Setting the DHCP Configuration](#) on page 909
- [Setting the Bonjour Gateway Configuration](#) on page 924
- [Setting the DHCPv6 Server Policy](#) on page 928
- [Setting the RADIUS Configuration](#) on page 935
- [Setting the URL List](#) on page 955
- [Configure Imagotag Policy](#) on page 957
- [Services Deployment Considerations](#) on page 962

The WING software supports services providing captive portal access, leased DHCP IP address assignments to requesting clients, and local RADIUS client authentication.

For more information, refer to the sections listed above.

Refer to [Services Deployment Considerations](#) on page 962 for tips on how to optimize the access point's configuration.

Captive Portal Policy

A *captive portal* is an access policy for providing guests temporary and restrictive access to the controller or service platform managed network.

A captive portal policy provides secure authenticated controller or service platform access using a standard Web browser. Captive portals provides authenticated access by capturing and re-directing a wireless user's Web browser session to a captive portal login page where the user must enter valid credentials to access to the network. Once logged into the captive portal, additional Terms and Agreement, Welcome, Fail and No Service pages provide the administrator with a number of options on captive portal screen flow and user appearance.

Captive portal authentication is used primarily for guest or visitor access, but is increasingly used to provide authenticated access to private network resources when 802.1X EAP is not a viable option. Captive portal authentication does not provide end-user data encryption, but it can be used with static WEP, WPA-PSK or WPA2-PSK encryption.

Authentication for captive portal access requests is performed using a username and password pair, authenticated by an integrated RADIUS server. Authentication for

private network access is conducted either locally on the requesting wireless client, or centrally at a datacenter.

Captive portal uses a Web provisioning tool to create guest user accounts directly on the controller or service platform. The connection medium defined for the Web connection is either HTTP or HTTPS. Both HTTP and HTTPS use a request and response procedure clients follow to disseminate information to and from requesting wireless clients.

Captive Portal Policy Basic Configuration

1. Select **Add** to create a new captive portal policy, **Edit** to modify an existing policy, or **Delete** to remove an existing captive portal policy. Select **Copy** to create a copy of an existing captive portal policy and use it for further customization. Select **Rename** to change the name of an existing policy or copy a policy to a different location.

Select **Replace** to replace an existing captive portal policy with another captive portal policy.

A **Basic Configuration** screen displays by default. Define the policy's security, access, and whitelist basic configuration before actual HTML pages can be defined for guest user access requests.

The screenshot shows the 'Captive Portal Policy' configuration window with the 'Basic Configuration' tab selected. The window is divided into several sections:

- Settings:**
 - Captive Portal Server Mode: Internal (Self), Centralized, Centralized Controller
 - Hosting VLAN Interface: (0 to 4,096)
 - Captive Portal Server Host:
 - Captive Portal IPv6 Server:
 - Connection Mode: HTTP, HTTPS
 - Simultaneous Access: (1 to 8,192)
- Security:**
 - AAA Policy:
- Access:**
 - Access Type: No authentication required, RADIUS Authentication, Registration, Email Access, Mobile Access, Other Access
 - Terms and Conditions page:
 - Frictionless Onboarding:
- Social Media Authentication:**
 - This feature requires access to the relevant websites. Please refer to the Help section for additional information.
 - Facebook:
 - Google:
- Bypass:**
 - Bypass Captive Portal Detection:

At the bottom right, there are three buttons: 'OK', 'Apply', and 'Exit'.

Figure 382: Captive Portal Policy - Add/Edit - Basic Configuration Tab

2. Define the following captive portal policy **Settings**:

Captive Portal Policy	If you are creating a new policy, assign a name representative of its access permissions, location or intended wireless client user base. If you are editing an existing captive portal policy, the policy name cannot be modified. The name cannot exceed 32 characters.
Captive Portal Server Mode	Set the mode as either Internal (Self) , Centralized or Centralized Controller . Select the Internal (Self) radio button to maintain the captive portal configuration (Web pages) internally. Select the Centralized radio button if the captive portal is supported on an external server. Select the Centralized Controller radio button if the captive portal is supported on a centralized controller or service platform. The default value is Internal (Self).
Hosting VLAN Interface	When Centralized is selected as the Captive Portal Server Mode , specify the VLAN (between 0 and 4096) for client communication. Select 0 to use the default client VLAN. 0 is the default setting.
Captive Portal Server Host	When Centralized is selected as the Captive Portal Server Mode , set a numeric IP address (or DNS hostname) for the server validating guest user permissions for the captive portal policy. When Centralized Controller is selected, use this field to provide the hostname of the controller or controllers acting as the captive portal server host.
Captive Portal IPv6 Server	Set a numeric IP address (non DNS hostname) for the server validating guest user permissions for the captive portal policy. This option is available only if you are hosting the captive portal on an external (Centralized) server resource.
Connection Mode	Select either HTTP or HTTPS to define the connection medium to the Web server. We recommend the use of HTTPS because it affords some additional data protection HTTP cannot provide. The default value, however, is HTTP.
Simultaneous Access	Select this check box and use the spinner control to set from 1-8192 users (client MAC addresses) allowed simultaneous access to the captive portal and its resources.

3. Use the **AAA Policy** drop-down menu to select the **AAA** policy used to validate user credentials and provide captive portal access to the network.

If no AAA policies exist, one must be created by selecting the **Create** icon, or an existing AAA policy can be selected and modified by selected it from the drop-down menu and selecting the **Edit** icon.

For information on creating a AAA policy, see [AAA Policy](#) on page 778.

4. Set the following **Access** parameters to define captive portal access, RADIUS lookup information, and whether the Login pages contain agreement terms that must be

accepted before access is granted to controller or service platform resources using the captive portal:

<p>Access Type</p>	<p>Select the authentication scheme applied to clients requesting captive portal guest access to the WiNG network. Within the WiNG UI there are six options. The WiNG CLI uses five options. User interface options include:</p> <ul style="list-style-type: none"> • No authentication required - Requesting clients are redirected to the captive portal Welcome page without authentication. • RADIUS Authentication - A requesting client's user credentials require authentication before access to the captive portal is permitted. This is the default setting. • Registration - A requesting client's user credentials require authentication through social media credential exchange. • Email Access - Clients use E-mail username and passwords for authenticating their captive portal session. Optionally set whether E-mail access requests are RADIUS validated. • Mobile Access - Mobile clients use their device's access permissions for authenticating their captive portal session. Optionally set whether mobile access requests are RADIUS validated. • Other Access - Requesting guest clients use a different means of captive portal session access (aside from E-mail or mobile device permissions). Optionally set whether these other access requests are RADIUS validated.
<p>Terms and Conditions page</p>	<p>Select this option (with any access type) to include terms that must be adhered to for clients requesting captive portal access. These terms are included in the Terms and Conditions page when No authentication required is selected as the access type, otherwise the terms appear in the Login page. The default setting is disabled.</p>
<p>Frictionless Onboarding</p>	<p>Select this option to enable wireless clients, associated with guest WLANs, to self-register with the server. In other words, this feature enables frictionless on-boarding of guest users to the ExtremeGuest server. It also provides an integration API, as a means of on-boarding guest users through a loyalty application. In the captive portal, set access-type as 'Registration', enable 'Frictionless Onboarding', and provide the Localization URL to trigger a one-time redirect on demand. The defined URL is triggered from a mobile application to derive location information from the wireless network so an application can be localized to a particular store or region.</p> <p>Note: If enabling this feature, in the WLAN (using this captive-portal) set the following parameters: authentication-type as 'MAC' and registration-mode as 'device'. Enable the 'External Controller' and 'Follow</p>

	AAA' options. Use the AAA Policy drop-down menu to specify the AAA policy. In the AAA policy, ensure that the authentication server configuration points to the ExtremeGuest server.
--	--

5. Set the following **Social Media Authentication** parameters to utilize a requesting client's social media profile for captive portal registration:

Facebook	If selected, the requesting client's guest user Facebook social media profile (collected from the social media server) is registered on the device. Captive portal authentication then becomes a fallback mechanism to enforce guest registration through social authentication. This option is disabled by default.
Google	If selected, the requesting client's guest user Google social media profile (collected from the social media server) is registered on the device. Captive portal authentication then becomes a fallback mechanism to enforce guest registration through social authentication. This option is disabled by default.

6. Refer to the **Bypass** field to enable or disable Bypass Captive Portal Detection capabilities.

If enabled, captive portal detection requests are bypassed. This feature is disabled by default.

7. Set the following **Client Settings** to define client VLAN assignments, how long clients are allowed captive portal access, and when clients are timed out due to inactivity:

RADIUS VLAN Assignment	Select this option to enable the RADIUS server to assign a VLAN post authentication. Once a captive portal user is authenticated, the user is assigned the VLAN as configured in the Post Authentication VLAN field.
Post Authentication VLAN	When this option is selected, a specific VLAN is assigned to the client upon successful authentication. The available range is from 1 - 4,096.
Client Access Time	Use the spinner control to define the duration wireless clients are allowed access to using the captive portal policy when there is no session time value defined for the RADIUS response. Set an interval from 10 - 10,800 minutes. The default interval is 1,440 minutes.
Inactivity Timeout	Use the drop-down menu to specify an interval in either minutes (1 - 1,440) or seconds (60 - 86,400) that, when exceeded, times out the session. The default is 10 minutes.

8. Define the following **Loyalty App** settings to allow administrators to detect and report a captive portal client's usage of a selected (preferred) loyalty application:

Enable	Select this option to report a captive portal client's loyalty application presence and store this information in the captive portal's user database. The client's loyalty application detection occurs on the access point to which the client is associated and allows a retail administrator to assess whether a captive portal client is using specific retail (loyalty) applications in their captive portal. This setting is enabled by default.
App Name	Use the drop-down menu to select an existing application to track for loyalty utilization by captive portal clients. This enables an administrator to assess whether patrons are accessing an application as expected in specific retail environments. To create an application if none exists suiting the specific reporting needs of captive portal clients, see Application on page 814.

9. Use the **DNS Whitelist** parameter to create a set of allowed destination IP addresses for the captive portal.

These allowed DNS destination IP addresses are called a *whitelist*.

Each supported access point model can support up to 32 whitelists.

To effectively host captive portal pages on an external web server, the IP addresses of the destination web servers should be in the whitelist.

- a. Refer to the drop-down menu of existing **DNS Whitelist** entries to select a policy to be applied to this captive portal policy.

If no DNS Whitelist entries exist, select the **Create** or **Edit** icons and do the following.

For more information, see [Setting the DNS Whitelist Configuration](#) on page 908.

- b. If creating a new Whitelist, assign it a name up to 32 characters.

Use the **+ Add Row** button to populate the **Whitelist with Host** and **IP Index** values.

DNS Entry	Match Suffix	
TestDevice	✓	🗑️
* <input type="text"/>	Hostname	🗑️
	No	🗑️

+ Add Row

OK Reset Exit

Figure 383: Captive Portal Policy - Basic Configuration - Add DNS Whitelist Screen

- c. Provide a numerical **IP address** or **Hostname** within the **DNS Entry** parameter for each destination IP address or host included in the whitelist.
 - d. Use the **Match Suffix** parameter to match any hostname or domain name as a suffix.
The default setting is disabled.
 - e. If necessary, select the radio button of an existing whitelist entry and select the **Delete** icon to remove the entry from the whitelist.
10. Set the following **Accounting** parameters to define how accounting is conducted for clients entering and exiting the captive portal.
- Accounting is the method of collecting and sending security server information for billing, auditing and reporting user data; such as captive portal start and stop times, executed commands (such as PPP), number of packets and number of bytes.

Accounting enables wireless network administrators to track captive portal services users are consuming.

Enable RADIUS Accounting	Select this option to use an external RADIUS resource for AAA accounting. When selected, a AAA Policy field displays. This setting is disabled by default.
Enable Syslog Accounting	Select this option to log information about the use of remote access services by users using an external syslog resource. This information is of great assistance in partitioning local versus remote users. Remote user information can be archived to an external location for periodic network and user administration. This feature is disabled by default.
Syslog Host	When syslog accounting is enabled, use the drop-down menu to determine whether an IP address or Hostname is used as a syslog host. The IP address or hostname of an external server resource is required to route captive portal syslog events to that destination external resource destination.
Syslog Port	When syslog accounting is enabled, define the numerical syslog port the used to route traffic with the external syslog server. The default port is 514.

11. Set the following **Data Limit** parameters values to define a data limit for clients accessing the network using the restrictions of a captive portal:

Limit	Select this option to enable data limits for captive portal clients. Specify the maximum amount of data, in megabytes, allowed for each captive portal client.
Action	When a captive portal client reaches its data usage limit, a specified log action is executed. Choose from one of the following: <ul style="list-style-type: none"> • Log Only — Logs the event • log-and-disconnect — Logs the event and disconnects the user

12. Set the **Logout FQDN** as the *fully qualified domain name* (FQDN) of the domain where the user will be redirected after logging out of the captive portal.

Example: `logout.guest.com`

13. Set the following **Localization** settings to add a URL to trigger a one-time redirect on demand.

The defined URL is triggered from a mobile application to derive location information from the wireless network so an application can be localized to a particular store or region.

FQDN	Provide the FQDN address (for example, <code>local.guestaccess.com</code>) used to obtain localization parameters for a client.
Response	Enter a response message (512-character maximum) directed back to the client for localization HTTP requests.

14. Refer to the **Destination Ports for Redirection** parameter (within the **Redirection Ports** field), and enter destination ports (separated by commas, or using a dash for a range) for consideration when re-directing client connections.

Standard ports 80 and 443 are always considered for client connections regardless of what's entered by the administrator.

15. Select **OK** to save the changes made within the **Basic Configuration** screen.
Select **Reset** to revert to the last saved configuration.

Captive Portal Policy Web Page Configuration

1. Select the **Web Page** tab to create locally or externally hosted HTML pages.
The **Login** page displays by default

Figure 384: Captive Portal Policy - Web Page - Internal Option Screen

2. Refer to the following for information on the various captive portal Web pages:

The **Login** screen prompts the user for a username and password to access the captive portal and proceed to either the Terms and Conditions page (if used) or the Welcome page.

The **Terms and Conditions** page provides conditions that must be agreed to before captive portal access is permitted.

The **Welcome** page asserts a user has logged in successfully and can access the captive portal.

The **Welcome Back** page greets returning users.

The **Fail** page asserts authentication attempt has failed, the user is not allowed to access the internet (using this captive portal) and must provide the correct login information again to access the internet.

The **No Service** page asserts the captive portal service is temporarily unavailable for technical reasons. Once the services become available, the captive portal user is automatically connected back to the services available through the captive portal.

3. Select the location where the captive portal Login, Terms and Conditions, Welcome, Fail, No Service and Registration Web pages are hosted.

Available sources include Internal, External and Advanced. If Internal is selected, provide the information for each of the screens. If Advanced is selected, follow the on-screen instructions to upload custom Web pages. If **Externally hosted** is selected, provide the URLs for each of the necessary pages in the fields below.

Organization Name	Set any organizational specific name or identifier which clients see during login. This setting is available only for the Login page.
Title Text	Set the title text displayed on the pages when wireless clients access captive portal pages. The text should be in the form of a page title describing the respective function of each page and should be unique to each function.
Header Text	Provide header text unique to the function of each page.
Login Message	Specify a message containing unique instructions or information for the users who access the Login, Terms and Condition, Welcome, Fail, No Service or Registration pages. In the case of the Terms and Agreement page, the message can be the conditions requiring agreement before captive portal access is permitted.
Footer Text	Provide a footer message displayed on the bottom of each page. The footer text should be any concluding message unique to each page before accessing the next page in the succession of captive portal Web pages.

Main Logo URL	The Main Logo URL is the URL for the main logo image displayed on each of the pages. Use the Browse button to navigate to the location of the target file. Optionally select the Use as banner option to designate the selected main logo as the page's banner as well. The banner option is disabled by default.
Small Logo URL	The Small Logo URL is the URL for a small logo image displayed on the screens. Use the Browse button to navigate to the location of the target file.
Signature	Provide the copyright and legal signature associated with the usage of the captive portal and the usage of the organization name provided. This setting is available only for the Login page.

4. Refer to the right side of each screen to define how the **Org Name/Signature Background Color**, **Org/Name Signature Text Color**, **Body Background Color** and **Body Text Color** display for current screen.

Select the box to the right of each of these four items to launch a color palette where screen colors can be selected uniquely. Select **Preview Page** to review your color selections before committing the updates to captive portal screens. Each of the Login, Terms and Conditions, Welcome, Fail, No Service and Registration screens can have their background and signature colors set uniquely.

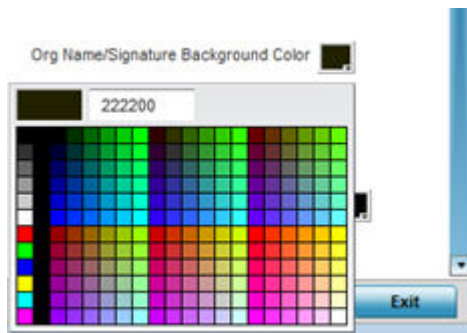


Figure 385: Captive Portal Policy - Web Page - Color Palette Menu

- When setting the properties of the **Registration** screen, refer to the bottom portion of the screen to define email, country, gender, mobile, zip, street and name filters used as additional authentication criteria.

Guest users are redirected to the registration portal on association to the captive portal SSID. Users are displayed an internal (or) externally hosted registration page where the guest user must complete the registration process if not previously registered.

These fields are customizable to meet the needs of retailers providing guest access. The captive portal sends a message to the user (on the phone number or Email address provided at registration) containing an access code. The user inputs the access code and the captive portal verifies the code before returning the Welcome page and providing access. This allows a retailer to verify the phone number or Email address is correct and can be traced back to a specific individual.

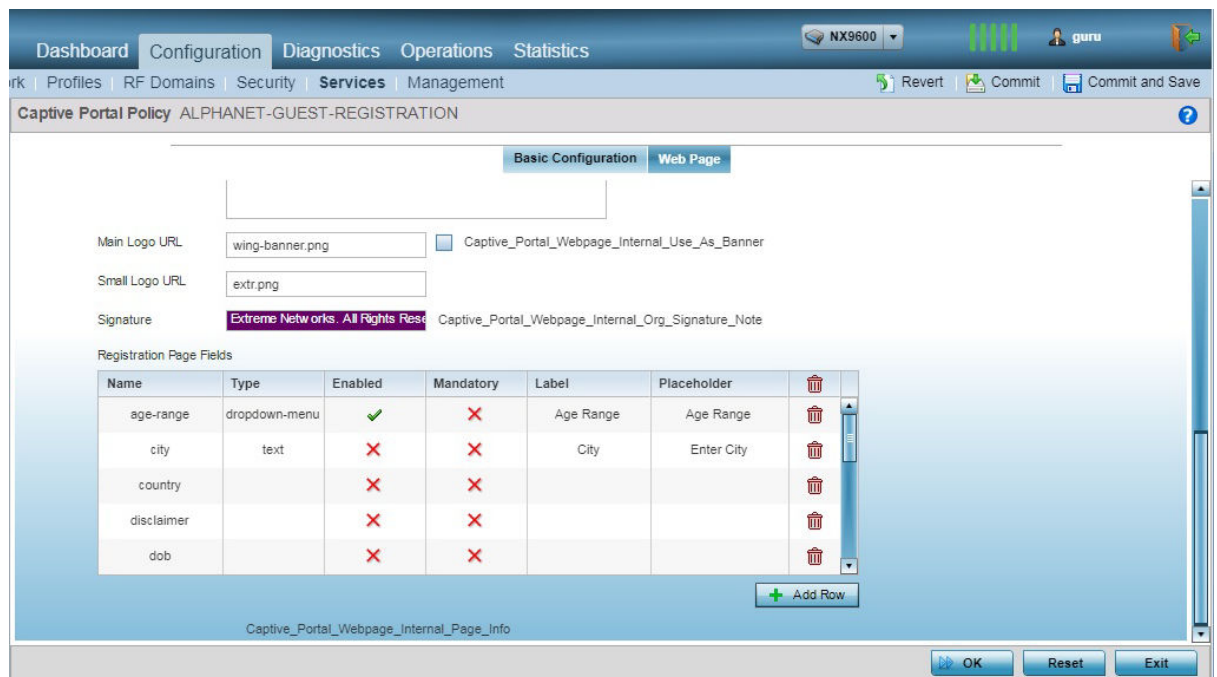


Figure 386: Captive Portal Policy - Web Page - Internal - Registration - Registration Page Fields Table

- Click **OK** to save the changes made within any of the **Internal Page** screens. Click **Reset** to revert to the last saved configuration.

7. If you are hosting the captive portal on an external system, select the **Externally Hosted** radio button.

The screenshot shows the 'Captive Portal Policy test' window with the 'Web Page' tab selected. Under 'Web Page Source', the 'Externally Hosted' radio button is selected. Below this are seven text input fields for 'Login URL', 'Agreement URL', 'Welcome URL', 'Fail URL', 'Welcome Back URL', 'No Service URL', and 'Registration URL'. A blue informational box at the bottom explains that these URLs point to external web pages for login, welcome, and failure messages. At the bottom right are 'OK', 'Reset', and 'Exit' buttons.

Figure 387: Captive Portal Policy Screen - Web Page Tab - Externally Hosted Web Page Screen

8. Set the following URL destinations for externally hosted captive portal pages:

Login URL	Define the complete URL for the location of the Login page. The Login screen prompts the user for a username and password to access the Terms and Conditions or Welcome page.
Agreement URL	Define the complete URL for the location of the Terms and Conditions page. The Terms and Conditions page provides conditions that must be agreed to before wireless client access is provided.
Welcome URL	Define the complete URL for the location of the Welcome page. The Welcome page asserts the user has logged in successfully and can access resources via the captive portal.
Fail URL	Define the complete URL for the location of the Fail page. The Fail page asserts authentication attempt has failed, and the client cannot access the captive portal and the client needs to provide correct login information to regain access.

Welcome Back URL	Define the complete URL for the location of the Welcome Back page. The Welcome Back page asserts the user has re-logged in successfully and can access resources via the captive portal.
No Service URL	Define the complete URL to the location of the No Service page. The No Service URL is needed by users encountering difficulties connecting to the external resource used to host the captive portal pages.
Registration URL	Define the complete URL to the location of the Registration page. The Registration page is displayed to new users to register (provide user information) in order to access the captive portal managed Internet resources.

9. Click **OK** when completed to update the captive portal policy settings.
Click **Reset** to revert to the last saved configuration.
10. Select **Advanced** to use a custom-developed directory of web pages.
Web pages in the directory can be copied to and from the access point, to support the captive portal.

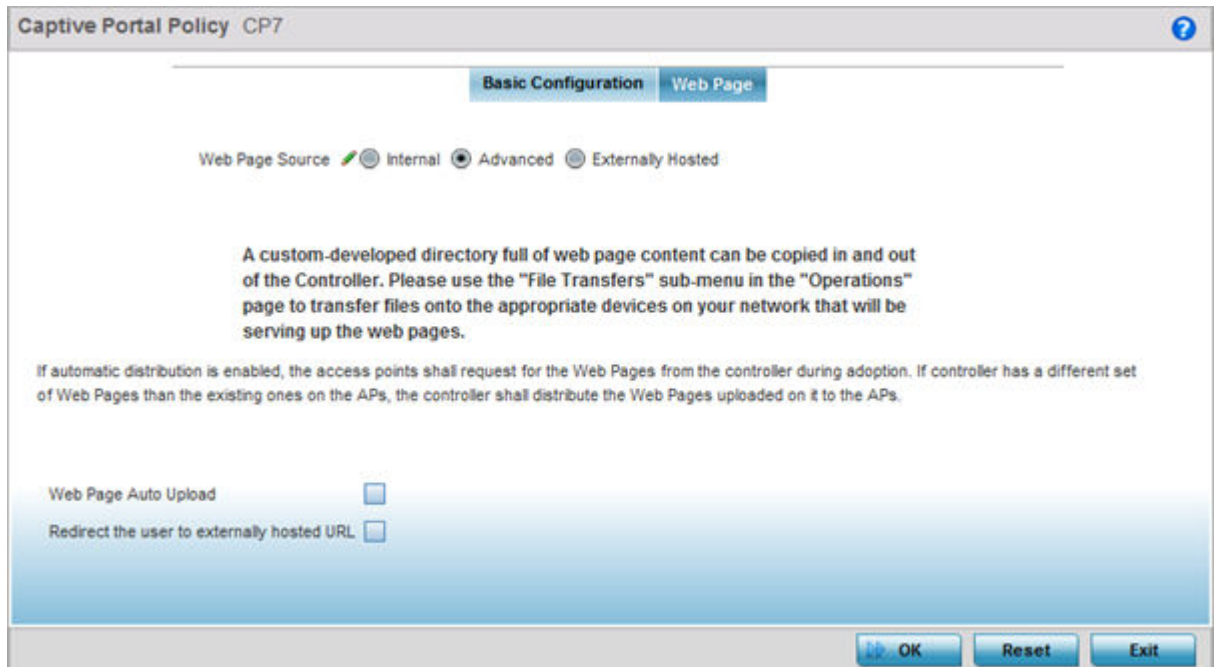


Figure 388: Captive Portal Policy - Web Page Screen - Advanced Option

11. The access point maintains its own set of Advanced web pages for custom captive portal creation.
Refer to **Operations > Devices > File Transfers** and use the **Source** and **Target** fields to move captive portal pages as needed to managed devices that may be displaying and hosting captive portal connections.

Select the **Web Page Auto Upload** check box to enable automatic upload of captive portal Web pages.

Select the **Redirect the user to externally-hosted success URL** check box, if the Welcome page is externally hosted.

- Click **OK** when completed to update the captive portal's advanced configuration.
Click **Reset** to revert the screen back to its last saved configuration.

Setting the DNS Whitelist Configuration

A DNS whitelist is used in conjunction with a captive portal to provide captive portal services to wireless clients. Use the DNS whitelist parameter to create a set of allowed destination IP addresses within the captive portal. These allowed IP addresses are called the Whitelist. To effectively host captive portal pages on an external Web server, the IP address of the destination Web server(s) should be in the whitelist. Each supported access point model can support up to 32 whitelists, with the exception of AP6521 model which can only support up to 16 whitelists.

To define a DNS whitelist:

- Select **Configuration > Services > DNS Whitelist**.
The **DNS Whitelist** screen displays those existing whitelists available to a captive portal.
- Select **Add** to create a whitelist, **Edit** to modify a selected whitelist, or **Delete** to remove a whitelist.
- To create a whitelist, assign it a name up to 32 characters.
Use the **+ Add Row** button to populate the whitelist table with Host and IP Index parameters that must be defined for each whitelist entry.

DNS Entry	Match Suffix	
TestDevice	✓	✖
<input type="text"/>	Hostname	No
		✖
		✖
		✖
		✖
		✖
		✖
		✖

+ Add Row

OK Reset Exit

Figure 389: DNS Whitelist Screen

- Provide a numerical IP address or Hostname within the DNS Entry parameter for each destination IP address or host in the whitelist.

5. Use the Match Suffix parameter to match any hostname or domain name as a suffix. The default setting is disabled.
6. If necessary, select the radio button of an existing whitelist entry and select the - **Delete** icon to remove the entry from the whitelist.
7. Click **OK** when completed to update the whitelist screen.
Click **Reset** to revert the screen to its last saved configuration.

Setting the DHCP Configuration

Dynamic Host Configuration Protocol (DHCP) allows hosts on an IP network to request and be assigned IP addresses and discover information about the network where they reside. Each subnet can be configured with its own address pool. Whenever a DHCP client requests an IP address, the DHCP server assigns an IP address from that subnet's address pool. When the onboard DHCP server allocates an address for a DHCP client, the client is assigned a lease, which expires after a pre-determined interval. Before a lease expires, wireless clients (to which leases are assigned) are expected to renew them to continue to use the addresses. Once the lease expires, the client is no longer permitted to use the leased IP address. The DHCP server ensures all IP addresses are unique, and no IP address is assigned to a second client while the first client's assignment is valid (its lease has not yet expired). Therefore, IP address management is conducted by the internal DHCP server, not by an administrator.

The internal DHCP server groups wireless clients based on defined user-class options. Clients with a defined set of user class values are segregated by class. A DHCP server can associate multiple classes to each pool. Each class in a pool is assigned an exclusive range of IP addresses. DHCP clients are compared against classes. If the client matches one of the classes assigned to the pool, it receives an IP address from the range assigned to the class. If the client doesn't match any of the classes in the pool, it receives an IP address from a default pool range (if defined). Multiple IP addresses for a single VLAN allow the configuration of multiple IP addresses, each belonging to different subnet. Class configuration allows a DHCP client to obtain an address from the first pool to which the class is assigned.

Refer to the following sections for more information on configuring DHCP parameters:

- [Defining DHCP Pools](#) on page 911
- [Defining DHCP Server Global Settings](#) on page 920
- [DHCP Class Policy Configuration](#) on page 922
- [DHCP Deployment Considerations](#) on page 923

To access and review the local DHCP server configuration:

1. Select **Configuration > Services > DHCP Server Policy**.

The **DHCP Server** screen displays. Clients with a defined set of user class values are segregated by class. A DHCP server can associate multiple classes to each pool. Each class in a pool is assigned an exclusive range of IP addresses. DHCP clients are then compared against classes.

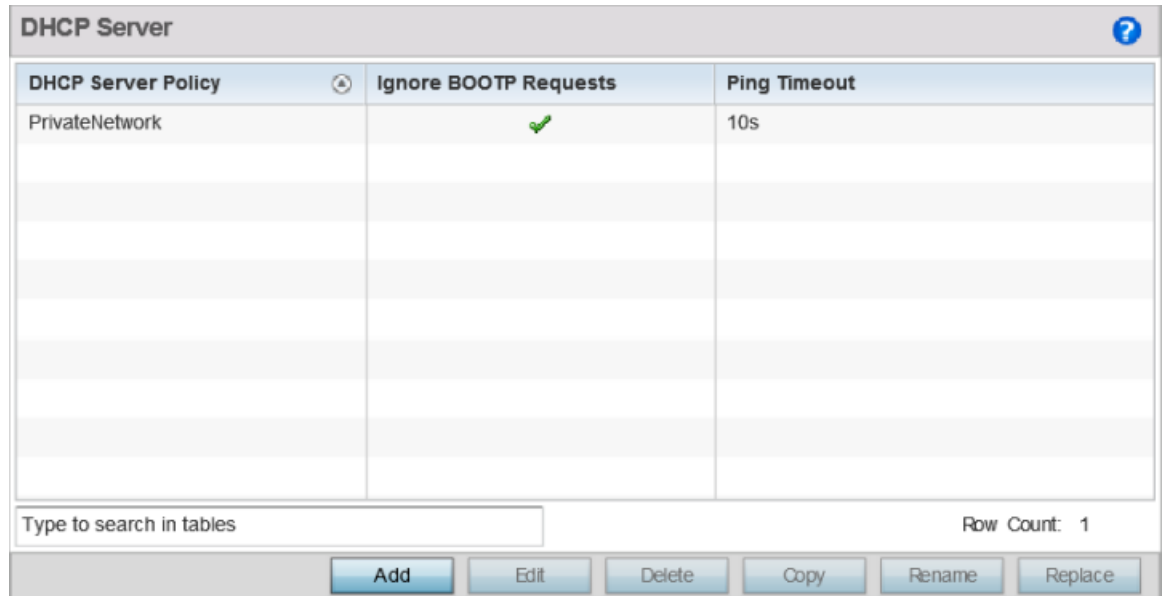


Figure 390: DHCP Server Policy Screen

2. Review the following DHCP server configurations (at a high level) to determine whether a new server policy requires creation, an existing policy requires modification or an existing policy requires deletion.

DHCP Server Policy	Lists the name assigned to each DHCP server policy when it was initially created. The name assigned to a DHCP server policy cannot be modified as part of the policy edit process. However, obsolete policies can be deleted as needed.
Ignore BOOTP Requests	A green checkmark within this column means this policy has been set to ignore BOOTP requests. A red “X” defines the policy as accepting BOOTP requests. BOOTP (boot protocol) requests boot remote systems within the controller or service platform managed network. BOOTP messages are encapsulated inside UDP messages and are forwarded by the controller or service platform. This parameter can be changed within the DHCP Server Global Settings screen.
Ping Timeout	Lists the interval (from 1 -10 seconds) for a DHCP server ping timeout. The timeout is used to intermittently ping and discover whether a client requested IP address is already in use. This parameter can be changed within the DHCP Server Global Settings screen.

- Click **Add** to create a new DHCP server policy, choose an existing policy and click **Edit** to modify the policy's properties, or choose an existing policy and click **Delete** to remove the policy from those available.

Adding or Editing a DHCP server policy displays the **DHCP Server Policy** screen by default. Click **Rename** to change the name of an existing policy or **Copy** a policy to a different location.

Defining DHCP Pools

A *pool* (or range) of IP network addresses and DHCP options can be created for each IP interface configured. This range of addresses can be made available to DHCP enabled wireless devices on either a permanent or leased basis. DHCP options are provided to each DHCP client with a DHCP response and provide DHCP clients information required to access network resources (default gateway, domain name, DNS server and WINS server configuration). An option exists to identify the vendor and functionality of a DHCP client. The information is a variable-length string of characters (or octets) with a meaning specified by the vendor of the DHCP client.

To define the parameters of a DHCP pool:

- Select **Configuration > Services**.
- Select **DHCP Server Policy**.

The **DHCP Server Policy** screen displays the DHCP Pool tab by default.

DHCP Pool	Subnet	Domain Name	Boot File	Lease Time
vlan1	192.168.1.0/24			1d 0h 0m 0s
vlan174	172.168.11.0/24			1d 0h 0m 0s
vlan4	172.168.7.0/24			1d 0h 0m 0s

Type to search in tables Row Count: 3

Figure 391: DHCP Server Policy - Add/Edit - DHCP Pool Tab

3. Review the following DHCP pool configurations to determine if an existing pool can be used as is, a new one requires creation or edit, or a pool requires deletion:

DHCP Pool	Displays the name assigned to the network pool when created. The DHCP pool name represents the group of IP addresses used to assign to DHCP clients upon request. The name assigned cannot be modified as part of the edit process. However, if the network pool configuration is obsolete it can be deleted.
Subnet	Displays the network address and mask used by clients requesting DHCP resources.
Domain Name	Displays the domain name defined used with this network pool. <i>Domain Name Services</i> (DNS) converts human-readable host names into IP addresses. Host names are not case sensitive and can contain alphabetic or numeric letters or a hyphen. A <i>fully qualified domain name</i> (FQDN) consists of a host name plus a domain name. For example, <i>computername.domain.com</i> .
Boot File	Boot files (<i>Boot Protocol</i>) are used to boot remote systems over the network. BOOTP messages are encapsulated inside UDP messages, so requests and replies can be forwarded. Each DHCP network pool can use a different file as needed.
Lease Time	If a lease time has been defined for a listed network pool, it displays in an interval from 1 - 9,999,999 seconds. DHCP leases provide addresses for defined times to various clients. If a client does not use the leased address for the defined time, that IP address can be re-assigned to another requesting DHCP client.

4. Select **Add** to create a new DHCP pool, **Edit** to modify an existing pool's properties or **Delete** to remove a pool from among those available.

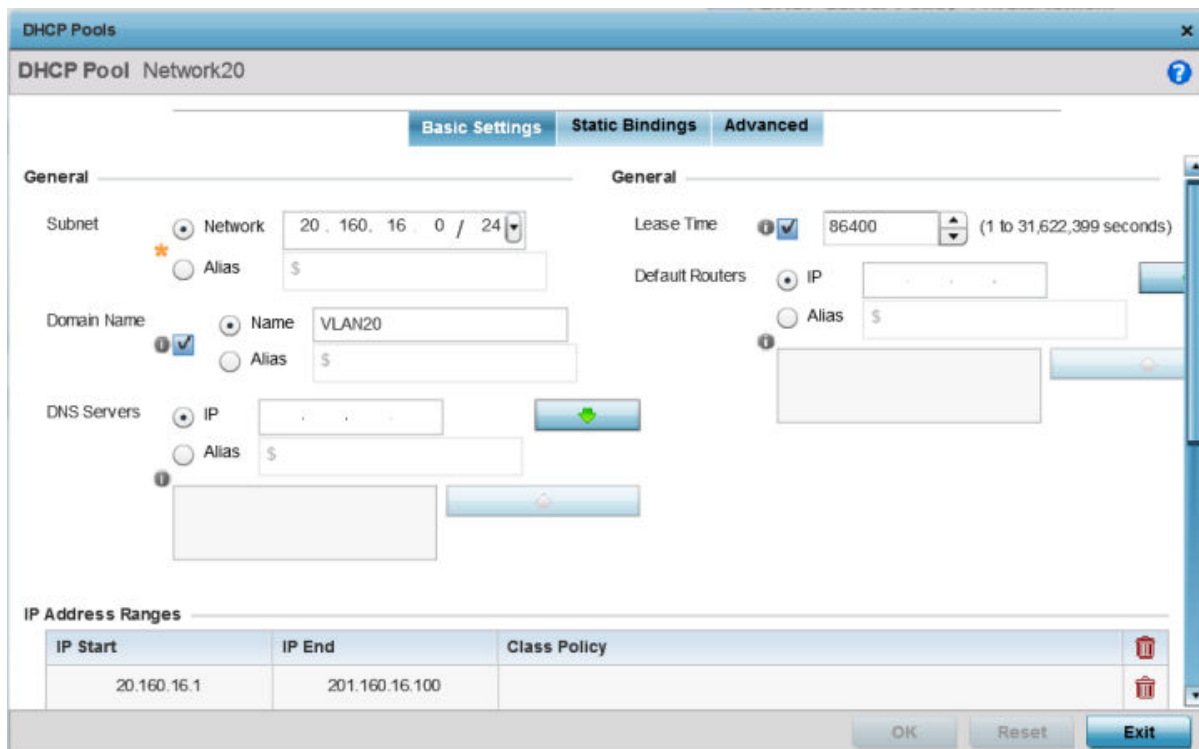


Figure 392: DHCP Pools - Add/Edit - Basic Settings Tab

If you are adding or editing a DHCP pool, the **DHCP Pool** screen displays the Basic Settings tab by default. Define the required parameters for the Basic Settings, Static Bindings and Advanced tabs to complete the creation of the DHCP pool.

5. Set the following **General** parameters, or aliases, from within the Basic Settings tab.

DHCP Pool	If adding a new pool, a name is required. The pool is the range of IP addresses defined for DHCP assignment or lease. The name assigned cannot be modified as part of the edit process. However, if the network pool configuration is obsolete it can be deleted. The name cannot exceed 32 characters.
Subnet	Define the IP address/Subnet Mask or IP alias used for DHCP discovery and requests between the local DHCP server and clients. The IP address and subnet mask (or its alias) are required to match the addresses of the layer 3 interface for the addresses to be supported through that interface. Select Alias to use a network alias with the subnet configuration. For more information, see Alias on page 801.
Domain Name	Provide the domain name or domain alias used with this pool. Domain names are not case sensitive and can contain alphabetic or numeric letters or a hyphen. A <i>fully qualified domain name</i> (FQDN) consists of a host name plus a domain name. For example, <i>computername.domain.com</i> . Select Alias to use a string alias with the domain name configuration. For more information, see Alias on page 801.

DNS Servers	Define one (or a group) of Domain Name Servers (DNS) to translate domain names to IP addresses. Select Clear to remove any single IP address as needed. Up to eight IP addresses can be supported. Select Alias to use a host alias with the DNS servers configuration. For more information, see Alias on page 801.
Lease Time	DHCP leases provide addresses for defined times to various clients. If a client does not use the leased address within the defined time, that IP address can be re-assigned to another DHCP supported client. Select this option to assign a lease in either Seconds (1 - 31,622,399), Minutes (1 - 527,040), Hours (1 - 8,784) or Days (1 - 366). The default setting is enabled, with a lease time of 1 day.
Default Routers	After a DHCP client has booted, the client begins sending packets to its default router. Set the IP address or IP alias for one or more routers used to map host names into IP addresses for clients. Up to eight default router IP addresses are supported. If setting a default router IP alias, ensure it begins with a dollar sign (\$) and does not exceed 32 characters. An actual router IP address is the default setting, not an alias. Select Alias to use a hoast alias with the default routers configuration. For more information, see Alias on page 801.

6. Define the range of included (starting and ending IP addresses) addresses for this particular pool.

Use the **IP Address Ranges** and **Excluded IP Address Ranges** fields for this operation.

- a. Select the **+ Add Row** button at the bottom of the IP addresses field to add a new range.

Select the radio button of an existing IP address range and select the **Delete** icon to remove it from the list of those available.

- b. Enter a viable range of IP addresses in the **IP Start** and **IP End** columns.

This is the range of addresses available for assignment to requesting clients.

- c. Select the **Create** icon or the **Edit** icon within the **Class Policy** column to display the **DHCP Server Policy** screen if a class policy is not available from the drop-down menu.

7. Refer to the **Excluded IP Address Range** field and select the **+Add Row** button.

Add ranges of IP address to exclude from lease to requesting clients. Having ranges of unavailable addresses is a good practice to ensure IP address resources are in reserve. Select the **Delete** icon as needed to remove an excluded address range.

8. Click **OK** to save the updates to the DHCP Pool Basic Settings tab.

Click **Reset** to revert to the last saved configuration.

9. Select the Static Bindings tab from within the **DHCP Pools** screen.

A binding is a collection of configuration parameters, including an IP address, associated with, or bound to, a DHCP client. Bindings are managed by DHCP servers. DHCP bindings automatically map a device MAC address to an IP address using a pool of DHCP supplied addresses. Static bindings assign IP addresses without creating numerous host pools with manual bindings. Static host bindings use a text file the DHCP server reads. It eliminates the need for a lengthy configuration file and reduces the space required to maintain address pools.

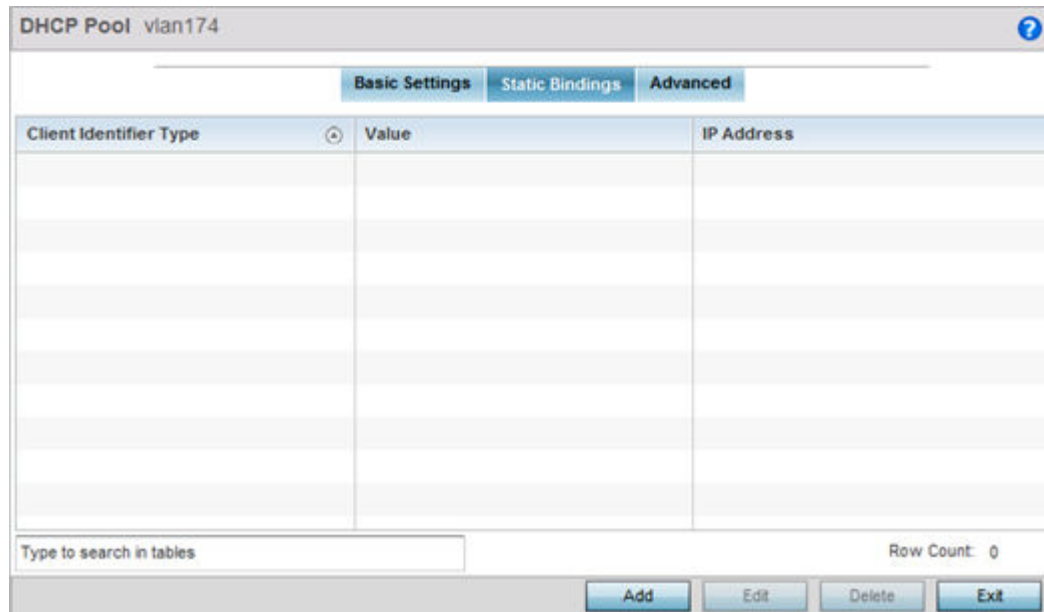


Figure 393: DHCP Pools - Add/Edit - Static Bindings Tab

10. Review existing DHCP pool static bindings to determine if a static binding can be used as is, if a new binding requires creation or edit, or if a binding requires deletion:

Client Identifier Type	Whether the reporting client is using a hardware address or client identifier as its identifier type within requests to the DHCP server.
Value	The hardware address or client identifier assigned to the client when added or last modified.
IP Address	The IP address of the client on this interface that’s currently using the pool name listed.

- Click **Add** to create a new static binding configuration, **Edit** to modify an existing static binding configuration or **Delete** to remove a static binding from among those available.

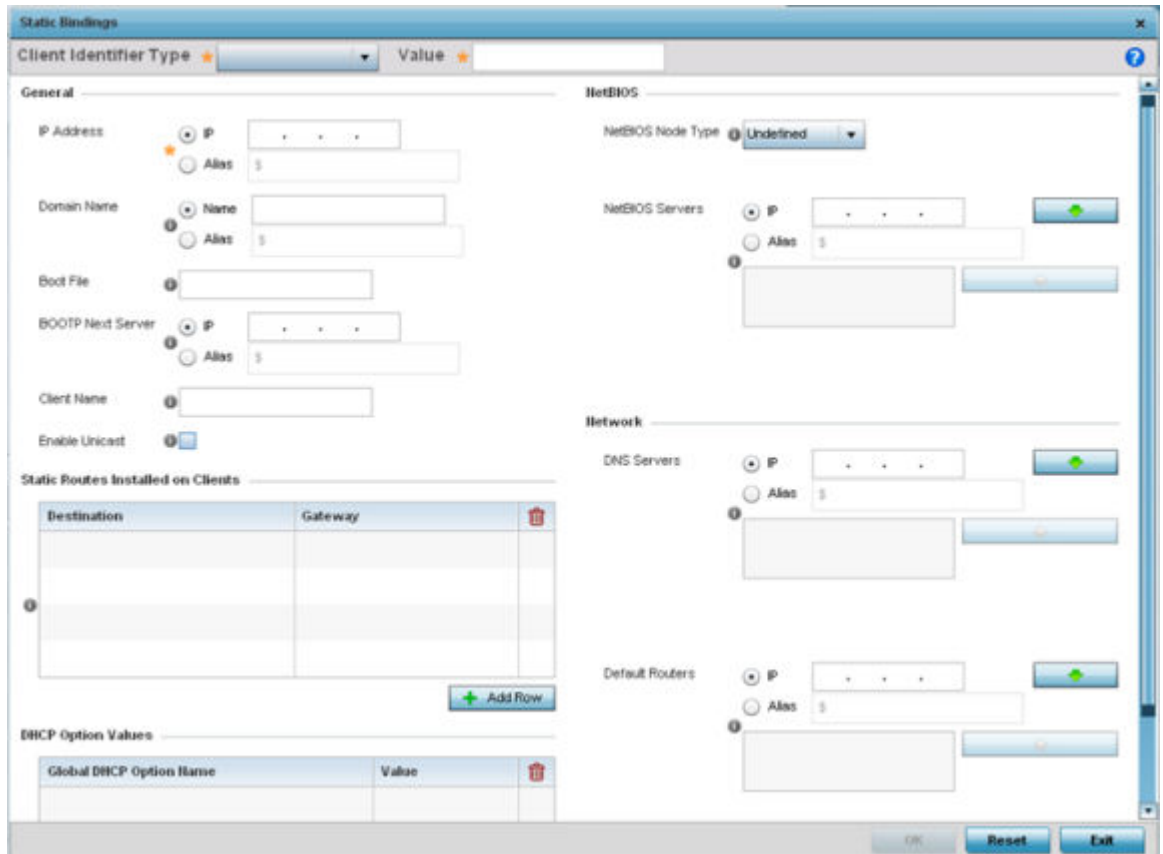


Figure 394: DHCP Pools - Add/Edit - Static Bindings - Add Screen

- Set the following **General** parameters or aliases to complete the creation of the static binding configuration.

Client Identifier Type	Use the drop-down menu whether the DHCP client is using a Hardware Address or Client Identifier as its identifier type with a DHCP server.
Value	Provide a hardware address or client identifier value to help differentiate the client from other client identifiers.
IP Address	Set the IP address of the client using this host pool. Select Alias to use a network alias with the IP address configuration. For more information, see Alias on page 801.
Domain Name	Provide a domain name for the current interface. Domain names are not case sensitive and can contain letters, numbers, and hyphens. A <i>fully qualified domain name</i> (FQDN) consists of a host name plus a domain name. For example, <i>computername.domain.com</i> . Select Alias to use a string alias with the domain name configuration. For more information see Alias on page 801.

Boot File	Enter the name of the boot file used with this pool. Boot files (Boot Protocol) can be used to boot remote systems over the network. BOOTP messages are encapsulated inside UDP messages so requests and replies can be forwarded. Each DHCP network pool can use a different file as needed.
BOOTP Next Server	Provide the numerical IP address or alias of the server providing BOOTP resources. Select Alias to use a network alias with the BOOTP Next Server configuration. For more information see Alias on page 801.
Client Name	Provide the name of the client requesting DHCP Server support.
Enable Unicast	Unicast packets are sent from one location to another location (there is just one sender and one receiver). Select this option to forward unicast messages to just a single device within this network pool. This setting is disabled by default.

13. Define the following **NetBIOS** parameters to complete the creation of the static binding configuration:

NetBIOS Node Type	Set the NetBIOS Node Type used with this particular pool. The following options are available: <ul style="list-style-type: none"> • Broadcast - Uses broadcasting to query nodes on the network for the owner of a NetBIOS name. • Peer-to-Peer - Uses directed calls to communicate with a known NetBIOS name server (such as a WINS server), for the IP address of a NetBIOS machine. • Mixed - A mixed node using broadcast queries to find a node, and failing that, queries a known p-node name server for the address. • Hybrid - A combination of two or more nodes. • None - No node type is applied.
NetBIOS Servers	Specify a numerical IP address of a single NetBIOS WINS server or a group of servers available to requesting clients. A maximum of eight server IP addresses can be assigned. Select Alias to use a network alias with the NetBIOS server configuration. For more information see Alias on page 801.

14. Refer to the **Static Routes Installed on Clients** field to set Destination IP and Gateway addresses enabling the assignment of static IP addresses without creating numerous host pools with manual bindings.

This eliminates the need for a long configuration file and reduces the space required in NVRAM to maintain address pools. Select the **+ Add Row** button to add individual destinations. Select the Delete icon to remove it from the list of those available.

15. Refer to the **DHCP Option Values** table to set Global DHCP options.

A set of global DHCP options applies to all clients, whereas a set of subnet options applies only to the clients on a specified subnet. If you configure the same option in more than one set of options, the precedence of the option type decides which the DHCP server supports a client.

a. Select the **+ Add Row** button to add individual options.

Assign each one a **Global DHCP Option Name** to help differentiate it from others with similar configurations. Select the radio button for an existing option and select the **- Delete** button to remove it from the list of those available.

b. Assign a Value to each option with codes from 1 through 254.

A vendor-specific option definition only applies to the vendor class for which it is defined.

16. In the **Network** field, define one or more of DNS Servers and Default Routers to translate domain names to IP addresses.

Up to eight IP addresses can be provided. The IP option is selected by default for both DNS Servers and Default Routers. foo

Select **Alias** to use a network alias with the DNS server configuration.. For more information see [Alias](#) on page 801.

17. Click **OK** when completed to update the static bindings configuration.

Click **Reset** to revert the screen back to its last saved configuration.

18. Select the Advanced tab to define additional NetBIOS and Dynamic DNS parameters.

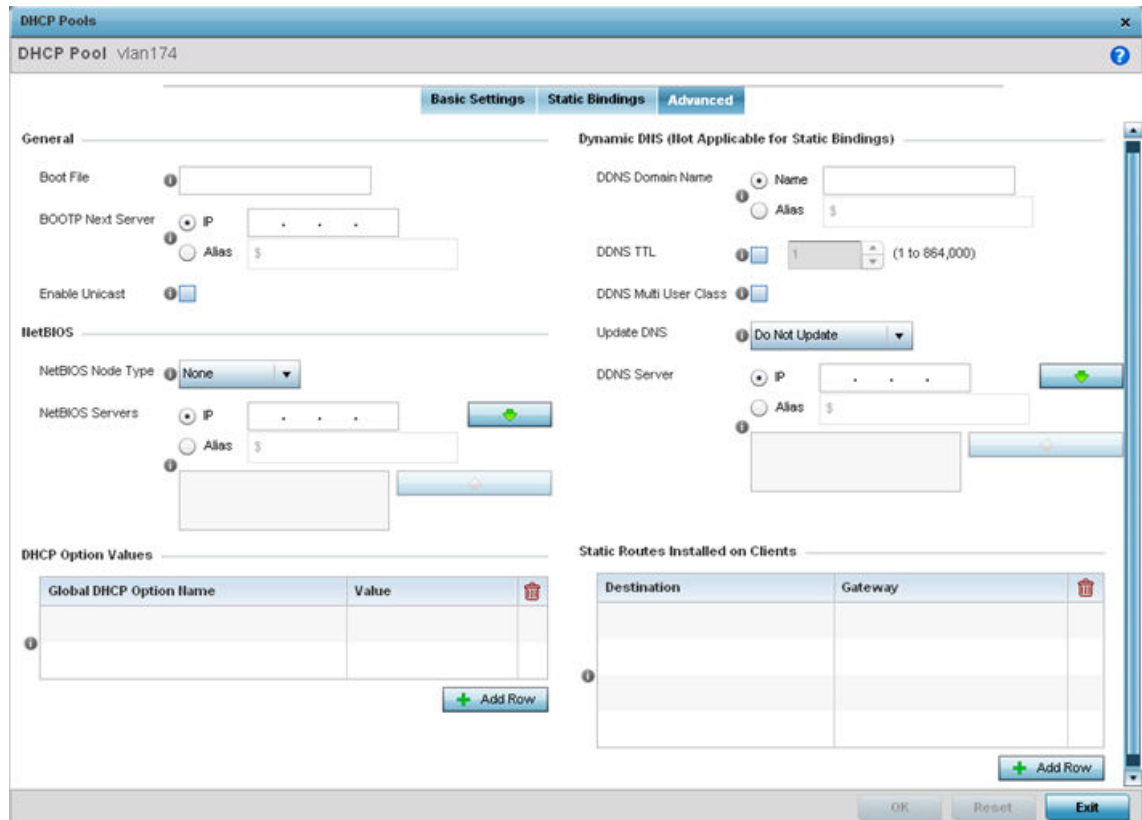


Figure 395: DHCP Pools - Add/Edit - Advanced Tab

19. To add or modify the DHCP pool's advanced settings, set the following General parameters:

Boot File	Enter the name of the boot file used with this pool. Boot files (boot protocol) can be used to boot remote systems over the network. BOOTP messages are encapsulated inside UDP messages so requests and replies can be forwarded. Each pool can use a different file as needed.
BOOTP Next Server	Provide the numerical IP address or alias of the server providing BOOTP resources. Select Alias to use a network alias with the BOOTP Next Server configuration. For more information see Alias on page 801.
Enable Unicast	Unicast packets are sent from one location to another location (there's just one sender, and one receiver). Select this option to forward unicast messages to just a single device within the network pool. This setting is disabled by default.

20. Set the following **NetBIOS** parameters for the network pool:

NetBIOS Node Type	Set the NetBIOS Node Type used with this particular pool. The following options are available: <ul style="list-style-type: none"> • Broadcast - Uses broadcasting to query nodes on the network for the owner of a NetBIOS name. • Peer-to-Peer - Uses directed calls to communicate with a known NetBIOS name server (such as a WINS server), for the IP address of a NetBIOS machine. • Mixed - Mixed uses broadcast queries to find a node, and failing that, queries a known p-node name server for the address. • Hybrid - A combination of two or more nodes. • None - No NetBIOS node type is applied.
NetBIOS Servers	Specify a numerical IP address of a single NetBIOS WINS server or a group of servers available to requesting clients. A maximum of eight server IP addresses can be assigned. Select Alias to use a network alias with the NetBIOS server configuration. For more information see Alias on page 801.

21. Refer to the **DHCP Option Values** table to set Global DHCP options applicable to all clients, whereas a set of subnet options applies only to the clients on a specified subnet.

a. Select the **+ Add Row** button to add individual options.

Assign each a Global DHCP Option Name to help differentiate it from others with similar configurations. Select the radio button of an existing option and select **Delete** to remove it from the list.

b. Assign a Value to each option from 1 through 254.

A vendor-specific option definition applies only to the vendor class for which it is defined.

22. Define the following set of **Dynamic DNS (Not Applicable for Static Bindings)** parameters used with the network pool configuration.

Using DDNS controllers and service platforms can instruct a DNS server to change, in real time (ad hoc) the active DNS configuration of its configured hostnames, addresses or other information stored in DNS.

DDNS Domain Name	Enter a domain name for DDNS updates representing the forward zone in the DNS server. For example, <i>test.net</i> . The Name option is selected by default. Optionally select Alias to provide a DDNS domain name alias beginning with a dollar sign (\$) and not exceeding 32 characters.
DDNS TTL	Select this option to set a TTL (Time to Live) to specify the validity of DDNS records. The maximum value configurable is 864000 seconds.
DDNS Multi User Class	Select the check box to associate the user class option names with a multiple user class. This allows the user class to transmit multiple option values to DHCP servers supporting multiple user class options.
Update DNS	Set if DNS is updated from a client or a server. Select either Do Not Update , Update from Server , or Update from Client . The default setting is Do Not Update , implying that no DNS updates occur at all.
DDNS Server	Specify a numerical IP address of one or two DDNS servers. Dynamic DNS (DDNS) prompts a computer or network to obtain a new IP address lease and dynamically associate a hostname with that address, without having to manually enter the change every time. Since there are situations where an IP address can change, it helps to have a way of automatically updating hostnames that point to the new address every time. The IP option is selected by default. Optionally select Alias to provide a DDNS server IP alias beginning with a dollar sign (\$) and not exceeding 32 characters.

23. Refer to the **Static Routes Installed on Clients** table to set fixed routes for client destination and gateways.

Select the **+ Add Row** button to add individual options for Destination and Gateway addresses.

24. Click **OK** to save updates to the DHCP pool's Advanced settings.

Click **Reset** to revert the screen to its last saved configuration.

Defining DHCP Server Global Settings

Set a DHCP server global configuration by defining whether BOOTP requests are ignored and by defining DHCP global server options.

To define DHCP server global settings:

1. Select the Global Settings tab and ensure that the **Activate DHCP Server Policy** button remains selected.

This option must remain selected to implement the configuration as part of the access point profile.

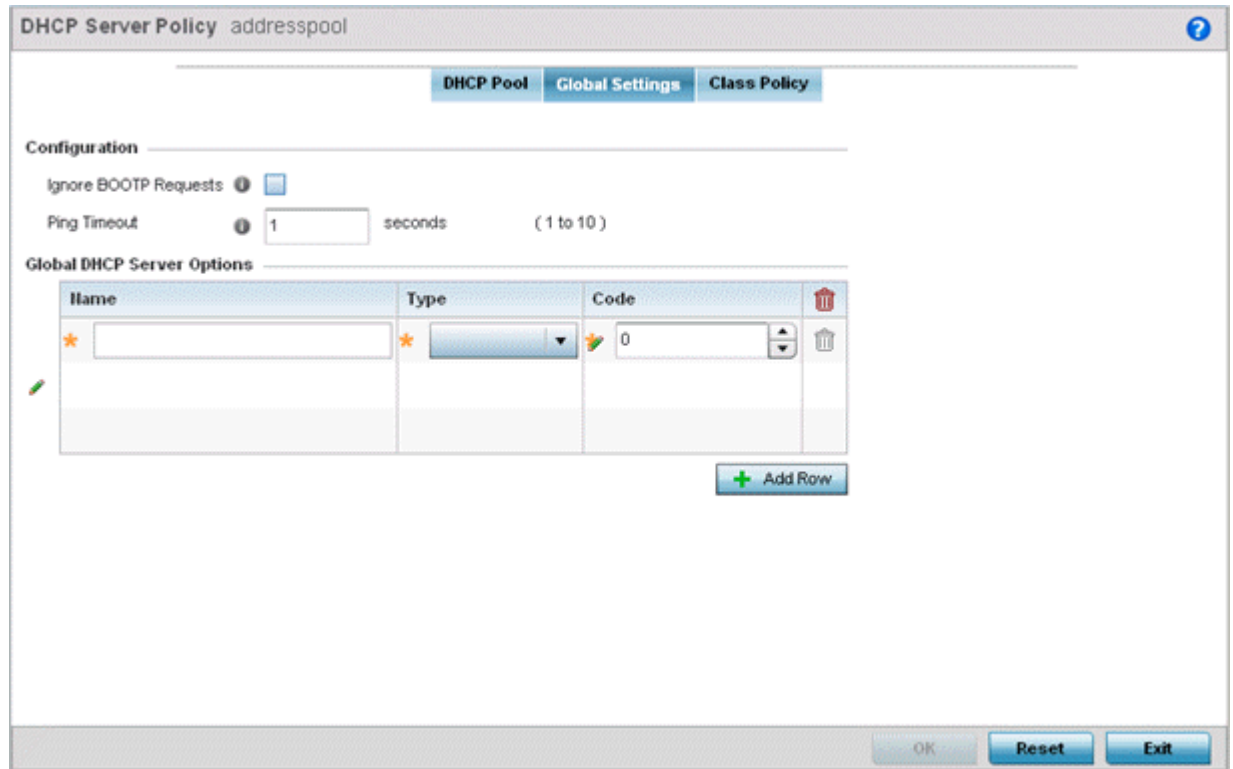


Figure 396: DHCP Server Policy - Add/Edit - Global Settings Tab

2. Set the following parameters within the **Configuration** field:

Ignore BOOTP Requests	Select the check box to ignore BOOTP requests. BOOTP (boot protocol) requests boot remote systems within the network. BOOTP messages are encapsulated inside UDP messages and forwarded. This feature is disabled by default, so unless selected, BOOTP requests are forwarded.
Ping Timeout	Set an interval (from 1 -10 seconds) for the DHCP server ping timeout. The timeout is the intermittent ping and discover interval to determine whether a client requested IP address is already used.

3. Set the **Activation Criteria** for the DHCP server policy:
Use the drop-down menu to select the criteria from one of **none**, **vrrp-master**, **cluster-master** or **rf-domain-manager**. The default value is **none**.
4. Refer to the **Global DHCP Server Options** field.
 - a. Use the **+ Add Row** button at the bottom of the field to add a new global DHCP server option.
Select the radio button of an existing global DHCP server option and select the Delete icon to remove it from the list of those available.

- b. Use the **Type** drop-down menu to specify whether the DHCP option is being defined as a numerical IP address, an ASCII string, or a hex string.
Highlight an entry from within the **Global Options** screen and click the **Remove** button to delete the name and value.
5. Click **OK** to save the updates to the DHCP server global settings.
Click **Reset** to revert the screen to its last saved configuration.

DHCP Class Policy Configuration

A controller, service platform or Access Point's local DHCP server assigns IP addresses to requesting DHCP clients based on user class option names. The DHCP server can assign IP addresses from as many IP address ranges as defined by an administrator. The DHCP user class associates a particular range of IP addresses to a device in such a way that all devices of that type are assigned IP addresses from the defined range.

Refer to the **DHCP Class Policy** screen to review existing DHCP class names and their current multiple user class designations. Multiple user class options enable a user class to transmit option values to DHCP servers supporting multiple user class options. Either add a new class policy, edit the configuration of an existing policy or permanently delete a policy as required.

To review DHCP class policies:

1. Select the **Class Policy** tab and ensure that the **Activate DHCP Server Policy** button remains selected.

This option must remain selected to implement the configuration as part of the access point profile.

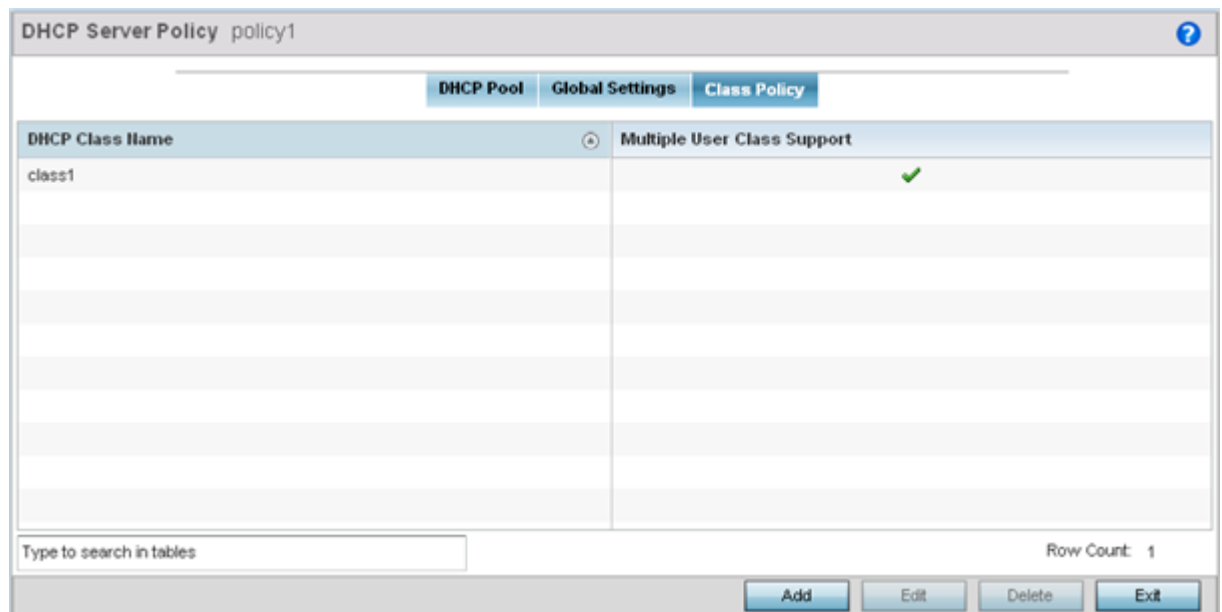


Figure 397: DHCP Server Policy - Class Policy Tab

- Click **Add** to create a new DHCP class policy, **Edit** to update an existing policy or **Delete** to remove an existing policy.

The screenshot shows a 'DHCP Class' configuration window. The 'DHCP Class Name' field contains 'class 3'. Under the 'Settings' section, there is a 'User Class' label and a table with two columns: 'Option' and 'Value'. The table contains 8 rows, with 'Option 1' having a value of '101'. Below the table is a checkbox for 'Multiple User Class Support' which is currently unchecked. At the bottom of the window are 'OK', 'Reset', and 'Exit' buttons.

Option	Value
Option 1	101
Option 2	
Option 3	
Option 4	
Option 5	
Option 6	
Option 7	
Option 8	

Figure 398: DHCP Class Name Add Screen

- If you are adding a new DHCP Class Name, assign a name representative of the device class supported.
The DHCP user class name should not exceed 32 characters.
- Select a row within the **Value** column to enter a 32-character maximum value string.
- Select **Multiple User Class** to enable multiple option values for the user class.
This allows the user class to transmit multiple option values to DHCP servers supporting multiple user class options.
- Click **OK** to save the updates to this DHCP class policy.
Click **Reset** to revert the screen to its last saved configuration.

DHCP Deployment Considerations

Before defining an DHCP server configuration, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- DHCP option 189 is required when AP650 model access points are deployed over a layer 3 network and require layer 3 adoption. DHCP services are not required for AP650 access points connected to a VLAN that's local to the controller or service platform.
- DHCP's lack of an authentication mechanism means a DHCP server cannot check if a client or user is authorized to use a given user class. This introduces a vulnerability when using user class options. For example, if a user class is used to assign a special parameter (for example, a database server), there is no way to authenticate a client and it's impossible to check if a client is authorized to use this parameter.

- Ensure that traffic can pass on UDP ports 67 and 68 for clients receiving DHCP information.

Setting the Bonjour Gateway Configuration

Bonjour is Apple's zero-configuration networking (Zeroconf) implementation. Zeroconf is a group of technologies that include service discovery, address assignment and hostname resolution. Bonjour locates the devices (printers, computers etc.) and services these computers provide over a local network.

Bonjour provides a method to discover services on a local area network (LAN). Bonjour allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour only works within a single broadcast domain. However, with a special DNS configuration, it can be extended to find services across broadcast domains.



Note

Up to eight (8) Bonjour discovery policies can be configured.

The following options can be configured:

- [Configuring a Bonjour Discovery Policy](#)
- [Configuring a Bonjour Forwarding Policy](#)



Note

The WiNG 7.1 release does not support Bonjour on AP505 and AP510 model access points. This feature will be supported in future releases.

Configuring a Bonjour Discovery Policy

The Bonjour discovery policy configures how Bonjour services are located. It configures the VLANs on which these services can be found.



Note

The WiNG 7.1 release does not support Bonjour on AP505 and AP510 model access points. This feature will be supported in future releases.

To display Bonjour discovery policy information:

1. Select **Configuration**.
2. Select **Services**.
3. Select **Bonjour Gateway** to expand its submenu.

4. Select **Discovery Policy**.

The **Discovery Policy** screen displays the name of the configured Bonjour discovery policies.

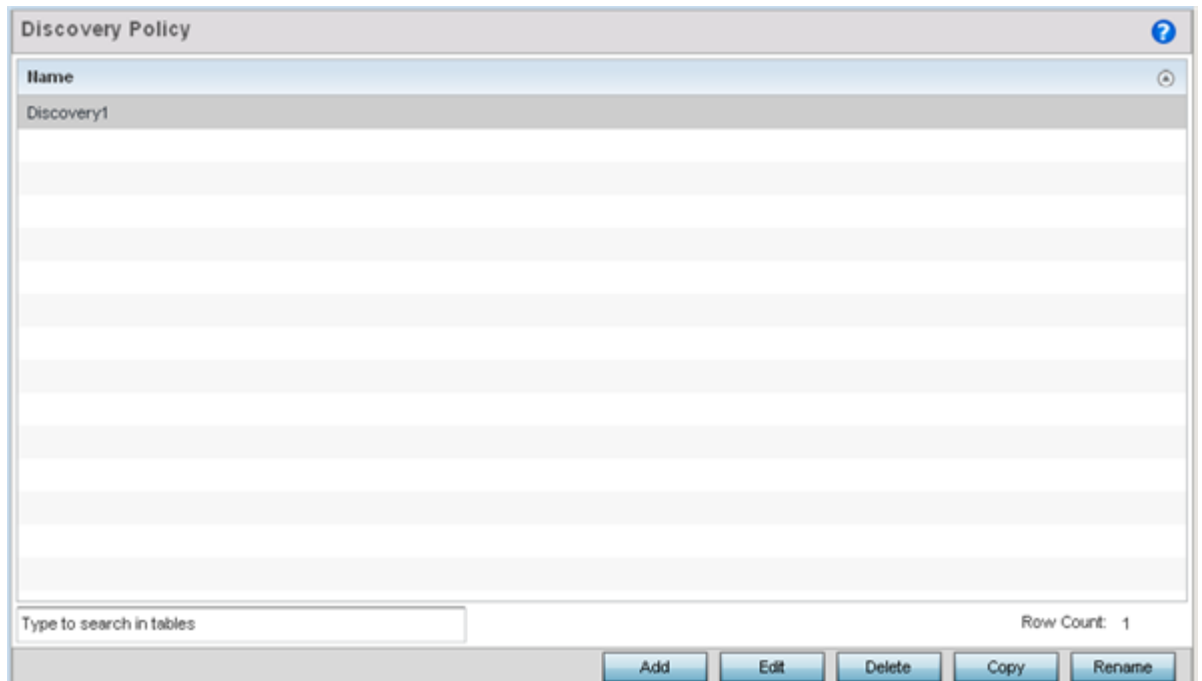


Figure 399: Bonjour Gateway - Discovery Policy Screen

5. Select an existing policy and select **Edit** to modify its configuration or select **Add** to create a new configuration..

Select an existing policy and click **Delete** to delete the policy, or use **Copy** to create a copy of a policy for further modifications. Optionally, **Rename** a policy or **Copy** a policy to a different location.

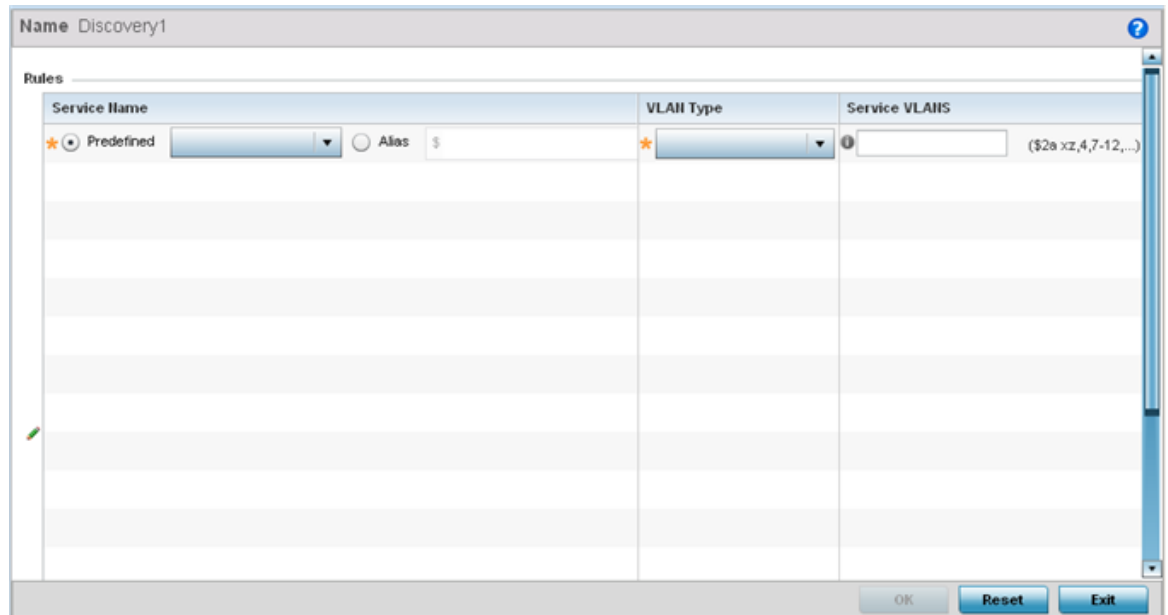


Figure 400: Bonjour - Discovery Policy - Add/Edit Policy Screen

6. Select the **+ Add Row** button to add a rule to the Bonjour discovery policy.
These are the services discoverable by the Bonjour gateway.
7. Set the following discovery attributes for the discovery policy configuration:

Service Name	<p>Define the service that can be discovered by the Bonjour gateway.</p> <ul style="list-style-type: none"> • Predefined – Use the drop-down menu to select from a list of predefined Apple services (Scanner, Printer, HomeSharing etc.). • Alias – Use an existing alias to define a service that is not available in the predefined list.
VLAN Type	<p>Use the drop-down menu to select the VLAN type.</p> <ul style="list-style-type: none"> • local – The VLAN(s) defined in the Service VLAN field use a local bridging mode. • tunneled – The VLAN(s) defined in the Service VLAN field are shared tunnel VLANs.
Service VLANs	<p>Provide a VLAN or a list of VLANs on which the selected service is discoverable.</p>

8. Click **OK** to save updates to this Bonjour Discovery policy.
Click **Reset** to revert the screen to its last saved configuration.

Configuring a Bonjour Forwarding Policy

A Bonjour forwarding policy enables the discovery of services on VLANs not visible to the device running the Bonjour Gateway. Bonjour forwarding enables the forwarding of Bonjour advertisements across VLANs to enable the Bonjour gateway to build a list of services and VLANs where services are available.

**Note**

Only one (1) Bonjour forwarding policy is configurable.

**Note**

There must be Layer 2 connectivity between devices for forwarding to work.

**Note**

The WiNG 7.1 release does not support Bonjour on AP505 and AP510 model access points. This feature will be supported in future releases.

To display Bonjour forwarding policy information:

1. Select **Configuration**.
2. Select **Services**.
3. Select **Bonjour Gateway** to expand its submenu.
4. Select **Forwarding Policy**.

The screen displays the name of existing Bonjour forwarding policies.

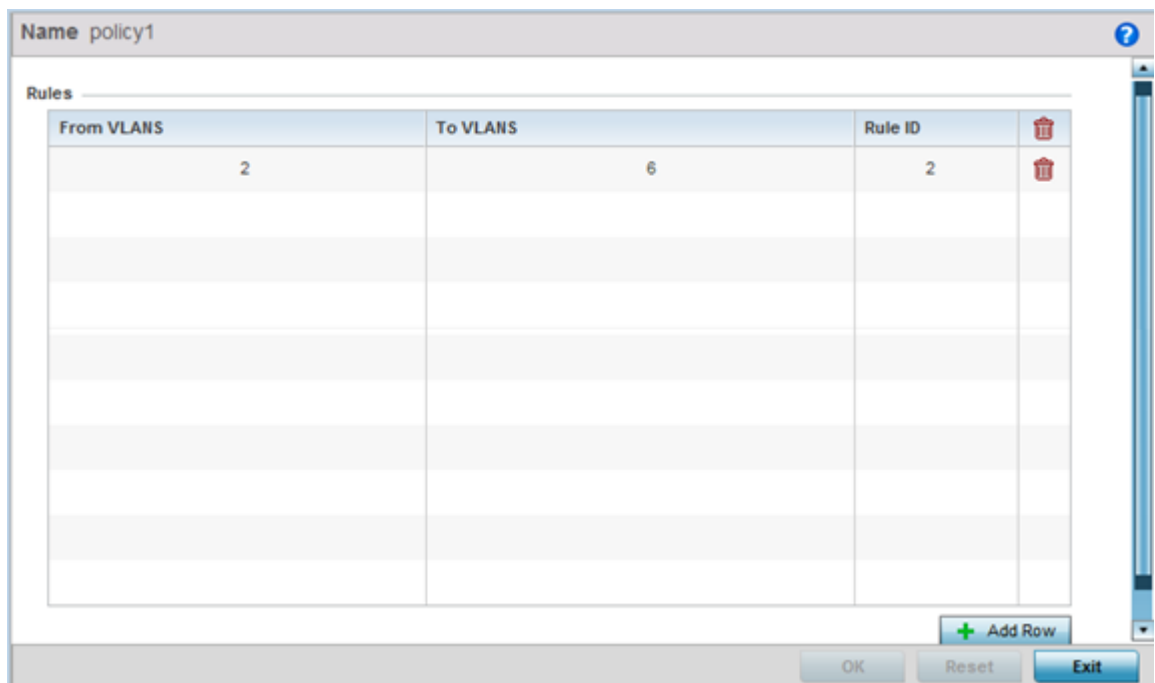


Figure 401: Bonjour Gateway - Forwarding Policy Screen

5. Select an existing policy and select **Edit** to modify its configuration or select **Add** to create a new configuration..

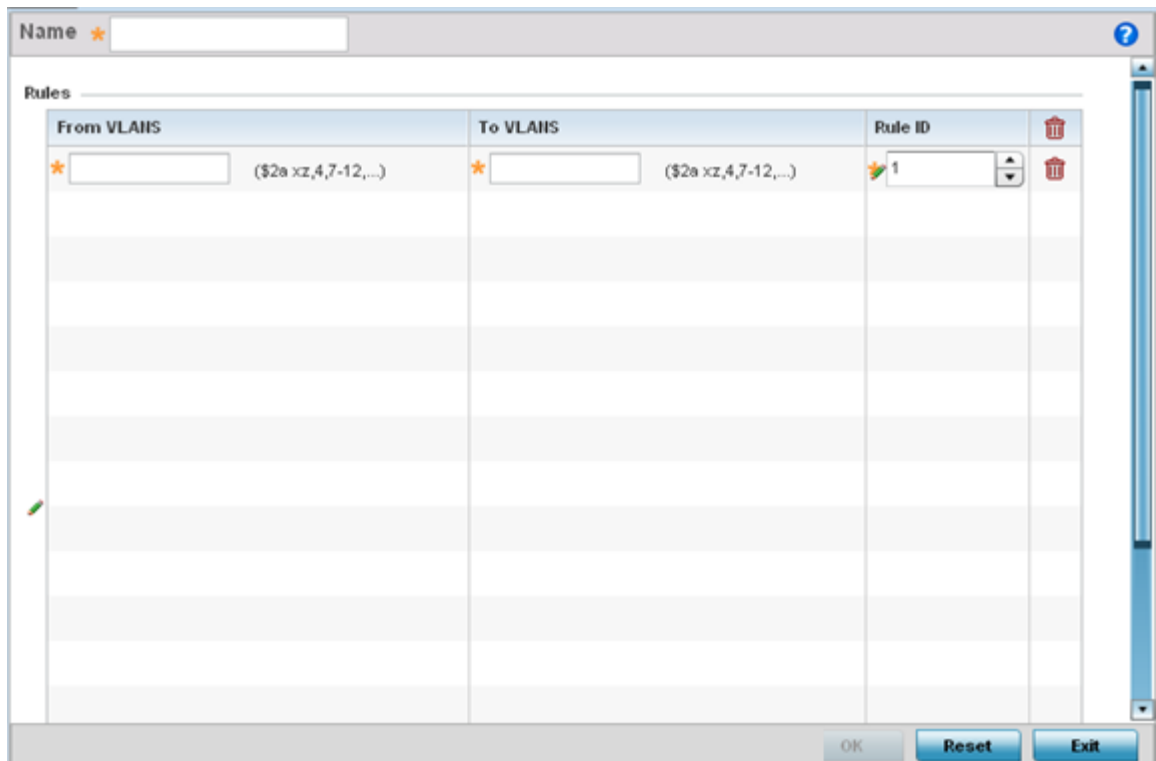


Figure 402: Bonjour Gateway - Forwarding Policy - Add Screen

6. Select the **+ Add Row** button to add a forwarding rule to the Bonjour Forwarding Policy.

Advertisements from VLANs that contain services are forwarded to VLANs containing clients.

From VLANs	<i>From VLANs</i> are virtual interfaces where the Apple services are available. Enter a VLAN ID or a range of VLANs. Aliases can also be used.
To VLANs	<i>To VLANs</i> are virtual interfaces where clients for the services are available. Enter a VLAN ID or a range of VLANs. Aliases can also be used.
Rule ID	Use the spinner to set a unique rule ID (from 1 - 16) for this rule. This acts as numerical differentiator from other indexes.

7. Click **OK** to save updates to this Bonjour Gateway Forwarding policy.
Click **Reset** to revert the screen to its last saved configuration.

Setting the DHCPv6 Server Policy

DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network.

DHCPv6 servers pass IPv6 network addresses to IPv6 clients. The DHCPv6 address assignment feature manages non-duplicate addresses in the correct prefix based on the network where the host is connected. Assigned addresses can be from one or multiple pools. Additional options, such as the default domain and DNS name-server address, can be passed back to the client. Address pools can be assigned for use on a specific interface or on multiple interfaces, or the server can automatically find the appropriate pool.



Note

DHCPv6 server updates are only implemented when the controller, service platform or service platform is restarted.

Refer to the following for more information on configuring the DHCPv6 Server Policy parameters:

- [Defining DHCPv6 Options](#) on page 930
- [DHCPv6 Pool Configuration](#) on page 932

To access and review the local DHCPv6 server configuration:

1. Select **Configuration > Services > DHCPv6 Server Policy**.

The **DHCPv6 Server Policy** screen displays.

DHCPv6 Server Policy Name	Restrict Vendor Options	Server Preference
pool1	✓	1

Type to search in tables Row Count: 1

Figure 403: DHCPv6 Server Policy Screen

- Review the following DHCPv6 server configurations (at a high level) to determine whether a new server policy requires creation, an existing policy requires modification or an existing policy requires deletion:

DHCPv6 Server Policy Name	The name assigned to each DHCPv6 server policy when it was initially created. The name assigned to a DHCPv6 server policy cannot be modified as part of the policy edit process. However, obsolete policies can be deleted, copied (archived) or renamed as needed.
Restrict Vendor Options	A green checkmark within this column means this policy has been set to restrict vendor DHCP options. A red "X" defines the policy as accepting all DHCP vendor options. Vendor specific DHCPv6 options apply only to the vendor class defined.
Server Preferences	Lists the server preference (from 0 - 255) specified for each DHCPv6 server policy. The default value is 0.

- Select **Add** to create a new DHCPv6 server policy, choose an existing policy and select the **Edit** button to modify the policy's properties, or choose an existing policy and select **Delete** to remove the policy from those available.

Adding or Editing a DHCP server policy displays the **DHCPv6 Server Policy Name** screen by default.

Defining DHCPv6 Options

DHCPv6 services are available for specific IP interfaces. A pool (or range) of IPv6 network addresses and DHCPv6 options can be created for each IPv6 interface defined. This range of addresses can be made available to DHCPv6 enabled devices on either a permanent or leased basis. DHCPv6 options are provided to each client with a DHCPv6 response and provide DHCPv6 clients information required to access network resources (default gateway, domain name, DNS server and WINS server configuration). An option exists to identify the vendor and functionality of a DHCPv6 client. The information is a variable-length string of characters (or octets) with a meaning specified by the vendor of the DHCPv6 client.

To set DHCPv6 options:

- Select **Configuration > Services > DHCPv6 Server Policy**.

2. Select **Add** to create a new policy or **Edit** to modify the properties of a selected DHCPv6 server policy.

Select **+ Add Row** to populate the screen with editable rows for DHCPv6 option configuration.

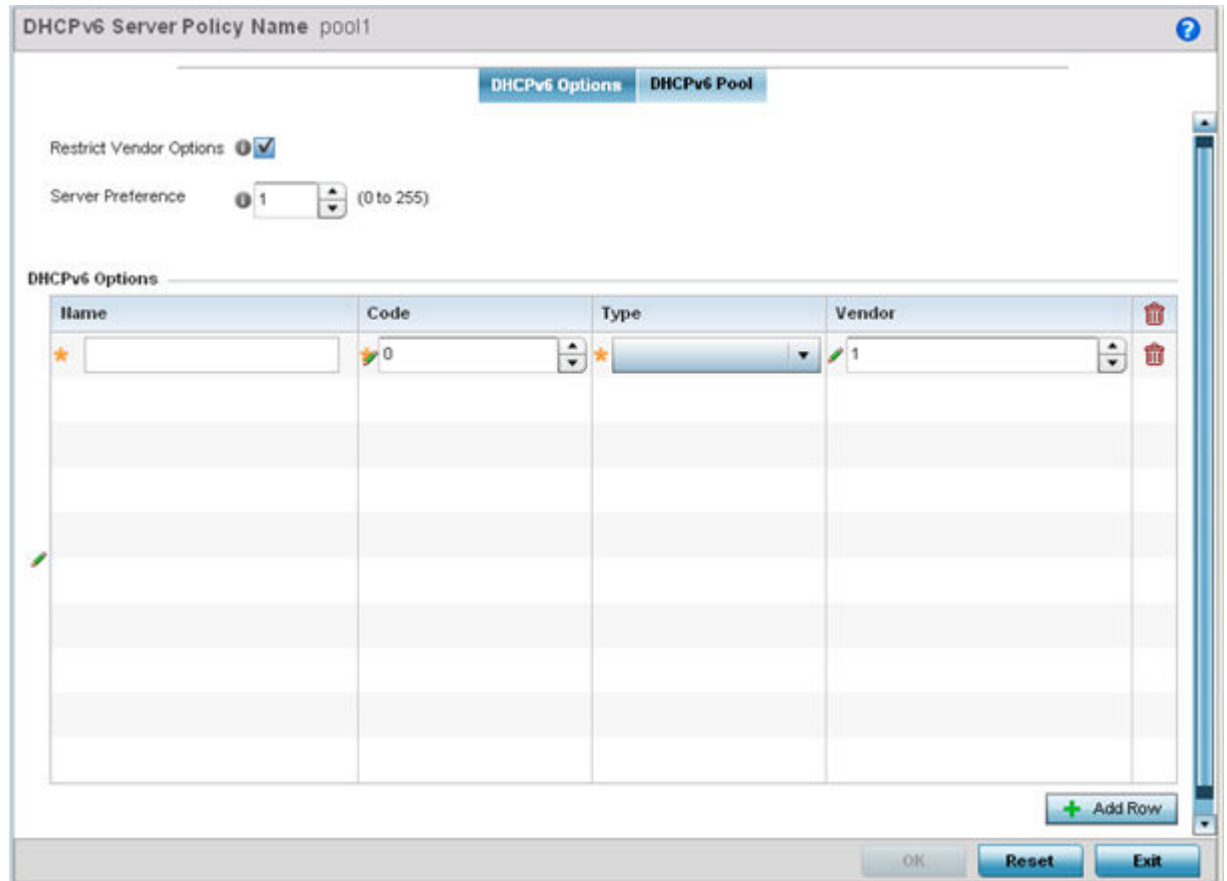


Figure 404: DHCPv6 Server Policy - DHCPv6 Options Tab

3. Select **Restrict Vendor Options** to restrict the use of vendor specific DHCPv6 options.

This limits the use of vendor specific DHCP options in this specific DHCPv6 policy.

4. Use the spinner control to select a **DHCPv6 Server Preference** from 0 - 255.

The default value is 0.

5. Set the following **DHCPv6 Option** configuration parameters:

Name	Enter a name to associate with the new DHCP option. This name should describe the new option's function.
Code	Use the spinner control to specify a DHCP option code (from 0 - 254) for the option. Only one code for each DHCPv6 option of the same value can be used in each DHCPv6 server policy.

Type	Use the drop-down menu to select the DHCP option type for the new option. The option can be either ASCII, which sends an ASCII compliant string to the client, ipv6 which sends an IPv6 compatible address to the client or Hex String which sends a hexadecimal string to the client.
Vendor	Use the spinner control to specify the numeric Vendor ID for the new option. Each vendor should have a unique vendor ID used by the DHCPv6 server to issue vendor specific DHCP options.

- Click **OK** to save the updates to the DHCPv6 options.
Click **Reset** to revert the screen to its last saved configuration.

DHCPv6 Pool Configuration

A DHCPv6 pool includes information about available configuration parameters and policies controlling the assignment of the parameters to requesting clients from the pool.

To create a DHCPv6 pool configuration:

- Select the **DHCPv6 Pool** tab.

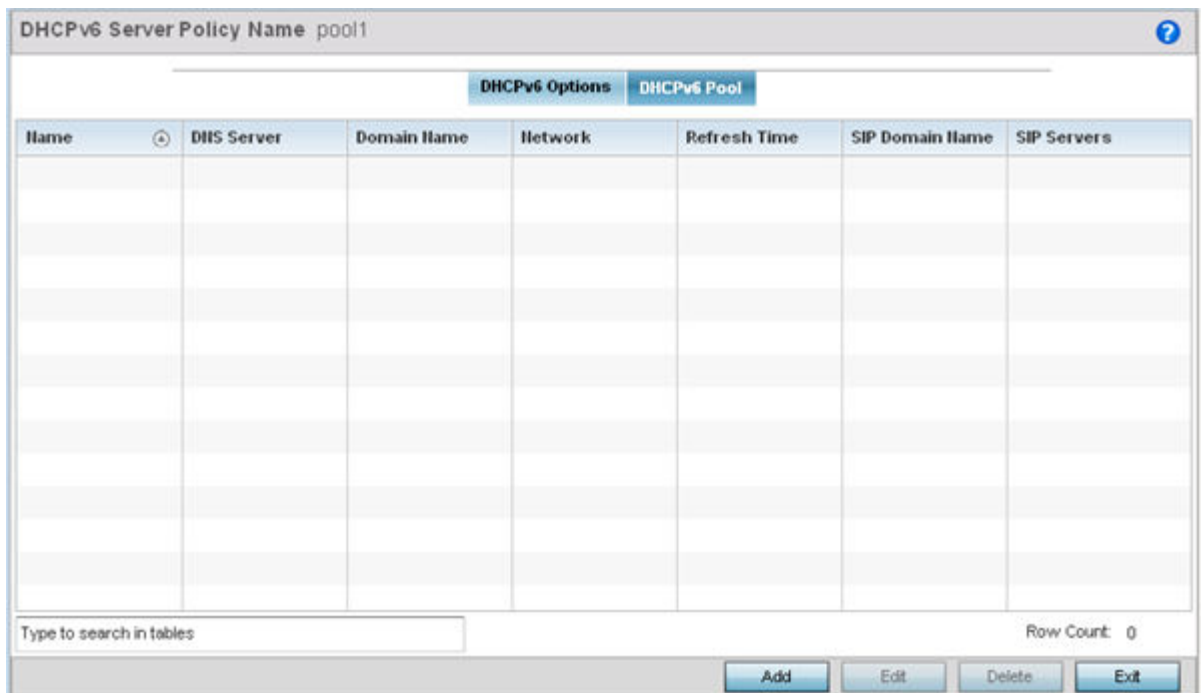


Figure 405: DHCP Server Policy - DHCPv6 Pool Tab

2. Refer to the following to review existing DHCPv6 Pool configuration to determine if a new configuration is needed or an existing configuration needs to be modified or edited.

Name	Lists the administrator assigned name of the IPv6 pool resource from which IPv6 formatted addresses can be issued to DHCPv6 client requests. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
DNS Server	Displays the address of the DNS server resource utilized with the DHCPv6 pool.
Domain Name	Displays the hostname of the domain associated with the DHCPv6 pool.
Network	Displays the IPv6 formatted address and mask utilized with the DHCPv6 address pool. The address can be configured in the Add/Edit screen.
Refresh Time	Displays the time, in seconds, between refreshes of the DHCPv6 address pool.
SIP DomainName	Displays the domain name associated with the <i>Session Initiation Protocol</i> (SIP) server that is used to prioritize voice and video traffic on a network. SIP is an application-layer control protocol that can establish, modify and terminate multimedia sessions or calls. A SIP system has several components (user agents, proxy servers, redirect servers, and registrars). User agents can contain SIP clients; proxy servers always contain SIP clients.
SIP Servers	Displays the IPv6 formatted address of the SIP server associated with the DHCP pool.

Adding or Editing DHCPv6 Server Configuration

1. Select **Add** to create a new DHCPv6 pool configuration or **Edit** to modify the policy's properties of a selected DHCPv6 pool.

Delete obsolete policies as warranted.

Figure 406: DHCP Server Policy - DHCPv6 Pool - Add/Edit Screen

2. Set the following **General** DHCPv6 pool parameters:

Name	Provide as administrator assigned name for the IPv6 pool resource from which IPv6 formatted addresses can be issued to DHCPv6 client requests. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
DNS Server	Enter the IPv6 formatted address of the DNS server utilized by the DHCP pool.
Domain Name	Enter the hostname or hostnames of the domain(s) utilized with the DHCP pool. A hostname cannot contain an underscore.
Network	Enter the IPv6 formatted address and mask associated with the DHCPv6 pool.
Refresh Time	Use the spinner control to set the time, in seconds, between refreshes of the DHCPv6 address pool. The refresh time can be set from 600 - 4,294,967,295 seconds.

SIP DomainName	Configure the domain name or domain names associated with the Session Initiation Protocol (SIP) servers used to prioritize voice and video traffic on a network. SIP is an application-layer control protocol that can establish, modify and terminate multimedia sessions or calls. A SIP system has several components (user agents, proxy servers, redirect servers, and registrars). User agents can contain SIP clients; proxy servers always contain SIP clients.
SIP Servers	Configure the IPv6 formatted address or addresses of the SIP servers associated with the DHCP pool.

3. If you are using DHCPv6 options in the pool, set the following within the **DHCPv6 Options Value** table.

Name	Use the drop-down menu to select an existing DHCP option name from the existing options configured in DHCPv6 Options. If no suitable option is available click the create button to define a new option.
Value	Enter or modify the numeric ID setting for the selected DHCP option.

4. Click **OK** to save the changes.

Click **Reset** to revert to the last saved configuration.

Setting the RADIUS Configuration

Remote Authentication Dial-In User Service (RADIUS) is a client/server protocol and software enabling remote access servers to authenticate users and authorize their access. RADIUS is a distributed client/server system that secures networks against unauthorized access. RADIUS clients send authentication requests to the controller, service platform or access point's local RADIUS server containing user authentication and network service access information.

RADIUS enables centralized management of authentication data (usernames and passwords). When a client attempts to associate to the controller, service platform or access point, authentication requests are sent to the RADIUS server. Authentication and encryption takes place through the use of a shared secret password (not transmitted over the network).

The local RADIUS server stores the user database locally, and can optionally use a remote user database. It ensures higher accounting performance. It allows the configuration of multiple users, and assign policies for the group authorization.

The access point allows the enforcement of user-based policies. User policies include dynamic VLAN assignment and access based on time of day. The access point uses a default trustpoint. A certificate is required for EAP TTLS, PEAP and TLS RADIUS authentication (configured with the RADIUS service).

Dynamic VLAN assignment is achieved based on the RADIUS server response. A user who associates to WLAN1 (mapped to VLAN1) can be assigned a different VLAN after authentication with the RADIUS server. This dynamic VLAN assignment overrides the WLAN's VLAN ID to which the user associates.

To view RADIUS configurations:

1. Select the **Configuration** tab from the main menu.
2. Select the **Services** tab.

The upper, left-hand side pane of the user interface displays the **RADIUS** option. The **RADIUS Group** screen displays by default.

For information on creating the groups, user pools and server policies needed to validate user credentials against a server policy configuration, refer to the following:

- [Creating RADIUS Groups](#) on page 936
- [Defining User Pools](#) on page 940
- [Configuring RADIUS Server Policy](#) on page 945

Creating RADIUS Groups

The RADIUS server allows the configuration of user groups with common user policies. User group names and associated users are stored in a local database. The user ID in the received access request is mapped to the specified group for authentication. RADIUS groups allows the enforcement of the following policies managing user access.

- Assign a VLAN to the user upon successful authentication
- Define a start and end of time in (HH:MM) when the user is allowed to authenticate
- Define the list of SSIDs to which a user belonging to this group is allowed to associate
- Define the days of the week the user is allowed to login
- Rate limit traffic

To access the RADIUS Groups menu:

1. Select **Configuration > Services > RADIUS** from the main menu.
2. Select **Groups**.

The browser displays a list of the existing groups.

RADIUS Group Policy	Guest User Group	Management Group	Role	VLAN	Time Start	Time Stop
group1	✗	✗		Not Set	12:00 am	11:59 pm
GUEST-USERS	✓	✗		Not Set	12:00 am	11:59 pm
guestgroup	✓	✗		Not Set	12:00 am	11:59 pm

Type to search in tables Row Count: 3

Figure 407: RADIUS Group Screen

3. Select a group from the **Group Browser** to view the following read-only information for existing groups:

RADIUS Group Policy	Displays the group name or identifier assigned to each listed group when it was created. The name cannot exceed 32 characters or be modified as part of the group edit process.
Guest User Group	Specifies whether a user group only has guest access and temporary permissions to the local RADIUS server. The terms of the guest access can be set uniquely for each group. A red "X" designates the group as having permanent access to the local RADIUS server. Guest user groups cannot be made management groups with unique access and role permissions.
Management Group	A green checkmark designates this RADIUS user group as a management group. Management groups can be assigned unique access and role permissions.
Role	If a group is listed as a management group, it may also have a unique role assigned. Available roles include: <ul style="list-style-type: none"> • monitor - Read-only access • helpdesk - Helpdesk/support access • network-admin - Wired and wireless access • security-admin - Full read/write access • system-admin - System administrator access • superuser - Super user access • webuser-admin - Rights to manage captive portal users • vendor-admin - Rights to manage device onboarding
VLAN	Displays the group's VLAN ID. The VLAN ID is representative of the shared SSID each group member (user) employs to interoperate within the network (once authenticated by the local RADIUS server).
Time Start	Specifies the time users within each listed group can access local RADIUS resources.
Time Stop	Specifies the time users within each listed group lose access to local RADIUS resources.

- Click **Add** to create a new RADIUS group, **Edit** to modify the configuration of an existing group, or **Delete** to permanently remove a selected group.

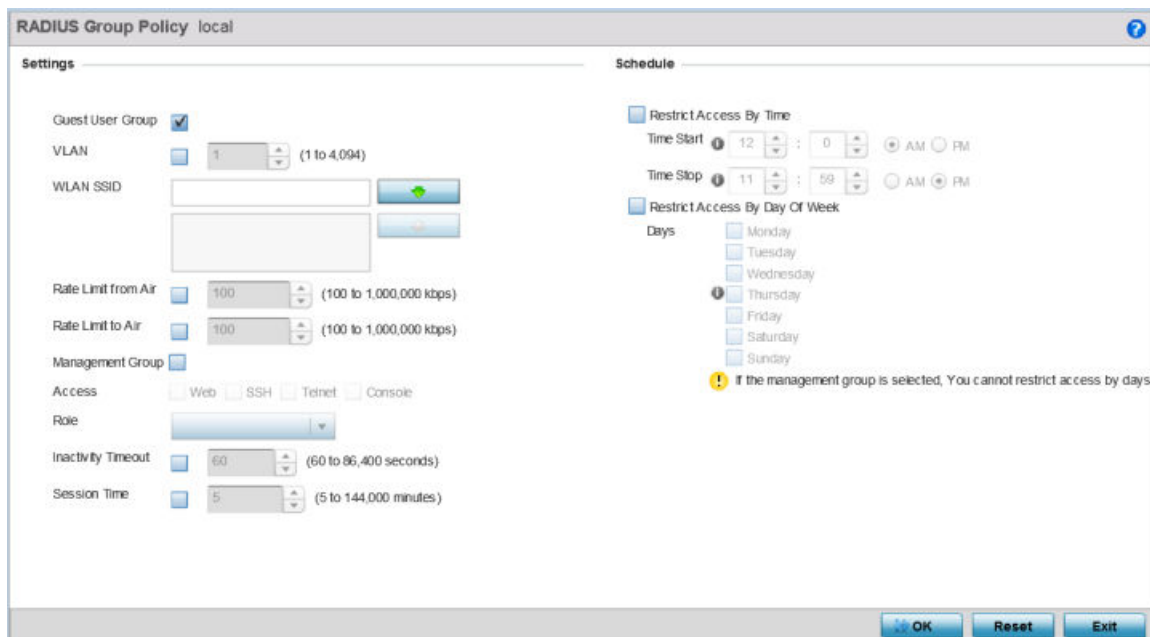


Figure 408: RADIUS Group Policy - Add/Edit Screen

- Define the following settings to define the user group configuration:

RADIUS Group Policy	If you are creating a new RADIUS group, assign it a name to help differentiate it from others with similar configurations. The name cannot exceed 32 characters or be modified as part of a RADIUS group edit process.
Guest User Group	Select this option to assign only guest access and temporary permissions to the local RADIUS server. Guest user groups cannot be made management groups with unique access and role permissions.
VLAN	Select this option to assign a specific VLAN to this RADIUS user group. Ensure Dynamic VLAN assignment (single VLAN) is enabled for the WLAN in order for the VLAN assignment to work properly. For more information, see “Configuring WLAN Basic Configuration” on page 529.
WLAN SSID	Assign a list of SSIDs users within this RADIUS group are allowed to associate with. An SSID cannot exceed 32 characters. Assign WLAN SSIDs representative of the configurations a guest user will need to access. The parameter is not available if this RADIUS group is a management group.
Rate Limit from Air	Select the checkbox to set the rate limit for clients within the RADIUS group. Use the spinner to set value from 100-1,000,000 kbps. Setting a value of 0 disables rate limiting.
Rate Limit To Air	Select the checkbox to set the rate limit from clients within the RADIUS group. Use the spinner to set value from 100-1,000,000 kbps. Setting a value of 0 disables rate limiting.

Management Group	Select this option to designate this RADIUS group as a management group. If set as management group, assign member roles (System-Admin, Help Desk etc.) using the Role drop-down menu. This feature is disabled by default.
Access	If a group is listed as a management group, assign how the devices can be accessed. Available access types are: <ul style="list-style-type: none"> • Web - Web access through browser is permitted. • SSH - SSH access through command line is permitted. • Telnet - Telnet access through command line is permitted. • Console - Console access to the device is permitted.
Role	If a group is listed as a management group, it may also have a unique role assigned. Available roles include: <ul style="list-style-type: none"> • monitor - Read-only access • helpdesk - Helpdesk/support access • network-admin - Wired and wireless access • security-admin - Full read/write access • system-admin - System administrator access • superuser - Super user access • webuser-admin - Rights to manage captive portal users • vendor-admin - Rights to manage device onboarding
Inactivity Timeout	Select the option to enable inactivity timeout. Use the drop-down menu to specify an interval in Seconds (60 - 86,400). When, for this duration no frame is received, the session is timed out. The default is 60 seconds.
Session Time	Select the option to enable session timeout. Use the drop-down menu to set a client session time in Minutes (5 - 144,000). This is the session time a client is granted upon successful authentication. When this time expires, the RADIUS session is terminated.

6. Set the **Schedule** to configure access times and dates.

Select **Restrict Access By Time** to enable time-based access.

Time Start	Use the spinner control to set the time (in HH:MM format) RADIUS group members are allowed access the RADIUS server resources. Select either the AM or PM radio button to set the time as morning or evening.
Time Stop	Use the spinner control to set the time (in HH:MM format) RADIUS group members are denied access to RADIUS server resources. Select either the AM or PM radio button to set the time as morning or evening. If already logged in, the RADIUS group user is deauthenticated from the WLAN.
Days	Optionally select the Restrict Access by Day Of Week option, and select the days on which RADIUS group members can access RADIUS resources. This is an additional means of refining the access permissions of RADIUS group members.

7. Click **OK** to save the changes.

Click **Reset** to revert to the last saved configuration.

Defining User Pools

A user pool defines policies for individual user access to local (controller, service platform or Access Point managed) RADIUS resources. User pools are a convenient means of providing RADIUS resources based on the pool's unique permissions (temporary or permanent). A pool can contain a single user or group of users.

To configure a RADIUS user pool and unique user IDs:

1. Select **Configuration** → **Services** → **RADIUS** from the main menu.
2. Select **User Pools**.

The **RADIUS User Pool** screen lists the default pool along with any other admin created user pool.

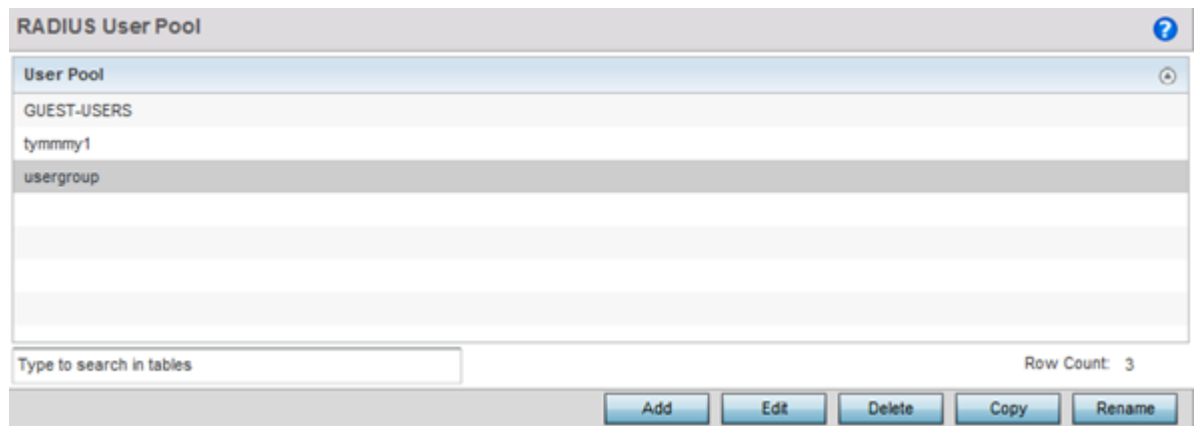


Figure 409: RADIUS User Pool Screen

3. Click **Add** to create a new RADIUS user pool, **Edit** to modify the configuration of an existing pool, or **Delete** to permanently remove a selected pool.

- If you are creating a new pool, assign it a name up to 32 characters and click **Continue**.

The name should be representative of the users comprising the pool and/or the temporary or permanent access privileges assigned.

User Id	Guest User	Group	Email Id	Telephone	Start Date	Start Time	Expiry Date	Expiry Time	Access Duration (days:hrs:m ins:secs)	Data Limit (KB)	Committed Downlink Rate (kbps)	Committed Uplink Rate (kbps)	Reduced Downlink Rate (kbps)	Reduced Uplink Rate (kbps)
cb	X								Till Expiry	Unlimited	-	-	-	-
daden	X								Till Expiry	Unlimited	-	-	-	-
deepakm	X								Till Expiry	Unlimited	-	-	-	-
jachthoma	X								Till Expiry	Unlimited	-	-	-	-
pbatta	X								Till Expiry	Unlimited	-	-	-	-
pepuru	X								Till Expiry	Unlimited	-	-	-	-
rajeshv	X								Till Expiry	Unlimited	-	-	-	-
sriram	X								Till Expiry	Unlimited	-	-	-	-
trevorm	X								Till Expiry	Unlimited	-	-	-	-

Figure 410: RADIUS User Pool - User Pools - Details Screen

- Refer to the following **User Pool** configurations.

They define when specific user IDs have access to the access point's RADIUS resources.

User ID	The unique string identifying this user. This is the ID assigned to the user when created and cannot be modified with the rest of the configuration.
Guest User	Specifies (with a green check) the user has guest access and temporary permissions to the local RADIUS server. The terms of the guest access can be set uniquely for each user. A red "X" designates the user as having permanent access to the local RADIUS server.
Group	The group name each configured user ID is a member.
Email ID	The configured E-mail ID for this user. This is the address used when communicating with users in this pool.
Telephone	The configured telephone number for this user. This is the number used when communicating with users in this pool.
Start Date	The month, day and year the listed user ID can access the access point's internal RADIUS server resources.
Start Time	The time the listed user ID can access the internal RADIUS server. The time applies only to the range defined by the start and expiry date.
Expiry Date	The month, day and year the listed user ID can no longer access the internal RADIUS server.

Expiry Time	The time the listed user loses access to internal RADIUS server resources. The time applies only to the range defined by the start and expiry date.
Access Duration (days:hrs:mins:secs)	The amount of time a user is allowed access when time-based access privileges are applied. The duration cannot exceed 365 days.
Data Limit (KB)	The total amount of bandwidth (in kilobytes) consumable by each guest user.
Committed Downlink Rate (kbps)	The download speed (in kilobytes) allocated to the guest user. When bandwidth is available, the user can download data at the specified rate. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Downlink Rate .
Committed Uplink Rate (kbps)	The upload speed (in kilobytes) allocated to the guest user. When bandwidth is available, the user can download data at the specified rate. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Uplink Rate .
Reduced Downlink Rate (kbps)	The reduced speed the guest utilizes (in kilobytes) when exceeding their specified data limit, if applicable. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Downlink Rate .
Reduced Uplink Rate (kbps)	The reduced speed the guest utilizes (in kilobytes) when exceeding their specified data limit, if applicable. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Uplink Rate .

- Click **Add** to add a new RADIUS user, **Edit** to modify the configuration of an existing user or **Delete** to remove an existing user ID.

Select a RADIUS user and click **Copy** to make a copy of the user to make further modifications or use **Rename** to rename the existing RADIUS user.

Figure 411: RADIUS User Pool - Add/Edit - Users Screen

- Refer to the following settings to create a new user with unique access privileges:

User ID	Assign a unique character string identifying this user. The ID cannot exceed 64 characters.
Password	Provide a password unique to this user ID. The password cannot exceed 32 characters. Select the Show checkbox to expose the password's actual character string. Otherwise the password displays as a string of asterisks (*).
Guest User	Select the check box to designate this user as a guest with temporary access. The guest user must be assigned unique access times to restrict their access.
Group	If the user has been defined as a guest, use the Group drop-down menu to assign the user a group with temporary access privileges. If the user is defined as a permanent user, select a group from the group list. If no groups are relevant to the user's intended access, select the Create link (or icon for guests) and create a new group configuration suitable for the user's membership. For more information, see Creating RADIUS Groups on page 936.

Email ID	Set the email ID for this user.
Telephone	Specify the telephone number for this user. Specify the 12-character maximum telephone number of the client user (user ID) requesting authentication validation to the controller or service platform using this user pool.

8. Refer to the following **Time** settings to define time-based guest user access privileges:

Start Date	Enter a start date, or use the calendar icon to select a starting date for the user's credentials to start working.
Start Time	Enter a start time, or use the spinner controls to select a starting time for the user's credentials to start working. Use the AM and PM buttons to apply a morning or afternoon/evening designation.
Expiry Date	Enter an end date, or use the calendar icon to define an expiration date for the user's credentials. Selecting this option enables the Till Expiry radio button.
Expiry Time	If you are using the Till Expiry option, enter an end time, or use the spinner controls to select an ending time for the user's credentials to expire. Use the AM and PM buttons to apply a morning or afternoon/evening designation.
Access Duration	Specify the time a user can access the system when time based access privilege are applied. Select Till Expiry to allow user access until their configured expiry date and time are met. To limit the time a user can access the captive portal during their configured time period, specify the Days, Minutes, and Seconds the user is allowed access. The Access Duration cannot exceed 365 days.

9. To allow the guest user unlimited data usage, select **Unlimited**.

To limit bandwidth, select **Limited** and refer to the **Data** field to create bandwidth based access privileges:

Data Limit	Use the spinner control to specify the maximum bandwidth consumable by the guest user. Once a value is configured, select the measurement as either GB (gigabytes) or MB (megabytes).
Committed Downlink Rate	Use the spinner control to specify the download speed dedicated to the guest user. When bandwidth is available, the user can download data at the specified rate. Once a value is configured, select the measurement as either MBPS (Megabytes per second) or KBPS (Kilobytes per second). If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the defined Reduced Downlink Rate .
Reduced Downlink Rate	Use the spinner control to specify a reduced speed for guest operation when they have exceeded their specified data limit, if applicable. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Downlink Rate . Once a value is configured, select the measurement as either MBPS (Megabytes per second) or KBPS (Kilobytes per second).

Committed Uplink Rate	Use the spinner control to specify the upload speed dedicated to the guest user. When bandwidth is available, the user is able to upload data at the specified rate. Once a value is configured, select the measurement as either MBPS (Megabytes per second) or KBPS (Kilobytes per second). If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Uplink Rate .
Reduced Uplink Rate	Use the spinner control to specify a reduced speed for guest operation when they've exceed their specified data limit, if applicable. If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the Reduced Uplink Rate . Once a value is configured, select the measurement as either MBPS (Megabytes per second) or KBPS (Kilobytes per second).

10. Click **OK** to save the user's group membership configuration.

Click **Reset** to revert to the last saved configuration.

Configuring RADIUS Server Policy

A RADIUS server policy is a unique authentication and authorization configuration for receiving user connection requests, authenticating users, and returning the configuration information necessary for the RADIUS client to deliver service to the user. An access point's requesting client is the entity with authentication information requiring validation. The access point's local RADIUS server has access to a database of authentication information used to validate client authentication requests.

The RADIUS server ensures the information is correct using an authentication scheme like *PAP*, *CHAP* or *EAP*. The user's proof of identification is verified, along with, optionally, other information. A RADIUS server policy can also use an external LDAP resource to verify user credentials. The creation and utilization of a single RADIUS server policy is supported.

To manage the access point's RADIUS server policy:

1. Select **Configuration** → **Services** from the main menu.

- Expand the **RADIUS** menu option and select **RADIUS Server**.

The **RADIUS Server Policy** screen displays with the Server Policy tab displayed by default.

S

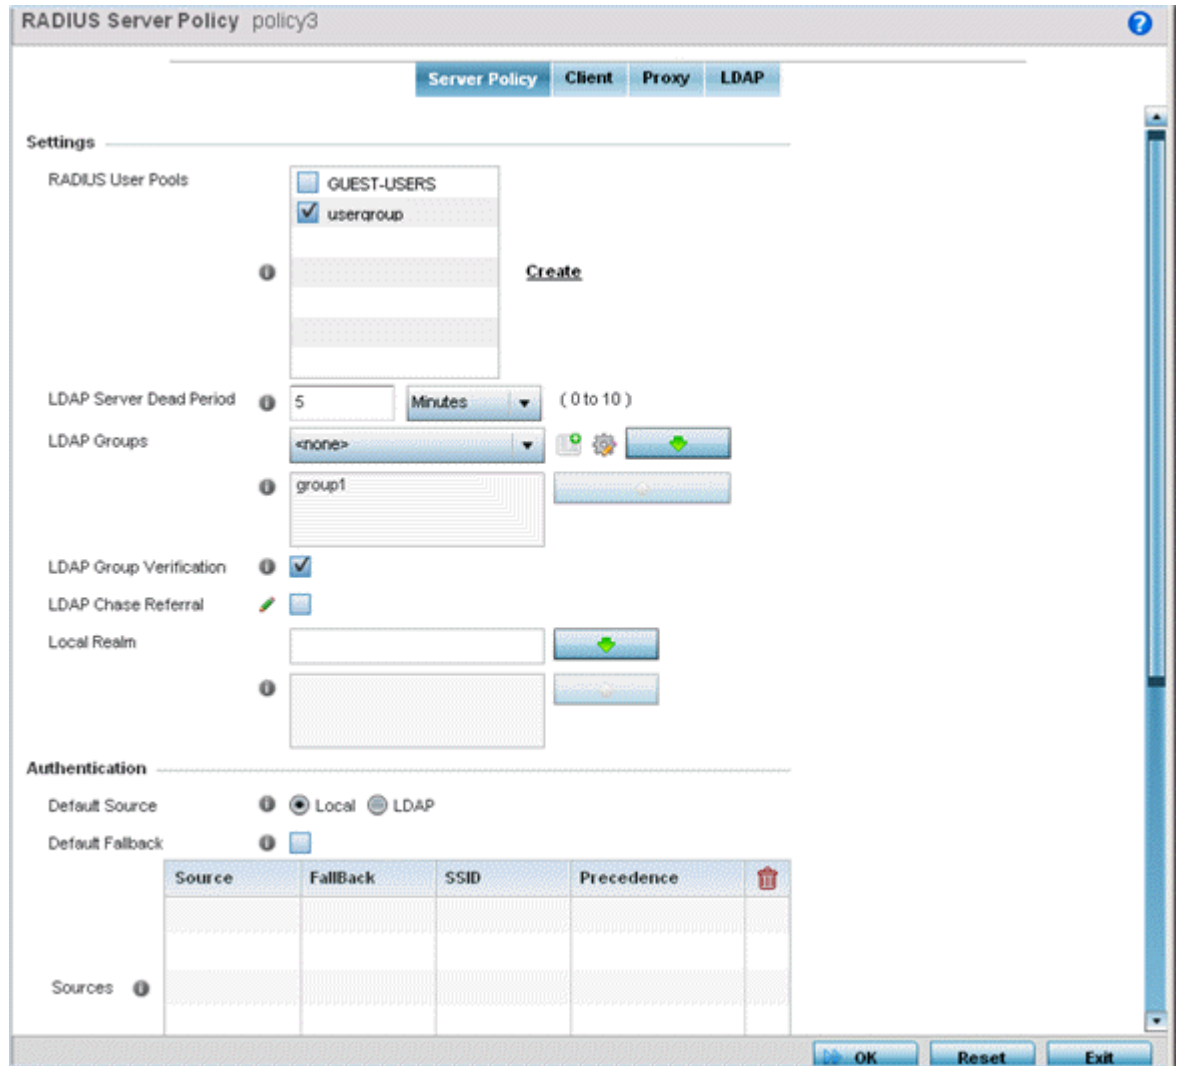


Figure 412: RADIUS Server Policy Screen - Server Policy Tab

- Select **Activate RADIUS Server Policy** to enable the parameters within the screen for configuration.

Ensure that this option remains selected, or this RADIUS server configuration will not be applied to the access point profile.

4. Define the following settings required to create or modify the server policy.

RADIUS Server Policy	Select the user pools (groups of existing client users) to apply to this server policy. If there is not an existing user pool configuration suitable for the deployment, select the Create link and define a new configuration. For more information, see Defining User Pools on page 940.
LDAP Server Dead Period	Set an interval in either seconds (0 - 600) or minutes (0- 10) during which the access point will not contact its LDAP server resource. A dead period is only implemented when additional LDAP servers are configured and available.
LDAP Groups	Use the drop-down menu to select LDAP groups to apply the server policy configuration. Select the Create or Edit icons as needed to either create a new group or modify an existing group. Use the arrow icons to add and remove groups as required.
LDAP Group Verification	Select the check box to set the LDAP group search configuration. This setting is enabled by default.
LDAP Chase Referral	Select the check box to set the LDAP referral chase feature. This settings is enabled by default. When enabled, if the LDAP server does not contain the requested information, it indicates to the LDAP client that it does not have the requested information and provides the client with another LDAP server that could have the requested information. It is up to the client to contact the other LDAP server for its information.
Local Realm	Define the LDAP Realm performing authentication using information from an LDAP server. User information includes user name, password, and the groups to which the user belongs.

5. Set the following **Authentication** parameters to define server policy authorization settings.

Default Source	Select the RADIUS resource for user authentication with this server policy. Options include Local for the local user database or LDAP for a remote LDAP resource. The default setting is Local .
Default Fallback	Select this option to indicate that fall back from RADIUS to local is enabled in case RADIUS authentication is not available for any reason. This option is enabled only when LDAP is selected as the Default Source. Use the Add Row button to add fallback sources into the Sources table. Provide the following information: <ul style="list-style-type: none"> • Source – Select the type of fallback. Select from LDAP or Local. • Fallback – Select to enable fallback on this record. • SSID – Enter the SSID to fall back on. • Precedence – Use the spinner to select the precedence for selection of fallback.

Authentication Type	<p>Use the drop-down menu to select the EAP authentication scheme used with this policy. The following EAP authentication types are supported:</p> <ul style="list-style-type: none"> • All – Enables both TTLS and PEAP • TLS - Uses TLS as the EAP type • TTLS and MD5 - The EAP type is TTLS with default authentication using MD5 • TTLS and PAP - The EAP type is TTLS with default authentication using PAP • TTLS and MSCHAPv2 - The EAP type is TTLS with default authentication using MSCHAPv2 • PEAP and GTC - The EAP type is PEAP with default authentication using GTC • PEAP and MSCHAPv2 - The EAP type is PEAP with default authentication using MSCHAPv2 <p>However, when user credentials are stored on an LDAP server, the RADIUS server cannot conduct PEAP-MSCHAPv2 authentication on its own, as it is not aware of the password. Use LDAP agent settings to locally authenticate the user. Additionally, an authentication utility (such as Samba) must be used to authenticate the user. Samba is an open source software used to share services between Windows and Linux machine.</p>
Do Not Verify Username	Enabled only when TLS is selected in Authentication Type . When selected, user name is not matched but the certificate expiry is checked.
Enable CRL Validation	Select this option to enable a <i>Certificate Revocation List</i> (CRL) check. Certificates can be checked and revoked for a number of reasons including failure or compromise of a device using a certificate, a compromise of a certificate key pair or errors within an issued certificate. This option is disabled by default.
Enable EAP Termination	Select this option to enable EAP Termination on the current RADIUS server policy. EAP Termination terminates EAP authentication at the controller
Bypass CRL Check	Select the option to bypass a <i>certificate revocation list</i> (CRL) check when a CRL is not detected. This setting is enabled by default. A CRL is a list of certificates that have been revoked or are no longer valid.
Allow Expired CRL	Select this option to allow the use of an expired CRL. This option is enabled by default



Note

When you are using LDAP as authentication external source, the PEAP-MSCHAPV2 authentication type can be used only if the LDAP server returns the password as plain-text. PEAP-MSCHAPv2 authentication is not supported if the LDAP server returns encrypted passwords. This restriction does not apply for Microsoft's Active Directory Server.

6. If you are using LDAP as the default authentication source, select **+ Add Row** to set LDAP Agent settings.

When a user's credentials are stored on an external LDAP server, the controller or service platform's local RADIUS server cannot successfully conduct PEAP-MSCHAPv2 authentication, since it is not aware of the user's credentials maintained on the external LDAP server resource. Therefore, up to two LDAP agents can be provided locally so remote LDAP authentication can be successfully accomplished on the remote LDAP resource using credentials maintained locally.

Username	Enter a 128-character maximum username for the LDAP server's domain administrator. This is the username defined on the LDAP server for RADIUS authentication requests.
Password	Enter and confirm the 32-character maximum password (for the username provided above). The successful verification of the password maintained on the controller or service platform enables PEAP-MSCHAPv2 authentication using the remote LDAP server resource.
Retry Timeout	Set the number of seconds (60 - 300) or minutes (1 - 5) to wait between LDAP server access requests when attempting to join the remote LDAP server's domain. The default setting is one minute.
Redundancy	Define the Primary or Secondary LDAP agent configuration used to connect to the LDAP server domain.
Domain Name	Enter the name of the domain (from 1 - 127 characters) to which the remote LDAP server resource belongs.

7. Set the following **Session Resumption/Fast Reauthentication** settings to define how server policy sessions are re-established once terminated and require cached data to resume:

Enable Session Resumption	Select the checkbox to control volume and the duration cached data is maintained by the server policy upon the termination of a server policy session. The availability and quick retrieval of the cached data speeds up session resumption. This setting is disabled by default.
Cached Entry Lifetime	If enabling session resumption, use the spinner control to set the lifetime (1 - 24 hours) cached data is maintained by the RADIUS server policy. The default setting is 1 hour.
Maximum Cache Entries	If enabling session resumption, use the spinner control to define the maximum number of entries maintained in cache for this RADIUS server policy. The default setting is 128 entries.

8. Click **OK** to save the settings to the server policy configuration.
Click **Reset** to revert to the last saved configuration.

Configuring RADIUS Server Clients

1. Select the **Client** tab, and ensure the **Activate RADIUS Server Policy** button remains selected.

The access point uses a RADIUS client as a mechanism to communicate with a central server to authenticate users and authorize access.

The client and server share a secret (a password). That shared secret followed by the request authenticator is put through a MD5 hash to create a 16 octet value used with the password entered by the user. If the user password is greater than 16 octets, additional MD5 calculations are performed, using the previous ciphertext instead of the request authenticator. The server receives a RADIUS access request packet and verifies the server possesses a shared secret for the client. If the server does not possess a shared secret for the client, the request is dropped. If the client received a verified access accept packet, the username and password are considered correct, and the user is authenticated. If the client receives a verified access reject message, the username and password are considered incorrect, and the user is not authenticated.

The screenshot shows the 'RADIUS Server Policy' configuration window for 'policy1'. The 'Client' tab is selected. Below the tabs, there is a section titled 'RADIUS Clients' containing a table with two columns: 'IP Address' and 'Shared Secret'. The 'IP Address' field is currently masked with asterisks. To the right of the 'Shared Secret' field, there is a 'Show' checkbox and a delete icon. At the bottom right of the table, there is a '+ Add Row' button. The window also features 'OK', 'Reset', and 'Exit' buttons at the bottom.

Figure 413: RADIUS Server Policy Screen - Add/Edit - Client Tab

2. Select the **+ Add Row** button to add a table entry for a new client's IP address, mask and shared secret.

To delete a client entry, select the Delete icon on the right-hand side of the table entry.

3. Specify the **IP Address** and mask of the RADIUS client authenticating with the RADIUS server.
4. Specify a **Shared Secret** for authenticating the RADIUS client.

Shared secrets verify RADIUS messages with a RADIUS-enabled device configured with the same shared secret. Select the **Show** checkbox to expose the shared secret's actual character string. Otherwise, the shared secret is displayed as a string of asterisks (*).

- Click **OK** to save the server policy's client configuration.
Click **Reset** to revert to the last saved configuration.

Configuring RADIUS Server Proxy Settings

- Select the **Proxy** tab, and ensure the **Activate RADIUS Server Policy** button remains selected.

A user's access request is sent to a proxy server if it cannot be authenticated by local RADIUS resources. The proxy server checks the information in the user access request, and either accepts or rejects the request. If the proxy server accepts the request, it returns configuration information specifying the type of connection service required to authenticate the user.

The RADIUS proxy appears to act as a RADIUS server to the NAS, whereas the proxy appears to act as a RADIUS client to the RADIUS server.

When the access point's RADIUS server receives a request for a user name containing a realm, the server references a table of configured realms. If the realm is known, the server proxies the request to the RADIUS server. The behavior of the proxying server is configuration-dependent on most servers. In addition, the proxying server can be configured to add, remove or rewrite requests when they are proxied.

RADIUS Server Policy INTERNAL-AAA

Server Policy Client **Proxy** LDAP

Proxy Retries

Proxy Retry Delay seconds (5 to 10)

Proxy Retry Count (3 to 6)

Realms

Realm Name	IP Address	Port Number	Shared Secret	

OK Reset **Exit**

Figure 414: RADIUS Server Policy Screen - Add/Edit - Proxy Tab

- Enter the **Proxy Retry Delay** as a value from 5 -10 seconds.
This is the interval the RADIUS server waits before making an additional connection attempt. The default delay interval is 5 seconds.

3. Enter the **Proxy Retry Count** as a value from 3 - 6.
This is the number of retries sent to the proxy server before giving up the request. The default retry count is 3 attempts.
4. Select the **+ Add Row** button to add a RADIUS server proxy realm name and network address.
To delete a proxy server entry, select the **Delete** icon on the right-hand side of the table.
5. Enter the realm name in the **Realm Name** field.
The realm name cannot exceed 50 characters. When the access point's RADIUS server receives a request for a user name, the server references a table of realms. If the realm is known, the server proxies the request to the RADIUS server.
6. Enter the proxy server IP address in the **IP Address** field.
This is the address of server checking the information in the user access request. The proxy server either accepts or rejects the request on behalf of the RADIUS server.
7. Enter the TCP/IP **Port Number** for the server used as a data source for the proxy server.
Use the spinner to select a value from 1024 - 65535. The default port is 1812.
8. Enter the RADIUS client's **Shared Secret** for authenticating the RADIUS proxy.
Select the **Show** checkbox to expose the shared secret's actual character string. Otherwise, the shared secret is displayed as a string of asterisks (*).
9. Click **OK** to save the configuration.
Click **Reset** to revert to the last saved configuration.

Configuring RADIUS Server LDAP Settings

1. Select the **LDAP** tab, and ensure the **Activate RADIUS Server Policy** button remains selected.

Administrators have the option of using the access point’s RADIUS server to authenticate users against an external LDAP server resource. An external LDAP user database allows the centralization of user information and reduces administrative user management overhead. Thus, making the RADIUS authorization process more secure and efficient.

RADIUS is not just a database. It is a protocol for asking intelligent questions to a user database (like LDAP). LDAP however is just a database of user credentials used optionally with the RADIUS server to free up resources and manage user credentials from a secure remote location. It is the access point’s RADIUS resources that provide the tools to perform user authentication and authorize users based on complex checks and logic. There is no way to perform such complex authorization checks from a LDAP user database alone.

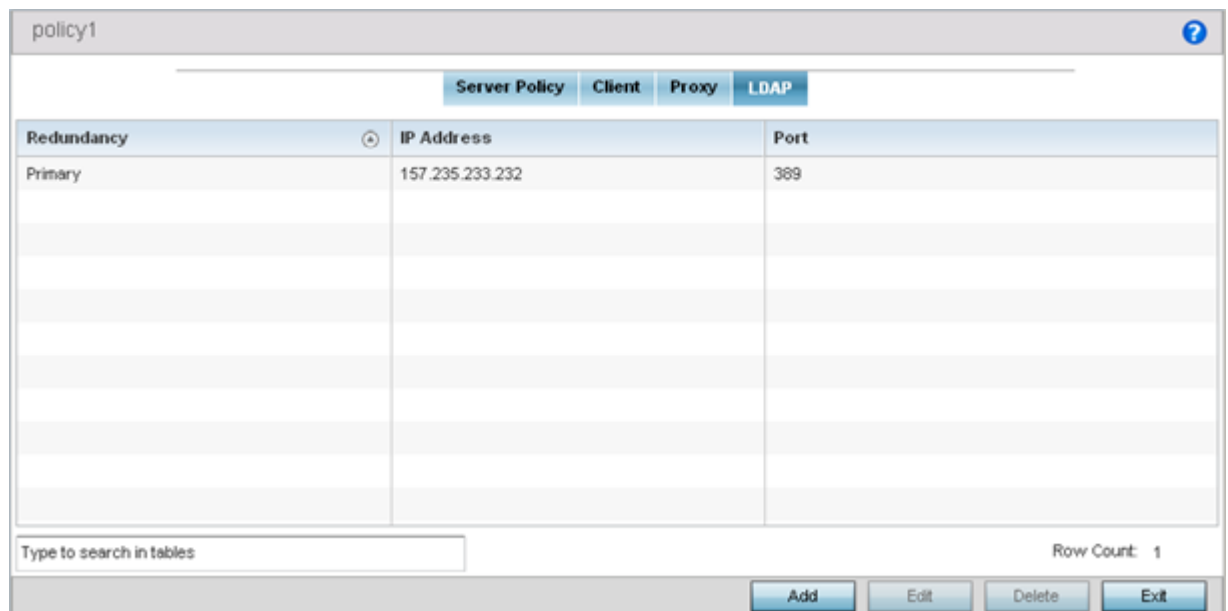


Figure 415: RADIUS Server Policy Screen - LDAP Tab

2. Refer to the following to determine whether an LDAP server can be used as is, a server configuration requires creation or modification, or a configuration requires deletion and permanent removal.

Redundancy	Whether the listed LDAP server IP address has been defined as a <i>primary</i> or <i>secondary</i> server resource. Designating at least one secondary server is a good practice to ensure RADIUS resources are available if a primary server becomes unavailable.
IP Address	The IP address of the external LDAP server acting as the data source for the RADIUS server.

Port	The physical port number used by the RADIUS server to secure a connection with the remote LDAP server resource.
Timeout	The number of seconds (1- 10) this server session waits for a connection before aborting the connection attempt with the listed RADIUS server resource.

3. Click **Add** to add a new LDAP server configuration, **Edit** to modify an existing LDAP server configuration, or **Delete** to remove a LDAP server from the list of those available.

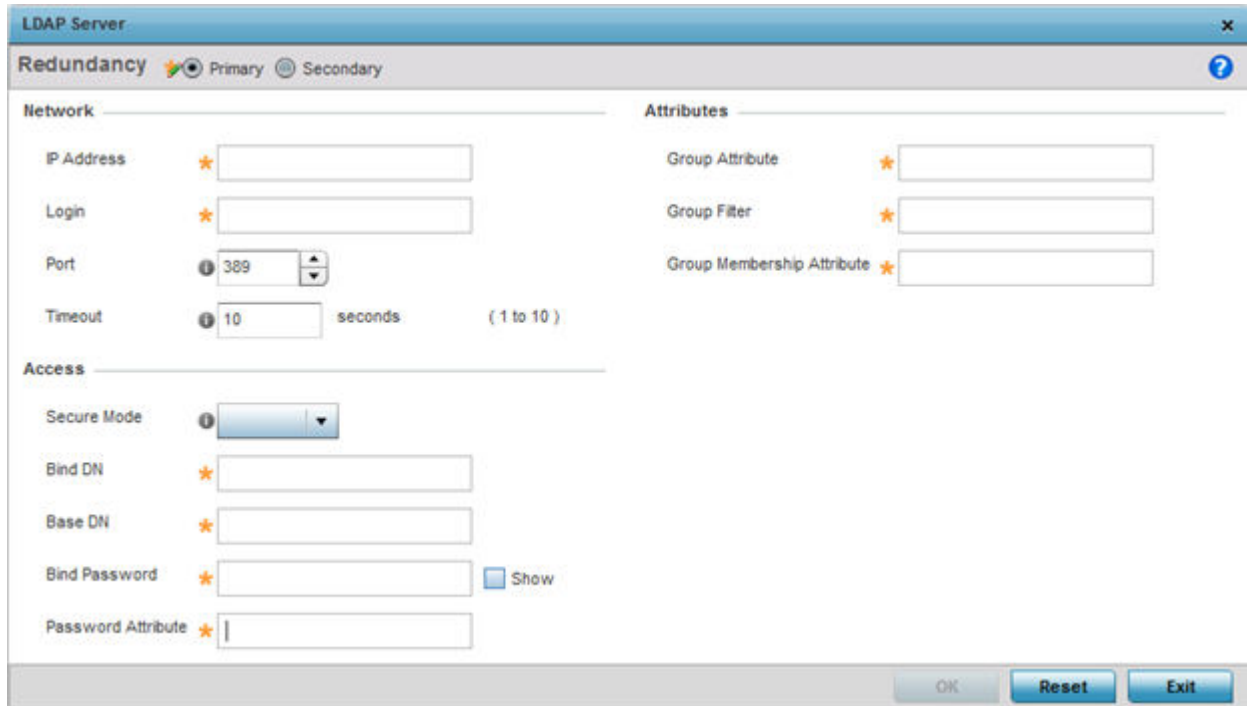


Figure 416: LDAP Server Add Screen

4. Set the following **Network** address information required for the connection to an external LDAP server resource:

Redundancy	Whether this LDAP server is a primary or secondary server resource. Primary servers are always queried for connection first. However, designating at least one secondary server is a good practice to ensure RADIUS user information is available if a primary server becomes unavailable.
IP Address	The 128-character maximum IP address or FQDN of the external LDAP server acting as the data source for the RADIUS server.
Login	A unique login name used for accessing the remote LDAP server resource. Consider using a unique login name for each LDAP server provided to increase the security of the connection to the remote LDAP server.

Port	Use the spinner control to set the physical port number used by the RADIUS server to secure a connection with the remote LDAP server resource. The default port is 389..
Timeout	An interval between 1 - 10 seconds the RADIUS server uses as a wait period for a response from the target primary or secondary LDAP server resource. The default setting is 10 seconds.

5. Set the following **Access** address information required for the connection to the external LDAP server resource:

Secure Mode	The security mode when connecting to an external LDAP server. Use start-tls or tls-mode to connect. The start-tls mode provides a way to upgrade a plain text connection to an encrypted connection using TLS.
Bind DN	The distinguished name to bind with the LDAP server. The DN is the name that uniquely identifies an entry in the LDAP directory. A DN is made up of attribute value pairs, separated by commas.
Base DN	A distinguished name (DN) that establishes the base object for the search. The base object is the point in the LDAP tree at which to start searching. LDAP DNs begin with the most specific attribute (usually some sort of name), and continue with progressively broader attributes, often ending with a country attribute. The first component of the DN is referred to as the Relative Distinguished Name (RDN). The RDN identifies an entry distinctly from any other entries that have the same parent.
Bind Password	A valid password for the LDAP server. Select the Show check box to expose the password's actual character string. Otherwise the password is displayed as a string of asterisks (*). The password cannot 32 characters.
Password Attribute	The LDAP server password attribute. The password cannot exceed 64 characters.

6. Set the following **Attributes** for LDAP groups to optimally refine group queries:

GroupAttribute	LDAP systems have the facility to poll dynamic groups. In an LDAP dynamic group, an administrator can specify search criteria. All users matching the search criteria are considered a member of this dynamic group. Specify a group attribute used by the LDAP server. An attribute could be a group name, group ID, password, or group membership name.
Group Filter	Specify the group filters used by the LDAP server. This filter is typically used for security role-to-group assignments and specifies the property to look up groups in the directory service.
Group Membership Attribute	Specify the group member attribute sent to the LDAP server when authenticating users.

7. Click **OK** to save the changes to the LDAP server configuration.
Click **Reset** to revert to the last saved configuration.

Setting the URL List

URL lists are used to select highly utilized URLs for smart caching. The selected URLs are monitored and routed according to existing cache content policies.

To configure a URL lists policy:

1. Select the **Configuration** tab from the main menu.
2. Select the **Services** tab from the Configuration menu.
3. Select **URL Lists**.

The URL Lists screen displays existing policies. New policies can be created. Existing policies can be modified, deleted or copied.

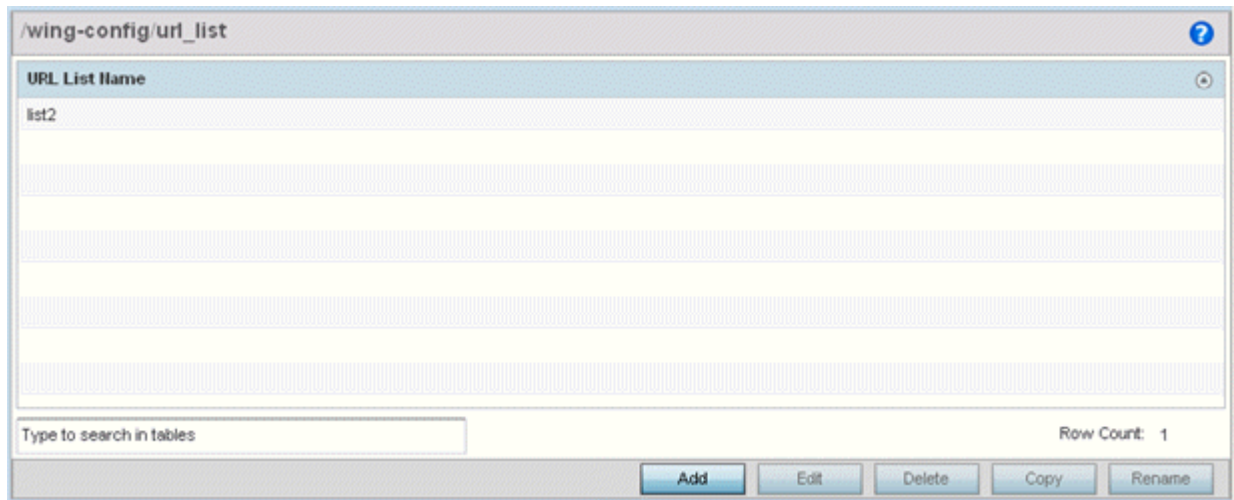


Figure 417: Smart Caching - URL List Name Screen

4. Refer to the **URL List Name** table to review the administrator assigned name applied to the URL list policy upon creation.
5. Select **Add** to create a URL lists policy. Select an existing policy and click **Edit** to modify, **Delete** to remove or **Copy** to copy the settings of a selected (existing) URL lists policy.

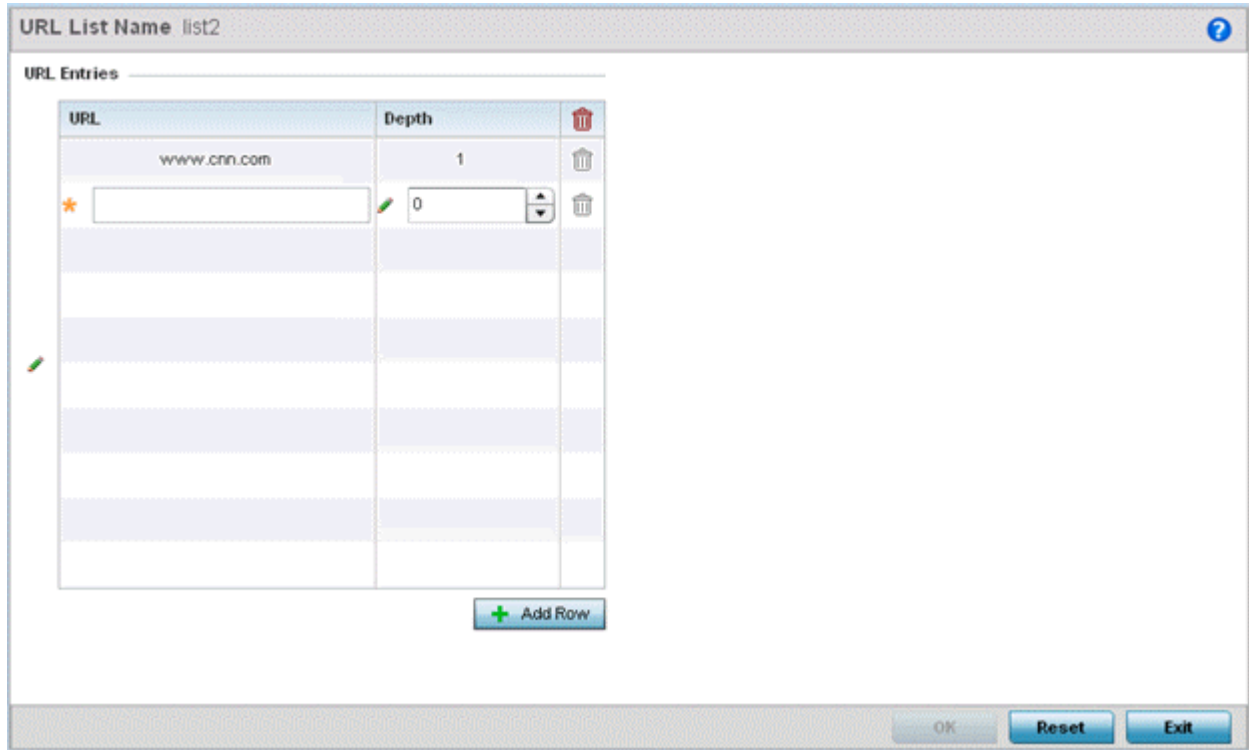


Figure 418: URL List Name - Add/Edit Screen

6. Select **+ Add Row** to display configurable parameters for defining a URL and its depth.
7. If you are creating a new URL lists policy, assign a name to it. The name cannot exceed 32 characters.

If you are editing an existing URL lists policy, the policy name cannot be modified.

8. Set the following **URL Lists** parameters:

URL	Set the requested URL monitored and routed according to existing cache content policies. This value is mandatory.
Depth	Select the number of levels to be cached. Because Web sites have different parameters to uniquely identify specific content, the same content may be stored on multiple origin servers. Smart caching uses subsets of these parameters to recognize that the content is the same and serves it from cache. The available range is from 1 - 10. This value is mandatory.

9. Select **OK** to save the URL Entries list configuration. Select **Reset** to revert to the last saved configuration.

Configure Imagotag Policy

SES-imagotag's ESL (*Electronic Shelf Label*) tags are small, battery-powered devices used by retail businesses to display information, such as product code and pricing. These tags are activated, configured, and managed through an SES-Imagotag provided server. The tags and server communicate through an ESL communicator (a USB

dongle), connected to the USB port on the WiNG AP. This communication is over the 2.4 GHz band using a proprietary RF protocol. The ESL communicator acts as a bridge between the tags and the server, using WiNG AP as an infrastructure device.

Use the Imagotag option to enable support for SES-imagotag's ESL tags on WiNG APs with USB interfaces. For a standalone AP, apply the policy to the AP. For APs that are adopted by a controller, apply the policy to the AP profile on the controller.

An Imagotag-enabled AP recognizes the ESL communicator, and facilitates communication between communicator and tags.

**Note**

Imagotag support is available on AP360i/e, AP310i/e, AP410i/e, AP460i/e, AP505i, AP510i/e, AP560i, AP560h, in addition to AP-8432.

**Important**

This feature is supported only on AP's with USB ports. Ensure the AP is using PoE+ (802.3at) power for the USB port to be enabled.

**Note**

Your AP will not communicate with the ESL server with any existing or older versions of Imagotag configuration.

The Imagotag ESL solution is upgraded with secure connectivity between AP and ESL server on-prem or on-cloud. Any unencrypted mode of communication between AP and ESL server is not supported in WiNG 7.4.0 release.

For configuration information, refer to the [Extreme Wireless Controller, Service Platform and Access Point CLI Reference Guide](#).

To navigate to the **Imagotag Policy** screen:

1. Select the **Configuration** tab from the main menu.
2. Select the **Services** tab from the **Configuration** menu.

The upper left-hand side of the user interface displays a Services menu pane where **Captive Portal**, **DNS Whitelist**, **DHCP Server Policy**, **RADIUS**, **Guest Management**, etc. configuration options can be selected.

3. Select the **Imagotag Policy** option.

Imagotag Name	Enable	Channel	Window Size	Payload Size	Output Power	SSL	FCC-Mode
ImagoTagPolicy	✓	9	12	25	Level-B	✗	✗

Figure 419: Configuration - Services - Imagotag Policy screen

4. Review existing Imagotag Policy settings, to determine whether a new policy requires creation, an existing policy requires modification or an existing policy requires deletion:

Imagotag Name	Displays the Imagotag policy name.
Enable	Displays the status of the policy: Enabled/Disabled. A green check mark indicates that the policy is enabled. A red cross mark indicates that the policy is disabled.
Channel	Displays the channel assigned for ESL communicator to tag communication in the 2.4 GHz band.
Window Size	Displays the transmission window size for messages exchanged between ESL communicator and tags.
Payload Size	Displays the maximum payload size in packets exchanged between ESL communicator and tags.
Output Power	Displays the maximum output power set for the ESL communicator.
SSL	Displays if <i>Secure Socket Layer</i> (SSL) encryption mode of communication is enabled or not. A green check mark indicates that this option is enabled. A red cross mark indicates that this option is disabled.
FCC-Mode	Displays if the FCC compatibility mode is enabled or not on the ESL communicator. A green check mark indicates that this option is enabled. A red cross mark indicates that this option is disabled.

Imagotag Firmware Updates

Use the following startup parameter to specify the name and path of a USB-Dongle-FW file:

```
--fw_path=update-firmware-dongle.xml
```

You can specify either a relative or absolute path to the file. If the SCD cannot find the file due to path or filename error, it will return the following error message in the console:

```
Loading firmware failed. Not reachable: Your File Name
```

Adding/Editing Imagotag Policy Settings

To add/edit an Imagotag policy:

1. Select **Add** and create a new policy. To modify, remove, copy or rename an existing policy, select the policy from those listed on the screen and click the **Edit**, **Delete**, **Copy** or **Rename** button.

The Imagotag Policy add/edit screen displays.

Figure 420: Add/Edit Imagotag Policy screen

2. If adding a new policy, in the **Imagotag Name** field, enter the policy name.

3. Configure or edit the following Imagotag policy settings:

Enable	Select to enable the policy.
Channel	Use this drop-down menu to configure the channel assigned for the ESL communicator to tag communication in the 2.4 GHz band. The options are: <ul style="list-style-type: none"> ACS (<i>Auto-Channel Selection</i>) - Enables auto channel selection mode. This is the default setting. 0 - 10 - Sets the RF channel of operation within the 0-10 range.
Window Size	Use the spinner control to set the transmission window size for messages exchanged between ESL communicator and tags. <ul style="list-style-type: none"> 1-14 - Set a value between 1-14 bytes. The default value is 14 bytes. <p>Note: SES-Imagotags recommends NOT to change the default setting.</p>
Payload Size	Use the spinner control to set the maximum size of the payload in packets exchanged between ESL communicator and tags. <ul style="list-style-type: none"> 1-32 - Specify the value from 1 - 32 bytes. The default setting is 32 bytes. <p>Note: SES-Imagotags recommends NOT to change the default setting.</p>
Output Power	Use the spinner control to configure the maximum output power for the ESL communicator. The options are: <ul style="list-style-type: none"> Level-A - 1 dBm. This is the default setting. Level-B - -4 dBm Level-C - -6 dBm Level-D - -12 dBm Level-E - 0 dBm Level-F - -2 dBm Level-G - -8 dBm Level-H - -10 dBm <p>Note: SES-Imagotags recommends NOT to change the default setting, which is in conformance to various country/region specific RF regulations.</p>
SSL	Select to enable secure, encrypted communication over the SSL (<i>Secure Socket Layer</i>) between the AP and SES-imagotag server. This option is disabled by default.
FCC-Mode	Select to enable the FCC (<i>Federal Communications Commission</i>) compatibility mode on the ESL communicator. This option is disabled by default.

Server ID	Use this field to specify the Imagotag server's IP address or hostname. As per the current implementation, at the ESL server end, the WiNG AP's IP address was configured to enable the server contact the AP and establish connection with the ESL communicator (USB Dongle). Starting with WiNG 5.9.3, it is the AP that initiates communication with the ESL Imagotag server. The AP sends a connection request to the ESL server specified here.
Port	Use the spinner control to set the port on which the Imagotag server is reachable. The default value is 7353.

4. Select **OK** to save the configurations. Select **Reset** to revert to the last saved configuration.

Services Deployment Considerations

Before defining the access point's configuration using the Services menu, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- We recommend that each RADIUS client use a different shared secret password. If a shared secret is compromised, only the one client poses a risk as opposed all the additional clients that potentially share that secret password.
- Consider using an LDAP server as a database of user credentials that can be used optionally with the RADIUS server to free up resources and manage user credentials from a secure remote location.
- Designating at least one secondary server is a good practice to ensure RADIUS user information is available if a primary server were to become unavailable.



Management Access

[Adding or Editing a Management Access Policy](#) on page 964

[Management Access Deployment Considerations](#) on page 981

Controllers, service platforms and access points have mechanisms to *allow* or *deny* device access for separate interfaces and protocols (*HTTP, HTTPS, Telnet, SSH* or *SNMP*). Management access can be *enabled* or *disabled* as required for unique policies. The Management Access functionality is not meant to function as an ACL (in routers or other firewalls), where administrators specify and customize specific IP addresses to access specific interfaces.

Controllers and service platforms can be managed using multiple interfaces (SNMP, CLI and Web UI). By default, management access is unrestricted, allowing management access to any enabled IP interface from any host using any enabled management service.

To enhance security, administrators can apply various restrictions as needed to:

- Restrict SNMP, CLI and Web UI access to specific hosts or subnets
- Disable un-used and insecure interfaces as required within managed access profiles. Disabling un-used management services can dramatically reduce an attack footprint and free resources on managed devices
- Provide authentication for management users
- Apply access restrictions and permissions to management users

Management restrictions can be applied to meet specific policies or industry requirements requiring only certain devices or users be granted access to critical infrastructure devices. Management restrictions can also be applied to reduce the attack footprint of the device when guest services are deployed.



Note

Access points utilize a single Management Access policy, so ensure all the intended administrative roles, permissions, authentication and SNMP settings are correctly set. If an access point is functioning as a Virtual Controller AP, these are the access settings used by adopted access points of the same model as the Virtual Controller AP.

Adding or Editing a Management Access Policy

To add a new Management Access policy, or edit an existing configuration:

1. Select **Configuration** → **Management** → **Management Policy** to display the main **Management Policy** screen and the Management Browser.
 - To modify an existing policy, select **Management Browser** > **Edit**.
 - To add a new policy, click **Add** on the bottom right-hand side of the Management screen.
2. Name the new policy to enable the **Access Control**, **SNMP**, **SNMP Traps** and **Administrators** tabs and define the policy configuration.

The name cannot exceed 32 characters.

3. Click **OK** to commit the new policy name.

Once the new name is defined, the screen's tabs become enabled, with the contents of the **Administrators** tab displayed by default. Refer to the following to define the configuration of the new Management Access policy:

Creating an Administrator Configuration

Use the **Administrators** tab to create specific users, assign them permissions to specific protocols and set specific administrative roles for the network.

Setting the Access Control Configuration

Use the **Access Control** tab to enable/disable specific protocols and interfaces. Again, this kind of access control is not meant to function as an ACL, but rather as a means to enable/disable specific protocols (HTTP, HTTPS, Telnet etc.) for each Management Access policy.

Setting the Authentication Configuration

Refer to the **Authentication** tab to set the authentication scheme used to validate user credentials with this policy.

Setting the SNMP Configuration

Refer to the **SNMP** tab to enable SNMPv2, SNMPv3 or both and define specific community strings for this policy.

Setting SNMP Trap Configuration

Use the **SNMP Traps** tab to enable trap generation for the policy and define trap receiver configurations.

For deployment considerations and recommendations impacting a controller or service platform's Management Access policy configuration, refer to [Management Access Deployment Considerations](#) on page 981.

Configure Management User Account

Management services (Telnet, SSHv2, HTTP, HTTPS and FTP) require administrators enter a valid username and password which is authenticated locally or centrally on a RADIUS server. SNMPv3 also requires a valid username and password which is authenticated by the SNMPv3 module. For CLI and Web UI users, the controller or

service platform also requires user role information to know what permissions to assign.

- If local authentication is used, associated role information is defined on the controller or service platform when the user account is created.
- If RADIUS is used, role information is supplied RADIUS using vendor specific return attributes. If no role information is supplied by RADIUS, the controller or service platform applies default read-only permissions.

Administrators can limit users to specific management interfaces. During authentication, the controller or service platform looks at the user's access assignment to determine if the user has permissions to access an interface:

- If local authentication is used, role information is defined on the controller or service platform when the user account is created.
- If RADIUS is used, role information is supplied by RADIUS using vendor specific return attributes.

The controller or service platform also supports multiple RADIUS server definitions as well as fallback to provide authentication in the event of failure. If the primary RADIUS server is unavailable, the controller or service platform authenticates with the next RADIUS sever, as defined in the AAA policy. If a RADIUS server is not reachable, the controller or service platform can fall back to the local database for authentication. If both RADIUS and local authentication services are unavailable, read-only access can be optionally provided.


The controller or service platform authenticates users using the integrated local database. When user credentials are presented the controller or service platform validates the username and password against the local database and assigns permissions based on the associated roles assigned. The controller or service platform can also deny the authentication request if the user is attempting to access a management interface not specified in the account's access mode list.

Use the **Administrators** tab to review existing administrators, their access medium (type) and administrative role within the controller, service platform or access point managed network. New administrators can be added, and existing administrative user configurations modified or deleted as required.

To create administrators and assign them access types and roles:

1. Select the **Administrators** tab if not selected by default.

The **Administrators** screen displays.

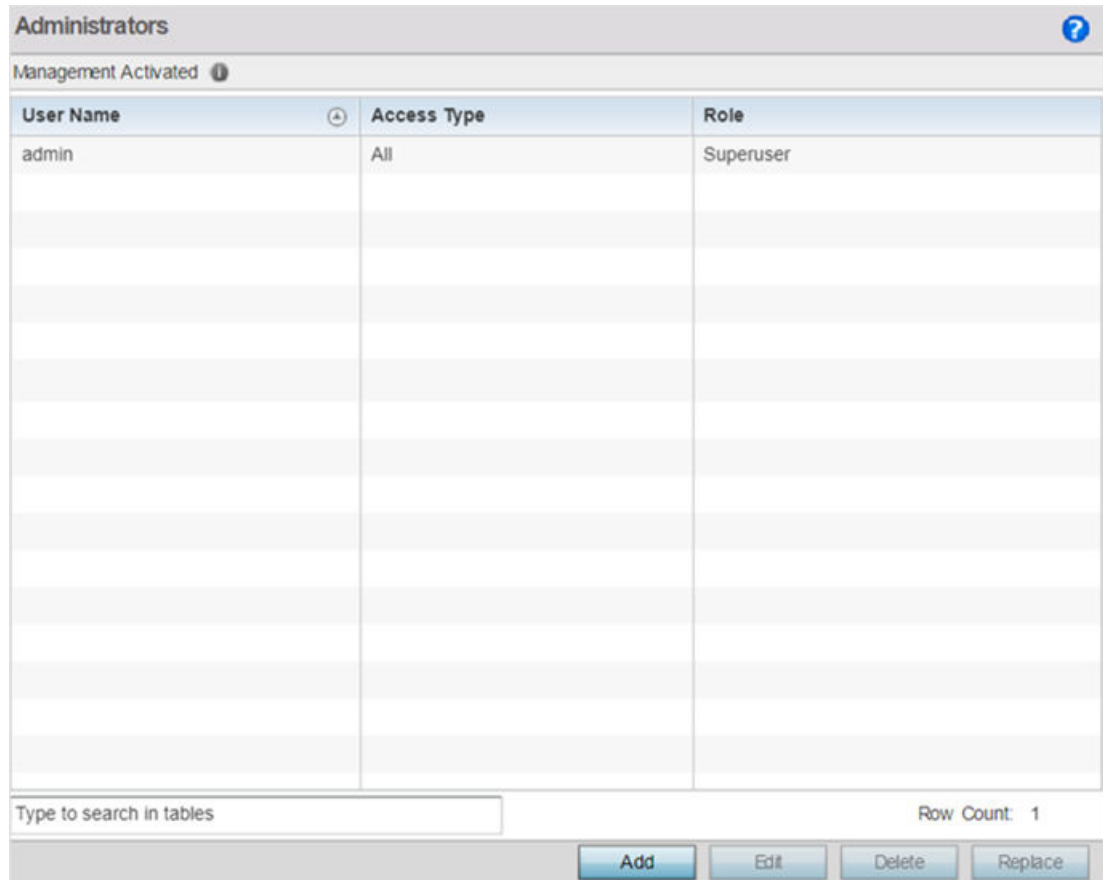


2. Refer to the following high-level configurations of existing administrators:

User Name	Displays the name assigned to the administrator upon creation of their account. The name cannot be modified as part of the administrator configuration edit process.
Access Type	Lists the Web UI, Telnet, SSH or Console access type assigned to each listed administrator. A single administrator can have any one (or all) of these roles assigned at the same time.
Role	Lists the Superuser, System, Network, Security, Monitor, Help Desk, Web User, Device Provisioning or Vendor Admin role assigned to each listed administrator. An administrator can only be assigned one role at a time.

3. Select **Add** to create a new administrator configuration, **Edit** to modify an existing configuration or **Delete** to permanently remove an administrator from the list of those available.

The **Administrators** screen displays.

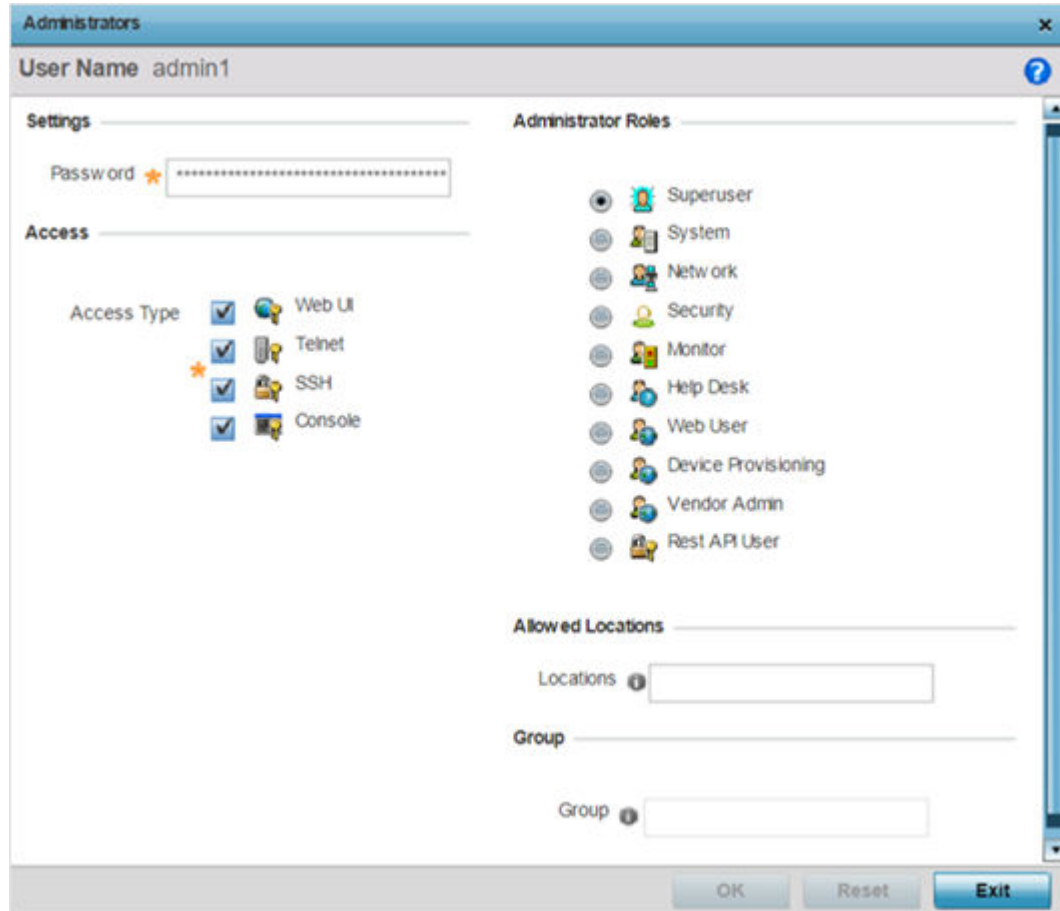

4. If creating a new administrator, enter a name in the **User Name** field.
This is a mandatory field for new administrators and cannot exceed 32 characters. Optimally assign a name representative of the user and role.
5. Provide a strong password for the administrator within the **Password** field.
Reconfirm the password to ensure its accurately entered. This is a mandatory field.
6. Select **Access** options to define the permitted access for the user. Access modes can be assigned to management user accounts to restrict which management interfaces the user can access. A management user can be assigned one or more access roles allowing access to multiple management interfaces. If required, all four options can be selected and invoked simultaneously.

Web UI	Select this option to enable access to the device's Web User Interface.
Telnet	Select this option to enable access to the device using TELNET.

SSH	Select this option to enable access to the device using SSH.
Console	Select this option to enable access to the device's console.

7. Select the **Administrator Role** for the administrator using this profile. Only one role can be assigned.

Superuser	Select this option to assign complete administrative rights to the user. This entails all the roles listed for all the other administrative roles.
System	The System administrator role provides permissions to configure general settings like NTP, boot parameters, licenses, perform image upgrades, auto install, manager redundancy/clustering and control access.
Network	The Network administrator role provides privileges to configure all wired and wireless parameters like IP configuration, VLANs, L2/L3 security, WLANs, radios, and captive portal.
Security	Select Security administrator to set the administrative rights for a security administrator allowing configuration of all security parameters.
Monitor	Assigns the System Monitor role to the new user. This role has read-only access to the system. The user can only view configuration and statistics. The user cannot view secret information and passwords. Select Monitor to assign permissions without any administrative rights.
Help Desk	Assign this role to someone who typically troubleshoots and debugs problems reported by the customer. The Help Desk manager typically runs troubleshooting utilities (like a sniffer), executes service commands, views and retrieves logs. Help Desk personnel are <i>not</i> allowed to conduct controller or service platform reloads.
Web User	Assigns the Web User Administrator role to the new user. This role allows the user to create guest users and credentials. The Web user admin can access only the custom GUI screen and does not have access to the normal CLI and GUI.
Device Provisioning	Assigns the Device provisioning administrator role to the new user. This role has privileges to update (provision) device configuration files or firmware. However, such updates run the risk of overwriting and loss of existing device configurations unless properly archived. Note: You can restrict a device-provisioning-admin user's access to devices within a specific location or locations by applying the Allowed Locations tag. When applied, this user, will only have access to devices within the locations (RF Domains/sites/tree-node paths) associated with the allowed-locations tag. For information on configuring the allowed-locations tag, click here .

Vendor Admin	<p>Configures this user's role as vendor-admin. Once created, the vendor-admin can access the online device-registration portal to add devices to the RADIUS vendor group to which he/she belongs. Vendor-admins have only Web access to the device registration portal. The WiNG software allows multiple vendors to securely on-board their devices through a single SSID. Each vendor has a 'vendor-admin' user who is assigned a unique, username/password credential for RADIUS server validation. Successfully validated vendor-admins can on-board their devices, which are, on completion of the on-boarding process, immediately placed on the vendor-allowed VLAN.</p> <p>If assigning the vendor-admin role, provide the vendor's group name for RADIUS authentication. The vendor's group takes precedence over the statically configured group for device registration.</p> <p>Note: The Allowed Locations option is not applicable to this role.</p>
REST API User	<p>Assigns the REST API user role. This user role provides read-only permission for the user to use APIs to retrieve statistics, etc. The user will not have permission to change/write configurations.</p>

8. Use the **Allowed Locations** field to specify the allowed-locations tag. Each allowed-locations tag is mapped to one or multiple locations (RF Domains/sites/tree-node paths). By specifying an allowed-locations tag you are restricting the user's access to the location(s) mapped to the tag. However, in WiNG, this option is only applicable to the Device Provisioning user role.
9. Use the **Group** field to specify the user group to which this user belongs.
10. Click **OK** to save the administrator's configuration, or click **Reset** to revert to the last saved configuration.

Setting the Access Control Configuration

Refer to the Access Control screen to allow/deny management access to the network using strategically selected protocols (HTTP, HTTPS, Telnet, SSH or SNMP). Access options can be either enabled or disabled as required. Consider disabling unused interfaces to close unnecessary security holes. The Access Control tab is not meant to function as an ACL (in routers or other firewalls), where you can specify and customize specific IPs to access specific interfaces.


Administrators can secure access to a controller or service platform by disabling less secure interfaces. By default, the CLI, SNMP and FTP disable interfaces that do not support encryption or authentication. However, Web management using HTTP is enabled. Insecure management interfaces such as Telnet, HTTP and SNMP should be disabled, and only secure management interfaces, like SSH and HTTPS should be used to access the controller or service platform managed network.

The following table demonstrates how some interfaces provide better security than others:

Access Type	Encrypted	Authenticated	Default State
Telnet	No	Yes	Disabled
SNMPv2	No	No	Enabled
SNMPv3	Yes	Yes	Enabled
HTTP	No	Yes	Disabled
HTTPS	Yes	Yes	Disabled
FTP	No	Yes	Disabled
SSHv2	Yes	Yes	Disabled

To set an access control configuration for the Management Access policy:

1. Select the **Access Control** tab.

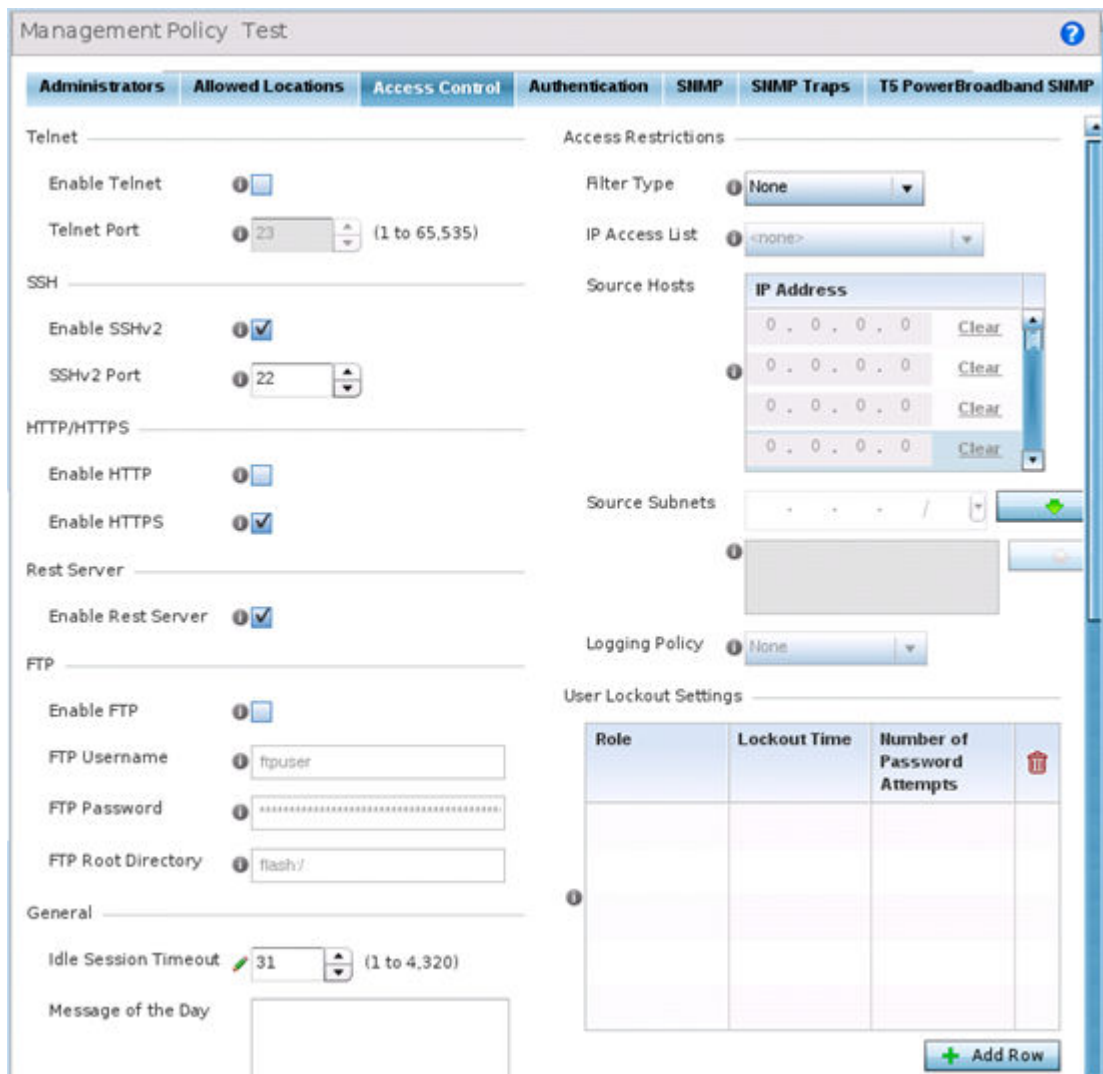

2. Set the following parameters required for Telnet access:

Enable Telnet	Select the checkbox to enable Telnet device access. Telnet provides a command line interface to a remote host over TCP. Telnet provides no encryption, but it does provide a measure of authentication. Telnet access is disabled by default.
Telnet Port	Set the port on which Telnet connections are made (1 - 65,535). The default port is 23. Change this value using the spinner control next to this field or by entering the port number in the field.

3. Set the following parameters required for SSH access:

Enable SSHv2	Select the checkbox to enable SSH device access. SSH (Secure Shell) version 2, like Telnet, provides a command line interface to a remote host. SSH transmissions are encrypted and authenticated, increasing the security of transmission. SSH access is disabled by default.
SSHv2 Port	Set the port on which SSH connections are made. The default port is 22. Change this value using the spinner control next to this field or by entering the port number in the field.

4. Set the following HTTP/HTTPS parameters:

Enable HTTP	Select the check box to enable HTTP device access. HTTP provides limited authentication and no encryption.
Enable HTTPS	Select the check box to enable HTTPS device access. HTTPS (Hypertext Transfer Protocol Secure) is more secure than plain HTTP. HTTPS provides both authentication and data encryption as opposed to just authentication.

**Note**

If the a RADIUS server is not reachable, HTTPS or SSH management access to the controller or service platform may be denied.

5. Set the following parameters required for FTP access:

Enable FTP	Select the check box to enable FTP device access. FTP (File Transfer Protocol) is the standard protocol for transferring files over a TCP/IP network. FTP requires administrators enter a valid username and password authenticated locally on the controller. FTP access is disabled by default.
FTP Username	Specify a username required when logging in to the FTP server. The username cannot exceed 32 characters.
FTP Password	Specify a password required when logging in to the FTP server. Reconfirm the password in the field provided to ensure it has been entered correctly. The password cannot exceed 63 characters.
FTP Root Directory	Provide the complete path to the root directory in the space provided. The default setting has the root directory set to flash:/

6. Set the following **General** parameters:

Idle Session Timeout	Specify an inactivity timeout for management connects (in seconds) between 1 - 4,320. The default setting is 12.0
Message of the Day	Enter message of the day text (no longer than 255 characters) displayed at login for clients connecting via Telnet or SSH.

7. Set the following **Access Restrictions** parameters:

Filter Type	Select a filter type for access restriction. Options include IP Access List, Source Address or None. To restrict management access to specific hosts, select Source Address as the filter type and provide the allowed addresses within the Source Hosts field.
IP Access List	If the selected filter type is IP Access List, select an access list from the drop-down menu or select the Create button to define a new one. IP based firewalls function like Access Control Lists (ACLs) to filter/mark packets based on the IP from which they arrive, as opposed to filtering packets on layer 2 ports. IP firewalls implement uniquely defined access control policies, so if you do not have an idea of what kind of access to allow or deny, a firewall is of little value, and could provide a false sense of network security.

Source Hosts	If the selected filter type is Source Address, enter an IP Address or IP Addresses for the source hosts. To restrict management access to specific hosts, select Source Address as the filter type and provide the allowed addresses within the Source Hosts field.
Source Subnets	If the selected filter type is Source Address, enter a source subnet or subnets for the source hosts. To restrict management access to specific subnets, select Source Address as the filter type and provide the allowed addresses within the Source Subnets field.
Logging Policy	If the selected filter is Source Address, enter a logging policy for administrative access. Options includes None, Denied Requests or All.


- Click **OK** to save the Access Control configuration or click **Reset** to revert to the last saved configuration.

Setting the Authentication Configuration

Refer to the **Authentication** tab to define how user credential validation is conducted on behalf of a Management Access policy. Setting up an authentication scheme by policy allows for policy member credential validation collectively, as opposed to authenticating users individually.

To configure an external authentication resource:

1. Select the **Authentication** tab.

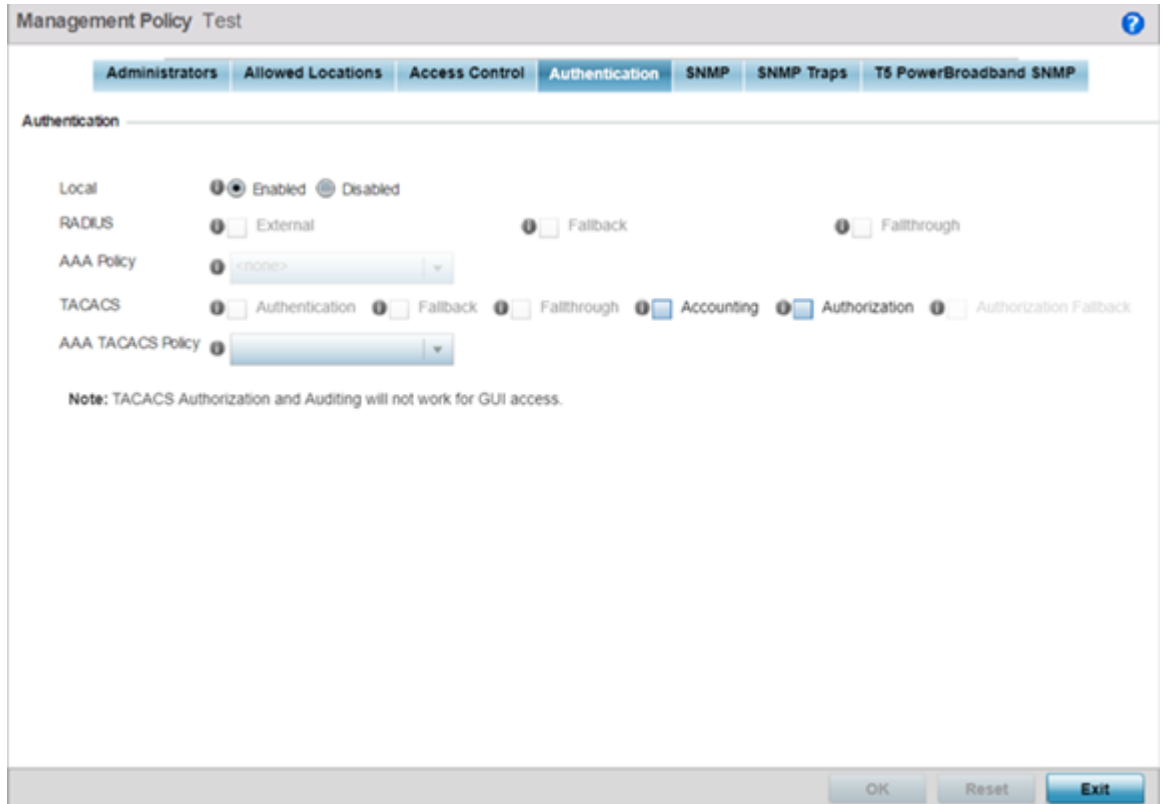

2. Define the following settings to authenticate management access requests:

Local	<p>Use this option to enable/disable local authentication mode. Local authentication uses the local username/password database to authenticate a user. When disabled, an external authentication resource is used to validate user access requests. The external authentication resource could be a dedicated RADIUS or TACACS server.</p> <p>Note: By default the local authentication mode is enabled. Disabling local authentication enables the other parameters on the screen.</p>
RADIUS	<p>If authentication is to be handled by an external RADIUS server, select one of the following options:</p> <ul style="list-style-type: none"> • External - Select this option to forward client authentication requests to an external RADIUS server. Enables external RADIUS server as the preferred authentication mode. However, this option does not provide fallback to local database authentication in case the server is unreachable or if the server rejects the request. • Fallback - Select this option to revert to local database authentication in case the external RADIUS server is unreachable. <p>When this option is enabled, RADIUS authentication is attempted first. However, if the external RADIUS server is unreachable the local database is used to authenticate the user.</p> <ul style="list-style-type: none"> • Fallthrough - Select this option to revert to local database authentication in the following scenarios: <ul style="list-style-type: none"> ◦ If the external RADIUS server is unreachable. ◦ If the external RADIUS server rejects the user authentication request. <p>When this option is enabled, RADIUS authentication is attempted first. However, if the external RADIUS server is unreachable <i>or</i> rejects the authentication request the local database is used to authenticate the user.</p>
AAA Policy	<p>If enabling external RADIUS server authentication, select the AAA policy to use with the external RADIUS resource. Controllers, service platforms and access points not using their local RADIUS resource will need to inter-operate with a RADIUS and LDAP Server (AAA Servers) to provide user database information and user authentication data. The AAA policy points to this external RADIUS server resource.</p> <p>Select the Create icon as needed to define a new AAA policy or select the Edit icon to modify the configuration of an existing policy.</p>

TACACS	<p>If local authentication is disabled, and authentication is to be handled by an external TACACS server, select one of the following options:</p> <ul style="list-style-type: none"> • Authentication - Select to enable TACACS authentication on login. • Fallback - Select this option to revert to local database authentication in case the TACACS server is unreachable. <p>When this option is enabled, TACACS authentication is attempted first. However, if the external TACACS server is unreachable the local database is used to authenticate the user.</p> <ul style="list-style-type: none"> • Fallthrough - Select this option to revert to local database authentication in the following scenarios: <ul style="list-style-type: none"> ◦ If the external TACACS server is unreachable. ◦ If the external TACACS server rejects the user authentication request. <p>When this option is enabled, TACACS authentication is attempted first. However, if the TACACS server is unreachable <i>or</i> rejects the authentication request the local database is used to authenticate the user.</p> <ul style="list-style-type: none"> • Accounting - Select to enable TACACS accounting on login. • Authorization - Select to enable TACACS authorization on login. <ul style="list-style-type: none"> ◦ Authorization Fallback - Select to enable fallback on TACACS authorization failure. This option is only available when Authorization is selected.
AAA TACACS Policy	<p>If enabling external TACACS server authentication, select the TACACS policy to use. The AAA TACACS policy points to this external TACACS server resource. Select an existing AAA TACACS policy (if available), or select Create to define a new policy or Edit to modify an existing one.</p>

3. Click **OK** to update the authentication configuration, or click **Reset** to revert to the last saved configuration.

Setting the SNMP Configuration

Optionally use the *Simple Network Management Protocol* (SNMP) to communicate with controllers, service platforms and access points within the wireless network. SNMP is an application layer protocol that facilitates the exchange of management information to and from a managed device. SNMP enabled devices listen on port 162 (by default) for SNMP packets from the management server. SNMP uses read-only and read-write community strings as an authentication mechanism to monitor and configure supported devices. The read-only community string is used to gather statistics and configuration parameters from a supported wireless device. The read-

write community string is used by a management server to *set* device parameters. SNMP is generally used to monitor a system's performance and other parameters.

SNMP Version	Encrypted	Authenticated	Default State
SNMPv1	No	No	Disabled
SNMPv2	No	No	Enabled
SNMPv3	Yes	Yes	Enabled

To configure SNMP Management Access:

1. Select the **SNMP** tab.

The screenshot displays the 'Management Policy default' configuration page. The 'SNMP' tab is selected. Under the 'SNMP' section, there are three checkboxes: 'Enable SNMPv1' (checked), 'Enable SNMPv2' (unchecked), and 'Enable SNMPv3' (checked). Below this is the 'SNMP v1/v2c Community String' table:

Community	Access Control	IP SNMP ACL	
private	rw	default	
public	ro	default	

Below the table is an 'Add Row' button. Further down is the 'SNMPv3 Users' table:

User Name	Authentication	Encryption	Password	
snmpmanager	md5	des	motorola	
snmpoperator	md5	des	operator	
snmptrap	md5	des	motorola	

Below this table is another 'Add Row' button. At the bottom of the interface are 'OK', 'Reset', and 'Exit' buttons.

2. Enable or disable SNMP v1, SNMPv2 and SNMPv3.

Enable SNMPv1	SNMP v1exposes a device's management data so it can be managed remotely. Device data is exposed as variables that can be accessed and modified as text strings, with version 1 being the original (rudimentary) implementation. SNMPv1 is enabled by default.
Enable SNMPv2	Select the checkbox to enable SNMPv2 support. SNMPv2 provides device management using a hierarchical set of variables. SNMPv2 uses Get, GetNext, and Set operations for data management. SNMPv2 is enabled by default.
Enable SNMPv3	Select the checkbox to enable SNMPv3 support. SNMPv3 adds security and remote configuration capabilities to previous versions. The SNMPv3 architecture introduces the <i>user-based security model</i> (USM) for message security and the <i>view-based access control model</i> (VACM) for access control. The architecture supports the concurrent use of different security, access control and message processing techniques. SNMPv3 is enabled by default.

3. Set the **SNMP v1/v2 Community String** configuration. Use the + Add Row function as needed to add additional SNMP v1/2 community strings, or select an existing community string's radio button and select the **Delete** icon to remove it.

Community	Define a public or private community designation. By default, SNMPv2 community strings on most devices are set to public, for the read-only community string, and private for the read-write community string.
Access Control	Set the access permission for each community string used by devices to retrieve or modify information. Available options include: <ul style="list-style-type: none"> • Read Only - Allows a remote device to retrieve information. • Read-Write - Allows a remote device to modify settings.
IP SNMP ACL	Set the IP SNMP ACL used along with community string. Use the dropdown menu to select an existing ACL. Use the Create icon to create and add a new ACL. Select an existing ACL and the Edit icon to update an existing ACL.

4. Set the **SNMPv3 Users** configuration. Use the + **Add Row** function as needed to add additional SNMPv3 user configurations, or select a SNMP user and select the Delete icon to remove the user.

User Name	Use the drop-down menu to define a user name of snmpmanager, snmpoperator or snmptrap.
Authentication	Displays the authentication scheme used with the listed SNMPv3 user. The listed authentication scheme ensures only trusted and authorized users and devices can access the network.

Encryption	Select to enable TACACS accounting on login. This option is not available when the Local field is set to enabled. When selected, the AAA TACACS Policy field is enabled.
Password	Provide the user's password in the field provided. Select the Show check box to display the actual character string used in the password, while leaving the check box unselected protects the password and displays each character as "*".

5. Select **OK** to update the SNMP configuration. Select Reset to revert to the last saved configuration.

Setting SNMP Trap Configuration


Controller, service platform and access point managed networks use SNMP trap receivers for fault notifications. SNMP traps are unsolicited notifications triggered by thresholds (or actions), and are an important fault management tool.

A SNMP trap receiver is the defined destination for SNMP messages (external to the controller, service platform or access point). A trap is like a Syslog message, just over another protocol (SNMP). A trap is generated when a device consolidates event information and transmits the information to an external repository. The trap contains several standard items, such as the SNMP version, community etc.

SNMP trap notifications exist for most operations, but not all are necessary for day-to-day operation.

To define a SNMP trap configuration for receiving events at a remote destination:

1. Select the **SNMP Traps** tab.

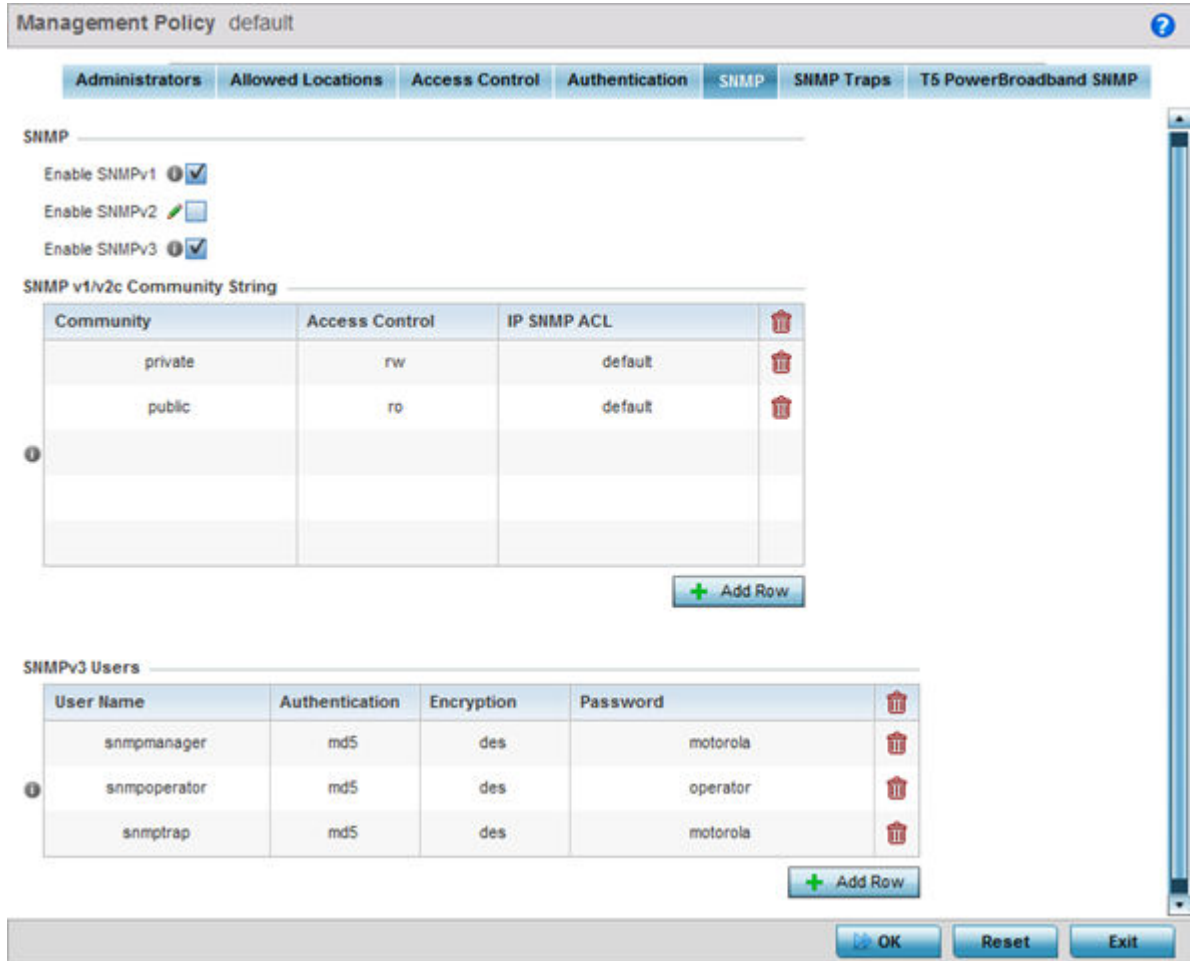

2. Select the **Enable Trap Generation** checkbox to enable trap generation using the trap receiver configuration defined. This feature is disabled by default.
3. Refer to the **Trap Receiver** table to set the configuration of the external resource dedicated to receive trap information. Select **Add Row +** as needed to add additional trap receivers. Select the **Delete** icon to permanently remove a trap receiver.

IP Address	Sets the IP address of an external server resource dedicated to receive SNMP traps on behalf of the controller, service platform or access point.
Port	Set the virtual port of the server resource dedicated to receiving SNMP traps. The default port is port 162.

Version	Sets the SNMP version to use to send SNMP traps. SNMPv2 is the default.
Trap Community	Provide a 32 character maximum trap community string. The community string functions like a user id or password allowing access to controller or access point resources. If the community string is correct, the controller or access point provides with the requested information. If the community string is incorrect, the device controller or access point discards the request and does not respond. Community strings are used only by devices which support SNMPv1 and SNMPv2c. SNMPv3 uses username/password authentication, along with an encryption key. The default setting is public .

4. Select **OK** to update the SNMP Trap configuration. Select **Reset** to revert to the last saved configuration.

Management Access Deployment Considerations

Before defining an access control configuration as part of a Management Access policy, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- Unused management protocols should be disabled to reduce a potential attack against managed resources. For example, if a device is only being managed by the Web UI and SNMP, there is no need to enable CLI interfaces.
- Use management interfaces providing encryption and authentication. Management services like HTTPS, SSH and SNMPv3 should be used when possible, as they provide both data privacy and authentication (as opposed to HTTP which does not).
- By default, SNMPv2 community strings on most devices are set to *public* for the read-only community string and *private* for the read-write community string. Legacy devices may use other community strings by default.
- SNMPv3 should be used for device management, as it provides both encryption and authentication (both unavailable together in HTTP).
- Enabling SNMP traps can provide alerts for isolated attacks at both small managed radio deployments or distributed attacks occurring across multiple managed sites.
- Whenever possible, centralized RADIUS management be enabled. This provides better management and control of user names and passwords, and allows administrators to quickly change credentials in the event of a security breach.



Diagnostics

[Fault Management](#) on page 982

[Crash Files](#) on page 987

[Advanced](#) on page 988

Resident diagnostic capabilities enable administrators to understand how devices are performing and troubleshoot issues impacting device performance. Performance and diagnostic information is collected and measured on controllers and service platforms for any anomalies potentially causing a key processes to fail.

An access point's resident diagnostic capabilities enable administrators to understand how devices are performing and troubleshoot issues impacting network performance. Performance and diagnostic information is collected and measured for anomalies causing a key processes to potentially fail.

Numerous tools are available within the Diagnostics menu. Some allow event filtering, some enable log views and some allow you to manage files generated when hardware or software issues are detected.

Diagnostic capabilities include those described in the sections listed above, at the start of this chapter.

Fault Management

Fault management enables user's administering multiple sites to assess how individual devices are performing and review issues impacting the network. Use the Fault Management screens to administrate errors generated by a controller, service platform, access point or wireless client.

Filter Events

To conduct fault management on an access point:

1. Select **Diagnostics > Fault Management > Filter Events**.

The screen displays by default. Use this screen to configure how events are tracked. By default, all events are enabled, and an administrator has to turn off events that do not require tracking.

Figure 421: Fault Management - Filter Events screen

2. Use the **Filter Events** screen to create filters for managing detected events. Events can be filtered based on severity, module received, source MAC, device MAC and client MAC address.
3. Define the following **Customize Event Filters** parameters for the Fault Management configuration:

Severity	Set the filtering severity. Select from the following: <i>All Severities</i> – All events are displayed, irrespective of their severity <i>Critical</i> – Only critical events are displayed <i>Error</i> – Only errors and above are displayed <i>Warning</i> – Only warnings and above are displayed <i>Informational</i> – Only informational and above events are displayed
Module	Select the module from which events are tracked. When a module is selected, events from other modules are not tracked. Remember this when interested in events generated by a particular module. Individual modules can be selected (such as <i>TEST</i> , <i>LOG</i> , <i>FSM</i> etc.) or all modules can be tracked by selecting <i>All Modules</i> .

Use the **View Events** screen to track and troubleshoot events using the source and severity levels defined in the configure events screen.

2. Refer to the following event parameters to assess nature and severity of the displayed:

Timestamp	Displays the Timestamp (time zone specific) when the fault occurred.
Module	Displays the module used to track the event. Events detected by other module are not tracked.
Message	Displays error or status messages for each event listed.
Severity	Displays the severity of the event as defined for tracking from the Configuration screen. Severity options include: <i>All Severities</i> – All events are displayed irrespective of their severity <i>Critical</i> – Only critical events are displayed <i>Error</i> – Only errors and above are displayed <i>Warning</i> – Only warnings and above are displayed <i>Informational</i> – Only informational and above events are displayed
Source	Displays the MAC address of the source device tracked by the selected module.
Hostname	Displays the Hostname/IP address of the source device tracked by the selected module.

3. Select **Clear All** to clear the events displayed on this screen and begin a new event data collection.

Event History

The Event History screen displays events for both wireless controllers and access points. The Controller(s) tab displays by default. Information on this tab can be filtered by controllers and then further by the RF Domains on the selected controller. Similarly, the access point(s) tab displays information for each RF Domain on the access point and this information can be further filtered on the devices adopted by this access point.

To review the Event History:

1. Select **Diagnostics > Fault Management > Event History**

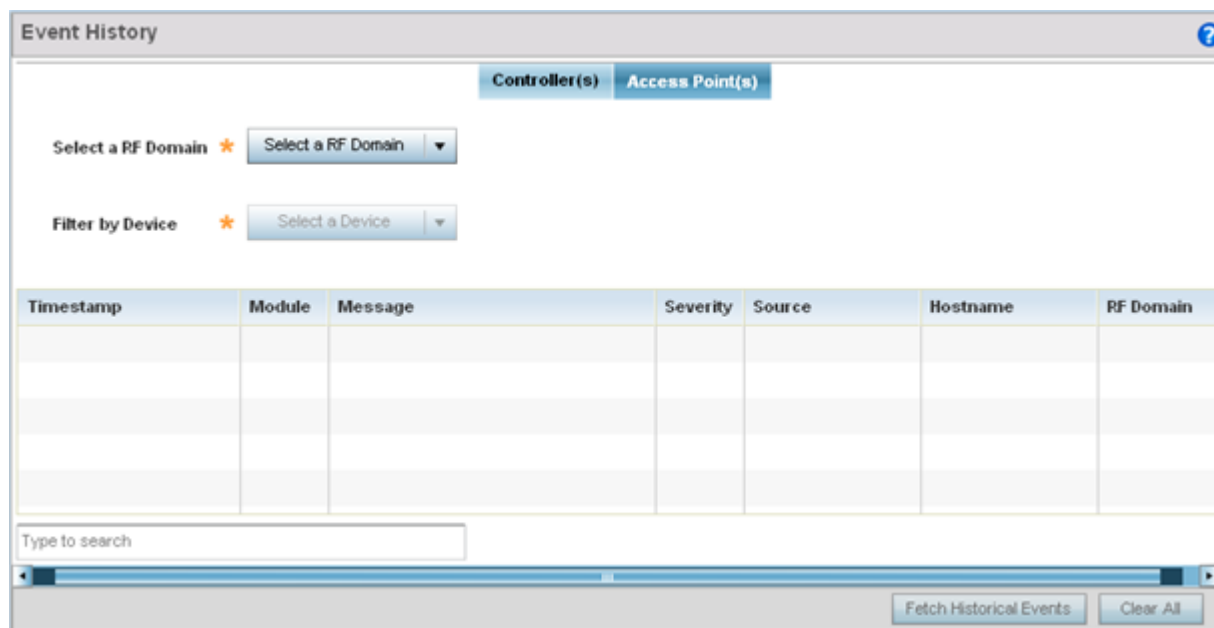


Figure 423: Fault Management - Event History screen

2. In the Controller(s) tab, select the controller from the **Select a Controller** field to filter events to display. To filter messages further, select a RF Domain from the **Filter by RF Domain** field.
3. In the access point(s) tab, select the RF Domain from the **Select a RF Domain** field to filter events to display. To filter messages further, select a device from the **Filter by Device** field.
4. Select **Fetch Historical Events** from the lower, right-hand, side of the UI to populate the table with either device or RF Domain events. The following event data is fetched and displayed:

Timestamp	Displays the timestamp (time zone specific) each listed event occurred.
Module	Displays the module tracking the listed event. Events detected by other modules are not tracked.
Message	Displays error or status messages for each event.
Severity	Displays the severity of the event as defined for tracking from the Configuration screen. Severity options include: <i>All Severities</i> – All events are displayed irrespective of their severity <i>Critical</i> – Only critical events are displayed <i>Error</i> – Only errors and above are displayed <i>Warning</i> – Only warnings and above are displayed <i>Informational</i> – Only informational and above events are displayed
Source	Displays the MAC address of the device tracked by the selected module.

Last Modified	Displays the time stamp of the most recent update to the file.
Actions	Displays the action taken in direct response to the detected crash event.

4. Select **Copy** to copy a selected crash file to an external location. Select **Delete** to remove a selected crash file.

Advanced

Use Advanced diagnostics to review and troubleshoot potential issues with the access point's *User Interface* (UI). The UI Diagnostics screen contains tools to effectively identify and correct access point UI issues. Diagnostics can also be performed at the device level for connected clients.

The following options are available under the Advanced menu:

- [UI Debugging](#) on page 988
- [Viewing UI Logs](#) on page 989
- [View Sessions](#) on page 991

UI Debugging

Use the **UI Debugging** screen to view debugging information for a selected device.

To review device debugging information:

1. Select **Diagnostics > Advanced > UI Debugging**

By default, **NETCONF Viewer** is selected.

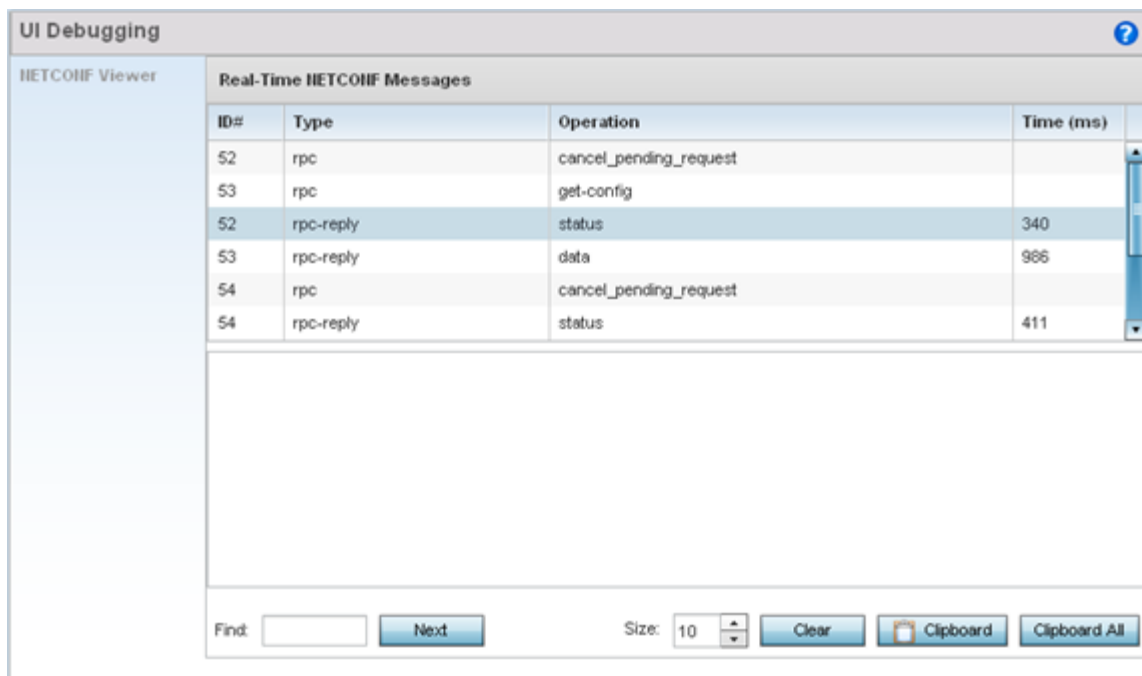


Figure 425: UI Debugging screen - NETCONF Viewer

2. Select a target ID to view its debugging information displays within the **NETCONF Viewer** screen.
3. Use **NETCONF Viewer** to review NETCONF information. NETCONF is a tag-based configuration protocol. Messages are exchanged using XML tags.

The **Real Time NETCONF Messages** area lists an XML representation of any message generated by the system. The main display area of the screen is updated in real time.

4. Use the **Clear** button to clear the contents of the **Real Time NETCONF Messages** area. Use the **Find** parameter and the **Next** button to search for message variables in the **Real Time NETCONF Messages** area.

Use the **Clipboard** button to copy the current selected message to the clipboard memory of the device used to access the user interface. Use the **Clipboard All** button to copy all the displayed messages to the clipboard memory.

Viewing UI Logs

Use the **View UI Logs** screen to view the log messages generated by the device. Logs are classified as Flex Logs and Error Logs. These logs provide a real-time look into the state of the device and provide useful information for debugging and trouble shooting issues.

To display the logs:

1. Select **Diagnostics > Advanced > Viewing UI Logs**.

By default, the **Flex Logs** screen displays.

Sequ	Date/Time	Type	Category	Message
0	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer set de
1	7/7/2015 09:20:2	INFO	mx.messaging.Channel	'direct_http_channel' channel endpoint set to http://192.168.13.:
2	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer sendin
3	7/7/2015 09:20:2	DEBU	mx.messaging.Channel	'direct_http_channel' channel sending message:
4	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer connec
5	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer acknow
6	7/7/2015 09:20:2	INFO	mx.rpc.http.HTTPService	Decoding HTTPService response
7	7/7/2015 09:20:2	DEBU	mx.rpc.http.HTTPService	Processing HTTPService response message:
8	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'9FF86B74-412E-EDEA-D663-66A2D6EBD4C6' producer set de
9	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer sendin
10	7/7/2015 09:20:2	DEBU	mx.messaging.Channel	'direct_http_channel' channel sending message:
11	7/7/2015 09:20:2	INFO	mx.messaging.Producer	'81753119-31A7-3D21-1B05-66A2D4B8F36F' producer acknow

Figure 426: View UI Logs - Flex Logs tab

2. The sequence (order of occurrence), Date/Time, Type, Category and Message items display for each application log, flex log or error log selected.

Use the **Clear All** button to clear all logs shown in this screen.

3. Select the **Error Logs** tab to display the error logs for this device.

Sequer	Date/Time	Type	Category	Message
0	7/3/2015 11:37:05.42	ERROR	com.motorola.wing.error.error	MEC0000E: UNKNOWN
1	7/3/2015 11:37:05.42	ERROR	com.motorola.wing.error.error	MEC0000E: UNKNOWN
2	7/3/2015 11:37:05.59	ERROR	com.motorola.wing.error.error	MEC0000E: UNKNOWN
3	7/3/2015 11:37:05.59	ERROR	com.motorola.wing.error.error	MEC0000E: UNKNOWN

Figure 427: View UI Logs - Error Logs tab

The Sequence (order of occurrence), Date/Time, Type, Category and Message items display for each log option selected.

View Sessions

The **View Sessions** displays a list of all sessions associated with this device. A session is created when a user name/password combination is used to access the device to interact with it for any purpose. Use the following to view a list of sessions associated with this device:

1. Select **Diagnostics > Advanced > View Sessions**

<input type="checkbox"/>	Cookie	From	Role	Start Time	User
<input checked="" type="checkbox"/>	16	192.168.100.210(web)	superuser	2015-07-07 09:59:07	admin
<input type="checkbox"/>	5	127.0.0.1	superuser	2015-07-06 12:36:21	snmp
<input type="checkbox"/>	6	127.0.0.1	superuser	2015-07-06 12:36:21	snmp2
<input type="checkbox"/>	15	192.168.13.30(web)	superuser	2015-07-07 09:32:13	admin

- 2.

Figure 428: Advanced - View Sessions screen

3. Refer to the following table for more information on the fields displayed in this screen:

Cookie	Displays the number of cookies created by this session.
From	Displays the IP address of the device/process initiating this session.
Role	Displays the role assigned to the user name as displayed in the User column.
Start Time	Displays the start time of this session. This is the time at which the user successfully created this session.
User	Displays the user name of the account used to initiate this session.

4. To remove a listed session, select the check box before session, then select **Delete**.



Operations

[Device Operations](#) on page 992

[Certificates](#) on page 1011

[Smart RF](#) on page 1029

[Operations Deployment Considerations](#) on page 1032

The functions supported within the **Operations** menu allow the administration of firmware, configuration files and certificates for managed devices.

A certificate links identity information with a public key enclosed in the certificate. Device certificates can be imported and exported to a secure remote location for archive and retrieval as they are required for application to other managed devices.

Self Monitoring At Run Time RF Management (Smart RF) is an innovation designed to simplify RF configurations for new deployments, while (over time) providing on-going deployment optimization and radio performance improvements. The Smart RF functionality scans the managed network to determine the best channel and transmit power for each managed access point radio.

For more information, refer to the sections listed above, at the start of this chapter.

Device Operations

Updated controller, service platform and access point firmware and configuration files are periodically updated and released to the Support Web site. If your device's firmware is older than the version on the Web site, consider updating to the latest version for full feature functionality and optimal controller utilization. Additionally, selected devices can either have a primary or secondary firmware image applied or fallback to a selected firmware image if an error occurs in the update process.

Upgrading Device Firmware

Controllers, service platforms and access points can conduct firmware updates for their managed or peer devices. access points can only update the firmware of peer access point models of the same type.

To update the firmware of a managed device:

1. Go to **Operations** → **Devices**.
2. Expand the **System** node and select an **RF Domain** from those listed.

- Expand the **RF Domain** node and select a device. The selected device's **Summary** page displays by default.
- Click the **Firmware Upgrade** button to start firmware upgrade.

By default, the **Firmware Upgrade** screen displays the tftp server parameters for the target device firmware file.

- Enter the complete path to the firmware file for the target controller, service platform or access point in the **Path/File** field.
- Provide the following information to accurately define the location of the target firmware file:

Protocol	Select the connection protocol used for updating device firmware. Available options include: <i>tftp</i> <i>ftp</i> <i>sftp</i> <i>http</i> <i>cf</i> <i>usb1-4</i>
Port	Use the spinner control or manually enter the value to define the port used for firmware updates. This option is not valid for <i>cf</i> and <i>usb1-4</i> .
IP Address	Enter IP address of the server used to update the firmware. This option is not valid for <i>cf</i> and <i>usb1-4</i> .
Hostname	Provide the hostname of the server used to update the firmware. This option is not valid for <i>cf</i> and <i>usb1-4</i> .
User Name	Define the user name used to access either a <i>FTP</i> or <i>SFTP</i> server.
Password	Specify the password for the user account to access a <i>FTP</i> or a <i>SFTP</i> server.
Path / File	Specify the path to the firmware file. Enter the complete relative path to the file on the server.

- Select **Apply** to start the firmware update. Select **Abort** to terminate an in process firmware update. Select **Close** to close the upgrade pop up screen. The upgrade continues in the background.

Adopted Device Upgrades

An administrator can designate controllers, service platforms or access points as RF Domain managers capable of receiving firmware files from the NOC (NX7500 or

NX9000 series service platforms) then provisioning other devices within their same RF Domain. Controllers, service platforms and access points can now all update the firmware of different device models within their RF Domain. However, firmware updates cannot be made simultaneously to devices in different site deployments.

Device Upgrade List

1. Ensure **Devices** is selected from the Operations menu on the top, left-hand, side of the screen.
2. Expand the System node, select a RF Domain and one of its member devices.
3. Select **Adopted Device Upgrade**. The screen displays with the **Device Upgrade List** selected by default.

Summary | **Adopted Device Upgrade** | File Management | Adopted Device Restart | Captive Portal Pages | RAID

Adopted Device Upgrade ?

Device Upgrade List | **Device Image File** | Upgrade Status | Upgrade History

Device Type List: NX9000

Scheduled Upgrade Time: Now | 10/04/2013 | 0 | 0 (HHMM) | No Reboot | Staggered Reboot


Scheduled Reboot Time: Now | 10/04/2013 | 0 | 0 (HHMM)

All Devices					
<input type="checkbox"/>	Hostname	MAC Address	Device Type	Version	Upload Version
<input type="checkbox"/>	AN-10-0F41C8	00-23-68-0F-41-C8	ap71xx	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-19-311779	00-23-68-31-17-79	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-18-3119E4	00-23-68-31-19-E4	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-17-311AC0	00-23-68-31-1A-C0	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-20-858F84	00-23-68-85-8F-84	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-21-859290	00-23-68-85-92-80	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-26-864484	00-23-68-86-44-84	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-11-8644B8	00-23-68-86-44-B8	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-15-864538	00-23-68-86-45-38	ap650	5.5.0.0-083R	5.5.0.0-083R
<input type="checkbox"/>	AN-12-86455C	00-23-68-86-45-5C	ap650	5.5.0.0-083R	5.5.0.0-083R

Type to search in tables

Update Firmware

4. Select the controller, service platform or access point model from the **Device Type List** drop-down menu. This is the device model used to provision firmware to the devices selected within the All Devices table below. Selecting **All** makes each controller, service platform and access point model images available for updates on those specific models.
5. Select **Device Image File**. Use this screen to select device image types for firmware updates and set the transfer protocol used for staging the firmware to the device itself prior to its update.

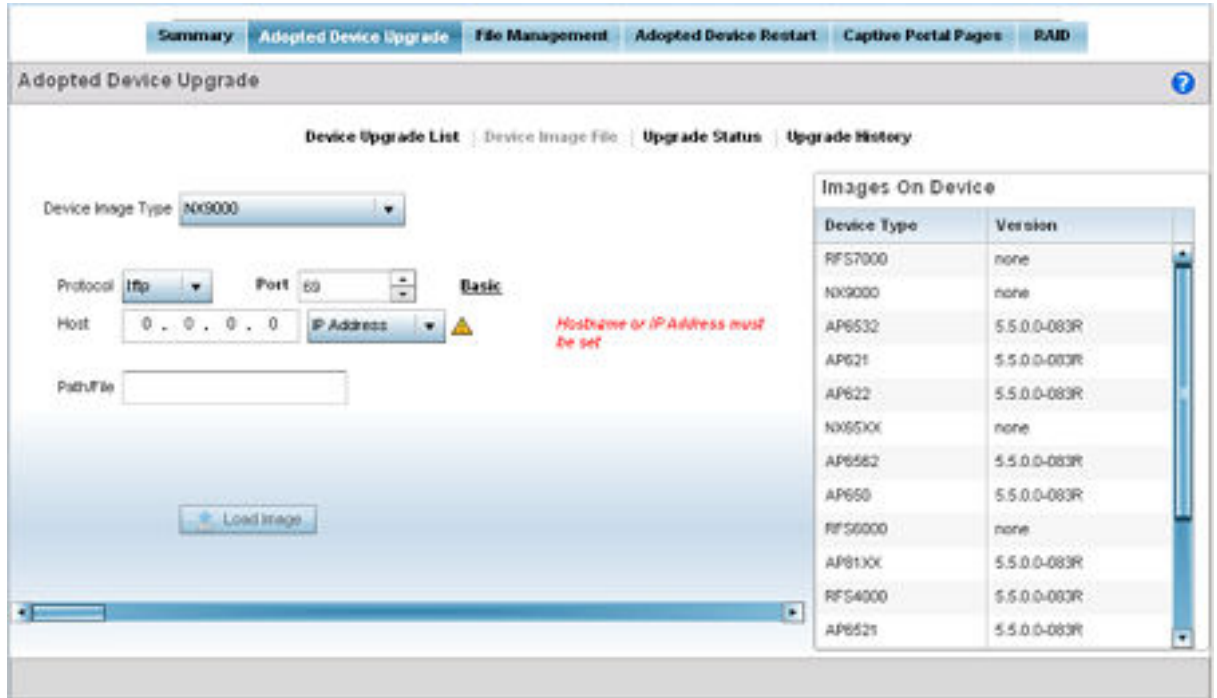

6. Select the **Basic** link to enter a URL pointing to the location of the controller, service platform or access point image files for the device update(s).
7. Selecting **Advanced** lists additional options for the device's firmware image file location:

Protocol	Select the protocol for device firmware file management and transfer. Available options include: <i>tftp</i> <i>ftp</i> <i>sftp</i> <i>http</i> <i>cf</i>
Port	Designate the port for transferring the firmware files used in the upgrade operation. Enter the port number directly or use the spinner control.
Host	Specify a numerical IP address or textual Hostname of the resource used to transfer files to the <i>devices</i> designated for a firmware update.
Path / File	Define the path to the file on the file repository resource. Enter the complete relative path to the file.

8. Select the **Load Image** button to upload the device firmware.


The firmware image is loaded to the flash/upgrade directory (not the flash/cache directory). If the NOC pushes the image, then it is loaded to flash/cache/upgrade.

Device Image File

Use the **Device Image File** screen to select device image types for firmware updates and set the transfer protocol used for staging the firmware to the device itself prior to its update.

To define an upgrade configuration for a controller, service platform or access point:

1. Select **Operations**.
2. Ensure **Devices** is selected from the Operations menu on the top, left-hand, side of the screen.
3. Expand the System node, select a RF Domain and one of its member devices.
4. Select the **Adopted Device Upgrade** tab.
5. Select **Device Image File**.

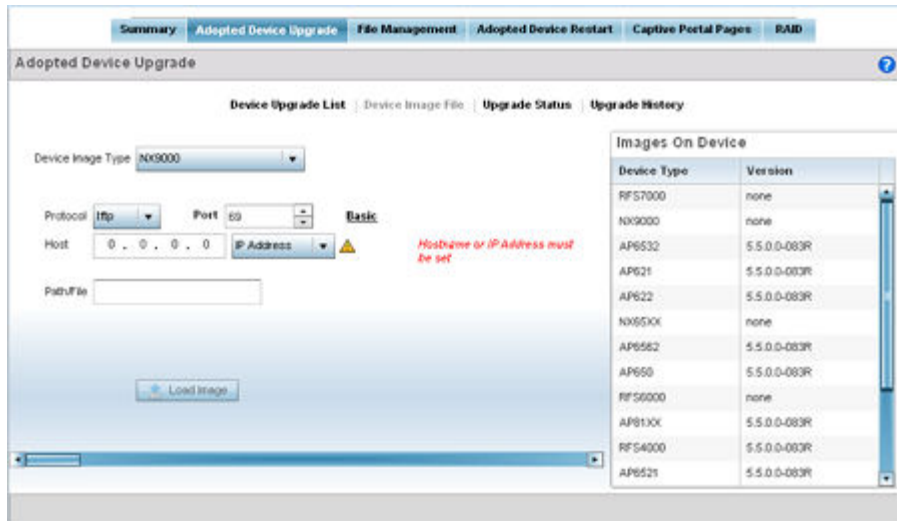

6. Select the controller, service platform or access point model from the **Device Type List** drop-down menu. This is the device model used to provision firmware to the devices selected within the All Devices table below. Selecting **All** makes each controller, service platform and access point model images available for updates on those specific models.
7. Select the **Basic** link to enter a URL pointing to the location of the controller, service platform or access point image files for the device update(s).
8. Selecting **Advanced** lists additional options for the device's firmware image file location:

Protocol	Select the protocol for device firmware file management and transfer. Available options include: <i>tftp</i> <i>ftp</i> <i>sftp</i> <i>http</i> <i>cf</i>
Port	Designate the port for transferring the firmware files used in the upgrade operation. Enter the port number directly or use the spinner control.
Host	Specify a numerical IP address or textual Hostname of the resource used to transfer files to the <i>devices</i> designated for a firmware update.
Path / File	Define the path to the file on the file repository resource. Enter the complete relative path to the file.

9. Select the **Load Image** button to upload the device firmware.


The firmware image is loaded to the flash/upgrade directory (not the flash/cache directory). If the NOC pushes the image, then it is loaded to flash/cache/upgrade.

Upgrade Status

Once an upgrade operation has been started or schedules, an administrator can assess whether the upgrade was successful, the number of times the operation was attempted before completed and the upgraded device's current status.

To assess the administration, scheduling and progress of device firmware updates:

1. Select **Operations**.
2. Ensure **Devices** is selected from the Operations menu on the top, left-hand, side of the screen.
3. Expand the **System** node, select a RF Domain and one of its member devices.
4. Select the **Adopted Device Upgrade** tab.
5. Select **Upgrade Status**.

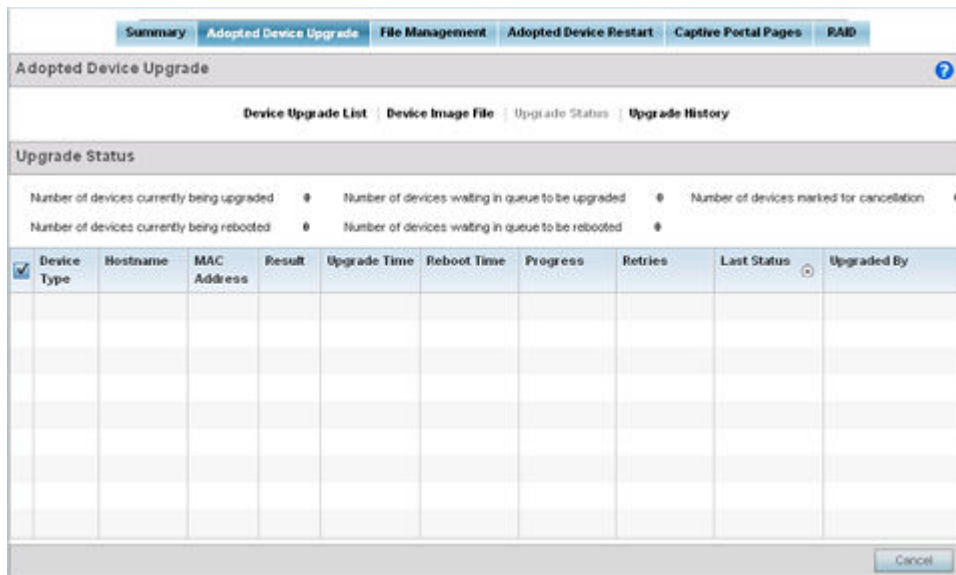

6. Refer to the **Upgrade Status** field to assess the completion of in-progress upgrades.

Number of devices currently being upgraded	Lists the number of firmware upgrades currently in-progress and downloading for selected devices. Once the device has the image it requires a reboot to implement the firmware image.
Number of devices currently being booted	Lists the number devices currently booting after receiving an upgrade image. The reboot is required to implement the new image and renders the device offline during that period. Using the <i>Device Upgrade List</i> , reboots can be staggered or placed on hold to ensure device remains in service.
Number of devices waiting in queue to be upgraded	Lists the number of devices waiting to receive a firmware image from their provisioning controller, service platform or access point. Each device can have its own upgrade time defined, so the upgrade queue could be staggered.

Number of devices waiting in queue to be upgraded	Lists the number of devices waiting to reboot before actively utilizing its upgraded image. The <i>Device Upgrade List</i> list allows an administrator to disable or stagger a reboot time, so device reboots may not occur immediately after an upgrade. The reboot operation renders the device offline until completed so reboots can be scheduled for periods of reduced load.
Number of devices marked for cancellation	Lists the number of upgrades that have been manually canceled during the upgrade operation.

7. Refer to the following status reported for each current or scheduled upgrade operation:

Device Type	Displays the model number of devices pending an upgrade. Each listed device is provisioned an image file unique to that model.
Hostname	Lists the factory encoded MAC address of a device either currently upgrading or in the queue of scheduled upgrades.
MAC Address	Lists the factory encoded MAC address of a device either currently upgrading or in the queue of scheduled upgrades.
Result	Lists the state of an upgrade operation (<i>downloading, waiting for a reboot</i> etc.).
Upgrade Time	Displays whether an upgrade is immediate or set by an administrator for a specific time. Staggering upgrades is helpful to ensure a sufficient number of devices remain in service at any given time while others are upgrading.
Reboot Time	Displays whether a reboot is immediate or time set by an administrator for a specific time. Reboots render the device offline, so planning reboots carefully is central to ensuring a sufficient number of devices remain in service.
Progress	Lists the number of specific device types currently upgrading.
Retries	Displays the number of retries, if any, needed for an in-progress firmware upgrade operation.
Last Status	Lists the last reported upgrade and reboot status of each listed in progress or planned upgrade operation.
Upgraded By	Lists the model of the controller, service platform or access point RF Domain manager that's provisioning an image to a listed device.

8. Optionally select **Cancel** (from the lower, right-hand corner of the screen) to cancel the upgrade of devices under the selected RF Domain. The Cancel button is enabled only if there are devices undergoing upgrade and they're selected for cancellation.
9. Select **Upgrade History**.

Once an upgrade operation has completed, an administrator can assess whether the upgrade was successful, the number of times the operation was attempted before completed and any errors encountered while upgrading.

The screenshot shows a web interface for 'Adopted Device Upgrade'. It has several tabs: Summary, Adopted Device Upgrade (selected), File Management, Adopted Device Restart, Captive Portal Pages, and RAID. Below the tabs, there are sub-tabs: Device Upgrade List, Device Image File, Upgrade Status, and Upgrade History (selected). The main content area is titled 'Upgrade History' and contains a table with the following data:

Hostname	Device Type	MAC Address	Result	Time	Retries	Upgraded By	Last Status
AN-27-7033F4	ap81xx	B4-C7-99-70-33	done	Tue Oct 1 2013 11:11:11	1	SJCALPHAWLC	Update error: Unable to get update
AN-21-859290	ap650	00-23-68-85-92	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-20-858F84	ap650	00-23-68-85-8F	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-04-703464	ap81xx	B4-C7-99-70-34	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-19-311779	ap650	00-23-68-31-17	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-12-86455C	ap650	00-23-68-86-45	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-14-8647BC	ap650	00-23-68-86-47	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-03-7034DC	ap81xx	B4-C7-99-70-34	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-24-4A5FB8	ap622	B4-C7-99-4A-5F	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-17-311AC0	ap650	00-23-68-31-1A	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-22-4A3824	ap622	B4-C7-99-4A-3E	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-28-435766	ap622	B4-C7-99-43-57	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-

A 'Clear History' button is located at the bottom right of the table area.

10. Refer to the following **Upgrade History** status:

Hostname	Displays the administrator assigned Hostname for each listed controller, service platform or access point that's received an update.
Device Type	Displays the controller, service platform or access point model upgraded by a firmware update operation.
MAC Address	Displays the device <i>Media Access Control</i> (MAC) or hardware address for a device that's received an update.
Result	Displays the upgrade result for each listed device.
Time	Displays the time and date of the last status received from an upgraded device.
Retries	Displays the number of retries, if any, needed for the firmware upgrade operation.
Upgraded By	Displays the administrator credentials responsible for initiating each listed upgrade operation.
Last Status	Displays the last status update received for devices that have been upgraded.

11. Select the **Clear History** button to clear the current update information for each listed device and begin new data collections.

Device Upgrade History

Once an upgrade operation has completed, an administrator can assess whether the upgrade was successful, the number of times the operation was attempted before completed and any errors encountered while upgrading.

To assess the administration, scheduling and progress of device firmware updates:

1. Select **Operations**.
2. Ensure **Devices** is selected from the Operations menu on the top, left-hand, side of the screen.
3. Expand the System node, select a RF Domain and one of its member devices.
4. Select the **Adopted Device Upgrade** tab.
5. Select **Upgrade History**.

The screenshot shows a web interface with several tabs: Summary, Adopted Device Upgrade (selected), File Management, Adopted Device Restart, Captive Portal Pages, and RAID. Below the tabs is a sub-header 'Adopted Device Upgrade' with a help icon. Underneath are links for 'Device Upgrade List', 'Device Image File', 'Upgrade Status', and 'Upgrade History'. The 'Upgrade History' section contains a table with the following data:

Hostname	Device Type	MAC Address	Result	Time	Retries	Upgraded By	Last Status
AN-27-7033F4	ap81xx	B4-C7-99-70-33	done	Tue Oct 1 2013 11:11:11	1	SJCALPHAWLC	Update error: Unable to get update
AN-21-859290	ap650	00-23-68-85-92	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-20-858F84	ap650	00-23-68-85-8F	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-04-703464	ap81xx	B4-C7-99-70-34	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-19-311779	ap650	00-23-68-31-17	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-12-86455C	ap650	00-23-68-86-45	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-14-8647BC	ap650	00-23-68-86-47	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-03-7034DC	ap81xx	B4-C7-99-70-34	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-24-4A5FB8	ap622	B4-C7-99-4A-5F	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-17-311AC0	ap650	00-23-68-31-1A	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-22-4A3824	ap622	B4-C7-99-4A-3E	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-
AN-28-435766	ap622	B4-C7-99-43-57	done	Tue Oct 1 2013 11:11:11	0	SJCALPHAWLC	-

A 'Clear History' button is located at the bottom right of the table.

6. Refer to the following **Upgrade History** status:

Hostname	Displays the administrator assigned Hostname for each listed controller, service platform or access point that's received an update.
Device Type	Displays the controller, service platform or access point model upgraded by a firmware update operation.
MAC Address	Displays the device <i>Media Access Control</i> (MAC) or hardware address for a device that's received an update.
Result	Displays the upgrade result for each listed device.
Time	Displays the time and date of the last status received from an upgraded device.
Retries	Displays the number of retries, if any, needed for the firmware upgrade operation.

Upgraded By	Displays the administrator credentials responsible for initiating each listed upgrade operation.
Last Status	Displays the last status update received for devices that have been upgraded.

7. Select the **Clear History** button to clear the current update information for each listed device and begin new data collections.

Using the File Management Browser

Controllers, service platforms and access points can utilize a File Browser allowing an administrator to review the files residing on a internal or external memory resource. Directories can be created and maintained for each File Browser location and folders and files can be moved and deleted as needed.




Note

The **File Management** tab is not available at the RF Domain level of the UI's hierarchal tree. A RF Domain must be selected and expanded to display the RF Domain's member devices. Once expanded, selected a RF Domain member device to ensure the File Management UI option is available.

To administer files for managed devices and memory resources:

1. Select the **Operations > Devices > File Management**.

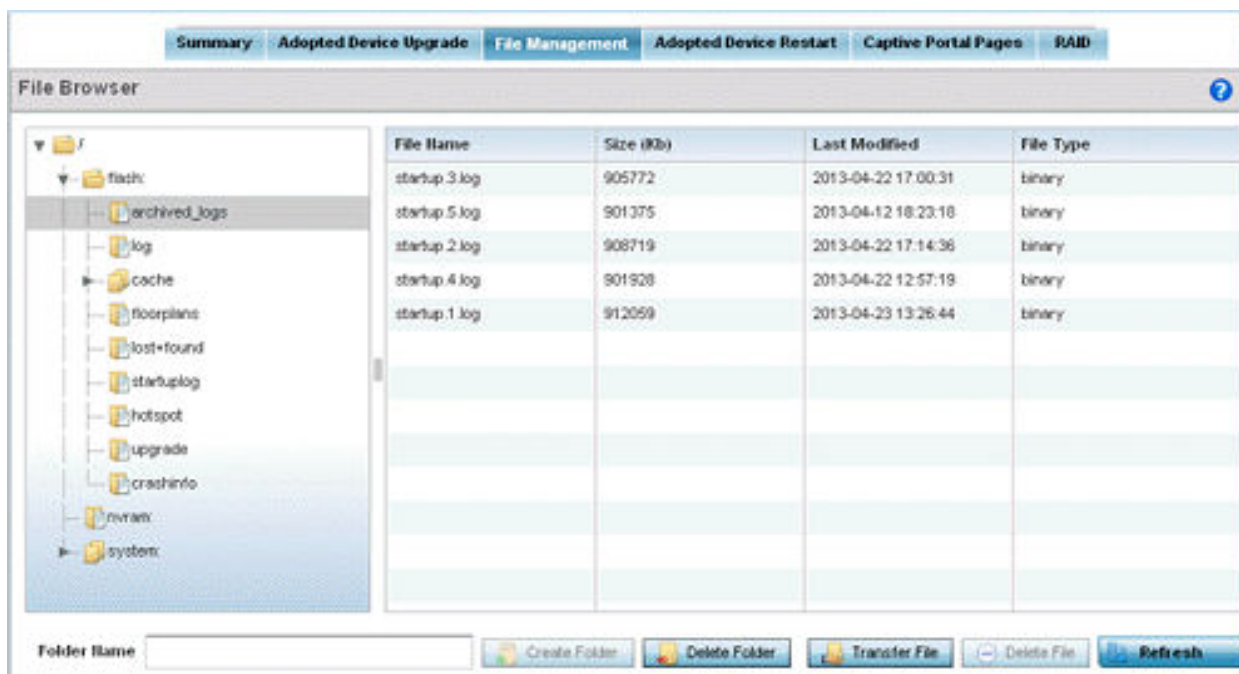

2. Refer to the following to determine whether a file needs to be deleted or included in a new folder for the selected internal (flash, system, nvram) or external (cf, USB1 -4) memory resource. The following display for each available memory resource:

File Name	Displays the name of the file residing on the selected <i>flash</i> , <i>system</i> , <i>nvram</i> or <i>usb1-4</i> location. The name cannot be modified from this location.
Size (Kb)	Displays the size of the file in kb. Use this information to help determine whether the file should be moved or deleted.
Last Modified	Lists a timestamp for the last time each listed file was modified. Use this information to determine the file's relevance or whether it should be deleted.
File Type	Displays the type for each file including binary, text or empty.


3. If needed, use the **Create Folder** utility to create a folder that servers as a directory for some or all of the files for a selected memory resource.
4. Select **Transfer File** to invoke a subscreen where the local or server file source and target (destination) are defined as well as the file transfer protocol and external destination location or resource.
5. Optionally, use the **Delete Folder** or **Delete File** buttons to remove a folder or file from within the current memory resource.

Managing File Transfers

Controllers and service platforms can administer files on managed devices. Transfer files from a device to this controller, to a remote server or from a remote server to the controller. An administrator can transfer logs, configurations and crash dumps.

To administer files for managed devices:

1. Go to **Operations** → **Devices** → **File Management**.
2. Select the **Transfer File** button.

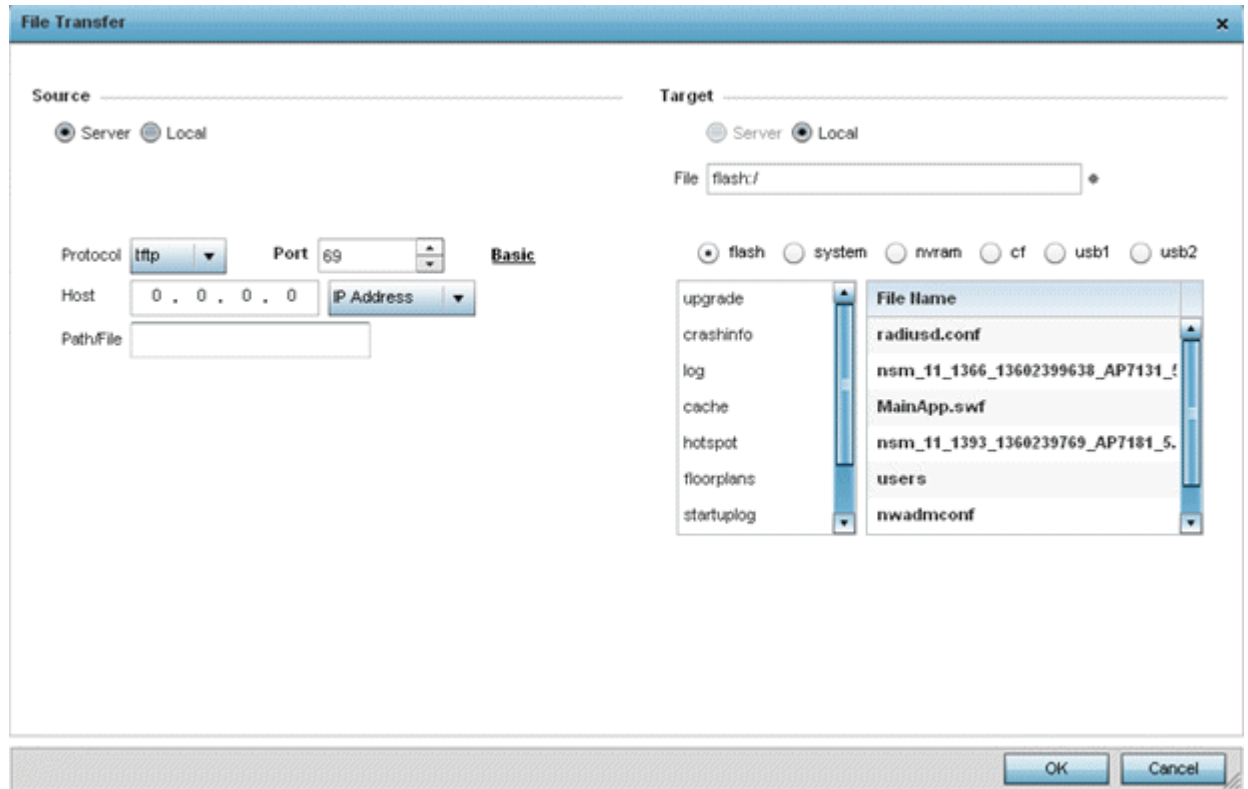

3. Set the following file management source and target directions and the configuration parameters of the required file management activity:

Source	Select the source of the file transfer. Select <i>Server</i> to indicate the source of the file is a remote server external to the controller or access point. Select <i>Local</i> to indicate the source of the file is the local device.
File	If the source is <i>Local</i> , enter the name of the file to be transferred.
Protocol	Select the protocol for file management. Available options include: <ul style="list-style-type: none"> ·tftp ·ftp ·sftp ·http ·cf ·usb1-4 This parameter is required only when <i>Server</i> is selected as the Source.
Port	Specify the physical port for transferring files. This option is not available for <i>cf</i> and <i>usb1-4</i> . Enter the port number directly or use the spinner control. This parameter is required only when <i>Server</i> is selected as the Source.

Host	If needed, specify a hostname or numeric IP address of the server transferring the file. This option is not valid for <i>cf</i> and <i>usb1-4</i> . If a hostname is provided, an IP Address is not needed. This field is only available when <i>Server</i> is selected in the <i>From</i> field.
User Name	Provide a user name to access a FTP or a SFTP server. This parameter is required only when <i>Server</i> is selected as the <i>Source</i> , and the selected protocol is <i>ftp</i> or <i>sftp</i> .
Password	Provide a password to access the FTP or SFTP server. This parameter is required only when <i>Server</i> is selected as the <i>Source</i> , and the selected protocol is <i>ftp</i> or <i>sftp</i> .
Path / File	Define the path to the file on the server. Enter the complete relative path to the file. This parameter is required only when <i>Server</i> is selected as the <i>Source</i> .
Target	Select the target destination to transfer the file. •Select <i>Server</i> if the destination is a remote server, provide a URL to the location of the server resource or select <i>Advanced</i> and provide the same network address information described above. •Select <i>Local</i> if the destination is the controller, service platform or access point.

4. Select **Copy** to begin the file transfer. Selecting **Reset** reverts the screen to its last saved configuration.

Crypto CMP Certificate

Certificate Management Protocol (CMP) is an Internet protocol to obtain and manage digital certificates in a Public Key Infrastructure (PKI) network. A Certificate Authority (CA) issues the certificates using the defined CMP.

Using CMP, a device can communicate to a CMP supported CA server, initiate a certificate request and download the required certificates from the CA server. CMP supports multiple request options through for device communicating to a CMP supported CA server. The device can initiate a request for getting the certificates from the server. It can also auto update the certificates which are about to expire.

The CMP client on the controller, service platform or Access Point triggers a request for the configured CMS CA server. Once the certificate is validated and confirmed from the CA server it is saved on the device and becomes part of the trustpoint. During the creation of the CMP policy the trustpoint is assigned a name and client information. An administrator can use a manually created trustpoint for one service (like HTTPs) and use the CMP generated trustpoint for RADIUS EAP certificate based authentication.

Use the Crypto CMP Certificate menu item to manage these certificates:

1. Refer to the following for more information on **Crypto CMP Certificates**:

:

Hostname	Lists the administrator assigned hostname of the CMP resource requesting a certificate renewal from the CMP CA server.
MAC Address	Lists the hardware encoded MAC address of the CMP server resource.
Trust Point Name	Trust Point Name Lists the 32 character maximum name assigned to the target trustpoint. A trustpoint represents a CA/identity pair containing the identity of the CA, CA specific configuration parameters, and an association with an enrolled identity certificate.
Trust Point Valid Until	The expiration of the CMP certificate is checked once a day. When a certificate is about to expire a certificate renewal can be initiated with the server via an existing IPsec tunnel. If the tunnel is not established, the CMP renewal request is not sent.

2. Select **Trigger Certificate Renewal** to begin update the credentials of the certificate. If a renewal succeeds, the newly obtained certificate overwrites an existing certificate. If the renewal fails, an error is logged.
3. Select **Refresh** to update the screen to the last saved configuration.

Restarting Adopted Devices

Controllers and service platforms can restart their adopted access points as needed for firmware upgrades or other administrative activities. access points set in Controller AP mode also have the ability to restart adopted peer model access points.




Note

The **Adopted Device Restart** tab is not available at the RF Domain level of the UI's hierarchical tree. A RF Domain must be selected and expanded to display the RF Domain's member devices. Once expanded, select a RF Domain member device to ensure the Adopted Device Restart option is available.

To restart one or more adopted access points:

1. Select the **Operations > Devices > Adopted AP Restart**.

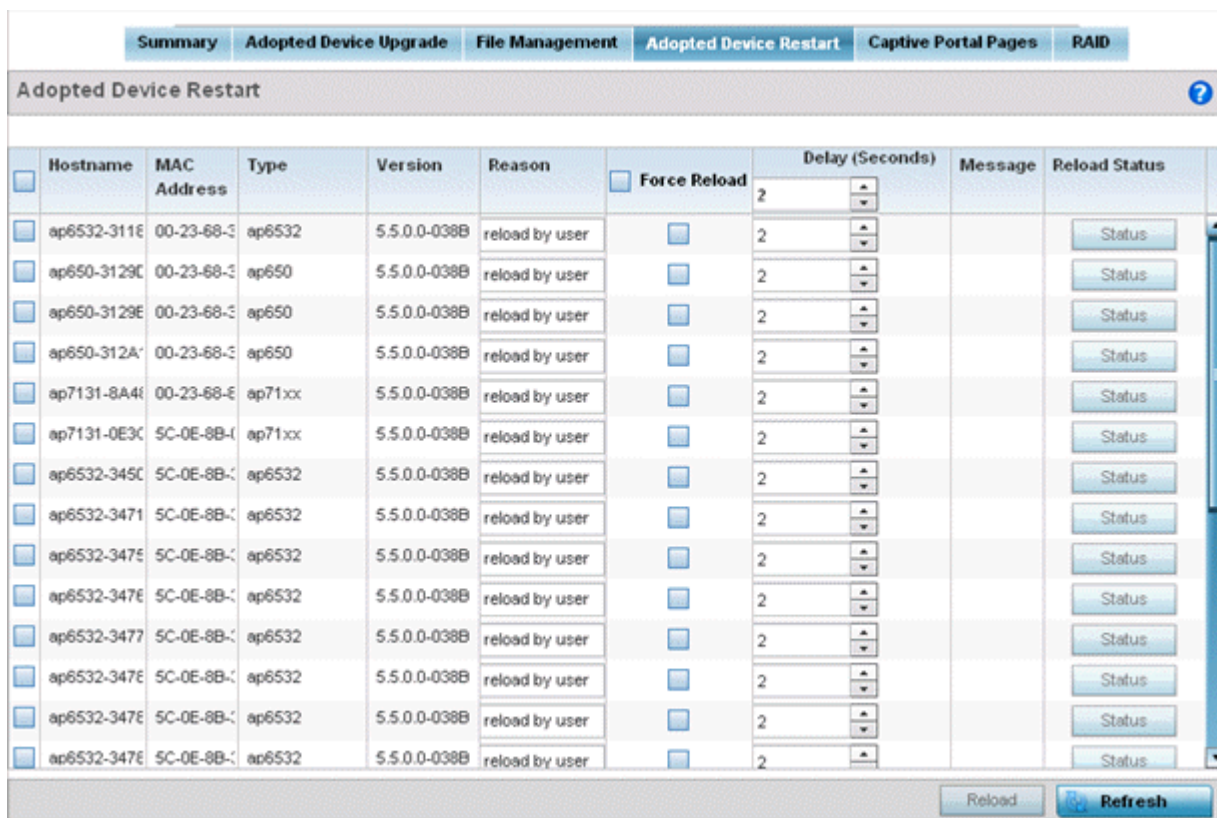

2. The Adopted AP Restart table displays the following information for each Adopted AP:

Hostname	Displays the administrator assigned hostname for each known access point.
MAC Address	Displays the factory assigned <i>Media Access Control</i> (MAC) or hardware address for each known access point.
Type	Displays the access point model number for each adopted access point.
Version	Displays the current firmware version for each adopted access point.
Reason	Lists the administrator defined reason an adopted device has been queued for a restart.

3. To restart one or more access points, select the checkbox to the left of each AP and set the following options:

Force Reload	To force a reload of an access point (or multiple access points), select the <i>Force Reload</i> checkbox next to the target AP.
Delay (Seconds)	Specify the amount of time, in seconds, before the access point restart is executed. Setting a delay time is recommended when an access point load cannot be assumed by a neighbor AP until a known time in the near future.
Message	Displays a message relating to the access point's current adoption.
Reload Status	Click the <i>Reload Status</i> button next to each adopted access point to display each device's current status information.

Captive Portal Configuration

For information moving captive portal configurations to managed access points and making captive portals available to requesting clients, see:

- [AP Upload](#)
- [CP Page Image File](#)
- [Status](#)

AP Upload List

Use the **AP Upload List** to provide connected access points with specific captive portal configurations so they can successfully provision login, welcome and condition pages to requesting clients attempting to access the wireless network using a captive portal.

To upload captive portal pages to connected access points:

1. Select the **Operations** menu item.
2. Select **Devices** and select the **Captive Portal Pages** tab. The **AP Upload List** tab displays by default.

The screenshot shows the 'Captive Portal Pages' configuration page. At the top, there are tabs for 'Summary', 'Adopted Device Upgrade', 'File Management', 'Adopted Device Restart', 'Captive Portal Pages', and 'RAID'. Below these is a sub-tab bar with 'AP Upload List', 'CP Page Image File', and 'Status'. The 'Captive Portal List' is set to 'CP8'. The 'Scheduled Upload Time' is set to 'Now' with a date of '04/23/2013' and time '00:00' (HHMM). There are two tables: 'All Devices' and 'Upload List'. The 'All Devices' table contains the following data:

Hostname	MAC
ap6532-3118E0	00-23-68-31-18-E0
ap650-3129D8	00-23-68-31-29-D8
ap650-3129EC	00-23-68-31-29-EC
ap650-312A10	00-23-68-31-2A-10
ap7131-8A4848	00-23-68-8A-48-48
ap7131-0E9C40	5C-0E-8B-0E-3C-40
ap6532-34503C	5C-0E-8B-34-50-3C
ap6532-347110	5C-0E-8B-34-71-10

The 'Upload List' table is currently empty. Navigation buttons (>>, >, <<, <) are located between the two tables. At the bottom right, there are 'Cancel' and 'Upload' buttons.

3. Use the **Captive Portal List** drop-down menu to select an existing captive portal configuration to upload to an access point and display to requesting client devices as they login and adhere to the terms required for captive portal access.

CP Page Image File

Use the **CP Pages Image File** screen to set the way managed access points receive captive portal images files required to provision captive portal access to requesting

clients. Captive portal image files are the login, welcome and conditions pages specifically.

To set the captive portal for upload and define the transfer configuration:

1. Got to **Operations** → **Devices** → **System**.
2. Expand one of the **RF Domains** listed within the System node, and select a target device.
3. Go to the **Captive_Portal_Distribute_Pages** → **CP Pages Image File** tab.

4. Set the following Captive Portal page upload settings:

Captive Portal List	Use the drop-down menu to select an existing policy. This policy contains the image (or set of login and conditions pages) requesting clients will navigate and complete before granted access to the network using the unique permissions of the captive portal.
Protocol	Define the protocol (transfer medium) used to forward the image files to the access points provisioning captive portal files to requesting clients. Available options include <i>ftp</i> , <i>http</i> , <i>tftp</i> and <i>sftp</i> . A protocol parameter is required only when Server is selected as the Source and the Advanced option is used.
Host	If needed, specify a Hostname or numeric IP address of the server transferring the file. If a hostname is provided, an <i>IP Address</i> is not needed. This field is only available when Server is selected in the <i>From</i> field.
Port	Specify the port for transferring files. Enter the port number directly or use the spinner control..
User Name	Provide a user name to access the FTP or SFTP server. This parameter is required only when the selected protocol is <i>ftp</i> or <i>sftp</i> .

Password	Provide the password for the user name used to log in to the FTP/SFTP server. Only required when the protocol is ftp or sftp.
Path/File	Define the path to the file on the server. Enter the complete relative path to the file.


5. Select **Load Image** to upload the image file. Optionally, refer to the **Load Image Status** field to review the status of the current upload.

Status

Use the **Status** screen to review those devices targeted for captive portal image uploads, their operational state and image upload completion status:

To assess the progress and completion status of captive portal image uploads:

1. Select the **Operations** menu item.
2. Select **Devices** and select the **Captive Portal Pages** tab.
3. Select the **Status** tab.

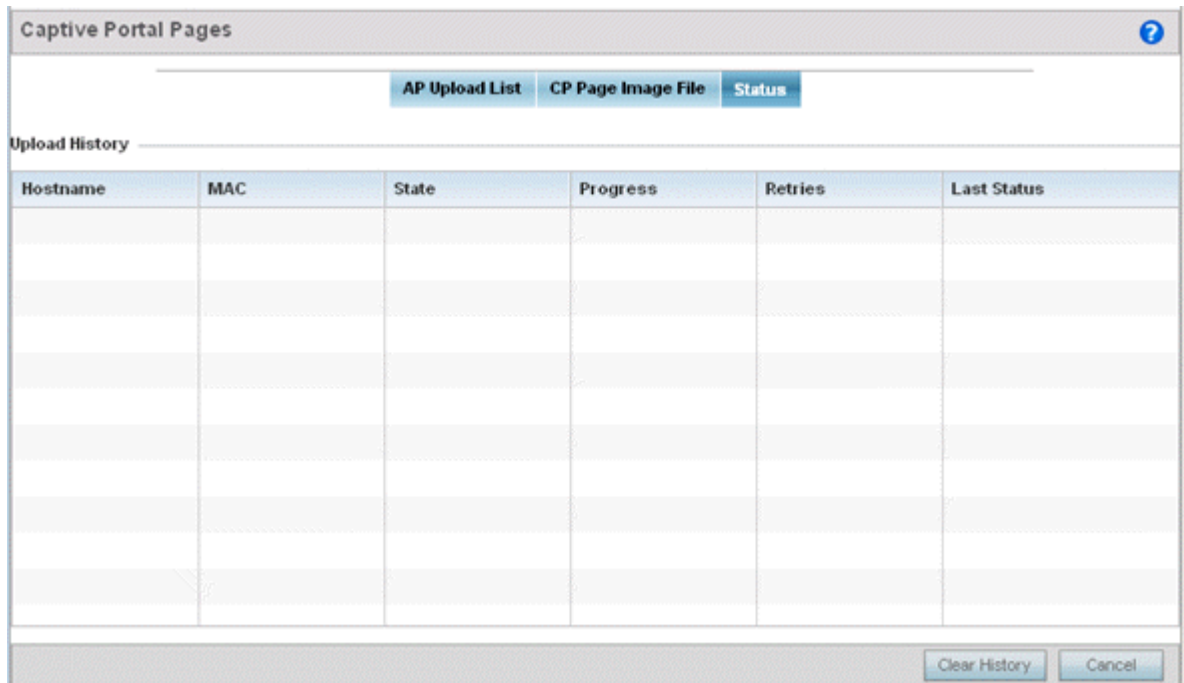

4. Refer to the following:

Hostname	Displays the administrator defined hostname for the device receiving the captive portal page upload.
MAC	Displays the hardware encoded <i>Media Access Control</i> (MAC) address of the unit performing the captive portal page upload.
State	Displays the target device's current operational state within the controller or service platform managed network.
Progress	Displays the current upload progress for each captive portal page upload.

Retries	Lists the number of retries needed to upload the captive portal files to each listed device.
Last Status	Displays the last known status of the captive portal page upload to each listed device.

5. Select **Clear History** to clear the history displayed in the Status tab and begin new data collections.

RF Domain - Device Upgrade Operation

You can configure device upgrade operation at the RF Domain level. RF Domain upgrades happen through the RF Domain manager. The RF Domain manager, requests and receives the firmware from the controller and upgrades RF Domain member devices. Therefore, prior to configuring device upgrade on the RF Domain, ensure the Controller is upgraded to the latest firmware. For more information, see [Upgrading Device Firmware](#) on page 992.

To configure RF Domain level device upgrade:

1. Go to **Operations** → **Devices**.
2. Expand the **System** node and selected a member **RF Domain**.
3. Select the **Device Upgrade** tab.

The screenshot shows the 'Device Upgrade' configuration page. At the top, there are four tabs: 'Summary', 'Device Upgrade' (selected), 'Captive Portal Distribute Pages', and 'Re-elect Controller'. Below the tabs, the page title is 'Device Upgrade' with a help icon. Underneath, there are three sub-sections: 'Device Upgrade List', 'Upgrade Status', and 'Upgrade History'. The 'Device Upgrade List' section contains several configuration options: 'Device Type List' set to 'All', 'Upgrade from Controller' checkbox, 'Scheduled Upgrade Time' set to 'Now' with a date of '02/07/2019' and time '00:00' (HH:MM), 'Scheduled Reboot Time' set to 'Now' with a date of '02/07/2019' and time '00:00' (HH:MM), 'No Reboot' checkbox, 'Staggered Reboot' checkbox, and 'Force Upgrade' checkbox. Below this is a table titled 'All Devices' with the following data:

✓	Hostname	MAC Address	Device Type	Version	RF Domain
✓	ap7562-84A224	84-24-8D-84-A2-24	ap7562	5.9.4.0-010D	default
✓	ap7532-DF9A4C	84-24-8D-DF-9A-4C	ap7532	5.9.4.0-010D	default

At the bottom right of the page, there are two buttons: 'Upgrade Firmware' and 'Clear History'.

4. Select the **Device Upgrade List** tab, if not selected by default.
5. Use the **Device Type List** drop-down menu to select the type of device to be upgraded. This is the device model used to provision firmware to the devices selected within the **All Devices** table below.
Select the **All** option to initiate upgrade of all devices within the selected RF Domain. If you select this option, the **All Devices** table is disabled.
6. Select the **Upgrade from Controller** checkbox to initiate upgrade through the controller to which the selected device is adopted.
7. Use the **Scheduled Upgrade Time** and **Scheduled Reboot Time** options to schedule the upgrade at a latter time.
By default, both the **Scheduled Upgrade Time** and **Scheduled Reboot Time** options are set to **Now**, which initiates immediate upgrade.

Certificates

A certificate links identity information with a public key enclosed in the certificate.

A *certificate authority* (CA) is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate. A browser must contain this CA certificate in its Trusted Root Library so it can trust certificates *signed* by the CA's private key.

Depending on the public key infrastructure, the digital certificate includes the owner's public key, the certificate expiration date, the owner's name and other public key owner information.

Each certificate is digitally signed by a *trustpoint*. The trustpoint signing the certificate can be a certificate authority, corporation or individual. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters and an association with an enrolled identity certificate.

SSH keys are a pair of cryptographic keys used to authenticate users instead of, or in addition to, a username/password. One key is private and the other is public key. *Secure Shell* (SSH) public key authentication can be used by a client to access managed resources, if properly configured. A RSA key pair must be generated on the client. The public portion of the key pair resides locally with the controller, service platform or access point, while the private portion remains on a secure local area of the client.

For more information on the certification activities supported, refer to the following:

- [Certificate Management](#) on page 1011
- [RSA Key Management](#) on page 1020
- [Certificate Creation](#) on page 1024
- [Generating a Certificate Signing Request](#) on page 1026


Certificate Management

If not wanting to use an existing key or certificate, a *stored* certificate can be leveraged from a peer controller, service platform or access point. Device certificates can be

imported and exported to a secure remote location for archive and retrieval as they are required for application to other managed devices.

To configure trustpoints for use with certificates:

1. Select **Operations > Manage Certificates**.
2. Select a device from amongst those displayed in either the RF Domain or Network panes on the left-hand side of the screen.

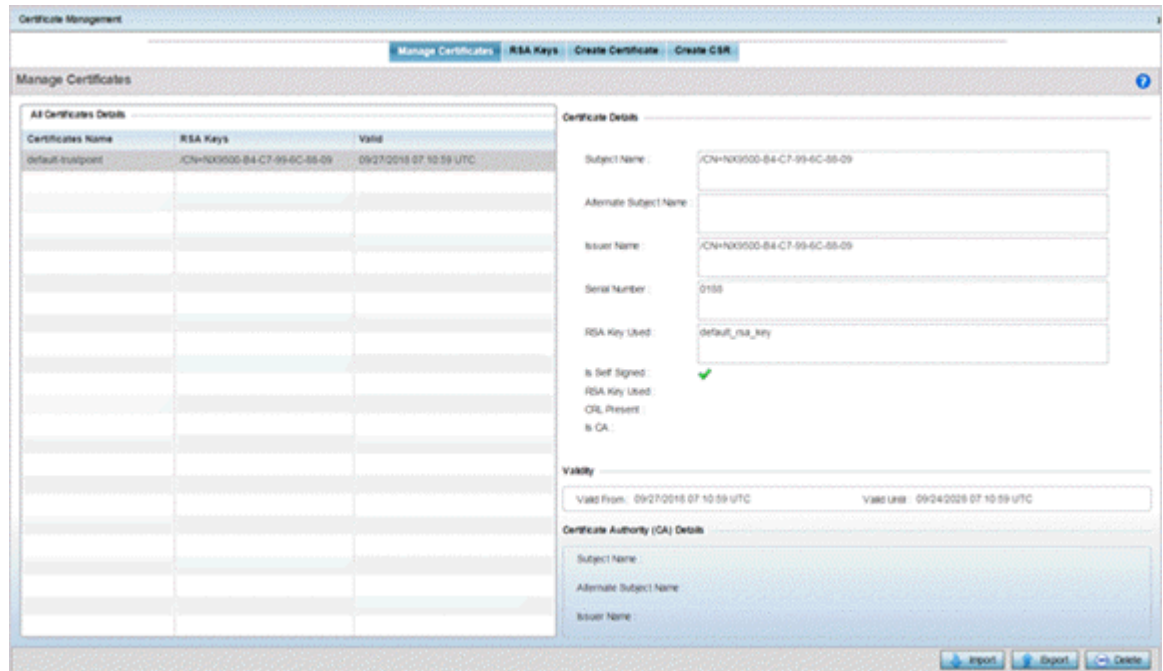

The **Manage Certificates** screen displays for the selected MAC address.

3. Select a device from amongst those displayed to review its certificate.
4. Refer to the **All Certificate Details** to review the certificate's properties, self-signed credentials, validity period and CA information.
5. To import a certificate to the controller or service platform, select the **Import** button from the bottom of the Manage Certificates screen.

An **Import New Trustpoint** screen displays where CA certificates, CRLs and signed certificates can optionally be imported to the controller or service platform once the network credentials of the file transfer have been defined.

Import Certificates and Trustpoints

A certificate links identity information with a public key enclosed in the certificate. Each certificate is digitally signed by a *trustpoint*. The trustpoint signing the certificate can be a certificate authority, corporation or individual. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters and an association with an enrolled identity certificate.

The screenshot shows the 'Import New Trustpoint' dialog box. It features a title bar with the text 'Import New Trustpoint' and a close button. Below the title bar, there are four radio buttons: 'Import' (selected), 'Import CA', 'Import CRL', and 'Import Signed Cert'. Below these is a 'Trustpoint Name' field with an asterisk and a question mark icon. Underneath is the 'Location of Trustpoint' section with a 'From Network' radio button selected. This section includes a 'Protocol' dropdown set to 'http', a 'Port' spinner set to '69', and a 'Basic' label. Below these are a 'Host' field with '0 . 0 . 0 . 0' and an 'IP Address' dropdown, and a 'PathFile' field. At the bottom of this section is a 'Cut and Paste' radio button and a large grey text area. At the very bottom of the dialog are 'OK' and 'Cancel' buttons.

Figure 429: Import New Trustpoint Screen

1. To optionally import a CA certificate, select the **Import CA** button on the **Import New Trustpoint** screen.

A CA is a network authority that issues and manages security credentials and public keys for message encryption. The CA signs all digital certificates it issues with its own private key. The corresponding public key is contained within the certificate and is called a CA certificate.

2. Define the following configuration parameters required to import a CA certificate:

Trustpoint Name	Enter the 32-character maximum name assigned to the target trustpoint. The trustpoint signing the certificate can be a certificate authority, a corporation, or an individual.
URL	Provide the complete URL to the location of the trustpoint. If needed, click Advanced to expand the dialog to display network address information to the location of the target trustpoint. The number of additional fields that populate the screen is also dependent on the selected protocol.
Protocol	Select the protocol used for importing the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .

Host	Provide the hostname string or numeric IP address of the server used to import the trustpoint. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the trustpoint file. Enter the complete relative path to the file on the server.

3. Select **OK** to import the defined CA certificate. Click **Cancel** to revert the screen to its last saved configuration.
4. To optionally import a CA certificate, select **Import CRL** button on the **Certificate Management** screen.

If a certificate displays in the **Certificate Management** screen with a CRL, that CRL can be imported. A CRL (*certificate revocation list*) is a list of certificates that have been revoked or are no longer valid. A certificate can be revoked if the CA had improperly issued a certificate, or if a private key is compromised. The most common reason for revocation is the user no longer being in sole possession of the private key.

5. Define the following configuration parameters required to import a CRL:

Trustpoint Name	Enter the 32-character maximum name assigned to the target trustpoint signing the certificate. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters, and an association with an enrolled identity certificate.
From Network	Select From Network to provide network address information to the location of the target CRL. The number of additional fields that populate the screen is also dependent on the selected protocol. This is the default setting.
URL	Provide the complete URL to the location of the CRL. If needed, click Advanced to expand the dialog to display network address information to the location of the CRL. The number of additional fields populating the screen depends on the selected protocol.
Advanced/Basic	Click Advanced or Basic to switch between a basic URL and an advanced location to specify trustpoint location.
Protocol	Select the protocol used for importing the CRL. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .
Host	Provide the hostname string or numeric IP address of the server used to import the CRL. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the CRL file. Enter the complete relative path to the file on the server.
Cut and Paste	Select Cut and Paste to copy an existing CRL into the field. When pasting, no additional network address information is required.

6. Select **OK** to import the CRL. Select **Cancel** to revert the screen to its last saved configuration.

7. To import a signed certificate, select the **Import Signed Cert** button on the **Import New Trustpoint** screen.

Signed certificates (or root certificates) avoid the use of public or private CAs. A self-signed certificate is an identity certificate signed by its own creator, thus the certificate creator also signs off on its legitimacy. The lack of mistakes or corruption in the issuance of self signed certificates is central.

Self-signed certificates cannot be revoked which may allow an attacker who has already gained controller access to monitor and inject data into a connection to spoof an identity if a private key has been compromised. However, CAs have the ability to revoke a compromised certificate, preventing its further use.

8. Define the following parameters required to Import a Signed Certificate:

Certificate Name	Enter the 32-character maximum trustpoint name with which the certificate should be associated.
From Network	Select From Network to provide network address information to the location of the signed certificate. The number of additional fields that populate the screen is also dependent on the selected protocol. From Network is the default setting.
URL	Provide the complete URL to the location of the signed certificate. If needed, click Advanced to expand the dialog to display network address information to the location of the signed certificate. The number of additional fields populating the screen depends on the selected protocol.

Protocol	Select the protocol used for importing the signed certificate. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .
Host	Provide the hostname string or numeric IP address of the server used to import the signed certificate. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the signed certificate file. Enter the complete relative path to the file on the server.
Cut and Paste	Select Cut and Paste to copy an existing certificate into the field. When pasting, no additional network address information is required.

9. Select **OK** to import the signed certificate. Select **Cancel** to revert the screen to its last saved configuration.

Export Trustpoints

Each certificate is digitally signed by a *trustpoint*. The trustpoint signing the certificate can be a certificate authority, corporation or individual. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters and an association with an enrolled identity certificate.

The trustpoints utilized by a controller, service platform or access point can be exported to an external resource for archive.

To export trustpoints:

1. Select **Operations → Manage Certificates**.
2. To optionally export a trustpoint to a remote location, select **Export** from the **Certificate Management** screen.

Once a certificate has been generated on the local authentication server, export the self signed certificate. A digital CA certificate is different from a self signed certificate. The CA certificate contains the public and private key pairs. The self certificate only contains a public key. Export the self certificate for publication on a Web server or file server for certificate deployment or export it in to an active directory group policy for automatic root certificate deployment.

3. Additionally export the key to a redundant RADIUS server so it can be imported without generating a second key. If there's more than one RADIUS authentication server, export the certificate and don't generate a second key unless you want to deploy two root certificates.

Figure 430: Certificate Management - Export Trustpoint Screen

4. Define the following configuration parameters required for the export of the trustpoint.

Trustpoint Name	Enter the 32-character maximum name assigned to the trustpoint. The trustpoint signing the certificate can be a certificate authority, a corporation, or an individual..
URL	Provide the complete URL to the location of the trustpoint. If needed, click Advanced to expand the dialog to display network address information to the location of the trustpoint. The number of additional fields populating the screen depends on the selected protocol.
Protocol	Select the protocol used for exporting the target trustpoint. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .

Host	Provide the hostname string or numeric IP address of the server used to export the trustpoint. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the signed trustpoint file. Enter the complete relative path to the file on the server.
Cut and Paste	Select Cut and Paste to copy an existing trustpoint into the field. When pasting, no additional network address information is required.

5. Select **OK** to export the defined trustpoint. Select **Cancel** to revert the screen to its last saved configuration.


RSA Key Management

Refer to the RSA Keys screen to review existing RSA key configurations applied to controller, service platform or access point managed devices. If an existing key does not meet the needs of a pending certificate request, generate a new key or import/export an existing key to and from a remote location.

Rivest, Shamir, and Adleman (RSA) is an algorithm for public key cryptography. It's an algorithm that can be used for certificate signing and encryption. When a device trustpoint is created, the RSA key is the private key used with the trustpoint.

To review existing device RSA key configurations, generate additional keys or import/export keys to and from remote locations:

1. Select **RSA Keys** tab from the Certificate Management screen.

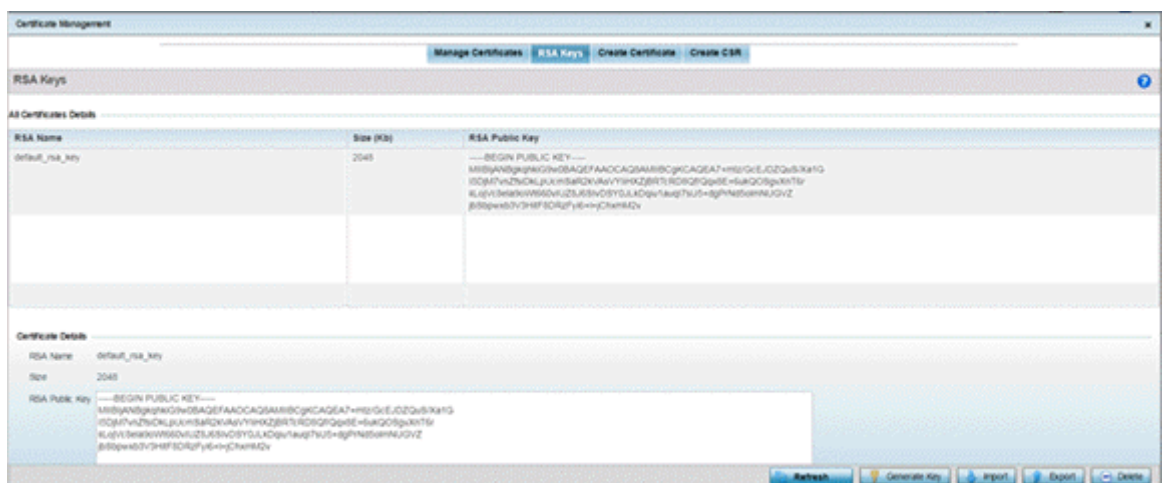

2. Select a listed device to review its current RSA key configuration.

Each key can have its size and character syntax displayed. Once reviewed, optionally generate a new RSA key, import a key from a selected device, export a key to a remote location or delete a key from a selected device.

3. Select **Generate Key** to create a new key with a defined size.
4. Define the following configuration parameters required for the Import of the key:

Key Name	Enter the 32 character maximum name assigned to the RSA key.
Key Size	Use the spinner control to set the size of the key (from 1,024 - 2,048 bits). Consider leaving this value at the default setting to ensure optimum functionality.

5. Select **OK** to generate the RSA key. Select **Cancel** to revert the screen to its last saved configuration.

Import an RSA Key

Controllers, service platforms and access point can import RSA keys utilized by other devices.

To Import an RSA Key:

1. Select **RSA Keys** tab from the Certificate Management screen.
2. To optionally import an RSA key, select **Import** from the **Certificate Management → RSA Keys** screen.

Figure 431: Certificate Management - Import New RSA Key Screen

3. Define the following parameters required for the Import of the RSA key:

Key Name	Enter the 32-character maximum name assigned to identify the RSA key.
Key Passphrase	Define the key used by both the controller or service platform and the server (or repository) of the target RSA key. Click Show expose the actual characters used in the passphrase. When Show is not selected, the passphrase displays as a series of asterisks (****).
URL	Provide the complete URL to the location of the RSA key. If needed, click Advanced to expand the dialog to display network address information to the location of the target key. The number of additional fields that populate the screen is dependent on the selected protocol.
Advanced/Basic	Select either Advanced or Basic to switch between a basic URL and an advanced location to specify key location.
Protocol	Select the protocol used for importing the target key. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .
Host	Provide the hostname string or numeric IP address of the server used to import the RSA key. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the RSA key. Enter the complete relative path to the key on the server.

4. Select **OK** to import the defined RSA key. Select **Cancel** to revert the screen to its last saved configuration.

Export an RSA Key

The keys utilized by a controller, service platform or access point can be exported to an external resource for archive and future use.

Export the key to a redundant RADIUS server to import it without generating a second key. If there's more than one RADIUS authentication server, export the certificate and don't generate a second key unless you want to deploy two root certificates.

To export an RSA Key:

1. Select **Export** from the **Certificate Management → RSA Keys** screen.

The Export RSA Key window displays.

Figure 432: Certificate Management - Export RSA Key Screen

Export the key to a redundant RADIUS server to import it without generating a second key. If there's more than one RADIUS authentication server, export the certificate and don't generate a second key unless you want to deploy two root certificates.

2. Define the following configuration parameters required for the Export of the RSA key.

Key Name	Enter the 32-character maximum name assigned to the RSA key.
Key Passphrase	Define the key used by both the controller or service platform and the server. Click Show expose the actual characters used in the passphrase. When Show is not selected, the passphrase displays as a series of asterisks (****).
URL	Provide the complete URL to the location of the key. If needed, click Advanced to expand the dialog to display network address information to the location of the target key. The number of additional fields that populate the screen is dependent on the selected protocol.
Protocol	Select the protocol used for exporting the RSA key. Available options include: <ul style="list-style-type: none"> • tftp • ftp • sftp • http • cf • usb1-4
Port	Set the port. This option is not valid for cf and usb1-4 .

Host	Provide the hostname string or numeric IP address of the server used to export the RSA key. Hostnames cannot include an underscore character. This option is not valid for cf and usb1-4 . Select IPv4 Address to use an IPv4 formatted address as the host. Select IPv6 Address to use an IPv6 formatted address as the host. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Path/File	Specify the path to the key. Enter the complete relative path to the key on the server.

3. Select **OK** to export the defined RSA key. Select **Cancel** to revert the screen to its last saved configuration.

Delete an RSA Key

As keys become obsolete they can be deleted from their managing controller, service platform or access point.

To delete an RSA Key:

1. Select **RSA Keys** tab from the Certificate Management screen.
2. Select the **Delete** button from within the **RSA Keys** tab.
3. Provide the key name within the **Delete RSA Key** screen and select **Delete Certificates** to remove the certificate.
4. Select **OK** to proceed with the deletion, or **Cancel** to revert back to the Certificate Management screen.

Certificate Creation

Use the **Certificate Management** screen to create new self-signed certificates. Self-signed certificates (often referred to as root certificates) do not use public or private CAs. A self-signed certificate is a certificate signed by its own creator, with the certificate creator responsible for its legitimacy.

To create a self-signed certificate that can be applied to a managed device:

1. In the **Certificate Management** screen, select **Launch Manager** from either the SSH RSA Key, RADIUS Certificate Authority, or RADIUS Server Certificate parameters.
2. Select **Create Certificate** from the upper, left-hand, side of the **Certificate Management** screen.

Figure 433: Certificate Management - Create Certificate Screen

3. Define the following configuration parameters required to **Create New Self-Signed Certificate**:

Certificate Name	Enter the 32-character maximum name assigned to identify the name of the trustpoint associated with the certificate. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters, and an association with an enrolled identity certificate.
RSA Key	Select Use Existing and use the drop-down menu to set the key used by both the controller or service platform and the server (or repository) of the target RSA key Optionally, select Create New to enter a 32-character maximum name used to identify the RSA key. Set the size of the key to either 1,024 or 2,048 bits. We recommend leaving this value at the default setting of 2,048 to ensure optimum functionality.

4. Set the following **Certificate Subject Name** parameters required for the creation of the certificate:

Certificate Subject Name	Select either auto-generate to automatically create the certificate's subject credentials or user-configured to manually enter the credentials of the self-signed certificate. The default setting is auto-generate .
Country (C)	Define the country used in the certificate. The field can be modified by the user to other values. This is a required field and must not exceed 2 characters.
State (ST)	Enter the state or province name used in the certificate. This is a required field.
City (L)	Enter a city to represent the city used in the certificate. This is a required field.
Organization (O)	Define the organization represented in the certificate. This is a required field.
Organizational Unit (OU)	Enter the organization unit represented in the certificate. This is a required field.
Common Name (CN)	If there is a common name (IP address) for the organizational unit issuing the certificate, enter it here.

5. Select the following **Additional Credentials** required for the generation of the self-signed certificate:

Email Address	Provide an email address used as the contact address for issues relating to this certificate request.
Domain Name	Enter a <i>fully qualified domain name</i> (FQDN): an unambiguous domain name that absolutely specifies the node's position in the DNS tree hierarchy. To distinguish an FQDN from a regular domain name, a trailing period is added – for example, <i>somehost.example.com</i> . An FQDN differs from a regular domain name by its absoluteness, as a suffix is not added.
IP Address	Specify the IP address used as the destination for certificate requests. Only IPv4 formatted IP addresses are permitted. IPv6 formatted addresses are not permitted.

6. Click **Generate Certificate** at the bottom of the **Certificate Management > Create Certificate** screen to produce the certificate.

Generating a Certificate Signing Request

A CSR (*certificate signing request*) is a message from a requester to a certificate authority to apply for a digital certificate. The CSR is composed of a block of encrypted text generated on the server where the certificate will be used. It contains the organization name, common name (domain name), locality, and country.

An RSA key must be either created or applied to the certificate request before the certificate can be generated. A private key is not included in the CSR, but it is used to digitally sign the completed request. The certificate created with a particular CSR only works with the private key generated with it. If the private key is lost, the certificate is no longer functional. The CSR can be accompanied by other identity credentials

required by the certificate authority, and the certificate authority maintains the right to contact the applicant for additional information.

If the request is successful, the CA sends an identity certificate digitally signed with the private key of the CA.

To create a CSR:

1. In the **Certificate Management** screen, select **Launch Manager** from either the SSH RSA Key, RADIUS Certificate Authority, or RADIUS Server Certificate parameters.
2. Select **Create CSR** from the upper, left-hand, side of the **Certificate Management** screen.

The screenshot displays the 'Certificate Management' interface with the 'Create CSR' tab selected. The form is titled 'Create New Certificate Signing Request (CSR)'. It features three main sections: 'RSA Key' with 'Create New' selected and a value of '2048'; 'Certificate Subject Name' with 'auto-generate' selected and fields for Country (C), State (ST), City (L), Organization (O), Organizational Unit (OU), and Common Name (CN); and 'Additional Credentials' with fields for Email Address, Domain Name, and IP Address. A 'Generate CSR' button is positioned at the bottom right of the form.

Figure 434: Certificate Management - Create CSR Screen

3. Define the following configuration parameter required to **Create New Certificate Signing Request (CSR)**:

RSA Key	Select Use Existing and use the drop-down menu to set the key used by both the controller or service platform and the server (or repository) of the target RSA key. Optionally, select Create New to enter a 32-character maximum name used to identify the RSA key. Set the size of the key to either 1,024 or 2,048 bits. We recommend leaving this value at the default setting of 2,048 to ensure optimum functionality.
---------	--

4. Set the following **Certificate Subject Name** parameters required for the creation of the certificate:

Certificate Subject Name	Select either auto-generate to automatically create the certificate's subject credentials or user-configured to manually enter the credentials of the self-signed certificate. The default setting is auto-generate .
Country (C)	Define the country used in the CSR. The field can be modified by the user to other values. This is a required field and must not exceed 2 characters.
State (ST)	Enter the state or province name represented in the CSR. This is a required field.
City (L)	Enter a city represented in the CSR. This is a required field.
Organization (O)	Define the organization represented in the CSR. This is a required field.
Organizational Unit (OU)	Enter the organization unit represented in the CSR. This is a required field.
Common Name (CN)	If there is a common name (IP address) for the organizational unit issuing the certificate, enter it here.

5. Select the following **Additional Credentials** required for the generation of the CSR:

Email Address	Provide an email address used as the contact address for issues relating to this CSR.
Domain Name	Enter a <i>fully qualified domain name (FQDN)</i> : an unambiguous domain name that absolutely specifies the node's position in the DNS tree hierarchy. To distinguish an FQDN from a regular domain name, a trailing period is added – for example, <i>somehost.example.com</i> . An FQDN differs from a regular domain name by its absoluteness, as a suffix is not added.
IP Address	Specify the IP address used as the destination for certificate requests. Only IPv4 formatted IP addresses are permitted. IPv6 formatted addresses are not permitted.

6. Select **Generate CSR** to produce the CSR.

Smart RF

Self Monitoring At Run Time RF Management (Smart RF) is an innovation designed to simplify RF configurations for new deployments, while (over time) providing on-going deployment optimization and radio performance improvements.

The Smart RF functionality scans the managed network to determine the best channel and transmit power for each access point radio. Smart RF policies can be applied to specific RF Domains, to apply site specific deployment configurations and self recovery values to groups of devices within pre-defined physical RF coverage areas.

Smart RF also provides self recovery functions by monitoring the managed network in real-time and provides automatic mitigation from potentially problematic events such as radio interference, coverage holes and radio failures. Smart RF employs self recovery to enable a WLAN to better maintain wireless client performance and site coverage during dynamic RF environment changes, which typically require manual reconfiguration to resolve.

Within the Operations node, Smart RF is managed within selected RF Domains, using the access points that comprise the RF Domain and their respective radio and channel configurations as the basis to conduct Smart RF calibration operations.

Managing Smart RF for an RF Domain

When calibration is initiated, Smart RF instructs adopted radios (within a selected RF Domain) to beacon on a specific legal channel, using a specific transmit power setting. Smart RF measures the signal strength of each beacon received from both managed and unmanaged neighboring APs to define a RF map of the neighboring radio coverage area. Smart RF uses this information to calculate each managed radio's RF configuration as well as assign radio roles, channel and power.

Within a well planned RF Domain, any associated radio should be reachable by at least one other radio. The Smart RF feature records signals received from its neighbors. access point to access point distance is recorded in terms of signal attenuation. The information is used during channel assignment to minimize interference.

To conduct Smart RF calibration for a controller, service platform or access point RF Domain:

1. Select **Operations**.
2. Select **Smart RF**.
3. The Smart RF screen displays information specific to the devices within the selected RF Domain using data from the last interactive calibration.

RF Domain simba										
Hostname	AP MAC Address	Radio MAC Address	Radio Index	Old Channel	Channel	Old Power	Power	Smart Sensor	State	Type
ap622-57F	B4-C7-99-E	B4-C7-99-E	0		1	0 dBm	13 dBm	✗	Normal	802.11bgn
ap622-57F	B4-C7-99-E	B4-C7-99-E	1		52w	0 dBm	10 dBm	✗	Normal	802.11an
ap622-586	B4-C7-99-E	B4-C7-99-E	1		44w	0 dBm	17 dBm	✗	Normal	802.11an
ap622-586	B4-C7-99-E	B4-C7-99-E	0		8	0 dBm	10 dBm	✗	Normal	802.11bgn

Type to search in tables Row Count: 4

4. Refer to the following to determine whether a Smart RF calibration or an interactive calibration is required:

Hostname	Displays the administrator assigned Hostname for each member of the RF Domain.
AP MAC Address	Displays the hardware encoded MAC address assigned to each access point radio within the selected RF Domain. This value cannot be modified as past of a calibration activity.
Radio MAC Address	Displays the hardware encoded MAC address assigned to each access point radio within the selected RF Domain. This value cannot be modified as part of a calibration activity.
Radio Index	Displays a numerical index assigned to each listed access point radio when it was added to the network. This index helps distinguish this radio from others within this RF Domain with similar configurations. This value is not subject to change as a result of a calibration activity, but each listed radio index can be used in Smart RF calibration.
Old Channel	Lists the channel originally assigned to each listed access point MAC address within this RF Domain. This value may have been changed as part an Interactive Calibration process applied to this RF Domain. Compare this Old Channel against the Channel value to right of it (in the table) to determine whether a new channel assignment was warranted to compensate for a coverage hole.
Channel	Lists the current channel assignment for each listed access point, as potentially updated by an Interactive Calibration. Use this data to determine whether a channel assignment was modified as part of an Interactive Calibration. If a revision was made to the channel assignment, a coverage hole was detected on the channel as a result of a potentially failed or under performing access point radio within this RF Domain.
Old Power	Lists the transmit power assigned to each listed access point MAC address within this RF Domain. The power level may have been increased or decreased as part an Interactive Calibration process applied to this RF Domain. Compare this Old Power level against the Power value to right of it (in the table) to determine whether a new power level was warranted to compensate for a coverage hole.

Power	This column displays the transmit power level for the listed access point MAC address after an Interactive Calibration resulted in a power adjustment. This is the new power level defined by Smart RF to compensate for a coverage hole.
Smart Sensor	Defines whether a listed access point is smart sensor on behalf of the other access point radios comprising the RF Domain.
State	Displays the current state of the Smart RF managed access point radio. Possible states include: <i>Normal</i> , <i>Offline</i> and <i>Sensor</i> .
Type	Displays the radio type (802.11an, 802.11bgn etc.) of each listed access point radio within the selected RF Domain.


5. Select the **Refresh** button to (as needed) to update the contents of the Smart RF screen and the attributes of the devices within the selected RF Domain.



Note

Smart RF is not able to detect a voice call in progress, and will switch to a different channel resulting in voice call reconnections.

6. Select the **Interactive Calibration** button to initiate a Smart RF calibration using the access points within the selected RF Domain. The results of the calibration display within the Smart RF screen. Of particular interest are the channel and power adjustments made by the controller's Smart RF module. Expand the screen to display the Event Monitor to track the progress of the Interactive Calibration.
7. Select the **Calibration Result Actions** button to launch a sub screen used to determine the actions taken based on the results of the Interactive Calibration. The results of an Interactive calibration are not applied to radios directly, the administrator has the choice to select one of following options:



Replace	Overwrites the current channel and power values with new channel power values the Interactive Calibration has calculated.
Write	Writes the new channel and power values to the radios under their respective device configurations.
Discard	Discards the results of the Interactive Calibration without applying them to their respective devices.

8. Select the **Run Calibration** option to initiate a calibration. New channel and power values are applied to radios, they are not written to the running-configuration.

These values are dynamic and may keep changing during the course of the run-time monitoring and calibration the Smart RF module keeps performing to continually maintain good coverage. Unlike an Interactive Calibration, the Smart RF screen is not populated with the changes needed on access point radios to remedy a detected coverage hole. Expand the screen to display the Event Monitor to track the progress of the calibration.

9. The calibration process can be stopped by selecting the **Stop Calibration** button.

Operations Deployment Considerations

Before defining the access point's configuration using the Operations menu, refer to the following deployment guidelines to ensure the configuration is optimally effective:

- If an access point's (or its associated device's) firmware is older than the version on the support site, update to the latest firmware version for full functionality and utilization.
- An access point must be rebooted to implement a firmware upgrade. Take advantage of the reboot scheduling mechanisms available to the access point to ensure its continuously available during anticipated periods of heavy wireless traffic utilization.
- In a well planned RF Domain, any associated radio should be reachable by at least one other radio. Keep this in mind when utilizing the Smart RF feature to record signals from neighboring access points. Access point to access point distance is recorded in terms of signal attenuation.



Statistics

- [System Statistics](#) on page 1034
- [RF Domain Statistics](#) on page 1044
- [Access Point Statistics](#) on page 1101
- [Wireless Client Statistics](#) on page 1237

This chapter describes statistics displayed by the GUI (*graphical user interface*). Statistics are available for access point and their managed devices.

A Smart RF statistical history is available to assess adjustments made to device configurations to compensate for detected coverage holes or device failures.

Statistics display detailed information about peers, health, device inventories, wireless clients associations, adopted AP information, rogue APs and WLANs. Access point statistics can be exclusively displayed to validate connected access points, their VLAN assignments and their current authentication and encryption schemes.

Wireless client statistics are available for an overview of client health. Wireless client statistics includes RF quality, traffic utilization and user details. Use this information to assess if configuration changes are required to improve network performance.

System wide statistics are available to review the health of the entire wireless network, including all its RF Domains and member devices.

RF Domain statistics are available to administrate specific device groups (domains) created in respect to their shared deployment objective.

Access Point statistics can be exclusively displayed to validate connected access points, their VLAN assignments and their current authentication and encryption schemes.

Wireless Client statistics are available for an overview of client health. Wireless client statistics includes RF quality, traffic utilization and user details. Use this information to assess if configuration changes are required to improve network performance.

Guest Access statistics are also available for the periodic review of wireless clients requesting the required pass code, authentication and access into the WiNG managed guest network.

For more information, see the sections listed above, at the start of this chapter.

System Statistics

The **System** screen displays information supporting managed devices (wireless controllers, service platforms, access points and their connected wireless clients). Use this information to assess the overall state of the devices comprising the system. Systems data is organized as follows:

The data is organized as follows:

- [Health](#)
- [Inventory](#)
- [Adopted Devices](#)
- [Pending Adoptions](#)
- [Offline Devices](#)
- [Device Upgrade](#)
- [WIPS Summary](#)

The following devices can report system data:

- Access Points - AP 6522, AP 6562, AP 7161, AP 7502, AP-7522, AP 7532, AP-7562, AP 7602, AP-7612, AP 7622, AP7632, AP7662, AP-8163, AP-8432, AP-8533
- Wireless Controllers - RFS 4000
- Service Platforms - NX 5500, NX 7510, NX 95XX, NX 96XX, VX

Health

The **Health** screen displays the overall performance of the managed network (system). This includes device availability, overall RF quality, resource utilization and network threat perception.

To display the health of the managed network:

1. Select the **Statistics** → **System** menu from the Web UI.
2. Select **Health** from the left-hand side of the UI.

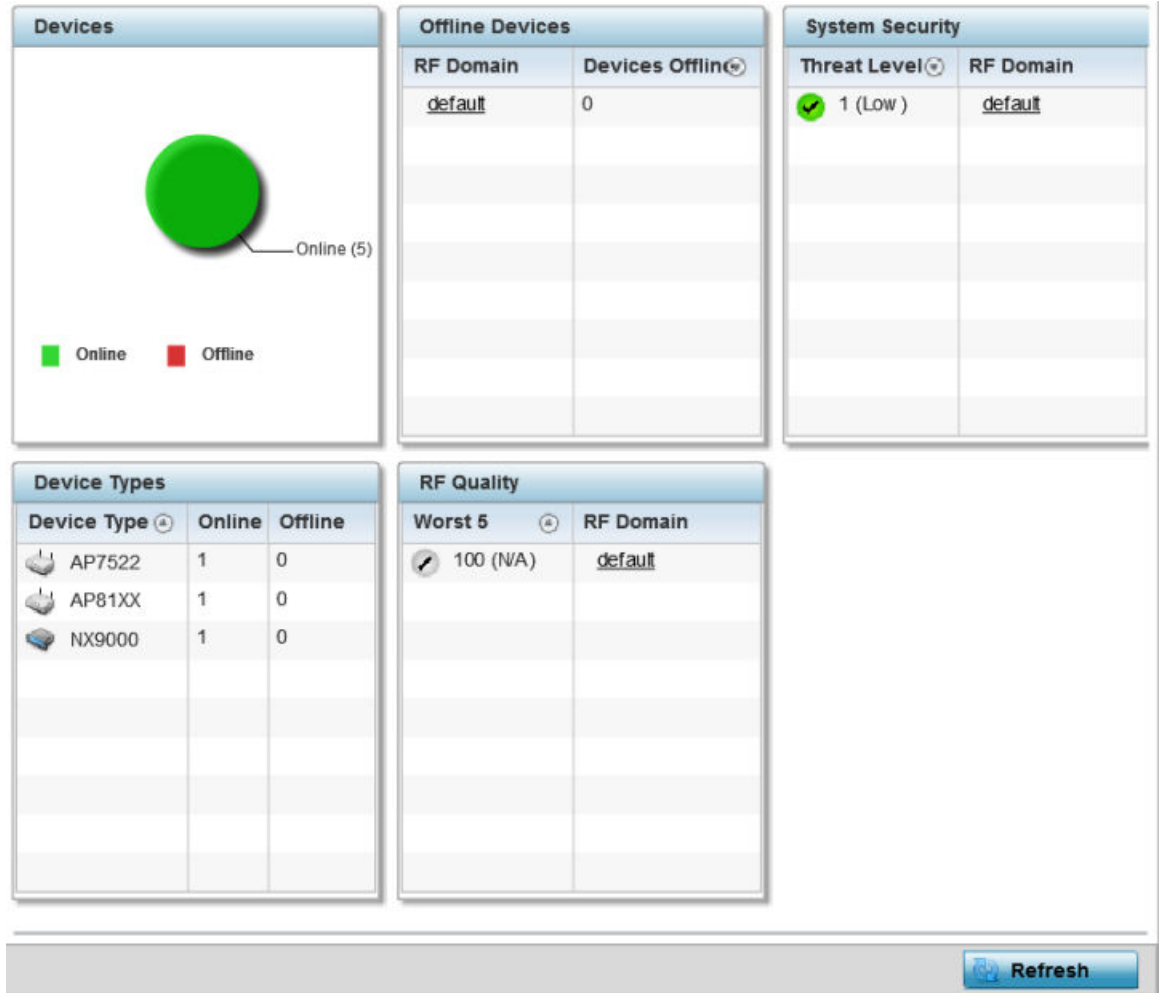


Figure 435: Statistics - System - Health Screen

- The **Devices** table displays the total number of devices in the access point managed network. The pie chart is a proportional view of how many devices are functional and currently online. Green indicates online devices and red offline devices detected within the managed network.
- The **Offline Devices** table displays a list of devices in the controller managed network that are currently offline.

The table displays the number of offline devices within each impacted RF Domain. Assess whether the configuration of a particular RF Domain is contributing to an excessive number of offline devices.
- The **Device Types** table displays the kinds of devices detected within the system. Each device type displays the number currently online and offline.
- Use the **RF Quality** table to isolate poorly performing radio devices within specific controller managed RF Domains. This information is a starting point to improving the overall quality of the wireless controller managed network. The **RF Quality** area displays the RF Domain performance.

Refer to the following table for details:

Worst 5	Displays five RF Domains with the lowest quality indices in the wireless controller managed network. The value can be interpreted as: <ul style="list-style-type: none"> • 0-50 – Poor Quality • 50-75 – Medium Quality • 75-100 – Good Quality
RF Domain	Displays the name of the RF Domain wherein system statistics are polled for the poorly performing device.

7. The **System Security** table defines a **Threat Level** as an integer value indicating a potential threat to the system. It is an average of the threat indices of all the RF Domains managed by the access point.

Threat Level	Displays the threat perception value. This value can be interpreted as: <ul style="list-style-type: none"> • 0-2 – Low threat level • 3-4 – Moderate threat level • 5 – High threat level
RF Domain	Displays the name of the target RF Domain for which the threat level is displayed.


8. Select **Refresh** at any time to update the statistics counters to their latest values.

Inventory

The **Inventory** screen displays information about the physical hardware managed within the system by its member controller or service platforms. Use this information to assess the overall performance of wireless devices.

To display the inventory statistics:

1. Select **Inventory** from the left side of the screen.

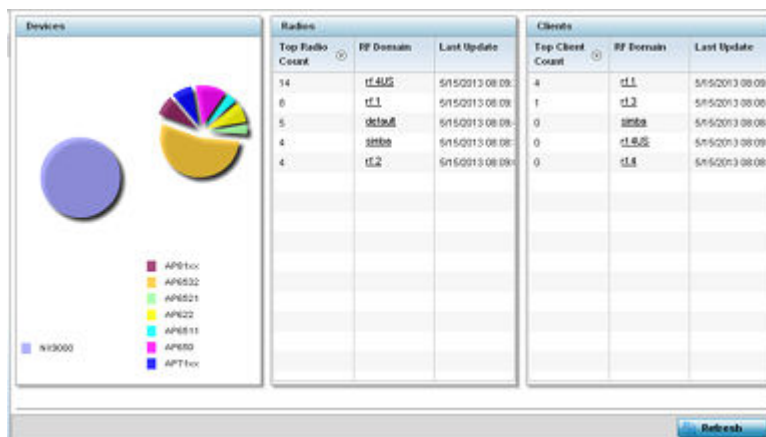

2. The **Devices** table displays an exploded pie chart depicting the controller, service platform and access point device type distribution by model. Use this information to assess whether these are the correct models for the system's deployment objective.
3. The **Radios** table displays radios deployed within the access point managed network. This area displays the total number of managed radios and the top 5 RF

The **Adopted Devices** screen displays the following information:

Adopted Device	Displays the administrator assigned hostname of the adopted device. Select the adopted device link to display configuration and network address information in greater detail.
Type	Displays the adopted access point's model type.
RF Domain Name	Displays the domain the adopted AP has been assigned. Select the RF Domain link to display configuration and network address information in greater detail for member devices.
Model Number	Lists the model number of each AP that has been adopted since this screen was last refreshed.
Config Status	Displays the configuration file version in use by each listed adopted device. Use this information to determine whether an upgrade would increase the functionality of the adopted device.
Config Errors	Lists any errors encountered when the listed device was adopted.
Adopter Hostname	Lists the administrator hostname assigned to the adopting controller, service platform or access point.
Adoption Time	Displays a timestamp for each listed device reflecting when the device was adopted.
Startup Time	Provides a date stamp when the adopted device was restarted post adoption

4. Click **Refresh** to update the statistics counters to their latest values.

Pending Adoptions

The **Pending Devices** screen displays those devices detected within an access point managed coverage area, but have yet to be adopted. Review these devices to assess whether they are good available resources to provide services to requesting clients and peer radio devices.

To view pending adoptions:

1. Select the **Statistics** menu from the Web UI.
2. Select the **System** node from the left navigation pane.
3. Select **Pending Adoptions** from the left-hand side of the UI.

To view offline devices potentially available for adoption:

1. Select the **Statistics** menu from the Web UI.
2. Select the **System** node from the left navigation pane.
3. Select **Offline Devices** from the left-hand side of the UI.

Hostname	MAC Address	Type	RF Domain Name	Reporter	Area	Floor	Connected To	Last Update
ap622-57F5F	B4-C7-99-57	AP622	simba	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap622-5864A	B4-C7-99-58	AP622	simba	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap650-3129C	00-23-68-31	AP650	rf_4	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap650-3129E	00-23-68-31	AP650	rf_4	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap650-312A1	00-23-68-31	AP650	default	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6511-8A4E	5C-0E-8B-8A	AP6511	rf_3	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6521-970C	5C-0E-8B-97	AP6521	CN	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6522-5A84	B4-C7-99-5A	AP6522	default	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3118	00-23-68-31	AP6532	rf_2	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3450	5C-0E-8B-34	AP6532	rf_1	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3471	5C-0E-8B-34	AP6532	rf_4US	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3475	5C-0E-8B-34	AP6532	rf_4US	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3476	5C-0E-8B-34	AP6532	rf_4US	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3477	5C-0E-8B-34	AP6532	rf_4US	nx9500-0C				8/16/2013 12:28:18 PM ▶
ap6532-3478	5C-0E-8B-34	AP6532	rf_4US	nx9500-0C				8/16/2013 12:28:18 PM ▶

Type to search in tables Row Count: 27

[Refresh](#)

The **Offline Devices** screen lists the following information:

Hostname	Lists the administrator assigned hostname provided when the device was added to the network.
MAC Address	Displays the factory encoded MAC address of each listed offline device.
Type	Displays the AP model type.
RF Domain Name	Displays the name of the offline device's RF Domain membership, if applicable. Select the RF Domain link to display configuration and network address information in greater detail.
Reporter	Displays the administrator assigned hostname of the device reporting a device as offline. Select the reporting device link to display configuration and network address information in greater detail.
Area	Lists the administrator assigned deployment area where the offline device is detected.
Floor	Lists the administrator assigned deployment floor where the offline device is detected.

Connected To	Lists the offline device's connected controller, service platform or peer model access point.
Last Update	Displays a date and time stamp for the last time the listed device was detected within the managed network. Select the arrow next to the date and time to toggle between standard time and UTC.

4. Click **Refresh** to update the statistics counters to their latest values.

Device Upgrade

The **Device Upgrade** screen displays available licenses for devices within a cluster. It displays the total number of AP licenses.

To view upgrade statistics at a system level:

1. Select the **Statistics** menu from the Web UI.
2. Select the **System** node from the left navigation pane.
3. Select **Device Upgrade** from the left-hand side of the UI.

Upgraded By Device	Type	Device Hostname	History Id	Last Update Status	Time Last Upgraded	Retries Count	State
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	Update error:	Mon May 13 2013 04:05:51 AM	1	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 04:05:32 AM	0	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 04:05:30 AM	0	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	Update error:	Mon May 13 2013 04:05:31 AM	1	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	Update error:	Mon May 13 2013 04:00:42 AM	1	done
nx9500-0C9848	ap622	ap622-5864	B4-C7-99-0C-98-48.1368	Update error:	Mon May 13 2013 03:59:45 AM	1	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 04:04:47 AM	0	done
nx9500-0C9848	ap6532	ap6532-311	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 04:04:50 AM	0	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	Update error:	Mon May 13 2013 04:05:02 AM	1	done
nx9500-0C9848	ap81xx	ap8132-73B	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 04:05:18 AM	0	done
nx9500-0C9848	ap6532	ap6532-A65	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:57:23 AM	0	done
nx9500-0C9848	ap650	ap650-3129	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:57:38 AM	0	done
nx9500-0C9848	ap6511	ap6511-8A4	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:57:48 AM	0	done
nx9500-0C9848	ap6532	ap6532-347	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:57:55 AM	0	done
nx9500-0C9848	ap6521	ap6521-970	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:58:22 AM	0	done
nx9500-0C9848	ap650	ap650-312A	B4-C7-99-0C-98-48.1368	-	Mon May 13 2013 03:58:47 AM	0	done
nx9500-0C9848	ap81xx	ap8132-73B	B4-C7-99-0C-98-48.1368	Start Upgrade	Mon May 13 2013 03:58:58 AM	3	failed

Type to search in tables Row Count: 720

The **Device Upgrade** screen displays the following information:

Upgraded By Device	Displays the MAC address of the controller, service platform or peer model access point that performed an upgrade.
Type	Displays the model of the access point.
Device Hostname	Displays the administrator-assigned hostname of the access point or the device receiving the update.
History ID	Displays a unique timestamp for the upgrade event.

Last Update Status	Displays the initiation, completion or error status of each listed upgrade operation.
Time Last Upgraded	Displays the date and time of the last upgrade operation.
Retries Count	Displays the number of retries made in an update operation.
State	Displays the done or failed state of an upgrade operation.

4. Click **Clear History** to clear the screen of its current status and begin a new data collection.
5. Click **Refresh** to update the statistics counters to their latest values.


WIPS Summary

The WIPS (*Wireless Intrusion Protection System*) provides continuous protection against wireless threats and acts as an additional layer of security complementing wireless VPNs and existing encryption and authentication policies. Controllers and service platforms support WIPS through the use of dedicated sensor devices, designed to actively detect and locate unauthorized AP devices. After detection, they use mitigation techniques to block devices using manual termination, air lock down or port suppression.

The **WIPS Summary** screen lists RF Domains residing in the system and reports the number of unauthorized and interfering devices contributing to the potential poor performance of the RF Domain's network traffic. Additionally, the number of WIPS events reported by each RF Domain is also listed to help an administrator better mitigate risks to the network.

To review and assess the impact of rogue and interfering APs, as well as the occurrence of WIPS events within the managed system:

1. Select the **Statistics** menu from the Web UI.
2. Select the **System** node from the left navigation pane.
3. Select **WIPS Summary** from the left-hand side of the UI.



6. Select one of the following options to refine event reporting to a specific type of WIPS activity.
 - **Only Rogue APs**
 - **Only Interferer APs**
 - **All APs**
7. Click **Generate Report** to compile and archive the results of the query.
8. Click **Refresh** to update the screen's statistics counters to their latest values.

RF Domain Statistics

The **RF Domain** screens display status for a selected controller, service platform or access point RF Domain. This includes the RF Domain *health* and *device inventory*, *wireless clients* and *Smart RF* functionalities. RF Domains allow administrators to assign regional, regulatory and RF configuration to devices deployed in a common coverage area, such as on a building floor or site. Each RF Domain contains regional, regulatory and sensor server configuration parameters and may also be assigned policies that determine Access, SMART RF and WIPS configuration.

Unlike controllers and service platforms, access point RF Domains are comprised of just other APs.

Use the following information to obtain an overall view of the performance of the selected RF Domain and troubleshoot issues with the domain or any member device.

- [Health](#)
- [Inventory](#)
- [Devices](#)
- [AP Detection](#)
- [Device Upgrade](#)
- [Wireless Clients](#)
- [Wireless LANs](#)
- [Radios](#)
- [Bluetooth](#)
- [Mesh](#)
- [Mesh Point](#)
- [SMART RF](#)
- [WIPS](#)

- Captive Portal
- Application Visibility
- Coverage Hole Detection


Health

The **Health** screen displays general status information for a selected RF Domain, including data polled from all its members.

To display the collective device membership health of a controller, service platform or AP RF Domain:

1. Select the **Statistics → System** menu from the Web UI.
2. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

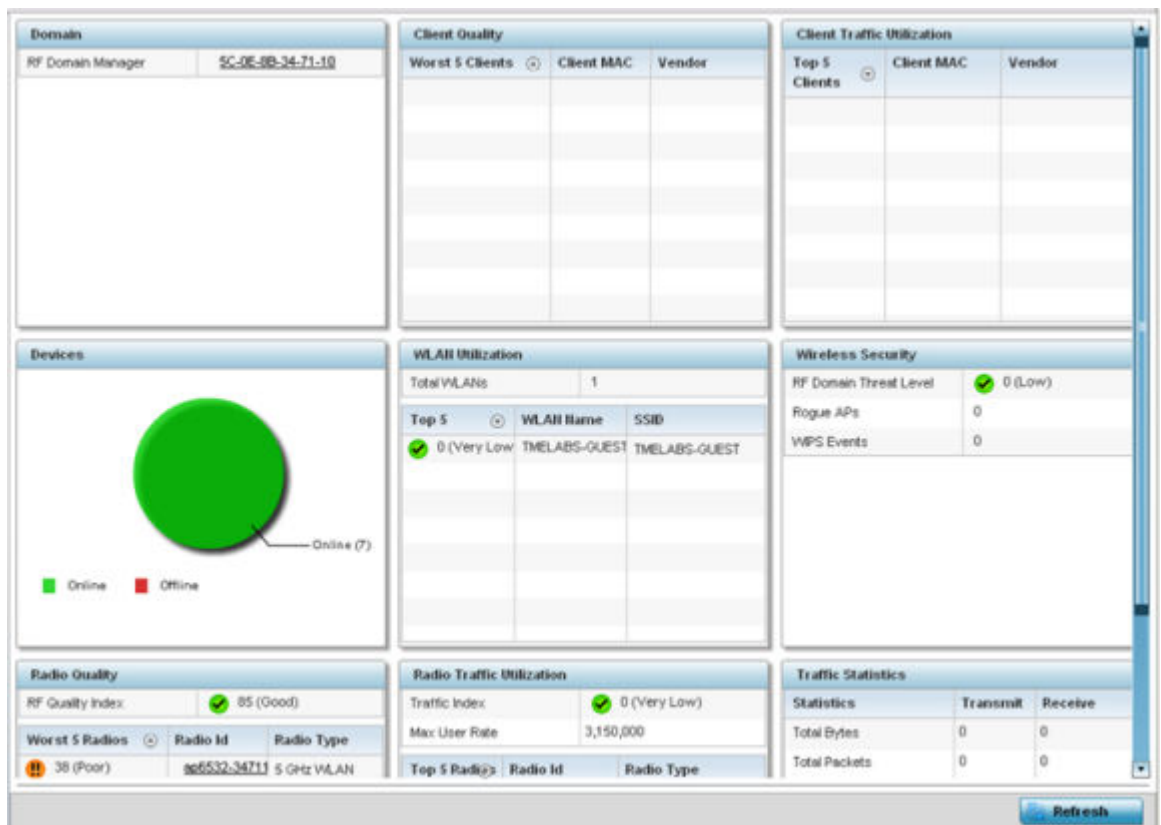

3. Review the different fields displayed on the **RF Domain > Health** screen:
 - **Domain** - Displays the name of the RF Domain manager. The RF Domain manager is the focal point for the radio system and acts as a central registry of applications, hardware and capabilities. It also serves as a mount point for all the different pieces of the hardware system file.
 - **Devices** - Displays the total number of online versus offline devices in the RF Domain, and an exploded pie chart depicts their status.

- **Radio Quality** - Displays information on the RF Domain's RF quality. The RF quality index is the overall effectiveness of the RF environment as a percentage of the connect rate in both directions, as well as the retry and error rate. This area also lists the worst 5 performing radios amongst all the RF Domain device member radios.

The RF Quality Index can be interpreted as:

- **0-20** – Very poor quality
- **20-40** – Poor quality
- **40-60** – Average quality
- **60-100** – Good quality

Refer to the Radio Quality table for RF Domain member radios requiring administration to improve performance:

Worst 5 Radios	Displays five radios with the lowest average quality in the RF Domain.
Radio ID	Lists each radio's administrator defined hostname and its radio designation (radio 1, radio 2 or radio 3).
Radio Type	Displays the radio type as either 5 GHz or 2.4 GHz.

- **Client Quality** - Refer to the table below for RF Domain connected clients requiring administration to improve performance:

Worst 5 Clients	Displays the five clients having the lowest average quality indices.
Client MAC	Displays the hard coded radio MAC of the wireless client.
Vendor	Displays the vendor name of the wireless client.

- **WLAN Utilization** - Refer to the table below to assess WLAN related information:

Total WLANs	Displays the total number of WLANs managed by RF Domain member access points.
Top 5	Displays the five RF Domain utilized WLANs with the highest average quality indices.
WLAN Name	Displays the WLAN Name for each of the Top 5 WLANs in the access point RF Domain.
SSID	Displays the SSID for the WLAN.

- **Radio Traffic Utilization** - Refer to the following table to identify radios requiring administration to improve performance:

Max. User Rate	Displays the maximum recorded user rate in kbps.
Top 5 Radios	Displays five radios with the best average quality in the RF Domain.
Radio ID	Lists each radio's administrator defined hostname and its radio designation (radio 1, radio 2 or radio 3).
Radio Type	Displays the radio type as either 5 GHz or 2.4 GHz.

- **Client Traffic Utilization** - Refer to the following table for wireless client related information:

Top 5 Clients	Displays the five clients having the highest average quality indices.
Client MAC	Displays the client's hard coded MAC address used a hardware identifier.
Vendor	Lists each client's manufacturer.

- **Wireless Security** - Indicates the security of the transmission between WLANs and the wireless clients they support. This value indicates the vulnerability of the WLANs.

RF Domain Threat Level	Indicates the threat from wireless clients trying to find network vulnerabilities within the RF Domain. The threat level is represented by an integer.
Rogue APs	Lists the number of unauthorized APs detected by RF Domain member devices.
WIPS Events	Lists the number of WIPS events generated by RF Domain member devices.

- **Traffic Statistics** - Displays the following information for transmitted and received packets:

Total Bytes	Displays the total bytes of data transmitted and received within the RF Domain.
Total Packets	Lists the total number of data packets transmitted and received within the RF Domain.
User Data Rate	Lists the average user data rate within the RF Domain.
Bcast/Mcast Packets	Displays the total number of broadcast/multicast packets transmitted and received within the RF Domain.
Management Packets	Displays the total number of management packets processed within the RF Domain.
Tx Dropped Packets	Displays the total number of dropped data packets within the RF Domain.
Rx Errors	Displays the number of errors encountered during data transmission within the RF Domain. The higher the error rate, the less reliable the connection or data transfer.

- **SMART RF Activity** - Refer to the table below for details:

Time Period	Lists the time period when Smart RF calibrations or adjustments were made to compensate for radio coverage holes or interference.
Power Changes	Displays the total number of radio transmit power changes that have been made using SMART RF within the RF Domain.

Channel Changes	Displays the total number of radio transmit channel changes that have been made using SMART RF within the RF Domain.
Coverage Changes	Displays the total number of radio coverage area changes that have been made using SMART RF within the RF Domain.

4. Periodically click **Refresh** to update the contents of the screen to their latest values.

Inventory

The **Inventory** screen displays an inventory of RF Domain member APs, connected wireless clients, wireless LAN utilization and radio availability. Use this screen to evaluate if the inventory adequately supports client needs within the wireless network radio coverage area.


To display RF Domain inventory statistics:

1. Select the **Statistics → System** menu from the Web UI.
2. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

3. Select **Inventory** from the RF Domain menu.

The **Inventory** screen displays.

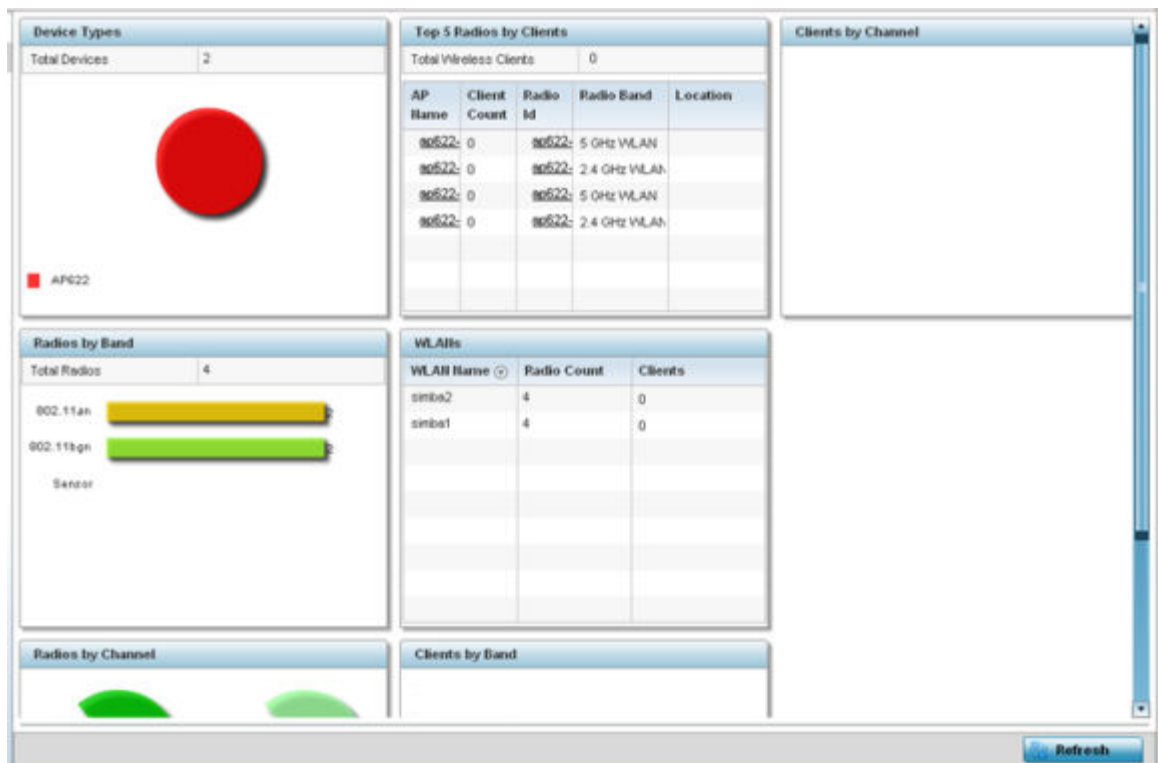

4. Review the different fields displayed on the **RF Domain > Inventory** screen:
- **Device Types** - Displays the total members in the RF Domain. The exploded pie chart depicts the distribution of RF Domain members by controller, service platform and AP model type.
 - **Radios by Band** - Displays the total number of radios using 802.11an and 802.11bgn bands within the RF Domain. The number of radios designated as sensors is also represented, to reflect available sensor resources for intrusion detection.
 - **Radios by Channel** - Displays the radio channels utilized by RF Domain member devices in two separate charts. One chart displays for 5 GHz channels and the other for 2.4 GHz channels
 - **Top 5 Radios by Clients** - Refer the following table, which displays the highest 5 performing wireless clients connected to RF Domain members:

Total Wireless Clients	Displays the total number of clients connected to RF Domain members.
AP Name	Displays the clients connected and reporting APs. The AP's name displays as a link that can be clicked to display AP data in greater detail.
Client Count	Displays the number of connected clients to each listed RF Domain member AP.
Radio	Displays each radio's administrator defined hostname and its radio designation (radio 1, radio 2 etc.).
Radio Band	Displays each client's operational radio band.
Location	Displays system assigned deployment location for the client.

- **WLANS** - Refer to this table to review RF Domain WLAN, radio and client utilization. Use this information to help determine whether the WLANs within this RF Domain have an optimal radio and client utilization.
 - **Clients by Band** - This bar graph displays the total number of RF Domain member clients by their IEEE 802.11 radio type.
 - **Clients by Channel** - This pie charts displays the channels used by RF Domain member clients using 5GHz and 2.4GHz radios.
5. Periodically select **Refresh** to update the contents of the screen to their latest values.

Devices

The **Devices** screen displays RF Domain member devices as links that can be selected to troubleshoot members in greater detail. Each device is listed with its factory encoded MAC address, connected client count, radio utilization and network IP address.

To display RF Domain device statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node and select and RF Domain.


To view device information on detected access points:

1. Go to **Statistics → System**.
2. Select an RF Domain from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

3. Select **AP Detection** from the RF Domain menu.

The **AP Detection** screen displays.

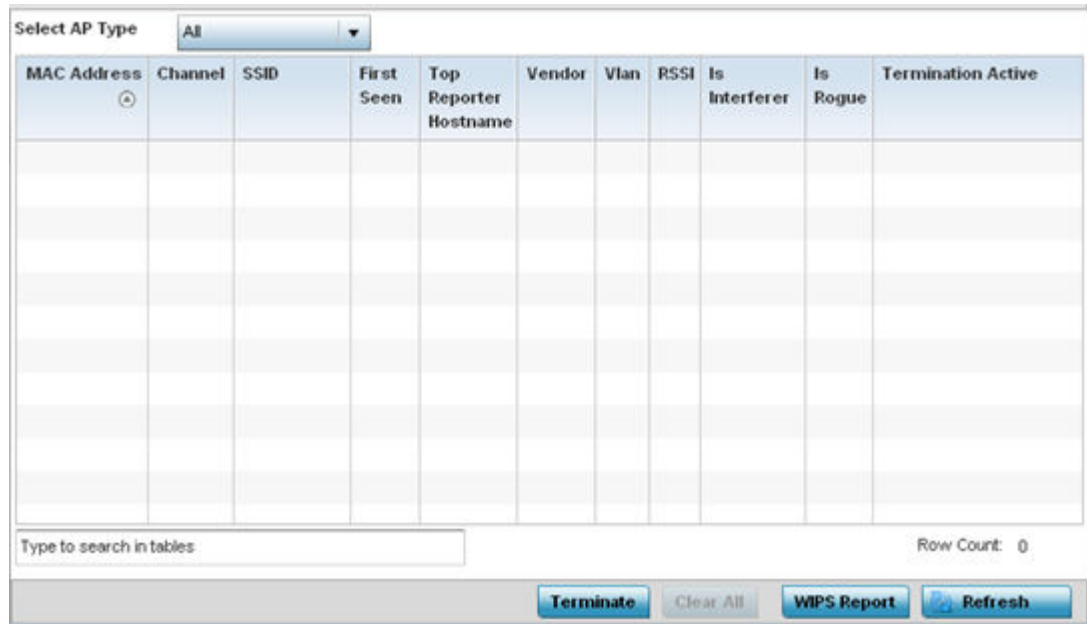

4. Refer the following table for **AP Detection** related information:

Select AP Type	Displays detected AP information based on the option selected from the drop-down menu. The options are: All , Rogue , Interferer , and Termination Active .
MAC Address	Displays the hardware encoded MAC address of each listed AP detected by a RF Domain member device. The MAC address is set at the factory and cannot be modified via the management software. The MAC address displays as a link that you can select to display RF Domain member device information in greater detail.
Channel	Displays the channel of operation used by the detected AP. The channel must be utilized by both the AP and its connected client and be approved for the target deployment country. This is necessary to designate the deployment as legal under FCC guidelines.
SSID	Displays the <i>Service Set ID</i> (SSID) of the network to which the detected AP belongs.
First Seen	Provides a time stamp when the detected AP was first seen by a RF Domain member device.

Top Reporter Hostname	Lists the administrator-assigned hostname of the top performing RF Domain member detecting the listed AP MAC address. Consider this top performer the best resource for information on the detected AP and its potential threat.
Vendor	Lists the manufacturer of the detected AP as an additional means of assessing its potential threat to the members of this RF Domain and its potential for interoperability with RF Domain device members.
VLAN	Lists the numeric VLAN ID (virtual interface) the detected AP was seen on by members of this RF Domain.
RSSI	Displays the <i>Received Signal Strength Indicator</i> (RSSI) of the detected AP. Use this variable to help determine whether a device connection would improve network coverage or add noise.
Is Interferer	Lists whether the detected device exceeds the administrator defined RSSI threshold (from -100 to -10 dBm) determining whether a detected AP is classified as an interferer.
Is Rogue	Displays whether the detected device has been classified as a rogue device whose detection threatens the interoperation of RF Domain member devices.
Termination Active	Lists whether Air Termination is active and applied to the detected AP. Air termination lets you terminate the connection between your WLAN and any AP or client associated with it. If the rogue device is an AP, all client association with the AP are removed. If the rogue device is a client, its connection with the AP is terminated. Note, Air Termination is disabled by default.

5. Click **Terminate** to remove the selected AP from RF Domain membership.
6. Click **Clear All** to reset the statistics counters to zero and begin a new data collection.
7. Click **WIPS Report** to launch a sub-screen to save a WIPS report (in PDF format) to a specified location.



Note

You are recommended to capture RF Domain member AP's client connection terminations in a format that can be archived externally.

8. Click **Refresh** to update the statistics counters to their latest values.

Device Upgrade

The **Device Upgrade** screen displays information about devices, within the selected RF Domain, receiving updates and devices performing updates. Use this screen to gather version data, install firmware images, boot an image and upgrade status.

To view the device upgrade statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Device Upgrade** from the RF Domain menu.

The **Device Upgrade** screen displays.

Upgraded By	Type	Device Hostname	History Id	Last Update Status	Time Last Upgraded	Retries Count	State
ap6532-34503C	ap6532	ap6532-A6572C	5C-0E-8B-34-50-3	-	Fri Oct 4 2013 02:24:05 AM	0	done
ap6532-34503C	ap6532	ap6532-A6572C	5C-0E-8B-34-50-3	Reboot failed, re	Fri Nov 2 2012 05:39:37 AM	1	done
ap6532-34503C	ap6532	ap6532-3118E0	5C-0E-8B-34-50-3	-	Fri Nov 2 2012 05:29:31 AM	0	done
ap6532-34503C	ap6532	ap6532-A65738	5C-0E-8B-34-50-3	-	Tue Aug 28 2012 02:39:53 AM	0	done
ap6532-34503C	ap6532	ap6532-3118E0	5C-0E-8B-34-50-3	-	Tue Aug 28 2012 02:39:41 AM	0	done
ap6532-34503C	ap6532	ap6532-A65724	5C-0E-8B-34-50-3	-	Sun Aug 26 2012 04:51:35 AM	0	done
ap6532-34503C	ap6532	ap6532-3118E0	5C-0E-8B-34-50-3	-	Sun Aug 26 2012 04:50:26 AM	0	done
ap6532-34503C	ap6532	ap6532-A65724	5C-0E-8B-34-50-3	-	Fri Aug 24 2012 05:32:42 AM	0	done
ap6532-34503C	ap6532	ap6532-3118E0	5C-0E-8B-34-50-3	-	Fri Aug 24 2012 05:32:19 AM	0	done
ap6532-34503C	ap6532	ap6532-3118E0	5C-0E-8B-34-50-3	-	Fri Aug 24 2012 04:06:22 AM	0	done no-reboot
ap6532-34503C	ap6532	ap6532-A65724	5C-0E-8B-34-50-3	-	Fri Aug 24 2012 04:06:10 AM	0	done no-reboot
ap6532-34503C	ap6532	ap6532-A6572C	5C-0E-8B-34-50-3	-	Fri Aug 24 2012 03:37:29 AM	0	done

Type to search in tables Row Count: 58

5. Refer the following table for **Device Upgrade** related information:

Upgraded By	Lists the name of the device performing an update on behalf of a RF Domain member peer device.
Type	Displays the model of the device receiving an update. With introduction of heterogeneous adoption, it is no longer necessary that the updating access point must be of the same model as the access point receiving the update. For more information on heterogeneous adoption, see the introduction in Web UI Features on page 25.
Device Hostname	Lists the administrator-assigned hostname of each device receiving an update from a RF Domain member.
History ID	Lists the RF Domain member device's MAC address along with a history ID appended to it for each upgrade operation.
Last Update Status	Displays the last status message from the RF Domain member device performing the upgrade operation.
Time Last Upgraded	Displays the date and time of the last firm ware image upgrade operation.
Retries Count	Lists the number of retries needed for each listed RF Domain member update operation.
State	Lists whether the upgrade operation is completed, in-progress, failed or whether an update was made without a device reboot.

6. Click **Clear History** to remove the upgrade records for RF Domain member devices.
7. Click **Refresh** to update the screen's statistics counters to their latest values.

Wireless Clients

The **Wireless Clients** screen displays device information for wireless clients connected to RF Domain member APs. Review this content to determine whether a client should be removed from AP association within the selected RF Domain.

To review a RF Domain's connected wireless clients:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Wireless Clients** from the RF Domain menu.

The **Wireless Clients** screen displays.

MAC Address	IP Address	IPv6 Address	Hostname	Role	Client Identity	Vendor	Band	AP Hostname	Radio MAC	WLAN	VLAN	Last Active	RF Domain Name
24:77:03:4E:AC:8C	32.32.1.36	fe80::21b7::	Symbol-PC		Unknown	Intel Corp	11an	ap6532-A65	5C-0E-	110test	32	Tue Mar	rt 1
98:0C:82:46:67:54	33.33.0.14		android-adsobe		Unknown	Samsung E	11bgn	ap6532-A65	5C-0E-	RF1VA	33	Tue Mar	rt 1

Type to search in tables Row Count: 2

[Disconnect All Clients](#)
[Disconnect Client](#)
[Refresh](#)

5. Refer the following table for **Wireless Clients** related information:

MAC Address	Displays the hostname (MAC address) of each listed wireless client. This address is hard-coded at the factory and can not be modified. The hostname address displays as a link that you can select to view client configuration and network address information in greater detail.
IP Address	Displays the current IP address the wireless client is using for a network identifier.
IPv6 Address	Displays the current IPv6 formatted IP address a listed wireless client is using as a network identifier. IPv6 is the latest revision of the <i>Internet Protocol</i> (IP) designed to replace IPv4. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.

Hostname	Displays the unique administrator-assigned hostname when the client connection was defined.
Role	Lists the role assigned to each controller, service platform or AP managed client.
Client Identity	Lists the client's operating system identity (Android, Windows, etc.).
Vendor	Displays the manufacturer of each listed client as a means of assessing its support capabilities with the WiNG managed wireless infrastructure.
Band	Lists the 2.4 or 5 GHz radio band the listed client is currently utilizing with its connected access point within the RF Domain.
AP Hostname	Displays administrator-assigned hostname of the AP reporting client stats to RF Domain member devices.
Radio MAC	Displays the hardware-encoded MAC address of the AP radio to which the client is currently connected within the RF Domain.
WLAN	Displays the name of the WLAN the wireless client is currently using for its AP interoperation within the RF Domain.
VLAN	Displays the VLAN ID the client's connected AP has defined for use as a virtual interface.
Last Active	Displays the last detected transmit and receive activity for the listed client within the WiNG managed device radio coverage area.
RF Domain Name	Lists each client's RF Domain membership as defined by its connected access point and associated controller or service platform.

6. Click **Disconnect All Clients** to terminate each listed client's connection and RF Domain membership.
7. Select a specific client MAC address, and click the **Disconnect Client** to terminate this client's connection and RF Domain membership.
8. Periodically click **Refresh** button to update the statistics counters to their latest values.

Wireless LANs

The **Wireless LANs** screen displays the name, network identification and radio quality information for the WLANs currently being utilized by RF Domain members.

To view wireless LAN statistics for RF Domain members:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Wireless LANs** from the RF Domain menu.

The **Wireless LANs** screen displays.

	WLAN Name	SSID	Traffic Index	Radio Count	Tx Bytes	Tx User Data Rate	Rx Bytes	Rx User Data Rate
	11Dtest	11Dtest	0 (Very Low)	8	23,539,676	0 kbps	3,585,609	0 kbps
	RF1WLAN1	RF1WLAN1	0 (Very Low)	6	41,948	0 kbps	140,970	0 kbps
	RF1WLAN2	RF1WLAN2	0 (Very Low)	6	360	0 kbps	361	0 kbps
	RF1WLANEXT	RF1EXT	0 (Very Low)	6	0	0 kbps	0	0 kbps
Type to search in tables								
								Row Count: 4
						Disconnect All Clients	Refresh	

5. Refer the following table for **Wireless LANs** related information:

WLAN Name	Displays the name assigned to the WLAN upon its creation within the controller, service platform managed or AP network.
SSID	Displays the SSID assigned to the WLAN.
Traffic Index	Displays the traffic utilization index of each listed WLAN, which measures how efficiently the traffic medium is used. It's defined as the percentage of current throughput relative to the maximum possible throughput. Traffic indices are: <ul style="list-style-type: none"> • 0 – 20 - (very low utilization) • 20 – 40 - (low utilization) • 40 – 60 - (moderate utilization) • 60 and above - (high utilization)
Radio Count	Displays the number of radios deployed in each listed WLAN within this RF Domain. Use this information to assess each WLAN's client support capabilities in respect to the number of radio's available and their operational band.
Tx Bytes	Displays the average number of packets (in bytes) sent on each listed RF Domain member WLAN.
Tx User Data Rate	Displays the average data rate per user for packets transmitted on each listed RF Domain member WLAN.
Rx Bytes	Displays the average number of packets (in bytes) received on each listed RF Domain member WLAN.
Rx User Data Rate	Displays the average data rate per user for packets received on each listed RF Domain member WLAN.

6. Click **Disconnect All Clients** to terminate all client's WLAN membership.

4. Refer the following table for **Radio Status** information:

Radio	Displays the name assigned to each listed RF Domain member access point radio. Each name displays as a link that you can be select to view radio information in greater detail.
Radio MAC	Displays the MAC address as a factory-set, numerical value hard coded for each listed RF Domain member AP radio.
Radio Type	Defines whether the radio is operating within the 2.4 or 5 GHz radio band
Access Point	Displays the user assigned name of the RF Domain member access point to which the radio resides.
AP Type	Lists the model type of each listed RF Domain member AP.
State	Displays the radio's current operational state.
Channel Current (Config)	Displays the current channel each listed RF Domain member AP radio is broadcasting on.
Power Current (Config)	Displays the current power level the radio is using for transmissions.
Clients	Displays the number of clients currently connected to each listed RF Domain member AP radio. Supported models can manage up to 256 clients per radio.

5. Click **Refresh** to update the statistics counters to their latest values.

Radio RF Statistics

The **RF Statistics** screen lists signal, noise ratio, transmit and receive, error and retry information for RF Domain member access point radios. Individual radios can be selected as needed to display (and troubleshoot) information specific to that RF Domain member radio resource.

To view the RF Domain radio statistics:

1. Select the **Statistics → System** menu from the Web UI.
2. Select an RF Domain from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

3. Expand **Radios** and select **RF Statistics**.

The **RF Statistics** screen displays.

Tx Dropped	Displays the total number of packets dropped by each RF Domain member AP radio during transmission. This includes user data as well as management overhead packets.
Rx Errors	Displays the total number of packets containing errors, received by each RF Domain member AP radio.

5. Click **Refresh** to update the statistics counters to their latest values.

Bluetooth

The AP7602, AP7612, AP7632, AP7662, AP8432 and AP8533 model access points utilize a built in Bluetooth chip for specific Bluetooth functional behaviors in a WiNG managed network.

These platforms can use their Bluetooth classic enabled radio to sense other Bluetooth enabled devices and report device data (MAC address, RSSI and device calls) to an ADSP server for intrusion detection. If the device presence varies in an unexpected manner, ADSP can raise an alarm.

AP-8432 and AP-8533 model access points support Bluetooth beaconing to emit either iBeacon or Eddystone- URL beacons. The access point's Bluetooth radio sends non-connectable, undirected LE (*low-energy*) advertisement packets on a periodic basis. These advertisement packets are short, and they are sent on Bluetooth advertising channels that conform to already-established iBeacon and Eddystone-URL standards. Portions of the advertising packet are still customizable, however.



Note

The WiNG 7.1 release does not support Bluetooth on AP505 and AP510 model access points. This feature will be supported in future releases.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Click **Bluetooth**.

The **Statistics** → **RF Domain** → **Bluetooth** screen displays.

Bluetooth Radio Statistics	
Name	bluetooth1
Alias	ap8533-06FB6E B1
Radio State	Off
Off Reason	shutdown in cfg
Radio MAC	74-67-F7-06-FB-72
Hostname	ap8533-06FB6E
Device MAC	74-67-F7-06-FB-6E
AP Location	rf2
Radio Mode	BT-Sensor
Beacon Period	1,000
Beacon Type	Eddystone-URL1
Last Error	

[Refresh](#)

5. Refer the following table for **Bluetooth** related information:

Name	Lists the administrator assigned name of the access point's Bluetooth radio.
Alias	If an alias has been defined for the AP it is listed here. The alias value is expressed in the form of <hostname>: B<Bluetooth_radio_number>. If the administrator has defined a hostname for the AP, it is used in place of the AP's default hostname.
Radio State	Displays the current operational state (On/Off) of the Bluetooth radio.
Off Reason	If the Bluetooth radio is offline, this field states the reason.
Radio MAC	Lists the Bluetooth radio's factory-encoded MAC address serving as this device's hardware identifier on the network.
Hostname	Lists the AP's hostname as its network identifier.
Device MAC	Lists the AP's factory-encoded MAC address serving as this device's hardware identifier on the network.
AP Location	Lists the AP's administrator-assigned deployment location.
Radio Mode	Lists an access point's Bluetooth radio functional mode as either btsensor or le-beacon .
Beacon Period	Lists the Bluetooth radio's beacon transmission period from 100 -10,000 milliseconds.
Beacon Type	Lists the type of beacon currently configured.
Last Error	Lists descriptive text on any error that is preventing the Bluetooth radio from operating.

6. Click **Refresh** to update the statistics counters to their latest values.

Portal	Displays a numerical portal Index ID for the each mesh client connected to a RF Domain member AP radio.
Portal Radio MAC	Displays the hardware encoded MAC address for each radio in the RF Domain's mesh network.
Connect Time	Displays the total connection time for each listed client within the RF Domain's mesh network.

6. Click **Refresh** to update the statistics counters to their latest values.

Mesh Point

Mesh networking provides users wireless access to broadband applications anywhere (even in a moving vehicle). Initially developed for secure and reliable military battlefield communications, mesh technology supports public safety, public access and public works. Mesh technology reduces the expense of wide-scale networks, by leveraging Wi-Fi enabled devices already deployed.

Mesh points are APs dedicated to mesh network support. Mesh points capture and disseminate their own data and serve as a relay for other nodes.



Note

The WiNG 7.1 release does not support MeshConnex on AP505 and AP510 model access points. This feature will be supported in future releases.

The **RF Domain > Mesh Point** option has the following sub-menus:

- [MCX Geographical View](#) on page 1064.
- [MCX Logical View](#) on page 1065.
- [Device Type](#) on page 1067.
- [Device Brief Info](#) on page 1073.
- [Device Data Transmit](#) on page 1079.

MCX Geographical View

The **MCX Geographical View** displays a map where icons of each device in the RF Domain is overlaid. This provides a geographical overview of the location of each RF Domain member device.

To display the MCX Geographic View:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.


The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mesh Point** from the RF Domain menu.

The **MCX Geographical View** screen displays by default.

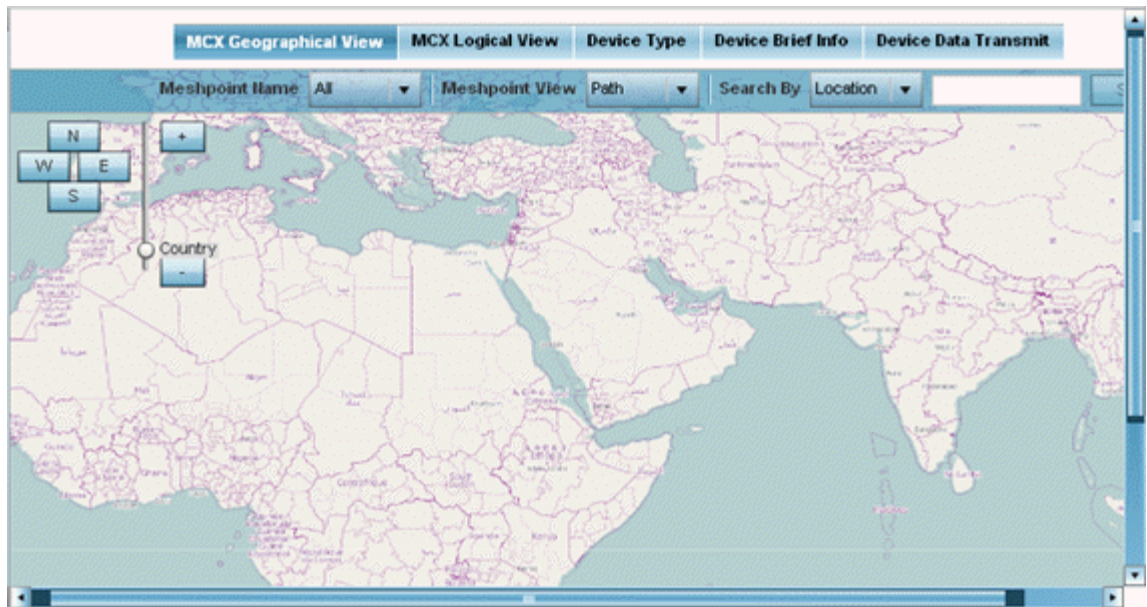

This screen displays a map overlaid with icons of each device deployed within the selected RF Domain. Use this screen for an overview of geographical location of RF Domain member mesh devices.

5. Use the **N**, **W**, **E** and **S** buttons to scroll the map up, down or side-ways in the North, East, West and South directions. Use the slider next to these buttons to zoom in and out. The available fixed zoom levels are **World**, **Country**, **State**, **Town**, **Street** and **House**.
6. Use the **Meshpoint Name** drop-down menu to select the mesh point name from the list displayed. Or, select **All** to view mesh statistics for all mesh points within the selected RF Domain.
7. Use the **Meshpoint View** drop-down menu to specify the view type as either **Path** or **Neighbor**.
8. Use the **Search By** drop-down menu to specify the search range as: **Location**, **Device MAC** or **Hostname**.
9. Based on the **Search by** option specified, enter the search criteria in the **Search** field, and click **Search**.
10. Click **Maximize** for full-screen view.
11. Periodically, click **Refresh** to update the status of the screen.

MCX Logical View

The **MCX Logical View** screen provides a logical representation of mesh point statistics.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an RF Domain from the list.


The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mesh Point** from the RF Domain menu.

The **MCX Geographical View** screen displays by default.

5. Click **MCX Logical View**.

The **MCX Logical View** screen displays.

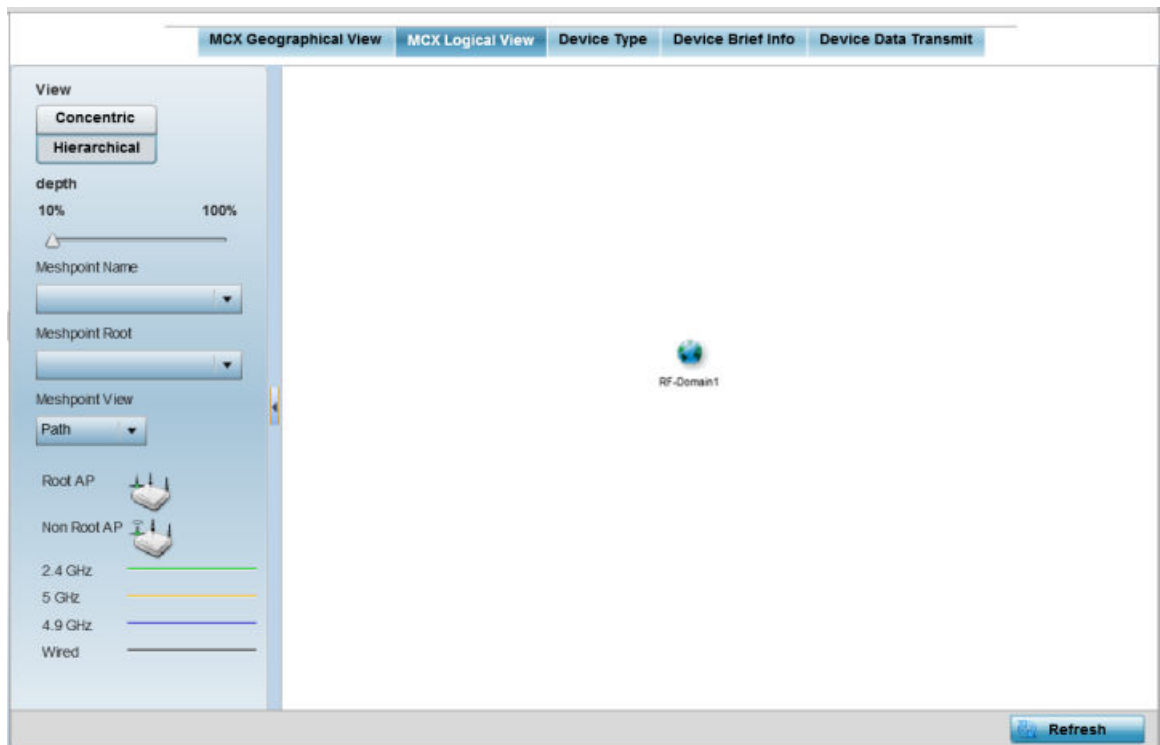

This screen has two panes. The left-hand pane provides filter options to help you define the display format. The right-hand pane displays mesh statistics based on the filters specified by you in the left-hand pane.

In the left-hand pane:

6. Specify the **View** format as **Concentric** or **Hierarchical**.

The **Concentric** view displays the mesh as a concentric arrangement of devices, with the mesh's root node at the centre and the other mesh devices arranged in circles around it.

The **Hierarchical** view displays the mesh's root node at the top of the mesh tree, and the relationship of the mesh nodes are displayed as such.

7. Use the **Meshpoint Name** drop-down menu to select the mesh point. The graphical representation of the selected mesh point is displayed in the right-hand view area.
8. Use the **Meshpoint Root** drop-down to select the mesh root. Or, select **All Roots**.

9. To further refine the display, use the **Meshpoint View** drop-down menu to specify the view type as either **Path** or **Neighbor**.
10. Periodically click **Refresh** to update the status of the screen.

Device Type

To view mesh point statistics for RF Domain member access points and their connected clients:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mesh Point** from the RF Domain menu.

The **MCX Geographical View** screen displays by default.

5. Click **Device Type**.

The **Device Type** screen displays by default.

The screenshot shows a web interface with two main panels. The top-left panel is titled 'Root' and is currently empty. The top-right panel is titled 'Non Root' and displays a grid of six mesh point cards. Each card shows a 'Demo MeshPo' icon, a title 'Demo MeshPo', and a MAC address: AA-11-00-00-00-00, AA-22-00-00-00-00, AA-11-00-00-00-00, AA-33-00-00-00-00, AA-44-00-00-00-00, and BB-33-00-00-00-00. Below these panels is a 'MeshPoint Details' section with a tabbed interface. The 'General' tab is selected, showing a table with the following data:

Mesh Point Name	MAC	Hostname	Configured as Root	Is Root	Meshpoint Identifier	Interface ID	Radio Interface	Next Hop IPID	Next Hops use time	Root Hops	Root MP ID	Root bound time	IFID Count
Demo MeshPo	AA-11-00-00-00-00		✗ No	✗ No	10-10-10-1					10-10-10-1	AA-00-BB-		13
Demo MeshPo	AA-22-00-00-00-00		✗ No	✗ No	10-10-10-1					10-10-10-1	00-00-00-C		13
Demo MeshPo	AA-11-00-00-00-00		✗ No	✗ No	10-10-10-1					10-10-10-1	AA-00-BB-		13
Demo MeshPo	AA-33-00-00-00-00		✗ No	✗ No	10-10-10-1					10-10-10-1	00-00-00-C		13
Demo MeshPo	AA-44-00-00-00-00		✗ No	✗ No	10-10-10-1					10-10-10-1	AA-00-BB-		13

A 'Refresh' button is located at the bottom right of the table.

This screen has the following elements:

- The **Root** field - the top, left-hand pane that displays the Mesh ID and MAC Address of the configured root mesh points in the RF Domain.
- The **Non Root** field - the top, right-hand pane that displays the Mesh ID and MAC Address of all configured non-root mesh points in the RF Domain. displays the Mesh ID and MAC Address of all configured non-root mesh points in the RF Domain.
- The **MeshPoint Details** table- the bottom pane that displays the following tabs: **General, Path, Root, Multicast Path, Neighbors, Security** and **Proxy**. Refer to the following:

6. Click the **General** tab.

Refer the following table for the **General** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
MAC	Displays the MAC Address of each configured mesh point in the RF Domain.
Hostname	Displays the administrator assigned hostname for each configured mesh point in the RF Domain.
Configured As Root	Indicates whether a mesh point is configured to act as a root device. (Yes/No).
Is Root	A root mesh point is defined as a mesh point connected to the WAN and provides a wired backhaul to the network (Yes/No).
Meshpoint Identifier	The MP identifier is used to distinguish between other mesh points both on the same device and on other devices. This is used by a user to setup the preferred root configuration.
Interface ID	The IFID uniquely identifies an interface associated with the MPID. Each mesh point on a device can be associated with one or more interfaces.
Next Hop IFID	Lists the ID of the interface on which the next hop for the mesh network can be found.
Next Hops Use Time	Lists the time when the next hop in the mesh network was last utilized.
Root Hops	Number of hops to a root and should not exceed 4 in general practice. If using the same interface to both transmit and receive, then you will get approximately half the performance every additional hop out.
Root MP ID	Displays the ID of the root device for this mesh point.
Root Bound Time	Displays the duration this mesh point has been connected to the mesh root.
IFID Count	Displays the number of <i>Interface IDs</i> (IFIDs) associated with all the configured mesh points in the RF Domain.

7. Click the **Path** tab.

Refer the following table for detailed information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a Mesh Point ID.
Next Hop IFID	The Interface ID of the mesh point that traffic is being directed to.
Is Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network (Yes/No).
MiNT ID	Displays the MiNT Protocol ID for the global mint area identifier. This area identifier separates two overlapping mint networks and need only be configured if the administrator has two mint networks that share the same packet broadcast domain.
Hops	Number of hops to a root and should not exceed 4 in general practice. If using the same interface to both transmit and receive, then you will get approximately half the performance every additional hop out.
Mobility	Displays whether the mesh point is a mobile or static node. Displays True when the device is mobile and False when the device is not mobile.
Metric	A measure of the quality of the path. A lower value indicates a better path.
State	Indicates whether the path is currently Valid of Invalid .
Binding	Indicates whether the path is bound or unbound.
Timeout	The timeout interval in milliseconds. The interpretation this value will vary depending on the value of the state.
Sequence	The sequence number also known as the destination sequence number. It is updated whenever a mesh point receives new information about the sequence number from <i>RREQ</i> , <i>RREP</i> , or <i>RERR</i> messages that may be received related to that destination.

8. Click the **Root** tab.

Refer the following table for the **Root** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Recommended	Displays the root that is recommended by the mesh routing layer.
Root MPID	The MP identifier is used to distinguish between other mesh points both on the same device and on other devices. This is used by a user to setup the preferred root configuration.
Next Hop IFID	The IFID of the next hop. The IFID is the MAC Address on the destination device.
Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Bound	Indicates whether the root is bound or unbound.

Metric	Displays the computed path metric between the neighbor and their root mesh point.
Interface Bias	This field lists any bias applied because of the Preferred Root Interface Index.
Neighbor Bias	This field lists any bias applied because of the Preferred Root Next-Hop Neighbor IFID.
Root Bias	This field lists any bias applied because of the Preferred Root MPID.

9. Click the **Multicast Path** tab.

Refer the following table for the **Multicast Path** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Subscriber Name	The identifier is used to distinguish between other mesh points both on the same device and on other devices. This is used by a user to setup the preferred root configuration.
Subscriber MPID	Lists the subscriber ID to distinguish between other mesh point neighbor devices in the RF Domain.
Group Address	Displays the MAC address used for the Group in the mesh point.
Timeout	The timeout interval in seconds. The interpretation this value will vary depending on the value of the state. If the state is Init or In Progress , the timeout duration has no significance. If the state is Enabled , the timeout duration indicates the amount of time left before the security validity check is initiated. If the state is Failed , the timeout duration is the amount of time after which the system will retry.

10. Click the **Neighbors** tab.

Refer the following table for the **Neighbors** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	Displays the MeshID (MAC Address) of each mesh point in the RF Domain.
Neighbor MP ID	The MAC Address that the device uses to define the mesh point in the device that the neighbor is a part of. It is used to distinguish the device that is the neighbor.
Neighbor IFID	The MAC Address used by the interface on the neighbor device to communicate with this device. This may define a particular radio or Ethernet port that communicates with this device over the mesh.
Root MP ID	The MAC Address of the neighbor's root mesh point.
Is Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network. Yes if the mesh point that is the neighbor is a root mesh point or No if the mesh point that is the neighbor is not a root mesh point.
Mobility	Displays whether the mesh point is a mobile or static node. Displays True when the device is mobile and False when the device is not mobile.

Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Mesh Root Hops	The number of devices between the neighbor and its root mesh point. If the neighbor is a root mesh point, this value will be 0 . If the neighbor is not a root mesh point but it has a neighbor that is a root mesh point, this value will be 1 . Each mesh point between the neighbor and its root mesh point is counted as 1 hop.
Resourced	Displays whether the mesh point has been resourced or not. The Mesh Connex neighbor table can contain more neighbors than the AP supports. If the neighbor is resourced, it will take away a one of the resources for a wireless client device to be used for meshing. Displays True when the device is resourced and False when the device is not.
Link Quality	An abstract value depicting the quality of the mesh link between the device and the neighbor. The range is from 0 (weakest) to 100 (strongest).
Link Metric	This value shows the computed path metric from the device to the neighbor mesh point using this interface. The lower the number the better the possibility that the neighbor will be chosen as the path to the root mesh point.
Root Metric	The computed path metric between the neighbor and their root mesh point.
Rank	<p>The rank is the level of importance and is used for automatic resource management.</p> <ul style="list-style-type: none"> • 8 – The current next hop to the recommended root. • 7 – Any secondary next hop to the recommended root to has a good potential route metric. • 6 – A next hop to an alternate root node. • 5 – A downstream node currently hopping through to get to the root. • 4 – A downstream node that could hop through to get to the root, but is currently not hopping through any node (look at authentication, as this might be an issue). • 3 – A downstream node that is currently hopping through a different node to get to the root, but could potentially have a better route metric if it hopped through this node. • 2 – Reserved for active peer to peer routes and is not currently used. • 1 - A neighbor bound to the same recommended root but does not have a potential route metric as good as the neighbors ranked 8 and 7. • 0 – A neighbor bound to a different root node. • -1 – Not a member of the mesh as it has a different mesh ID. <p>All client devices hold a rank of 3 and can replace any mesh devices lower than that rank.</p>
Age	Displays the number of milliseconds since the mesh point last heard from this neighbor.

11. Click the **Security** tab.

Refer the following table for the **Security** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Interface ID	The IFID uniquely identifies an interface associated with the MPID. Each mesh point on a device can be associated with one or more interfaces.
State	Displays the Link State for each mesh point: <ul style="list-style-type: none"> • Init - indicates the link has not been established or has expired. • Enabled - indicates the link is available for communication. • Failed - indicates the attempt to establish the link failed and cannot be retried yet. • In Progress - indicates the link is being established but is not yet available.
Timeout	Displays the maximum value in seconds that the link is allowed to stay in the In Progress state before timing out.
Keep Alive	Yes indicates that the local MP will act as a supplicant to authenticate the link and not let it expire (if possible). No indicates that the local MP does not need the link and will let it expire if not maintained by the remote MP.

12. Click the **Proxy** tab.

Refer the following table for the **Proxy** tab information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Proxy Address	Displays the MAC Address of the proxy used in the mesh point.
Age	Displays the age of the proxy connection for each of the mesh points in the RF Domain.
Proxy Owner	The owner (MPID) is used to distinguish the device that is the neighbor.
Persistence	Displays the persistence (duration) of the proxy connection for each of the mesh points in the RF Domain.
VLAN	The VLAN ID used as a virtual interface with this proxy. A value of 4095 indicates that there is no VLAN ID.

13. Periodically click **Refresh** to update the status of the screen.

Device Brief Info

To view mesh point statistics for RF Domain member APs and their connected clients:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mesh Point** from the RF Domain menu.

The **MCX Geographical View** screen displays by default.

5. Click **Device Brief Info** from the top of the screen.

The **Device Brief Info** screen displays.

The screenshot displays two panels from the Device Brief Info screen. The top panel, titled "All Roots and Mesh Points", is a table with 8 columns: MAC, Mesh Point Name, Hostname, Configured as Root, Is Root, Meshpoint Identifier, Root Hops, and IFID Count. It lists 10 "Demo MeshPoint" entries with various MAC addresses and consistent values for the other columns. The bottom panel, titled "MeshPoint Details", shows a detailed view for MAC address AA-11-00-00-00. It includes tabs for General, Path, Root, Multicast Path, Neighbors, Security, and Proxy. The table below the tabs lists details for three "Demo MeshP" entries, including MAC, Hostname, Configured as Root, Is Root, Meshpoint Identifier, Next Hop IFID, Next Hops use time, Root Hops, Root MP ID, Root bound time, and IFID Count.

MAC	Mesh Point Name	Hostname	Configured as Root	Is Root	Meshpoint Identifier	Root Hops	IFID Count
AA-11-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-22-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-11-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-33-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-44-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
BB-33-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-11-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-33-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
AA-55-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13
BB-33-00-00-00-00	Demo MeshPoint		✗ No	✗ No	10-10-10-10-10-AA-	10-10-10-10-11-11	13

Mesh Point Name	MAC	Hostname	Configured as Root	Is Root	Meshpoint Identifier	Next Hop IFID	Next Hops use time	Root Hops	Root MP ID	Root bound time	IFID Count
Demo MeshP	AA-11-00-00		✗ No	✗ No	10-10-10-10			10-10-10-10	AA-00-BB-1		13
Demo MeshP	AA-22-00-00		✗ No	✗ No	10-10-10-10			10-10-10-10	00-00-00-00		13
Demo MeshP	AA-11-00-00		✗ No	✗ No	10-10-10-10			10-10-10-10	AA-00-BB-1		13

The **Device Brief Info** has the following sections:

- **All Roots and Mesh Points** - The top pane
- **MeshPoint Details** - The bottom pane

6. Refer the following table for the **All Roots and Mesh Points** table information:

MAC	Displays the MAC Address of each configured mesh point in the RF Domain.
Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Hostname	Displays the administrator assigned hostname for each configured mesh point in the RF Domain.
Configured as Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network (Yes/No).
Is Root	Indicates whether the current mesh point is a root mesh point (Yes/No).
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Root Hops	The number of devices between the selected mesh point and the destination device.
IFID Count	Displays the number of Interface IDs (IFIDs) associated with all the configured mesh points in the RF Domain.

The **Mesh Point Details** field on the bottom portion of the screen displays the following tabs:

- [General](#)
- [Path](#)
- [Root](#)
- [Multicast Path](#)
- [Neighbors](#)
- [Security](#)
- [Proxy](#)

7. Refer the following table for the **General** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
MAC	Displays the MAC Address of each configured mesh point in the RF Domain.
Hostname	Displays the administrator assigned hostname for each configured mesh point in the RF Domain.
Configured as Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network (Yes/No).
Is Root	Indicates whether the current mesh point is a root mesh point (Yes/No).
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Interface ID	Uniquely identifies an interface associated with the ID. Each mesh point on a device can be associated with one or more interfaces.
Root Interface	Lists the radio interface on which the mesh point operates

Next Hop IFID	Identifies the ID of the interface on which the next hop for the mesh network can be found.
Next Hop Use Time	Lists the time when the next hop in the mesh network topology was last utilized.
Root Hops	Number of hops to a root and should not exceed 4 in general practice. If using the same interface to both transmit and receive, then you will get approximately half the performance every additional hop out.
Root MP ID	Lists the interface ID of the interface on which the next hop for the mesh network can be found.
Root Bound Time	Displays the duration this mesh point has been connected to the mesh root.
IFID Count	Displays the number of IFIDs associated with all the configured mesh points in the RF Domain.

8. Refer the following table for the **Path** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Destination	The MAC Address used by the interface on the neighbor device to communicate with this device. This may define a particular radio or Ethernet port that communicates with this device over the mesh.
Is Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network (Yes/No).
MiNT ID	Displays the MiNT Protocol ID for the global mint area identifier. This area identifier separates two overlapping mint networks and need only be configured if the administrator has two mint networks that share the same packet broadcast domain.
Next Hop IFID	The Interface ID of the mesh point that traffic is being directed to.
Hops	Number of hops to a root and should not exceed 4 in general practice. If using the same interface to both transmit and receive, then you will get approximately half the performance every additional hop out.
Mobility	Displays whether the mesh point is a mobile or static node. Displays True when the device is mobile and False when the device is not mobile.
Metric	A measure of the quality of the path. A lower value indicates a better path.
State	Indicates whether the path is currently Valid of Invalid .
Binding	Indicates whether the path is bound or unbound .

Timeout	The timeout interval in seconds. The interpretation this value will vary depending on the value of the state. If the state is Init or In Progress , the timeout duration has no significance. If the state is Enabled , the timeout duration indicates the amount of time left before the security validity check is initiated. If the state is Failed , the timeout duration is the amount of time after which the system will retry.
Sequence	The sequence number also known as the destination sequence number. It is updated whenever a mesh point receives new information about the sequence number from <i>RREQ</i> , <i>RREP</i> , or <i>RERR</i> messages that may be received related to that destination.

9. Refer the following table for the **Root** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Recommended	Displays the root that is recommended by the mesh routing layer.
Root MPID	The MP identifier is used to distinguish between other mesh points both on the same device and on other devices. This is used by a user to setup the preferred root configuration.
Next Hop IFID	The IFID of the next hop. The IFID is the MAC Address on the destination device.
Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Bound	Indicates whether the root is bound or unbound.
Metric	Displays the computed path metric between the neighbor and their root mesh point.
Interface Bias	This field lists any bias applied because of the Preferred Root Interface Index.
Neighbor Bias	This field lists any bias applied because of the Preferred Root Next-Hop Neighbor IFID.
Root Bias	This field lists any bias applied because of the Preferred Root MPID.

10. Refer the following table for the **Multicast Path** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Subscriber Name	Lists the subscriber name is used to distinguish between other mesh point neighbors both on the same device and on other devices.
Subscriber MPID	Lists the subscriber ID to distinguish between other mesh point neighbors both on the same device and on other devices.

Group Address	Displays the MAC address used for the Group in the mesh point.
Timeout	The timeout interval in seconds. The interpretation this value will vary depending on the value of the state. If the state is Init or In Progress , the timeout duration has no significance. If the state is Enabled , the timeout duration indicates the amount of time left before the security validity check is initiated. If the state is Failed , the timeout duration is the amount of time after which the system will retry.

11. Refer the following table for the **Neighbors** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Neighbor MP ID	The MAC Address that the device uses to define the mesh point in the device that the neighbor is a part of. It is used to distinguish the device that is the neighbor.
Neighbor IFID	The MAC Address used by the interface on the neighbor device to communicate with this device. This may define a particular radio or Ethernet port that communicates with this device over the mesh.
Root MP ID	The mesh point ID of the neighbor's root mesh point.
Is Root	A root mesh point is defined as a mesh point that is connected to the WAN and provides a wired backhaul to the network. Yes if the mesh point that is the neighbor is a root mesh point or No if the Mesh Point that is the neighbor is not a root.
Mobility	Displays whether the mesh point is a mobile or static node. Displays True when the device is mobile and False when the device is not mobile.
Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Mesh Root Hops	The number of devices between the neighbor and its root mesh point. If the neighbor is a root mesh point, this value will be 0 . If the neighbor is not a root mesh point but it has a neighbor that is a root mesh point, this value will be 1 . Each mesh point between the neighbor and its root mesh point is counted as 1 hop.
Resourced	Displays whether the mesh point has been resourced or not. The Mesh Connex neighbor table can contain more neighbors than the AP supports. If the neighbor is resourced, it will take away a one of the resources for a wireless client device to be used for meshing. Displays True when the device is resourced and False when the device is not.
Link Quality	An abstract value depicting the quality of the mesh link between the device and the neighbor. The range is from 0 (weakest) to 100 (strongest).

Link Metric	This value shows the computed path metric from the device to the neighbor mesh point using this interface. The lower the number the better the possibility that the neighbor will be chosen as the path to the root mesh point.
Root Metric	The computed path metric between the neighbor and their root mesh point.
Rank	<p>The rank is the level of importance and is used for automatic resource management.</p> <ul style="list-style-type: none"> • 8 – The current next hop to the recommended root. • 7 – Any secondary next hop to the recommended root to has a good potential route metric. • 6 – A next hop to an alternate root node. • 5 – A downstream node currently hopping through to get to the root. • 4 – A downstream node that could hop through to get to the root, but is currently not hopping through any node (look at authentication, as this might be an issue). • 3 – A downstream node that is currently hopping through a different node to get to the root, but could potentially have a better route metric if it hopped through this node. • 2 – Reserved for active peer to peer routes and is not currently used. • 1 - A neighbor bound to the same recommended root but does not have a potential route metric as good as the neighbors ranked 8 and 7. • 0 – A neighbor bound to a different root node. • -1 – Not a member of the mesh as it has a different mesh ID. <p>All client devices hold a rank of 3 and can replace any mesh devices lower than that rank.</p>
Age	Displays the number of miliseconds since the mesh point last heard from this neighbor.

12. Refer the following table for the **Security** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Radio Interface	This indicates the interface that is used by the device to communicate with this neighbor. The values are 2.4 and 5.8 , indicating the frequency of the radio that is used to communicate with the neighbor.
Interface ID	The IFID uniquely identifies an interface associated with the MPID. Each mesh point on a device can be associated with one or more interfaces.

State	Displays the Link State for each mesh point: <ul style="list-style-type: none"> • Init - indicates the link has not been established or has expired. • Enabled - indicates the link is available for communication. • Failed - indicates the attempt to establish the link failed and cannot be retried yet. • In Progress - indicates the link is being established but is not yet available.
Timeout	Displays the maximum value in seconds that the link is allowed to stay in the In Progress state before timing out.
Keep Alive	Yes indicates that the local MP will act as a supplicant to authenticate the link and not let it expire (if possible). No indicates that the local MP does not need the link and will let it expire if not maintained by the remote MP.

13. Refer the following table for the **Proxy** tab table information:

Mesh Point Name	Displays the name of each configured mesh point in the RF Domain.
Destination Addr	The destination is the endpoint of mesh path. It may be a MAC address or a mesh point ID.
Proxy Address	Displays the MAC Address of the proxy used in the mesh point.
Age	Displays the age of the proxy connection for each of the mesh points in the RF Domain.
Proxy Owner	The owner (MPID) is used to distinguish the device that is the neighbor.
VLAN	The VLAN ID used as a virtual interface with this proxy. A value of 4095 indicates that there is no VLAN ID.

14. Periodically click **Refresh** to update the status of the screen.

Device Data Transmit

To view mesh point statistics for RF Domain member APs and their connected clients:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mesh Point** from the RF Domain menu.

The **MCX Geographical View** screen displays by default.

5. Click **Device Data Transmit** from the top of the screen.

The **Device Data Transmit** screen displays.

Data Bytes (Bytes) Transmitted Bytes Received Bytes Total Bytes	Broadcast Packets Tx Bcast/Mcast Pkts Rx Bcast/Mcast Pkts Total Bcast/Mcast Pkts
Data Packets Throughput (Kbps) Transmitted Packets Received Packets Total Packets	Management Packets Transmitted by the node Received by the node Total Through the domain
Data Rates (bps) Transmit Data Rate Receive Data Rate Total Data Rate	Data Indicators Traffic Index ✘ No Max User Rate
Packets Rate (pps) Transmitting packet rate Receiving packet rate Total packet rate	Data Distribution Neighbor Count Radio Count

6. Review the following transmit and receive statistics for Mesh nodes:

Data Bytes (Bytes): Transmitted Bytes	Displays the total amount of data, in Bytes, transmitted by Mesh Points in the RF Domain.
Data Bytes (Bytes): Received Bytes	Displays the total amount of data, in Bytes, received by Mesh Points in the RF Domain.
Data Bytes (Bytes): Total Bytes	Displays the total amount of data, in Bytes, transmitted and received by Mesh Points in the RF Domain.
Data Packets Throughput (Kbps): Transmitted Packets	Displays the total amount of data, in packets, transmitted by Mesh Points in the RF Domain.
Data Packets Throughput (Kbps): Received Packets	Displays the total amount of data, in packets, received by Mesh Points in the RF Domain.
Data Packets Throughput (Kbps): Total Packets	Displays the total amount of data, in packets, transmitted and received by Mesh Points in the RF Domain.
Data Rates (bps): Transmit Data Rate	Displays the average data rate, in kbps, for all data transmitted by Mesh Points in the RF Domain.
Data Rates (bps): Receive Data Rate	Displays the average data rate, in kbps, for all data received by Mesh Points in the RF Domain.

Data Rates (bps): Total Data Rate	Displays the average data rate, in kbps, for all data transmitted and received by Mesh Points in the RF Domain.
Packets Rate (pps): Transmitting Packet rate	Displays the average packet rate, in packets per second, for all data transmitted and received by Mesh Points in the RF Domain.
Packets Rate (pps): Received Packet rate	Displays the average packet rate, in packets per second, for all data received and received by Mesh Points in the RF Domain.
Packets Rate (pps): Total Packet Rate	Displays the average data packet rate, in packets per second, for all data transmitted and received by Mesh Points in the RF Domain.
Data Packets Dropped and Errors: Tx Dropped	Displays the total number of transmissions that were dropped Mesh Points in the RF Domain.
Data Packets Dropped and Errors: Rx Errors	Displays the total number of receive errors from Mesh Points in the RF Domain.
Broadcast Packets: Tx Bcast/Mcast Pkts	Displays the total number of broadcast and multicast packets transmitted from Mesh Points in the RF Domain.
Broadcast Packets: Rx Bcast/Mcast Pkts	Displays the total number of broadcast and multicast packets received from Mesh Points in the RF Domain.
Broadcast Packets: Total Bcast/Mcast Pkts	Displays the total number of broadcast and multicast packets transmitted and received from Mesh Points in the RF Domain.
Management Packets: Transmitted by the node	Displays the total number of management packets that were transmitted through the Mesh Point node.
Management Packets: Received by the node	Displays the total number of management packets that were received through the Mesh Point node.
Management Packets: Total Through the domain	Displays the total number of management packets that were transmitted and received through the Mesh Point node.
Data Indicators: Traffic Index	Displays True or False to indicate whether or not a traffic index is present.
Data Indicators: Max User Rate	Displays the maximum user throughput rate for Mesh Points in the RF Domain.
Data Distribution: Neighbor Count	Displays the total number of neighbors known to the Mesh Points in the RF Domain.
Data Distribution: Neighbor Count	Displays the total number of neighbor radios known to the Mesh Points in the RF Domain.

7. Select the **Refresh** button to update the screen's statistics counters to their latest values.

SMART RF - Overview

When invoked by an administrator, Smart RF (*Self-Monitoring At Run Time*) instructs access point radios to change to a specific channel and begin beaconing using the maximum available transmit power. Within a well-planned deployment, any RF

Domain member access point radio should be reachable by at least one other radio. Smart RF records signals received from its neighbors as well as signals from external, unmanaged radios. AP-to-AP distance is recorded in terms of signal attenuation. The information from external radios is used during channel assignment to minimize interference.

The **RF Domain > SMART RF** option has the following sub-menus:

- [SMART RF - Summary](#) on page 1082.
- [SMART RF - Details - Details](#) on page 1086.
- [SMART RF - Details - Energy Graph](#) on page 1087.
- [SMART RF - History](#) on page 1088.

SMART RF - Summary

The **Summary** screen enables administrators to assess the efficiency of RF Domain member device channel distributions, sources of interference potentially requiring Smart RF adjustments, top performing RF Domain member device radios and the number of power, channel and coverage changes required as part of a Smart RF performance compensation activity.

To view the Smart RF summary for RF Domain member access point radios:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.


The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **SMART RF** from the RF Domain menu.

The **SMART RF Summary** screen displays by default.

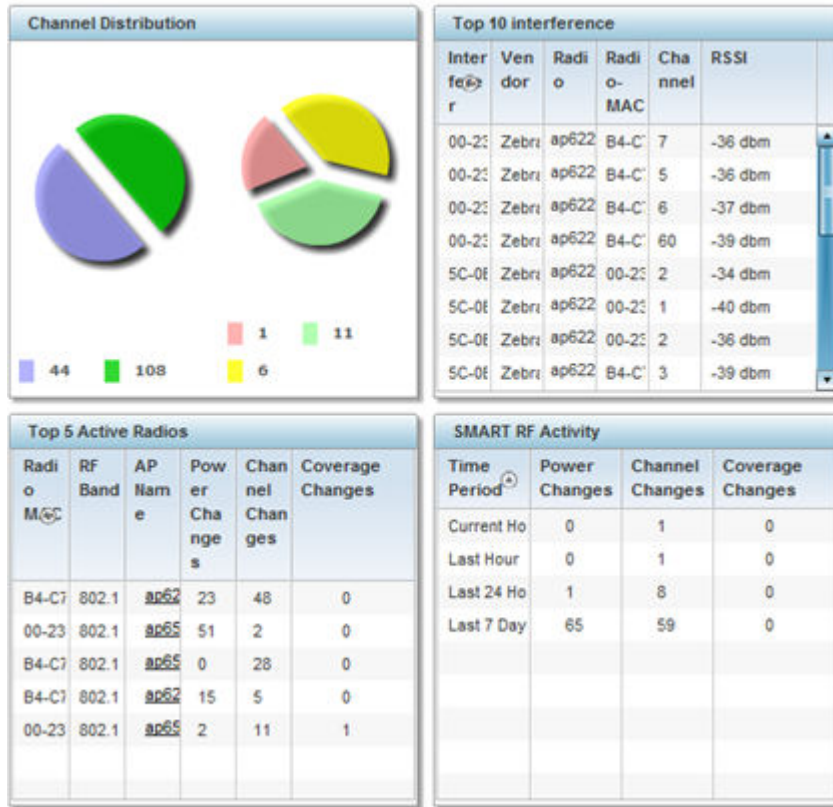

The Summary screen displays the following SMART RF related statistics:

5. Use the **Channel Distribution** area to determine how RF Domain member devices are utilizing different channels to optimally support connect devices and avoid congestion and interference with neighboring devices. Use this data to assess whether the channel spectrum is being effectively utilized and whether channel changes are warranted to improve RF Domain member device performance.
6. Review the **Top 10 interference** table to assess RF Domain member devices whose level of interference exceeds the threshold set (from -100 to -10 dBm) for acceptable performance.

Interferer	Lists the administrator defined name of the interfering RF Domain member device.
Vendor	Displays the vendor name (manufacturer) of the interfering RF Domain member device radio.
Radio MAC	Displays the factory encoded hardware MAC address assigned to the RF Domain member device radio.
Channel	Displays the channel each of the 10 poorly performing RF Domain member devices was detected on. Numerous interfering devices on the same channel could define the need for better channel segregation to reduce the levels of detected interference.
RSSI	Lists a RSSI (<i>received signal strength indication</i>) in dBm for those RF Domain member devices falling into the poorest performing 10 devices based on the administrator defined threshold value.

7. Review the **Top 5 Active Radios** to assess the significance of any Smart RF initiated compensations versus their reported top performance.

Radio MAC	Lists the hardware-encoded MAC address of each listed top performing RF Domain member device radio.
RF Band	Displays the top performing radio's operation band. This may help administrate whether more changes were required in the 2.4 GHz band then 5 GHz or vice versa.
AP Name	Lists the administrator-assigned AP name used to differentiate from other RF Domain member AP radios. The name displays in the form of a link that you can select to vie device information in greater detail.
Power Changes	Displays the number of Smart RF initiated power level changes reported for this top performing RF Domain member radio.
Channel Changes	Displays the number of Smart RF initiated channel changes reported for this top performing RF Domain member radio.
Coverage Changes	Displays the number of Smart RF initiated coverage changes reported for this top performing RF Domain member radio.

8. Refer to the **SMART RF Activity** table to view the trending of Smart RF compensations.

Time Period	Lists the frequency Smart RF activity is trended for the RF Domain. Trending periods include the Current Hour, Last 24 Hours or the Last Seven Days . Comparing Smart RF adjustments versus the last seven days enables an administrator to assess whether periods of interference and poor performance were relegated to just specific periods.
Power Changes	Displays the number of Smart RF initiated power level changes needed for RF Domain member devices during each of the three trending periods. Determine whether power compensations were relegated to known device outages or if compensations were consistent over the course of a day or week.
Channel Changes	Lists the number of Smart RF initiated channel changes needed for RF Domain member devices during each of the three trending periods. Determine if channel adjustments were relegated to known device count increases or decreases over the course of a day or week.
Coverage Changes	Displays the number of Smart RF initiated coverage changes needed for RF Domain member devices during each of the three trending periods. Determine if coverage changes were relegated to known device failures or known periods of interference over the course of a day or week.

9. Click **Refresh** to update the Summary to its latest RF Domain Smart RF information.

SMART RF - Details - Details

To view Smart RF stats for RF Domain member AP radios:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an RF Domain from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand **SMART RF** from the RF Domain menu.
5. Click **Details**.

The **SMART RF Details** screen displays.

The screenshot shows the SMART RF Details screen. On the left is a table listing AP radios. On the right is a details panel for a selected radio, showing general information and a neighbors table.

AP Hostname	Radio MAC Address	Radio Type	State	Channel	Power
ap6511-8A4	5C-0E-8B-8E-2F-E	11bgn	offline		0
ap621-E9F8	5C-0E-8B-F3-2B-C	11bgn	offline		0
ap6532-347	5C-0E-8B-22-DD-	11an	norma	52w	4
ap81xx-711	B4-C7-99-78-61-E	11an	offline		0
ap6532-347	5C-0E-8B-21-77-7	11bgn	norma	1	10
ap6532-347	5C-0E-8B-22-DF-v	11bgn	norma	1	10
ap6532-347	5C-0E-8B-22-A2-	11bgn	norma	1	10
ap6532-347	5C-0E-8B-22-64-C	11bgn	norma	1	10
ap6532-347	5C-0E-8B-22-06-E	11an	norma	100w	17
ap650-2433	B4-C7-99-18-62-F	11an	offline		0
ap8232-7F0	FC-0A-81-8D-2E-I	11an	offline		0
ap650-2433	B4-C7-99-18-4A-I	11bgn	offline		0
ap7131-135	B4-C7-99-EC-96-C	11an	offline		0
ap7532-160	FC-0A-81-A3-10-	11an	norma	36	17
	5C-0F-8B-71-78-4	11an	norma	10Rw	4

The details panel for the selected radio (ap6532-347) shows:

- General**
 - Radio MAC Address: 5C-0E-8B-21-56-00
 - Radio Index: 0
 - Radio Type: 11bgn
 - State: normal
 - AP Hostname: ap6532-347854
 - Channel: 1
 - Power: 10
- Neighbors**

AP Hostname	Attenuation	Channel	Radio MAC Address	Power	Radio id
ap7502-B	87	11	FC-0A-81-I	10	0

6. Refer to the **General** field to review and assess the radio's:
 - factory-encoded hardware MAC address.
 - administrator-assigned index.
 - 802.11 radio type.
 - current operational state.
 - AP's administrator-assigned hostname.
 - current operating channel and power.
7. Refer to the **Neighbors** table to review the attributes of neighbor radio resources available for Smart RF radio compensations for other RF Domain member device

radios. Select individual AP hostnames to review RF Domain member radios in greater detail.

**Note**

Attenuation is a measure of the reduction of signal strength during transmission. Attenuation is the opposite of amplification, and is normal when a signal is sent from one point to another. If the signal attenuates too much, it becomes unintelligible. Attenuation is measured in decibels.

The radio's current operating channel is also displayed, as is the radio's hard coded MAC address transmit power level and administrator assigned ID.

8. Select **Refresh** to update the screen to its latest values.

SMART RF - Details - Energy Graph

The **SMART RF Energy Graph** screen displays the RF Domain member AP's radio's operating channel, noise level and neighbor count. Use this information to assess whether Smart RF neighbor recovery is needed in respect to poorly performing radios.

To access the SMART RF Energy Graph screen:


1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand **SMART RF** from the RF Domain menu.
5. Click **Details**.
6. Select the **Energy Graph** tab.

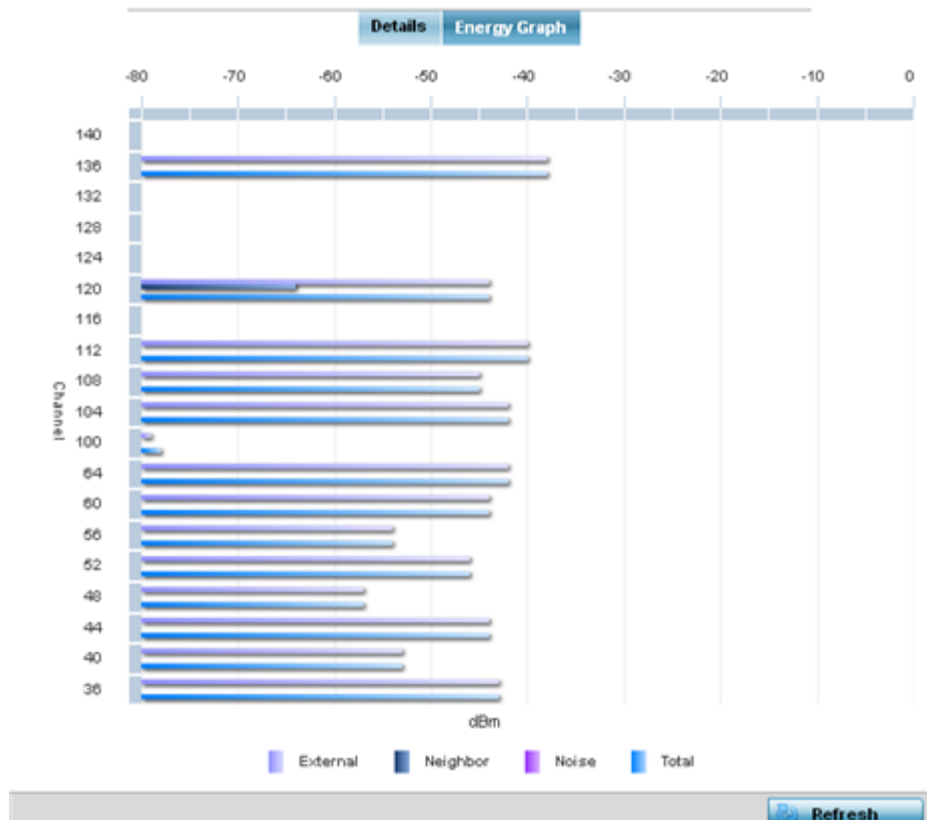

7. Select **Refresh** to update the screen to its latest values.

SMART RF - History

Select **Smart RF History** to review Smart RF events impacting RF Domain member devices.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand **SMART RF** from the RF Domain menu.
5. Click the **SMART RF History** tab.

Time	Type	Description
5/17/2013 12:54:52 AM	Interference Recovery	ap622-5864A0 Radio 2 (B4-C7-99-58-62-F0) channel changed from 136 to 112
5/17/2013 01:22:14 AM	AP Unadopted	ap622-5864A0 AP B4-C7-99-58-64-A0 master connectivity lost
5/13/2013 03:59:06 AM	AP Adopted	ap622-5864A0 AP B4-C7-99-58-64-A0 master connectivity established
5/13/2013 03:59:06 AM	Radio Added	ap622-5864A0 Radio 1 (B4-C7-99-58-61-10) added
5/13/2013 03:59:06 AM	Radio Added	ap622-5864A0 Radio 2 (B4-C7-99-58-62-F0) added
5/13/2013 04:01:24 AM	AP Unadopted	ap622-5864A0 AP B4-C7-99-58-64-A0 master connectivity lost
5/13/2013 04:01:24 AM	Radio Removed	ap622-5864A0 Radio 1 (B4-C7-99-58-61-10) removed
5/13/2013 04:01:24 AM	Radio Removed	ap622-5864A0 Radio 2 (B4-C7-99-58-62-F0) removed
5/13/2013 04:02:05 AM	AP Adopted	ap622-5864A0 AP B4-C7-99-58-64-A0 master connectivity established
5/13/2013 04:02:05 AM	Radio Added	ap622-5864A0 Radio 1 (B4-C7-99-58-61-10) added
5/13/2013 04:02:05 AM	Radio Added	ap622-5864A0 Radio 2 (B4-C7-99-58-62-F0) added
5/17/2013 01:22:14 AM	Radio Removed	ap622-5864A0 Radio 1 (B4-C7-99-58-61-10) removed
5/17/2013 01:25:38 AM	Interference Recovery	ap622-5864A0 Radio 2 (B4-C7-99-58-62-F0) channel changed from 112 to 120
5/19/2013 11:58:06 PM	Interference Recovery	ap622-5864A0 Radio 1 (B4-C7-99-58-61-10) channel changed from 4 to 8

Type to search in tables Row Count: 303

[Refresh](#)

The **SMART RF History** screen displays the following RF Domain member historical data:

Time	Displays the time stamp when Smart RF status was updated on behalf of a Smart RF adjustment within the selected RF Domain.
Type	Lists a high-level description of the Smart RF activity initiated for a RF Domain member device.
Description	Provides a more detailed description of the Smart RF event in respect to the actual Smart RF calibration or adjustment made to compensate for detected coverage holes and interference.

6. Select **Refresh** to update the screen to its latest values.

WIPS

WIPS (*Wireless Intrusion Protection System*) provides continuous protection against wireless threats and acts as an additional layer of security complementing wireless VPNs and traditional encryption and authentication schemes. WIPS utilizes dedicated sensor devices designed to actively detect and locate unauthorized access points within a controller or service platform managed RF Domain.

Refer to the WIPS screens to review a client blacklist and rogue device detection events reported by RF Domain member APs.

For more information, see:

- [WIPS Client Blacklist](#)
- [WIPS Events](#)

Total Time	Displays the duration the unauthorized (now blacklisted) device remained in the RF Domain. This is the duration for which the network was potentially vulnerable to the unauthorized device.
Time Left	Displays the time the blacklisted client remains on the list.

6. Select **Refresh** to update the screen to its latest values.

WIPS Events

Refer to the **WIPS Events** screen to assess WIPS events detected by RF Domain member access point radios and reported to the controller or service platform.

To view the rogue access point statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand **WIPS** from the RF Domain menu.
5. Click **WIPS Event**.

The **WIPS Event** screen displays.

Event Name	Reporting AP	Originating Device	Detector Radio	Time Reported
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 08:08:39 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 10:16:36 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 6 2015 04:24:30 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 03:14:12 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 08:03:12 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 08:01:12 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 10:47:57 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 6 2015 10:53:57 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 03:07:07 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Mon May 25 2015 08:10:27 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Mon May 25 2015 10:59:44 AM
ad-hoc-violation	ap7502-BC1340	60-03-08-A7-93-E0	1	Fri May 15 2015 01:22:14 AM

6. Review the **WIPS Events** screen information:

Event Name	Displays the event name of the intrusion detected by a RF Domain member AP radio.
Reporting AP	Displays the MAC address (hardware identifier) of the RF Domain member AP reporting the event.
Originating Device	Displays the MAC address of the device generating the event.

Detector Radio	Displays the index number of the AP's radio detecting the event.
Time Reported	Displays a time stamp of when the event was reported by the RF Domain member AP radio.

7. Select **Clear All** to clear the statistics counters and begin a new data collection.
8. Select **Refresh** to update the screen to its latest values.

Captive Portal

A *captive portal* is an access policy for providing temporary and restrictive access to the controller or service platform managed wireless network. Captive portal authentication is used primarily for guest or visitor access to the network, but is increasingly being used to provide authenticated access to private network resources when 802.1X EAP is not a viable option. Captive portal authentication does not provide end-user data encryption, but it can be used with static *WEP*, *WPA-PSK* or *WPA2-PSK* encryption.

To view the captive portal statistics for RF Domain member devices:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Captive Portal** from the RF Domain menu.

The **Captive Portal** screen displays.

Client MAC	Hostname	Client IP	Client IPv6	Captive Portal	Port Name	Authentication	WLAN	VLAN	Remaining Time
04-E5-36-29-2B-F1		172.16.1.8		ALPHANET-C		Pending	QUEST-ACC	666	0s
24-A0-74-12-4B-2D	VNiris-Phone	157.235.100	fe80::c0e:a8c	ALPHANET-C		Pending	QUEST-ACC	666	0s
40-0E-85-0B-D9-49		172.16.1.9		ALPHANET-C		Pending	QUEST-ACC	666	0s
54-26-96-54-A0-A5		172.16.1.163		ALPHANET-C		Pending	QUEST-ACC	666	0s
54-44-08-3E-00-98		172.16.1.38		ALPHANET-C		Pending	QUEST-ACC	666	0s
54-79-75-8B-A5-80	Windows-Ph	157.235.100		ALPHANET-C		Pending	QUEST-ACC	666	0s
70-3E-AC-44-D9-C6	Azil-Iphone6i	172.16.1.134	fe80::4d0:7c0	ALPHANET-C		Pending	QUEST-ACC	666	0s
90-3C-92-06-5C-F3		0.0.0.0		ALPHANET-G		Pending	QUEST-ACC	666	0s
9C-D3-5B-97-D3-87		172.16.1.77		ALPHANET-C		Pending	QUEST-ACC	666	0s
9C-F3-87-4C-F6-F6		0.0.0.0		ALPHANET-C		Pending	QUEST-ACC	666	0s
A4-D1-02-55-2D-CA		172.16.1.161		ALPHANET-C		Pending	QUEST-ACC	666	0s
C0-33-5E-2B-36-B7	StephenSurf	172.16.1.139	fe80::4081:b0	ALPHANET-C		Success	QUEST-ACC	666	4h 15m 38s
C4-43-8F-F5-B2-F5		172.16.1.80		ALPHANET-G		Pending	QUEST-ACC	666	0s
D8-58-E6-7F-79-04		172.16.1.196		ALPHANET-G		Pending	QUEST-ACC	666	0s
E8-50-8B-80-CF-E0		172.16.1.111		ALPHANET-C		Pending	QUEST-ACC	666	0s

Type to search in tables Row Count: 16

[Refresh](#)

5. Refer the table below for **Captive Portal** related statistical data:

Client MAC	Displays the MAC address of each listed client requesting captive portal access to the controller, service platform or AP managed network. This address can be selected to display client information in greater detail.
Host Name	Displays the administrator-assigned hostname of the device requesting captive portal access to the network's RF Domain resources.
Client IP	Displays the IPv4 formatted address of each listed client using its connected RF Domain member AP for captive portal access.
Client IPv6	Displays any IPv6 formatted address of any listed client using its connected RF Domain member AP for captive portal access. IPv6 is the latest revision of the IP (<i>Internet Protocol</i>) designed to replace IPv4. IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Captive Portal	Lists the name of the RF Domain captive portal currently being utilized by each listed client.
Port Name	Lists the name virtual port used for captive portal session direction.
Authentication	Displays the authentication status of requesting clients attempting to connect to the controller, service platform or AP via the captive portal.
WLAN	Displays the name of the WLAN the requesting client would use for interoperation with the controller, service platform or AP.
VLAN	Displays the name of the VLAN the client would use as a virtual interface for captive portal operation with the controller, service platform or AP.
Remaining Time	Displays the time after which a connected client is disconnected from the captive portal.

6. Select **Refresh** to update the screen to its latest values.

Application Visibility

RF Domain member devices inspect every byte of each application header packet allowed to pass through the WiNG managed network. When an application is recognized and classified by the WiNG application recognition engine, administrator defined actions can be applied to that specific application. For information on categorizing, filtering and logging the application data allowed to proliferate the WiNG managed network, refer to [Application](#) on page 814 and [Application Group](#) on page 816.




Note

The WiNG 7.1 release does not support DPI on AP505 and AP10 model access points. This feature will be supported in future releases.

To view the application utilization statistics:

1. Select the **Statistics** menu from the Web UI.

2. Expand the **System** node on the top, left-hand side of the screen.
The **System** node expands to display the RF Domains created within the managed network.
3. Select an **RF Domain** from the list.
The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Application Visibility** from the RF Domain menu.
The **Application Visibility > Application** screen displays.

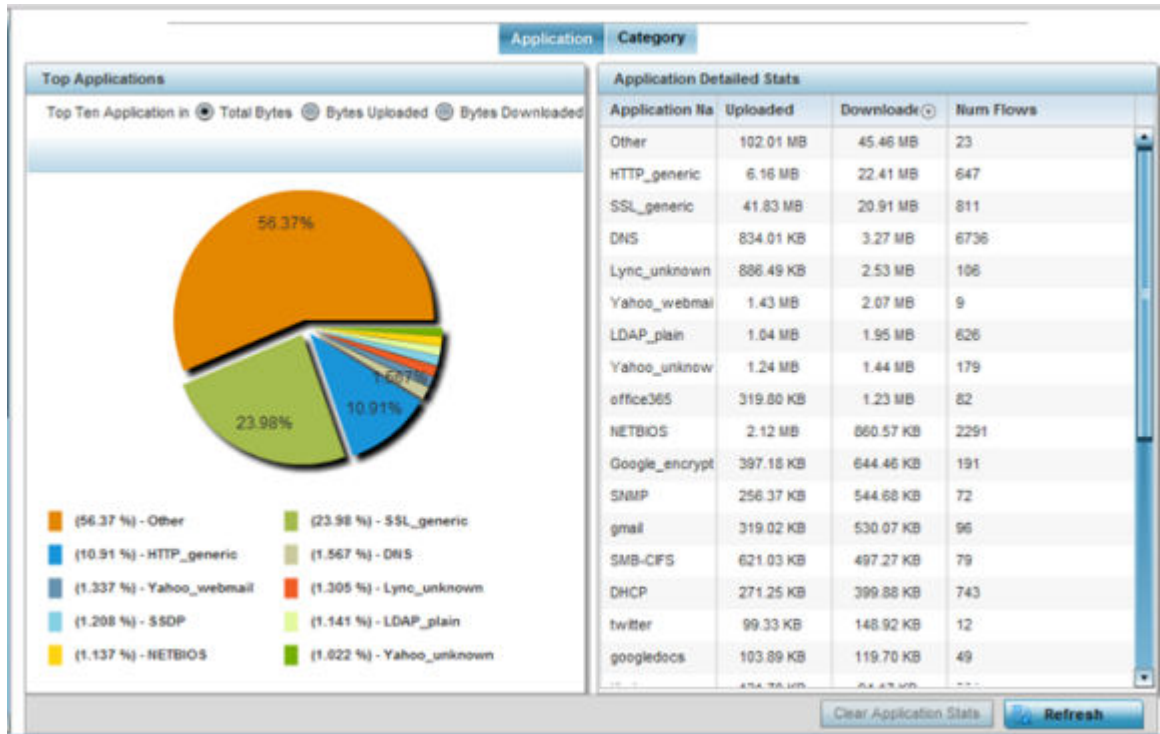

5. Refer to the **Top Applications** graph to assess the most prolific, and allowed, application data passing through RF Domain member devices.

Total Bytes	Displays the top ten RF Domain member utilized applications in respect to total data bytes passing through the RF Domain member WiNG managed network. These are only the administrator allowed applications approved for proliferation within the RF Domain member device.
Bytes Uploaded	Displays the top ten RF Domain member applications in respect to total data bytes uploaded through the RF Domain member WiNG managed network. If this application data is not aligned with application utilization expectations, consider allowing or denying additional applications and categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten RF Domain member applications in respect to total data bytes downloaded from the RF Domain member WiNG managed network. If this application data is not aligned with application utilization expectations, consider allowing or denying additional applications and categories or adjusting their precedence (priority).


- Refer to the **Application Detailed Stats** table to assess specific application data utilization:

Application Name	Lists the RF Domain member allowed application name whose data (bytes) are passing through the WiNG managed network.
Uploaded	Displays the number of uploaded application data (in bytes) passing the through the WiNG managed network.
Downloaded	Displays the number of downloaded application data (in bytes) passing the through the WiNG managed network.
Num Flows	Lists the total number of application data flows passing through RF Domain member devices for each listed application. An application flow can consist of packets in a specific connection or media stream. Application packets with the same source address/port and destination address/port are considered one flow.

- Click **Clear Application Stats** to clear the application assessment data counters and begin a new assessment.
- Periodically, click **Refresh** to update the statistics counters to their latest values.
- Select the **Category** tab.

Categories are existing WiNG or user defined application groups (video, streaming, mobile, audio etc.) that assist administrators in filtering (allowing or denying) application data. For information on categorizing application data, refer to [Application](#) on page 814 and [Application Group](#) on page 816.

The **Application Visibility > Category** screen displays.

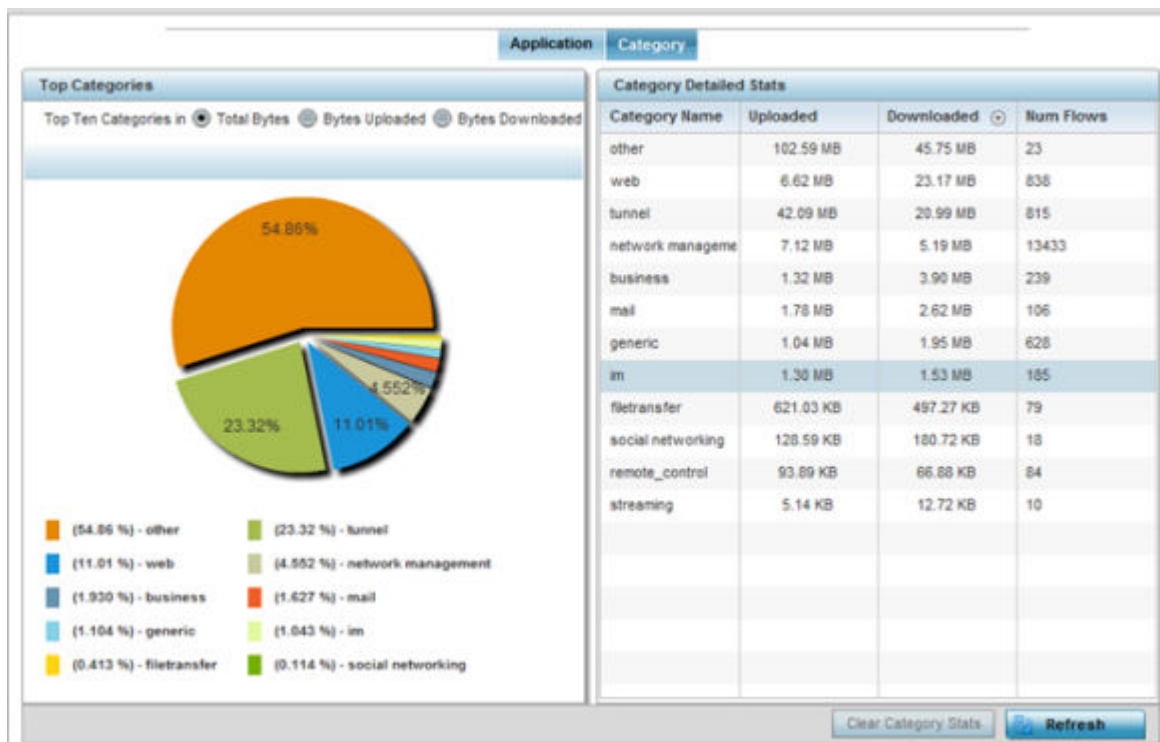

Refer to the **Top Categories** graph to assess the most prolific, and allowed, application data categories utilized by RF Domain member devices.

Total Bytes	Displays the top ten RF Domain member application categories in respect to total data bytes passing through the RF Domain member WiNG managed network. These are only the administrator allowed application categories approved for proliferation within the RF Domain.
Bytes Uploaded	Displays the top ten RF Domain member application categories in respect to total data bytes uploaded through the RF Domain member WiNG managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten RF Domain member application categories in respect to total data bytes downloaded from the RF Domain member WiNG managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories and categories or adjusting their precedence (priority).

Refer to the **Category Detailed Stats** table to assess specific application category data utilization:

Category Name	Lists the RF Domain member allowed category whose application data (in bytes) is passing through the WiNG managed network.
Uploaded	Displays the number of uploaded application category data (in bytes) passing the through the WiNG managed network.
Downloaded	Displays the number of downloaded application category data (in bytes) passing the through the WiNG managed network.
Num Flows	Lists the total number of application category data flows passing through RF Domain member devices. A category flow can consist of packets in a specific connection or media stream. Packets with the same source address/port and destination address/port are considered one flow.

10. Click **Clear Category Stats** to clear the application category assessment data counters and begin a new assessment.
11. Periodically, click **Refresh** to update the statistics counters to their latest values.


View Application Visibility - RF-Domain App-Category Stats

Categories are existing WiNG or user defined application groups (video, streaming, mobile, audio etc.) that assist administrators in filtering (allowing or denying)

application data. For information on categorizing application data, refer to [Application](#) on page 814 and [Application Group](#) on page 816.

1. Select the **Category** tab.

The **Category** screen displays.

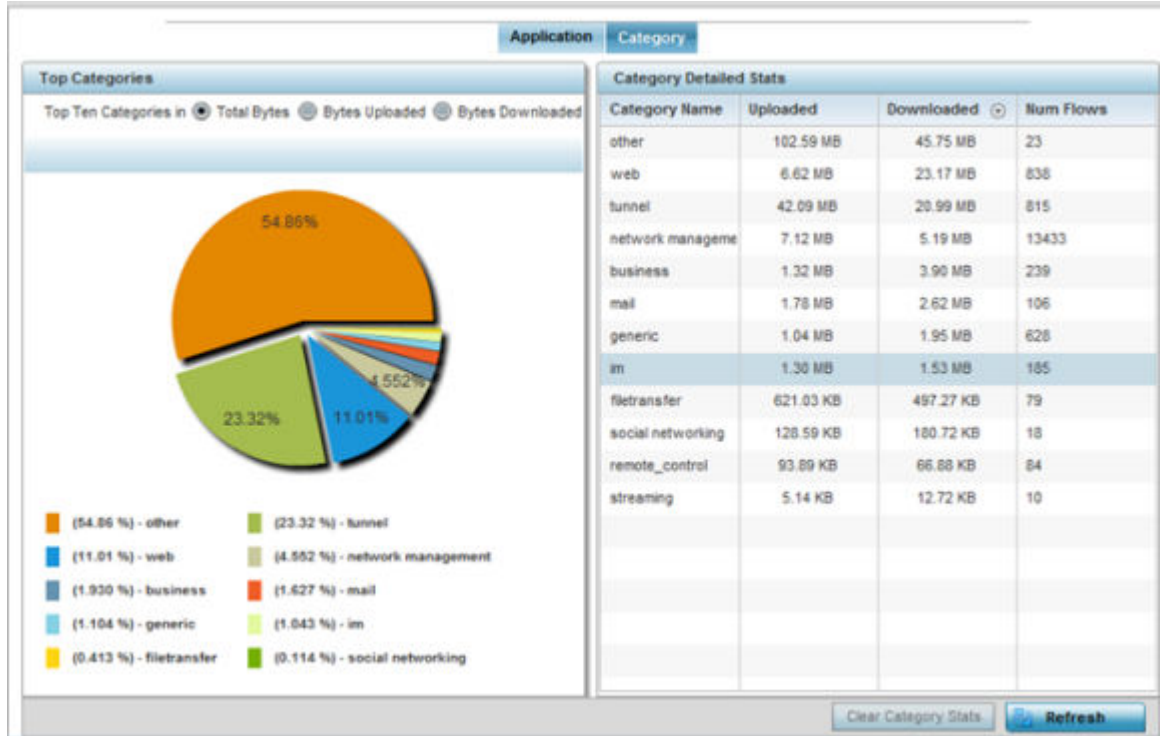

2. Refer to the **Top Categories** graph to assess the most prolific, and allowed, application data categories utilized by RF Domain member devices.

Total Bytes	Displays the top ten RF Domain member application categories in respect to total data bytes passing through the RF Domain member WiNG managed network. These are only the administrator allowed application categories approved for proliferation within the RF Domain.
Bytes Uploaded	Displays the top ten RF Domain member application categories in respect to total data bytes uploaded through the RF Domain member WiNG managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten RF Domain member application categories in respect to total data bytes downloaded from the RF Domain member WiNG managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories and categories or adjusting their precedence (priority).

3. Refer to the **Category Detailed Stats** table to assess specific application category data utilization:

Category Name	Lists the RF Domain member allowed category whose application data (in bytes) is passing through the WiNG managed network.
Uploaded	Displays the number of uploaded application category data (in bytes) passing the through the WiNG managed network.
Downloaded	Displays the number of downloaded application category data (in bytes) passing the through the WiNG managed network.
Num Flows	Lists the total number of application category data flows passing through RF Domain member devices. A category flow can consist of packets in a specific connection or media stream. Packets with the same source address/port and destination address/port are considered one flow.

4. Click **Clear Category Stats** to clear the application category assessment data counters and begin a new assessment.
5. Periodically, click **Refresh** to update the statistics counters to their latest values.

Coverage Hole Detection

Refer to the **Statistics > RF Domain > WIPS** screens to review a client blacklist and events reported by a RF Domain member access point.

Refer to the **Coverage Hole Detection** screens to review any coverage hole adjustments reported by access points in the selected RF-Domain. When coverage hole recovery is enabled and a deployment area radio coverage hole is detected, Smart RF determines the radio's power increase compensation required based on a reporting client's SNR ratio. If a client's SNR is above the administrator threshold, its connected access point's transmit power is increased until the noise rate falls below the threshold.

Coverage Hole Summary

To view a RF Domain's coverage hole summary:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Select an **RF Domain** from the list.

The RF Domain statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

8. Select **Filter** to begin the coverage hole data collection using the access point or client details provided. Refer to the following to review the data reported:

Hostname	Lists the administrator assigned hostname used as each listed access point's network identifier. This is the access point whose client(s) are reporting coverage hole RSSI data.
MAC address	Lists the reporting access point's MAC address.
Radio	Lists the access point radio receiving and reporting coverage hole RSSI data from the listed client MAC.
BSSID	Displays the BSSID (<i>basic service set identifier</i>) included in an access point's wireless packet transmissions. Packets need to go to their correct destination. While a SSID keeps packets within the correct WLAN there is usually multiple access points within each WLAN. A BSSID identifies the correct access point and its connected clients.
Client MAC	Lists each connected client's hardware encoded MAC address. This is the client reporting coverage hole RSSI data to its connected access point radio.
RSSI	Displays the RSSI (<i>Received Signal Strength Indicator</i>) of the detecting Access Radio or client.
Date-Time	Displays the date and time when each listed access point received its coverage hole indecent information.

9. Click **Clear AP Coverage Incidents** to clear the statistics counters and begin a new coverage hole summary for RF Domain member access point radios.
10. Click **Refresh** to update the statistics counters to their latest values.

Access Point Statistics

Access Point statistics screens displays access point *performance, health, version, client support, radio, mesh, interface, DHCP, firewall, WIPS, sensor, captive portal, NTP* and *load* information.

Access point statistics are reported from AP 6511, AP 6521, AP 6532, AP 6522, AP 6562, AP7131, AP 7161, AP 7181 or AP 8132 model access points in either Standalone or Controller AP mode or AP621 or AP650 model access points in *Dependent* mode. Dependent mode access points are reliant on their managing controller for their configuration file management and are unable to provide autonomous operation.

Access point statistics consists of the following:

- [Health](#)
- [Device](#)
- [AP Upgrade](#)
- [Adoption](#)
- [AP Detection](#)
- [Wireless Clients](#)
- [Wireless LANs](#)
- [Policy Based Routing](#)

- Radios
- Mesh
- Interfaces
- RTLS
- PPPoE
- OSPF
- L2TPv3
- VRRP
- Critical Resources
- Network
- DHCP Server
- Firewall
- VPN
- Certificates
- WIPS
- Sensor Servers
- Captive Portal
- Network Time
- Load Balancing
- Environmental Sensor

AP Health

The **Health** screen displays a selected access point's hardware and software version. Use this information to refine the performance of an access point. The Health screen should also be the starting point for troubleshooting an access point, since it displays a high level overview of access point performance efficiency and client support capability.

To view an access point's health:

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The **System** node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of its connected access points.
4. Select **Health** from the left-hand side of the UI.

The screenshot displays the AP Health interface with three main sections:

- Device Details:** A table listing various system parameters such as Hostname (ap6532-34776C), Device MAC (5C-0E-8B-34-77-6C), Primary IP (172.168.6.23), Type (AP6532), Model Number (AP-6532-66040-OUS), RF Domain Name (rf4US), Version (5.8.0.0-029D), Uptime (20 days, 13 hours 42 minutes), CPU (MIPS 24Kc V7.4), RAM (89844 kB), and System Clock (2015-05-26 14:39:59 PDT).
- Radio Utilization:** A table showing network statistics: Total Bytes (0), Total Packets (0), and Total Dropped (24), with separate columns for Transmit and Receive.
- Radio RF Quality Index:** A table showing two radio interfaces (R1 and R2) both with a quality index of 100 (Good) and operating on 2.4 GHz and 5 GHz WLAN respectively.

A Refresh button is located at the bottom right of the interface.

Review the different fields displayed on the **AP > Health** screen.

The **Device Details** field displays the following:

Hostname	Displays the AP's unique name as assigned within the controller or service platform managed network. A hostname is assigned to a device connected to a computer network.
Device MAC	Displays the MAC address of the AP. This is factory assigned and cannot be changed.
Primary IP	Displays the IP address of assigned to this device either through DHCP or through static IP assignment.
Type	Displays the access point's model type.
RF Domain Name	Displays the access point's RF Domain membership. Unlike a controller or service platform, an access point can only belong to one RF Domain based on its model. The domain name appears as a link that can be selected to show RF Domain utilization in greater detail.
Model Number	Displays the access point's model number to help further differentiate the access point from others of the same model series and defined country of operation.
Version	Displays the access point's current firmware version. Use this information to assess whether an upgrade is required for better compatibility.
Uptime	Displays the cumulative time since the access point was last rebooted or lost power.
CPU	Displays the processor core.

RAM	Displays the free memory available with the RAM.
System Clock	Displays the system clock information.

The **Radio RF Quality Index** field the following:

RF Quality Index	Displays access point radios and their quality indices. RF quality index indicates the overall RF performance. The RF quality indices are: <ul style="list-style-type: none"> • 0 – 50 (poor) • 50 – 75 (medium) • 75 – 100 (good)
Radio id	Displays a radio's hardware encoded MAC address The ID appears as a link that can be selected to show radio utilization in greater detail.
Radio Type	Identifies whether the radio is a 2.4 or 5 GHz.

The **Radio Utilization** field displays the following:

Total Bytes	Displays the total bytes of data transmitted and received by the access point since the screen was last refreshed.
Total Packets	Lists the total number of data packets transmitted and received by the access point since the screen was last refreshed.
Total Dropped	List the number of dropped data packets by an access point radio since the screen was last refreshed.

The **Client RF Quality Index** field displays the following:

Worst 5	Displays clients having lowest RF quality within the network.
Client MAC	Displays the MAC addresses of the clients with the lowest RF indices.
Retry Rate	Displays the average number of retries per packet. A high number indicates possible network or hardware problems.

5. Select **Refresh** as needed to update the screen's statistics counters to their latest values.

AP Device

The **Device** screen displays basic information about a selected access point. Use this screen to gather version information, boot image utilization and upgrade status. An access point's sensor server capability, power management and system resources can also be administrated from the **Device** screen.

To view the device statistics:

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Device**.

The screenshot displays the 'System' configuration page for an access point. It is divided into several sections:

- System:** A table with fields: Model Number (AP-6562-66040-0US), Serial Number (10260522200743), Version (5.9.0.0-056R), Boot Partition (secondary), Fallback Enabled (Enabled), Fallback Image Triggered (No), and Next Boot (secondary).
- Firmware Images:** A table with fields: Primary Build Date (11/25/2014 00:36:22), Primary Install Date (12/04/2014 10:40:16), Primary Version (5.8.0.0-006040), Secondary Build Date (04/17/2014 18:58:06), Secondary Install Date (12/04/2014 10:49:33), Secondary Version (5.6.0.0-056R), FPGA Version (Unknown), and PoE Firmware Version (Unknown).
- System Resources:** A table with fields: Available Memory (KB) (40,152), Total Memory (KB) (90,092), Currently Free RAM (44.5%), Recommended Free RAM (10.0%), Current File Descriptors (700), Maximum File Descriptors (25,500), CPU Load 1 Minute (4.2%), CPU Load 5 Minutes (4.2%), CPU Load 15 Minutes (4.1%), and Smart Cache.
- Upgrade Status:** A table with Upgrade Status (Successful).
- IPv6 Name Servers:** A table with columns Name Server and Type.
- Sensor Lock:** Sensor Lock State (No).
- IPv6 Hop Limit:** Hop Limit (64).

A 'Refresh' button is located at the bottom right of the page.

The **System** field displays the following:

Model Number	Displays the model of the selected access point to help distinguish its exact SKU and country of operation.
Serial Number	Displays the numeric serial number set for the access point.
Version	Displays the software (firmware) version on the access point. Use this information to assess whether a firmware upgrade would enhance the access point's support capability.
Boot Partition	Displays the boot partition type.
Fallback Enabled	Displays whether this option is enabled. This method enables a user to store a known legacy version and a new version in device memory. The user can test the new software, and use an automatic fallback, which loads the old version on the access point if the new version fails.
Fallback Image Triggered	Displays whether the fallback image was triggered. The fallback image is an old version of a known and trusted operational firmware image stored in device memory. This allows a user to test a new version of firmware. If the new version fails, you can use the old version to ensure the access point's duty cycle is maintained.
Next Boot	Designates this version as the version used the next time the access point is booted.

The **System Resources** field displays the following:

Available Memory (MB)	Displays the available memory (in MB) available on the access point.
Total Memory (MB)	Displays the access point's total memory.
Currently Free RAM	Displays the access point's free RAM space. If its very low, free up some space by closing some processes.
Recommended RAM	Displays the recommended RAM required for routine operation.
Current File Description	Displays the access point's current file description.
Maximum File Description	Displays the access point's maximum file description.
CPU Load 1 Minute	Lists this access point's CPU utilization over a 1 minute span.
CPU Load 5 Minutes	Lists this access point's CPU utilization over a 5 minute span.
CPU Load 15 Minutes	Lists this access point's CPU utilization over a 15 minute span.

The **Fan Speed** field displays the following:

Number	Displays the number of fans supported on the listed access point. access point models each have unique fan support.
Speed (Hz)	Displays the fan speed in Hz.

The **Temperature** field displays the following:

Number	Displays the number of temperature elements (gauges) used by the access point.
Temperature	Displays the current temperature (in Celsius) to assess a potential access point overheat condition.

The **Kernal Buffers** field displays the following:

Buffer Size	Lists the sequential buffer size.
Current Buffers	Displays the current buffers available to the selected access point.
Maximum Buffers	Lists the maximum buffers available to the selected access point.

The **IP Domain** field displays the following:

IP Domain Name	Displays the name of the IP Domain service used with the selected access point.
IP Domain Lookup state	Lists the current state of an IP lookup operation.

The **IP Name Servers** field displays the following:

Name Server	Displays the names of the servers designated to provide DNS resources to this access point.
Type	Displays the type of server for each server listed.

The **Firmware Images** field displays the following:

Primary Build Date	Displays the build date when this access point firmware version was created.
Primary Install Date	Displays the date this version was installed.
Primary Version	Displays the primary version string.
Secondary Build Date	Displays the build date when this version was created.
Secondary Install Date	Displays the date this secondary version was installed.
Secondary Version	Displays the secondary version string.
FPGA Version	Displays whether a FPGA supported firmware load is being utilized.
PoE Firmware Version	Displays whether a PoE supported firmware load is being utilized.

The **Sensor Lock** field displays the following:

Sensor Lock	Displays whether a lock has been applied to access point sensor capabilities. Keeping an access point from performing sensor support ensures client support is continuously maintained.
--------------------	---

The **Upgrade Status** field displays the following:

Upgrade Status	Displays the status of the image upgrade.
Upgrade Status Time	Displays the time of the image upgrade.

The **Power Management** field displays the following:

Power Management Mode	Displays the power mode currently invoked by the selected access point.
Power Management Status	Lists the power status of the access point.
Ethernet Power Status	Displays the access point's Ethernet power status.
Radio Power Status	Displays the power status of the access point's radios. Each access point radio is capable of having a unique, administrator defined, transmit capability.

The **IPv6v Hop Limit** table displays the following:

Hop Limit	Lists the maximum number of times IPv6 traffic can hop. The IPv6 header contains a hop limit field that controls the number of hops a datagram can be sent before being discarded (similar to the TTL field in an IPv4 header).
------------------	---

The **IPv6 Name Servers** field displays the following:

Name Server	List the IPv6 name server hosting a network service for providing responses to queries against a directory. The IPv6 name server maps a human recognizable identifier to a system's internal identifier. This service is performed by the server in response to a network service protocol request.
Type	Lists the type of IPv6 name server mapping a human readable identifier to system identifier.

The **IPv6 Delegated Prefixes** table displays the following:

IPv6 Delegated Prefix	In IPv6, prefix delegation is used to assign a network address prefix, configuring the controller or service platform with the prefix.
Prefix Name	Lists the name assigned to the IPv6 delegated prefix.
DHCPv6 Client State	Displays the current DHCPv6 client state as impacted by the IPv6 delegated prefix.
Interface Name	Lists the interface over which IPv6 prefix delegation occurs.
T1 timer (seconds)	Lists the amount of time in seconds before the DHCP T1 (delay before renew) timer expires.
T2 timer (seconds)	Lists the amount of time in seconds before the DHCP T2 (delay before rebind) timer expires.
Last Refreshed (seconds)	Lists the time, in seconds, since IPv6 prefix delegation has been updated.
Preferred Lifetime (seconds)	Lists is the time in seconds (relative to when the packet is sent) the IPv6 formatted addresses remains in a preferred state on the selected interface. The preferred lifetime must always be less than or equal to the valid lifetime.
Valid Lifetime (seconds)	Displays the time in seconds (relative to when the packet is sent) the IPv6 formatted address remains in a valid state on the selected interface. The valid lifetime must always be greater than or equal to the preferred lifetime.

5. Select **Refresh** to update the statistics counters to their latest values.


AP Web Filtering

The **Web-Filtering** screen displays information on Web requests for content and whether the requests were blocked or approved based on URL filter settings defined for the selected access point. A URL filter is comprised of several filter rules. A whitelist bans all sites except the categories and URL lists defined in the whitelist. The blacklist allows all sites except the categories and URL lists defined in the blacklist.

To view Web filter statistics:

1. Select the **Statistics** menu from the Web UI.

2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Web-Filtering**.
The **Statistics > AP > Web-Filtering** screen is displayed.

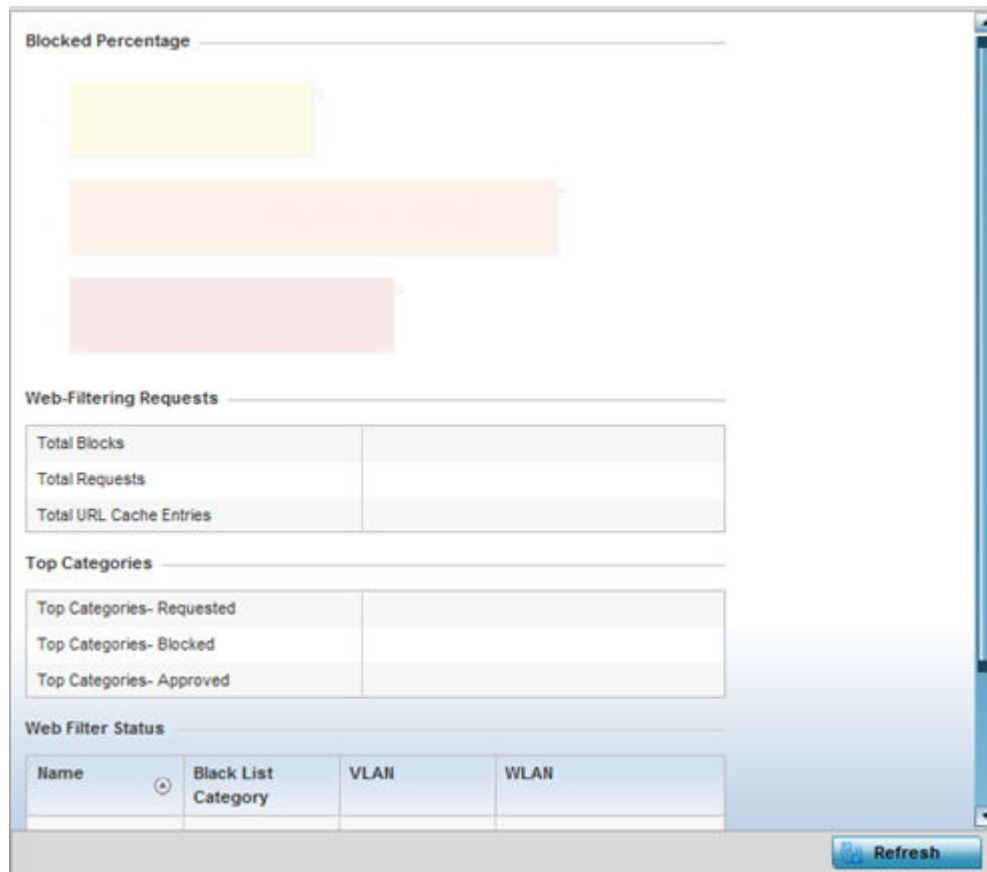

5. Review the following Web-Filtering statistics:
The **Web-Filtering Requests** field displays the following information:

Total Blocks	Lists the number of Web request hits against content blocked in the URL blacklist.
Total Requests	Lists the total number of requests for URL content cached locally on this access point.
Total URL Cache Entries	Displays the number of cached URL data entries made on this access point on the request of requesting clients requiring URL data managed by the access point and their respective <i>whitelist</i> or <i>blacklist</i> .

The **Top Categories** field helps administrators assess the content most requested, blocked and approved based on the defined *whitelist* and *blacklist* permissions:

Top Categories - Requested	Lists those Web content categories most requested by clients managed by this access point. Use this information to assess whether the permissions defined in the blacklist and whitelist optimally support these client requests for cached Web content.
Top Categories - Blocked	Lists those Web content categories blocked most often for requesting clients managed by this access point. Use this information to periodically assess whether the permissions defined in the blacklist and whitelist still restrict the desired cached Web content from requesting clients. Remember, a whitelist bans all sites except the categories and URL lists defined in the whitelist. The blacklist allows all sites except the categories and URL lists defined in the blacklist.
Top Categories - Approved	Lists those Web content categories approved most often on behalf of requesting clients managed by this access point. Periodically review this information to assess whether this cached and available Web content still adheres to your organization's standards for client access.

The **Web Filter Status** field displays the following information:

Name	Displays the name of the filter whose URL rule set has been invoked.
Blacklist Category	Lists the blacklist category whose URL filter rule set has caused data to be filtered to a requesting client. Periodically assess whether these rules are still relevant to the data requirements of requesting clients.
VLAN	Lists the impacted access point VLAN whose Web data traffic has been filtered based on the restrictions in the listed blacklist category.
WLAN	Lists the impacted access point WLAN whose Web data traffic has been filtered based on the restrictions in the listed blacklist category. Periodically assess whether clients are segregated to the correct WLAN based on their cached Web data requirements and impending filter rules.

6. Periodically, select **Refresh** to update this screen to its latest values.

AP Application Visibility (AVC)

Controllers and service platforms can inspect every byte of each application header packet allowed to pass their managed radio devices. When an application is recognized and classified by the WiNG application recognition engine, administrator defined actions can be applied to that specific application.




Note

The WiNG 7.1 release does not support DPI on AP505 and AP510 model access points. This feature will be supported in future releases.

1. Select the **Statistics → System** tab from the Web UI.

2. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
3. Select **Application Visibility (AVC)** from the menu.
The **Statistics** → **AP** → **Application Visibility (AVC)** → **Application** screen displays.

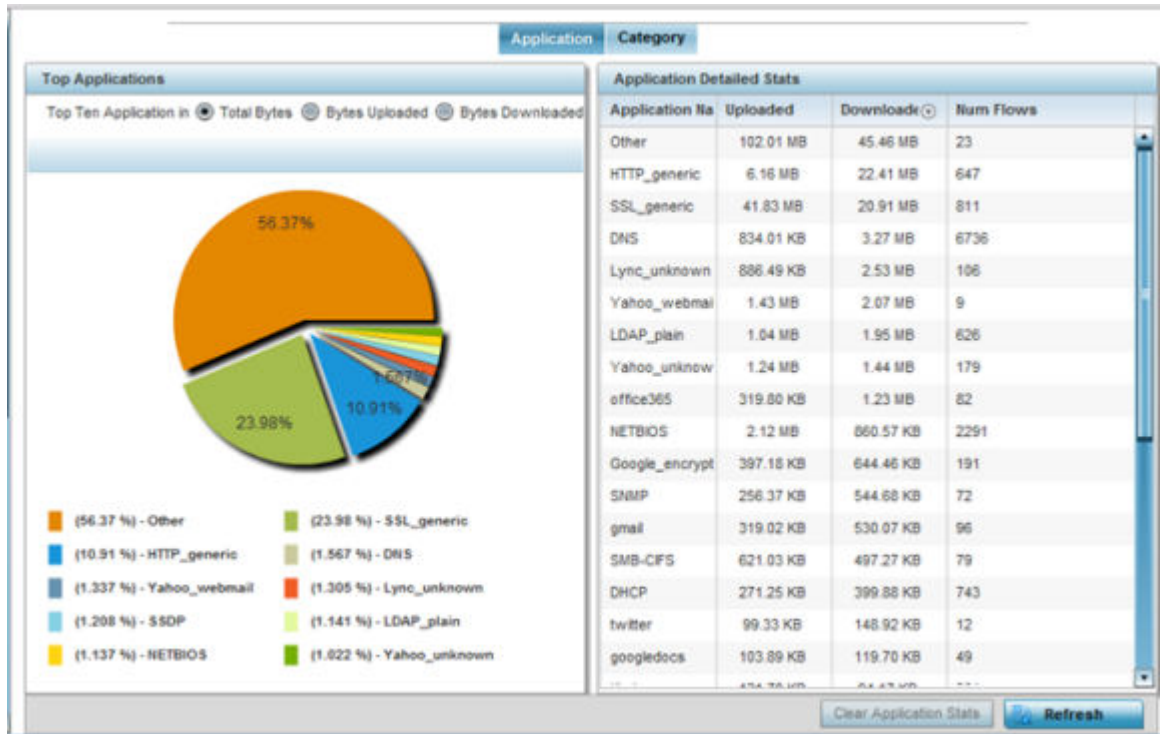

4. Refer to the **Top Applications** graph to assess the most prolific, and allowed, application data passing through the controller/access point managed network.

Total Bytes	Displays the top ten utilized applications in respect to total data bytes passing through the access point managed network. These are only the administrator allowed applications approved for proliferation within the access point managed network.
Bytes Uploaded	Displays the top ten applications in respect to total data bytes uploaded through the access point managed network. If this application data is not aligned with application utilization expectations, consider allowing or denying additional applications and categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten applications in respect to total data bytes downloaded from the access point managed network. If this application data is not aligned with application utilization expectations, consider allowing or denying additional applications and categories or adjusting their precedence (priority).


- Refer to the **Application Detailed Stats** table to assess specific application data utilization:

Application Name	Lists the allowed application name whose data (bytes) are passing through the access point managed network.
Uploaded	Displays the number of uploaded application data (in bytes) passing the through the access point managed network.
Downloaded	Displays the number of downloaded application data (in bytes) passing the through the access point managed network.
Num Flows	Lists the total number of application data flows passing through the access point for each listed application. An application flow can consist of packets in a specific connection or media stream. Application packets with the same source address/port and destination address/port are considered one flow.

- Click **Clear Application Stats** to clear the application assessment data counters and begin a new assessment. Selecting this option will not clear category stats, just application stats.
- Click the **Category** tab.

Categories are existing system or user defined application groups (video, streaming, mobile, audio etc.) that assist administrators in filtering (allowing or denying) application data.

The **Statistics > Controller > Application Visibility > Category** screen displays.

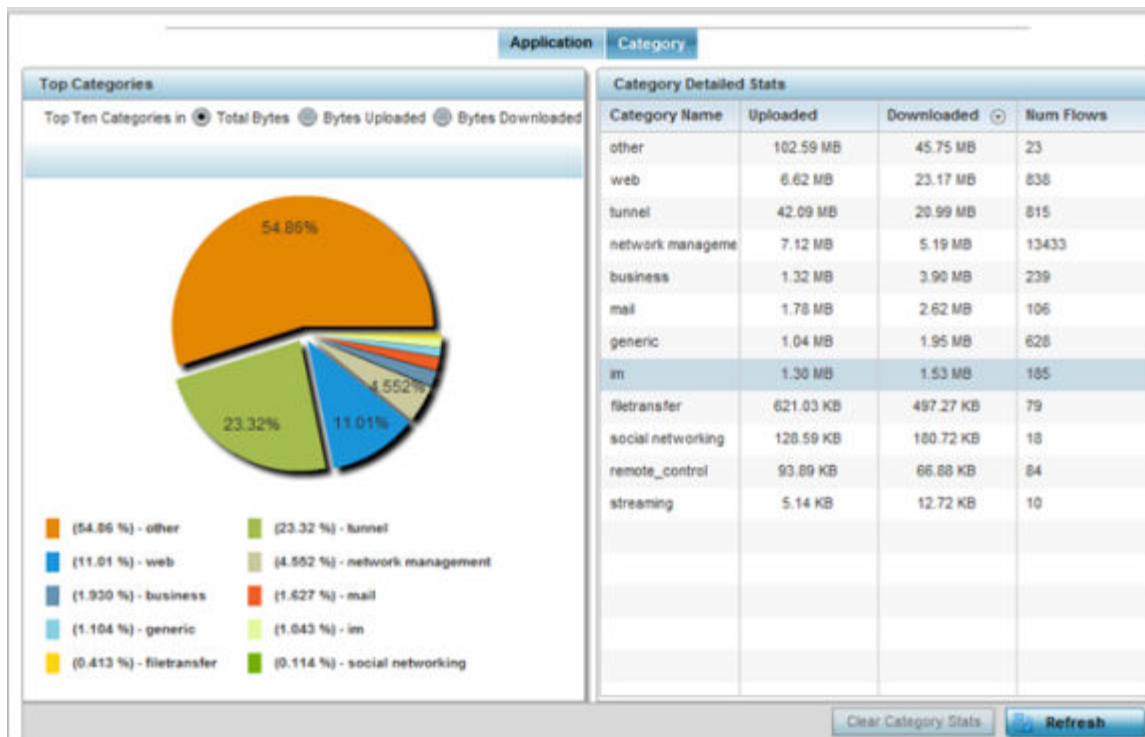

Refer to the **Top Categories** graph to assess the most prolific, and allowed, application data categories utilized by the access point.

Total Bytes	Displays the top ten application categories in respect to total data bytes passing through the access point managed network. These are only the administrator allowed application categories approved for proliferation within the access point managed network.
Bytes Uploaded	Displays the top ten application categories in respect to total data bytes uploaded through the access point managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten application categories in respect to total data bytes downloaded from the access point managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories and categories or adjusting their precedence (priority).

Refer to the **Category Detailed Stats** table to assess specific application category data utilization:

Category Name	Lists the allowed category whose application data (in bytes) is passing through the access point managed network.
Uploaded	Displays the number of uploaded application category data (in bytes) passing the through the access point managed network.
Downloaded	Displays the number of downloaded application category data (in bytes) passing the through the access point managed network.
Num Flows	Lists the total number of application category data flows passing through access point connected clients. A category flow can consist of packets in a specific connection or media stream. Packets with the same source address/port and destination address/port are considered one flow.


8. Click **Clear Category Stats** to clear the application category assessment data counters and begin a new assessment. Selecting this option will not clear application stats, just category stats.
9. Click **Refresh** to update the statistics counters to their latest values.

View Application Visibility - AP App-Category Stats

Categories are existing system or user defined application groups (video, streaming, mobile, audio etc.) that assist administrators in filtering (allowing or denying) application data.

1. Click the **Category** tab.

The **Category** screen displays.

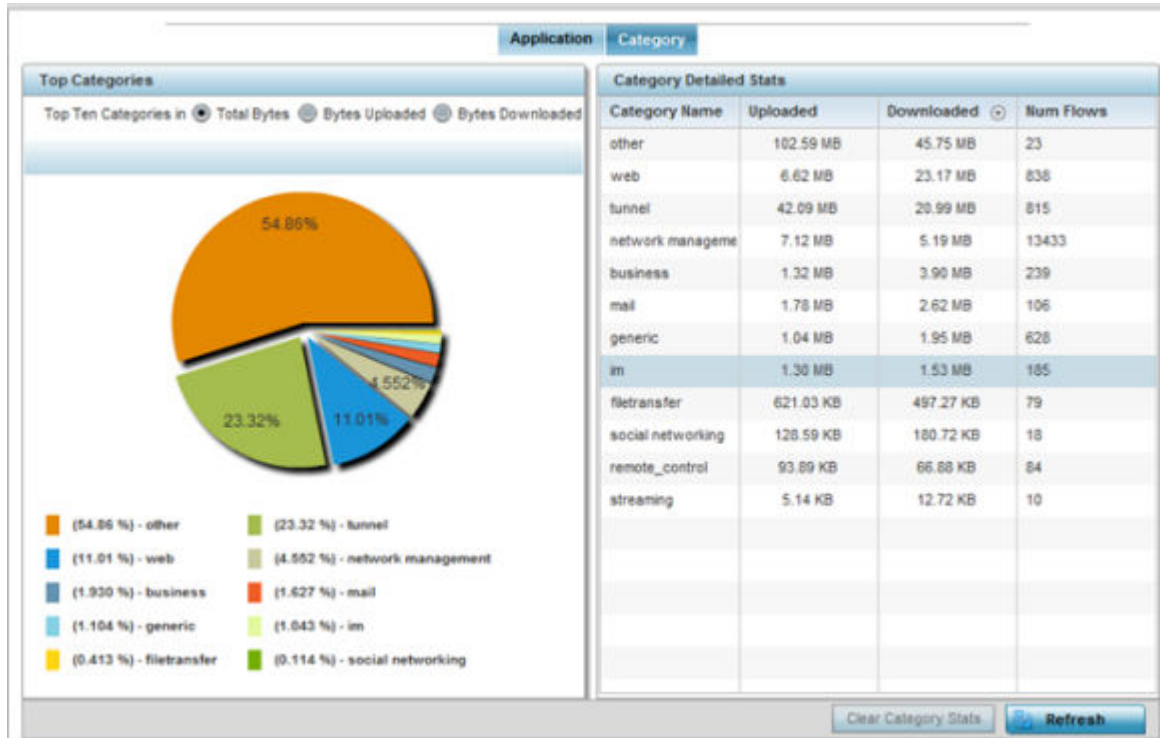

2. Refer to the **Top Categories** graph to assess the most prolific, and allowed, application data categories utilized by the access point.

Total Bytes	Displays the top ten application categories in respect to total data bytes passing through the access point managed network. These are only the administrator allowed application categories approved for proliferation within the access point managed network.
Bytes Uploaded	Displays the top ten application categories in respect to total data bytes uploaded through the access point managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories or adjusting their precedence (priority).
Bytes Downloaded	Displays the top ten application categories in respect to total data bytes downloaded from the access point managed network. If this category data is not aligned with application utilization expectations, consider allowing or denying additional categories and categories or adjusting their precedence (priority).

3. Refer to the **Category Detailed Stats** table to assess specific application category data utilization:

Category Name	Lists the allowed category whose application data (in bytes) is passing through the access point managed network.
Uploaded	Displays the number of uploaded application category data (in bytes) passing the through the access point managed network.
Downloaded	Displays the number of downloaded application category data (in bytes) passing the through the access point managed network.
Num Flows	Lists the total number of application category data flows passing through access point connected clients. A category flow can consist of packets in a specific connection or media stream. Packets with the same source address/port and destination address/port are considered one flow.

4. Click **Clear Category Stats** to clear the application category assessment data counters and begin a new assessment. Selecting this option will not clear application stats, just category stats.
5. Click **Refresh** to update the statistics counters to their latest values.

View Application Policy - AP Stats

When an application is recognized and classified by the WiNG application recognition engine, administrator defined actions can be applied to that specific application. An application policy defines the rules or actions executed on recognized HTTP (Facebook), enterprise (Webex) and peer-to-peer (gaming) applications or application-categories.

For each rule defined, a precedence is assigned to resolve conflicting rules for applications and categories. A deny rule is exclusive, as no other action can be combined with a deny. An allow rule is redundant with other actions, since the default action is allow. An allow rule is useful when wanting to deny packets for a category, but wanting to allow a few applications in the same category to proceed. In such a cases, add an allow rule for applications with a higher precedence then a deny rule for that category.

Mark actions mark packets for a recognized application and category with DSCP/8021p values used for QoS. Rate-limits create a rate-limiter applied to packets recognized for an application and category. Ingress and egress rates need to be specified for the rate-limiter, but both are not required. Mark and rate-limit are the only two actions that can be combined for an application and category. All other combinations are invalid.

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** node on the top, left-hand side of the screen.

The System node expands to display the RF Domains created within the managed network.

To view the device upgrade statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Device Upgrade**.

The AP Upgrade statistics screen is displayed.

Device Hostname	Type	State	Time Last Upgraded	Retries Count	Upgraded By	Last Update Status
ap6532-A6573	ap6532	failed	Mon Apr 13 2015 01:16:40 AM	3	NX95-Pri	download timed out
ap621-E9F899	ap621	failed	Mon Apr 13 2015 01:16:39 AM	3	NX95-Pri	download timed out
ap6532-34776C	ap6532	done	Tue Apr 14 2015 02:20:39 AM	2	NX95-Pri	download timed out
ap8232-7F0DE4	ap820x	done	Tue Apr 28 2015 06:19:33 AM	1	NX95-Pri	download timed out
ap6532-347800	ap6532	failed	Mon Apr 13 2015 01:16:39 AM	3	NX95-Pri	download timed out
ap6532-A6572	ap6532	failed	Mon Apr 13 2015 01:16:40 AM	3	NX95-Pri	download timed out
ap6532-3475E4	ap6532	failed	Mon Apr 13 2015 01:16:39 AM	3	NX95-Pri	download timed out
ap8132-738E2C	ap810x	failed	Mon Apr 13 2015 01:16:40 AM	3	NX95-Pri	download timed out
ap6511-8A4B1	ap6511	failed	Mon Apr 13 2015 01:16:40 AM	3	NX95-Pri	download timed out
ap6532-A6572	ap6532	done	Wed May 6 2015 12:59:30 AM	1	NX95-Pri	Update error: Unable to get
ap6532-347800	ap6532	done	Wed May 6 2015 12:59:30 AM	1	NX95-Pri	Update error: Unable to get
ap650-2433AC	ap650	done	Wed May 6 2015 12:59:24 AM	1	NX95-Pri	Update error: Unable to get

Type to search in tables Row Count: 2047

This screen displays the following:

Device Hostname	Displays the administrator-assigned hostname of the access point receiving the update.
Type	Displays the model type of the access point receiving a firmware update.
State	Displays the current state of the upgrade process (done , failed , etc.).
Time Last Upgraded	Displays the date and time of the last successful access point upgrade operation.
Retries Count	Displays the number of retries made in an access point update operation.
Upgraded By	Displays the MAC address of the access point that performed the upgrade.
Last Update Status	Displays the status of the last upgrade operation (Start Upgrade , Update error , etc.).

5. Select **Clear History** to clear the screen of its current status and begin a new data collection.
6. Select **Refresh** to update the screen's statistics counters to their latest values.

This screen displays the following:

Access Point	Displays the name assigned to the adopted access point as part of its device configuration.
Type	Displays each listed access point's model type
RF Domain Name	Displays each access point's RF Domain membership. An access point can only share RF Domain membership with other access points of the same model.
Model Number	Displays each listed access point's model number
Config Status	Displays each listed access point's configuration status to help determine its service role.
Config Errors	Lists any configuration errors that may be hindering a clean adoption.
Adopted By	Lists the adopting access point.
Adoption Time	Displays each listed access point's time of adoption.
Startup Time	Displays each listed access point's in-service time since last offline.

5. Select **Refresh** to update the screen's statistics counters to their latest values..

AP Adoption History

An **AP Adoption History** screen displays a list of peer access points and their adoption event status.

To view historical statistics for adopted access points:

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** from the navigation pane (on the left-hand side of the screen). The System node expands to display RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Adoption** menu.
5. Select **AP Adoption History**.

The **Adoption > Adoption History** screen is displayed.

Event Name	AP MAC Address	Reason	Event Time
Adopted	00-23-68-8D-FE-4C	N.A.	Tue Aug 20 2013 04:59:52 PM
Adopted	B4-C7-99-5A-84-2C	N.A.	Tue Aug 20 2013 04:59:52 PM
Adopted	5C-0E-8B-34-7B-7C	N.A.	Tue Aug 20 2013 05:01:49 PM
Adopted	5C-0E-8B-A6-57-2C	N.A.	Tue Aug 20 2013 05:01:50 PM
Adopted	00-23-68-31-18-E0	N.A.	Tue Aug 20 2013 05:01:51 PM
Adopted	5C-0E-8B-34-77-6C	N.A.	Tue Aug 20 2013 05:01:51 PM
Adopted	5C-0E-8B-34-78-00	N.A.	Tue Aug 20 2013 05:01:51 PM
Adopted	00-23-68-31-29-D8	N.A.	Tue Aug 20 2013 05:01:51 PM
Adopted	B4-C7-99-58-64-A0	N.A.	Tue Aug 20 2013 05:01:52 PM
Adopted	B4-C7-99-71-16-30	N.A.	Tue Aug 20 2013 05:01:52 PM
Adopted	5C-0E-8B-34-76-38	N.A.	Tue Aug 20 2013 05:01:52 PM
Adopted	5C-0E-8B-34-50-3C	N.A.	Tue Aug 20 2013 05:01:52 PM
Adopted	5C-0E-8B-34-4A-15	N.A.	Tue Aug 20 2013 05:01:52 PM

Type to search in tables Row Count: 26

Refresh

This screen describes the following historical data for adopted access points:

Event Name	Displays the adoption status of each listed access point as either adopted or un-adopted .
AP MAC Address	Displays the MAC address of each access point this access point has attempted to adopt.
Reason	Displays the reason code for each event listed in the adoption history table.
Event Time	Displays day, date and time for each access point adoption attempt.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Self Adoption History

The **AP Self Adoption History** displays an event history of peer access points that have adopted to the selected access point.

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Adoption** menu.
5. Select **AP Self Adoption History**.

The **Adoption > AP Self Adoption History** screen is displayed.

Event History	Mac	Reason	Adoption Time
Adopted	B4-C7-99-0C-98-48	N.A.	Wed May 6 2015 12:49:15 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Tue May 5 2015 06:05:38 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Tue May 5 2015 05:56:35 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Wed May 6 2015 12:50:59 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Wed May 6 2015 12:56:56 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Tue May 5 2015 06:05:19 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Tue May 5 2015 05:59:58 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Wed May 6 2015 12:56:47 AM
Adopted	B4-C7-99-0C-98-48	N.A.	Wed May 6 2015 12:45:07 AM
un-adopted	B4-C7-99-0C-98-48	Adopter 19.0C.98.48 is no longer reac	Wed May 6 2015 12:42:12 AM
un-adopted	B4-C7-99-0C-98-48	Adopter 19.0C.98.48 is no longer reac	Wed May 6 2015 12:48:59 AM
un-adopted	B4-C7-99-0C-98-48	Adopter 19.0C.98.48 is no longer reac	Tue May 5 2015 05:56:11 AM

Type to search in tables Row Count: 16

This screen describes the following historical data for adopted access points:

Event History	Displays the self adoption status of each AP as either Adopted or un-adopted .
MAC	Displays the MAC of the auto adopted access point.
Reason	Displays the adoption reason code for an access point's auto adoption.
Adoption Time	Displays a timestamp for the access point's auto-adoption.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

Pending Adoptions

The **Pending Adoptions** screen displays a list of devices yet to be adopted to this access point and access points still in the process of adoption.

To view pending access point statistics:

1. Select the **Statistics** tab from the Web UI.
2. Expand the **System** from the navigation pane (on the left-hand side of the screen). The System node expands to display RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Adoption** menu.
5. Select **Pending Adoptions**.

The **Statistics > Access Point > AP Detection** screen displays.

Unsanctioned AP	Reporting AP	SSID	AP Mode	Radio Type	Channel	RSSI	Last Seen
00-11-3F-DD-B7-20		wlan1			6	-68 dBm	2s
00-11-3F-DE-AE-E0		checksum			11	-66 dBm	33s
00-11-3F-DE-B9-90		traffic_shaping			6	-70 dBm	4s
00-11-3F-E3-4B-90		remotevpn			6	-79 dBm	2s
00-13-60-D4-A0-20		nanoDemo_1			6	-64 dBm	5s
00-14-C2-AA-FF-10		aaa			7	-66 dBm	3s
00-15-70-AE-32-38		M-Wireless			6	-74 dBm	18s
00-15-70-AE-33-E8		M-Guest			6	-68 dBm	6s
00-15-70-AE-33-F8		M-Guest			6	-65 dBm	2s
00-15-70-AE-37-A0		M-Wireless			1	-55 dBm	40s
00-15-70-AE-38-60		M-Wireless			11	-69 dBm	33s
00-15-70-C8-4F-60		test_pppoe_wlan			6	-75 dBm	17s

Type to search in tables Row Count: 190

Clear All **Refresh**

This screen displays the following:

Unsanctioned AP	Displays the MAC address detected access points that are yet to be authorized for interoperability within the access point managed network.
Reporting AP	Displays the hardware encoded MAC address of the radio used by the detecting access point. Select an access point to display configuration and network address information in greater detail.
SSID	Displays the WLAN SSID the unsanctioned access point was detected on.
AP Mode	Displays the operating mode of the unsanctioned access point.
Radio Type	Displays the type of the radio on the unsanctioned access point. The radio can be <i>802.11b</i> , <i>802.11bg</i> , <i>802.11bgn</i> , <i>802.11a</i> or <i>802.11an</i> .
Channel	Displays the channel the unsanctioned access point is currently transmitting on.
Last Seen	Displays the time (in seconds) the unsanctioned access point was last seen on the network.
RSSI	Lists a RSSI (<i>relative signal strength indication</i>) for a detected (and perhaps unsanctioned) access point.

5. T
6. Select **Clear All** to clear the screen of its current status and begin a new data collection.
7. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Wireless Clients

The **Wireless Clients** screen displays credential information for wireless clients associated with an access point. Use this information to assess if configuration changes are required to improve network performance. Clients can be selected from amongst those displayed to display the client's configuration in greater detail.

To view wireless client statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Wireless Clients**.

The **Statistics** → **Access Point** → **Wireless Client** screen displays.

Client MAC	IP Address	IPv6 Address	Hostname	Role	Client Identity	Vendor	Band	AP Hostname	Radio MAC	WLAN	VLAN	Last Active
08-60-6E-9C-...	157.235.91		android-5841	NA	Unknown	ASUSTel	11bgn	AN-17-311	00-23-...	STCWL	30	Fri Jan 10 1
24-77-03-CD-...	157.235.91		acc125-01	NA	Unknown	Intel Corp	11an	AN-17-311	00-23-...	STCWL	30	Fri Jan 10 1

Type to search in tables Row Count: 2

[Disconnect Client](#) [Refresh](#)

This screen displays the following information:

Client MAC	Lists the factory encoded hardware identifier for each listed client. The MAC address displays as a link that can be selected to display individual client configuration and network address information in greater detail.
IP Address	Displays the unique IP address of the client. Use this address as necessary throughout the applet for filtering and device intrusion recognition and approval.
IPv6 Address	Displays the current IPv6 formatted IP address a listed guest client is using as a network identifier. IPv6 is the latest revision of the <i>Internet Protocol</i> (IP) designed to replace IPv4. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Hostname	Displays the hostname (MAC addresses) of connected wireless clients. The hostname displays as a link that can be selected to display configuration and network address information in greater detail.
Role	Lists the client's defined role within the access point managed network.
Client Identity	Displays the unique Client Identity of this device.

Vendor	Lists the name of the manufacturer (hardware vendor) of each listed client to help assess its compatibility with the WING managed wireless infrastructure.
Band	Displays the 802.11 radio band on which the listed wireless client operates.
AP Hostname	Displays the administrator assigned name applied to the access point detecting the listed client.
Radio MAC	Lists the factory encoded hardware identifier assigned to the detecting access point radio.
WLAN	Displays the name of the WLAN the access point's using with each listed client. Use this information to determine if the client's WLAN assignment best suits its intended deployment in respect to the WLAN's QoS objective.
VLAN	Displays the VLAN ID each listed client is currently mapped to as a virtual interface for access point interoperability.
Last Active	Displays a time stamp when the detected client was last observed within the network.

5. Select a specific client MAC address and select **Disconnect Client** to terminate this client's connection and RF Domain membership.
6. Select **Refresh** to update the screen's statistics counters to their latest values.
7. The **Wireless Clients** screen displays the following:



AP Wireless LANs

The **Wireless LANs** screen displays an access point WLAN utilization. This screen displays access point WLAN assignments, SSIDs, traffic utilization, WLAN radio utilization and transmit and receive statistics.

To review a selected access point's WLAN statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Wireless LANs**.

The **Statistics > Access Point > Wireless WLANs** screen displays.

Client MAC	IP Address	IPv6 Address	Hostname	Role	Client Identity	Vendor	Band	AP Hostname	Radio MAC	WLAN	VLAN	Last Active
 08-60-6E-9C	157.235.91		android-5841	NA	Unknown	ASUSTel	11bgn	AN-17-311	00-23-	STCWL	30	Fri Jan 10 1
 24-77-03-CD	157.235.91		acc125-01	NA	Unknown	Intel Corp	11an	AN-17-311	00-23-	STCWL	30	Fri Jan 10 1

Type to search in tables Row Count: 2

[Disconnect Client](#) [Refresh](#)

This screen displays the following:

WLAN Name	Displays the name of the WLAN the access point is currently using for client support and QoS configuration segregation (voice versus data etc.).
SSID	Displays each listed WLAN's SSID.
Traffic Index	Displays the traffic utilization index, which measures how efficiently the WLAN's traffic medium is used. It's defined as the percentage of current throughput relative to maximum possible throughput. Low indexes may require administration to assess why there's an excess of missed packets. Traffic indices are: <ul style="list-style-type: none"> • 0 – 20 (very low utilization) • 20 – 40 (low utilization) • 40 – 60 (moderate utilization) • 60 and above (high utilization)
Radio Count	Displays the cumulative number of peer access point radios deployed within each listed WLAN.
Tx Bytes	Displays the total number of transmitted bytes on each listed WLAN.
Tx User Data Rate	Displays the user data rate in kbps for each listed WLAN.
Rx Bytes	Displays the total number of packets (in bytes) received on each listed WLAN.
Rx User Data Rate	Displays the received user data rate on each listed WLAN.

5. Select an WLAN then **Disassociate All Clients** to terminate each client connection within that WLAN.
6. Select **Refresh** to update the screen's statistics counters to their latest values.

Secondary Next Hop IP	If the primary hop is unavailable, a second redirection resource is used. This column lists the address set for the alternate route in the election process.
Secondary Next Hop State	Displays whether the secondary hop is being applied to incoming routed packets.
Default Next Hop IP	If a packet subjected to PBR does not have an explicit route to its destination, the pre-set next hop is used. This is either the IP address of the next hop or the outgoing interface. Only one default next hop is available. The difference between the next hop and the default next-hop is in case of former, PBR occurs first, then destination based routing. In case of the latter, the order is reverse.
Default Next Hop State	Displays whether the default hop is being applied to incoming routed packets.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Radios

The **Radio** statistics screens display information on access point radios. The actual number of radios depend on the access point model and type. The radio statistics screens display information on a per radio basis. Use this information to refine and optimize the performance of each radio and improve client throughput.

The access point's radio statistics screens detail associated radio ID, type, RF quality index etc. Use this information to assess the overall health of radio transmissions and access point deployment accuracy.

Each of these screens provide enough statistics to troubleshoot issues related to the following three areas:

- [AP Radio Status](#) on page 1128
- [AP Radio RF Statistics](#) on page 1130
- [AP Radio Traffic Statistics](#) on page 1131

Individual access point radios display as selectable links within each of the three radio screens. To review a radio's configuration in greater detail, select the link within the Radio column. Use the **Details** screen to review this radio's configuration in greater detail, as additional deployment location, configuration, Smart RF, quality index and wireless client information becomes available.

Additionally, navigate the *Traffic*, *WMM TSPEC*, *Wireless LANs* and *Graph* options available on the upper, left-hand side, of the screen to review radio traffic utilization, WMM QoS settings, WLAN advertisement and radio graph information in greater detail. This information can help determine whether the radio is properly configured in respect to its intended deployment objective.

AP Radio Status

Use the **Status** screen to review access point radio stats in detail. Optionally select individual and access points and launch sub screens with granular performance data.

Review radios, operational states, channel utilization and power consumption to assess whether a radio is optimally configured or physically deployed..

To view access point radio statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Radios** menu.

The **Statistics > Access Point > Radios > Status** screen displays by default.

Radio	Radio MAC	Radio Type	State	Channel Current(Config)	Power Current(Config)	Clients
ap8533-06FB6E_R1	74-67-F7-08-89-	2.4 GHz WLAN	Off	N/A (smt)	0 (smt)	0
ap8533-06FB6E_R2	74-67-F7-08-D2-	5 GHz WLAN	Off	N/A (smt)	0 (smt)	0
ap8533-06FB6E_R3	74-67-F7-08-B9-	Sensor	Off	N/A (smt)	0 (smt)	0

Type to search in tables Row Count: 3 Refresh

This screen displays the following:

Radio	Displays the administrator assigned radio name as its unique identifier. The name displays in the form of a link that can be selected to launch a detailed screen containing radio throughout data in greater detail.
Radio MAC	Displays the factory encoded hardware MAC address assigned to the radio.
Radio Type	Displays the radio as either supporting the 2.4 or 5 GHz radio band.
State	Lists a radio's On/Off operational designation.
Channel Current (Config)	Displays the configured channel each listed radio is set to transmit and receive on. Use this information to assess whether a channel adjustment has been made (by Smart RF) to compensate for a failed peers client load on a different channel.

SNR	Displays the SNR (<i>signal to noise ratio</i>) of the radio's associated wireless clients.
Tx Physical Layer Rate	Displays the data transmit rate for the radio's physical layer. The rate is displayed in Mbps.
Rx Physical Layer Rate	Displays the data receive rate for the radio's physical layer. The rate is displayed in Mbps.
Avg Retry Number	Displays the average number of retries per packet. A high number indicates possible network or hardware problems. Assess the error rate in respect to potentially high signal and SNR values to determine whether the error rate coincides with a noisy signal.
Error Rate	Displays the total number of received packets which contained errors for the listed radio.
Traffic Index	Displays the traffic utilization index of the radio. This is expressed as an integer value. 0 – 20 indicates very low utilization, and 60 and above indicate high utilization.
Quality Index	Displays an integer that indicates overall RF performance. The RF quality indices are: <ul style="list-style-type: none"> • 0 – 50 (poor) • 50 – 75 (medium) • 75 – 100 (good)

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Radio Traffic Statistics

Refer to the **Traffic Statistics** screen to review access point radio transmit and receive statistics, data rate and dropped packets during both transmit and receive operations.

To view the access point radio traffic statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Radios** menu.
5. Select **Traffic Statistics**.

The **Statistics > Access Point > Radios > Traffic Statistics** screen displays by default.

Radio	Tx Bytes	Rx Bytes	Tx Packets	Rx Packets	Tx User Data Rate	Rx User Data Rate	Tx Dropped	Traffic Index
ap7532-1601A8.R1	456,625,23	83,719,736	441,152	716,717	0 kbps	0 kbps	6,008	0 (Very Low)
ap7532-1601A8.R2	24,786,973	356,973,37	288,189,66	363,111,41	0 kbps	0 kbps	104,863	0 (Very Low)

Type to search in tables Row Count: 2

[Refresh](#)

This screen displays the following:

Radio	Displays the name assigned to the radio as its unique identifier. The name displays in the form of a link that can be selected to launch a detailed screen containing radio throughout data.
Tx Bytes	Displays the total number of bytes transmitted by each listed radio. This includes all user data as well as any management overhead data.
Rx Bytes	Displays the total number of bytes received by each listed radio. This includes all user data as well as any management overhead data.
Tx Packets	Displays the total number of packets transmitted by each listed radio. This includes all user data as well as any management overhead packets.
Rx Packets	Displays the total number of packets received by each listed radio. This includes all user data as well as any management overhead packets.
Tx User Data Rate	Displays the rate (in kbps) user data is transmitted by each listed radio. This rate only applies to user data and does not include management overhead.
Rx User Data Rate	Displays the rate (in kbps) user data is received by the radio. This rate only applies to user data and does not include management overhead.
Tx Dropped	Displays the total number of transmitted packets dropped by each listed radio. This includes all user data as well as management overhead packets that were dropped.
Error Rate	Displays the total number of received packets which contained errors for the listed radio.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

Portal Radio MAC	Lists the MAC addresses of those access points serving as portals within the mesh network.
Connect Time	Displays the elapsed connection time for each listed client in the mesh network.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Interfaces

The **Interface** screen provides detailed statistics on each of the interfaces available on the selected access point. Use this screen to review the statistics for each interface. Interfaces vary amongst supported access point models.

Use the following screens to review the configuration of each unique access point model interface:

- [AP Interface General Statistics](#) on page 1134
- [AP Interface IPv6 Address](#) on page 1138
- [AP Interface Multicast Groups Joined](#) on page 1142
- [AP Interface Network Graph](#) on page 1143


AP Interface General Statistics

The **General** screen provides information on a selected access point interface such as its MAC address, type and TX/RX statistics.

To view the general interface statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Interfaces** menu.

The **Statistics > AP > Interface > General** screen displays.

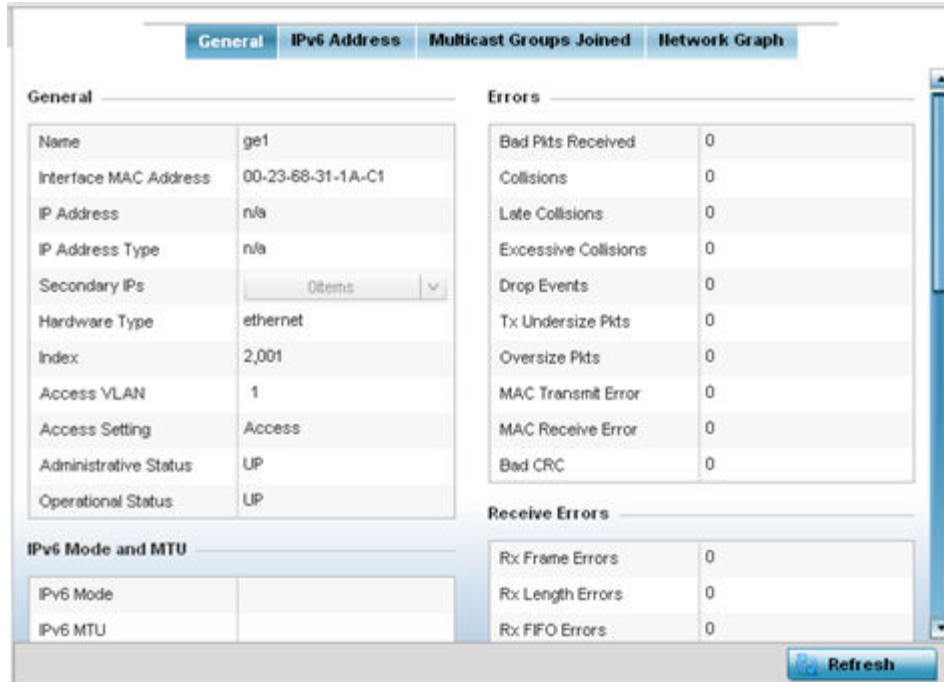

5. Select an access point interface from those available for the selected model. The subsequent display within the **General** and **Network Graph** tabs is specific to the selected model and interface.

The **General** field describes the following:

Name	Displays the name of the access point interface ge1 , vlan1 , etc.
Interface MAC Address	Displays the MAC address of the access point interface.
IP Address	IP address of the interface.
IP Address Type	Displays the IP address type, either IPv4 or IPv6 .
Secondary IP	Displays a list of secondary IP resources assigned to this interface.
Hardware Type	Displays the hardware connected type of the interface.
Index	Displays the unique numerical identifier supporting the interface.
Access VLAN	Displays the tag assigned to the native VLAN.
Access Setting	Displays the mode of the VLAN as either Access or Trunk .
Administrative Status	Displays whether the interface is currently UP or DOWN .
Operational Status	Lists whether the selected interface is currently UP (operational) or DOWN .

The **IPv6 Mode and MTU** table displays the following:

IPv6 Mode	Lists the current IPv6 mode utilized.
IPv6 MTU	Lists the IPv6 formatted largest packet size that can be sent over this interface.

The **Specification** field displays the following:

Media Type	Displays the physical connection type of the interface. Medium types include: Copper - Used on RJ-45 Ethernet ports Optical - Used on fibre optic gigabit Ethernet ports
Protocol	Displays the routing protocol used by the interface.
MTU	Displays the MTU (<i>maximum transmission unit</i>) setting configured on the interface. The MTU value represents the largest packet size that can be sent over a link. 10/100 Ethernet ports have a maximum setting of 1500.
Mode	The mode can be either: <ul style="list-style-type: none"> • Access – This Ethernet interface accepts packets only from the native VLANs. • Trunk – This Ethernet interface allows packets from a list of VLANs you can add to the trunk.
Metric	Displays the metric associated with the interface's route.
Maximum Speed	Displays the maximum speed the interface uses to transmit or receive data.
Admin. Speed	Displays the speed the port can transmit or receive. This value can be either 10 , 100 , 1000 or Auto . This value is the maximum port speed in Mbps. Auto indicates the speed is negotiated between connected devices..
Operator Speed	Displays the current speed of the data transmitted and received over the interface.
Admin. Duplex Setting	Displays the administrator's duplex setting.
Current Duplex Setting	Displays the interface as either half duplex , full duplex or unknown .

The **Traffic** field describes the following for the selected access point interface:

Good Octets Sent	Displays the number of octets (bytes) with no errors sent by the interface.
Good Octets Received	Displays the number of octets (bytes) with no errors received by the interface.
Good Pkts Sent	Describes the number of good packets transmitted.
Good Pkts Received	Describes the number of good packets received.
Mcast Pkts Sent	Displays the number of multicast packets sent through the selected interface.

Mcast Pkts Received	Displays the number of multicast packets received through the selected interface.
Ucast Pkts Sent	Displays the number of unicast packets sent through the selected interface.
Ucast Pkts Received	Displays the number of unicast packets received through the selected interface.
Bcast Pkts Sent	Displays the number of broadcast packets sent through the interface.
Bcast Pkts Received	Displays the number of broadcast packets received through the interface.
Packet Fragments	Displays the number of packet fragments transmitted or received through the interface.
Jabber Pkts	Displays the number of packets transmitted through the interface larger than the MTU.

The **Errors** field displays the following information for the selected access point interface:

Bad Pkts Received	Displays the number of bad packets received through the interface.
Collisions	Displays the number of collisions on the interface.
Late Collisions	A late collision is any collision that occurs after the first 64 octets of data have been sent by the sending client. Late collisions are not normal, and are usually the result of out-of-specification cabling or a malfunctioning device.
Excessive Collisions	Displays the number of excessive collisions. Excessive collisions occur when the traffic load increases to the point that a single Ethernet network cannot handle it efficiently.
Drop Events	Displays the number of dropped packets transmitted or received through the interface.
Tx Undersize Pkts	Displays the number of <i>undersized</i> packets transmitted through the interface.
Oversize Pkts	Displays the number of <i>oversized</i> packets transmitted through the interface.
MAC Transmit Error	Displays the number of transmits that failed because of an internal MAC sublayer error that is not a late collision, excessive collision count, or a carrier sense error.
MAC Receive Error	Displays the number of received packets failed because of an internal MAC sublayer that is not a late collision, excessive collision count, or a carrier sense error.
Bad CRC	Displays the CRC error. The <i>Cyclical Redundancy Check</i> (CRC) is the 4 byte field at the end of every frame. The receiving station uses it to interpret if the frame is valid. If the CRC value computed by the interface does not match the value at the end of the frame, it's considered a bad CRC.

The **Receive Errors** field displays the following information about the selected interface:

Rx Frame Errors	Displays the number of frame errors received at the interface. A frame error occurs when a byte of data is received, but not in the format expected.
Rx Length Errors	Displays the number of length errors received at the interface. Length errors are generated when the received frame length was less than (or exceeded) the Ethernet standard.
Rx FIFO Errors	Displays the number of FIFO errors received at the interface. <i>First-in First-Out</i> queueing is an algorithm that involves buffering and forwarding of packets in the order of arrival. FIFO entails no priority for traffic. There is only one queue, and all packets are treated equally.
Rx Missed Errors	Displays the number of missed packets. Packets are missed when the hardware received FIFO has insufficient space to store the incoming packet.
Rx Over Errors	Displays the number of overflow errors. An overflow occurs when packet size exceeds the allocated buffer size.

The **Transmit Errors** field displays the following:

Tx Errors	Displays the number of packets with errors transmitted on the interface.
Tx Dropped	Displays the number of transmitted packets dropped from the interface.
Tx Aborted Errors	Displays the number of packets aborted on the interface because a <i>clear-to-send</i> request was not detected.
Tx Carrier Errors	Displays the number of carrier errors on the interface. This generally indicates bad Ethernet hardware or cabling.
Tx FIFO Errors	Displays the number of FIFO errors received at the interface. <i>First-in-First-Out</i> queueing is an algorithm that involves the buffering and forwarding of packets in the order of arrival. FIFO entails no priority for traffic. There is only one queue, and all packets are treated equally.
Tx Heartbeat Errors	Displays the number of heartbeat errors. This generally indicates a software crash or packets stuck in an endless loop.
Tx Window Errors	Displays the number of window errors transmitted. TCP uses a sliding window flow control protocol. In each TCP segment, the receiver specifies the amount of additional received data (in bytes) in the receive window field the receiver is willing to buffer for the connection. The sending host can send only up to that amount. If the sending host transmits more data before receiving an acknowledgment from the receiving host, it constitutes a window error.

6. Select **Refresh** to update the statistics counters to their latest value.

AP Interface IPv6 Address

IPv6 is the latest revision of the Internet Protocol (IP) designed to replace IPv4. IPV6 provides enhanced identification and location information for computers on networks

routing traffic across the Internet. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.

To review IPv6 Address interface statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).


The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand the **Interfaces** menu.
5. Select the **IPv6 Address** tab.

The **Statistics > AP > Interfaces > IPv6 Address > IPv6 Address** screen displays by default in the right-hand pane.

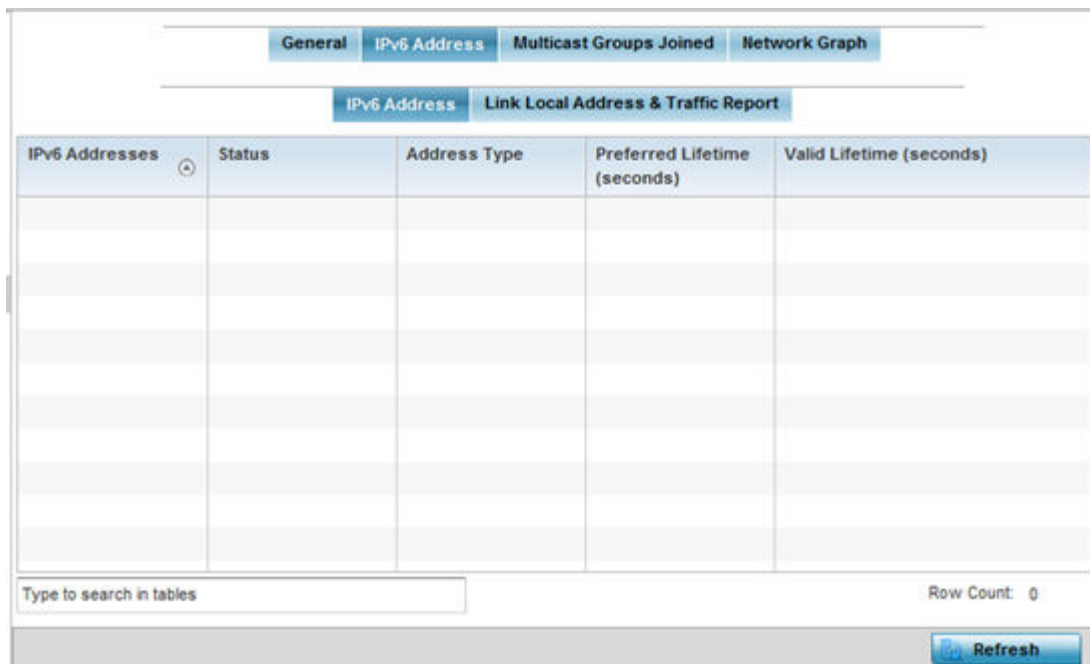

The **IPv6 Address** table displays the following sections:

IPv6 Addresses	Lists the IPv6 formatted addresses currently utilized by the access point in the selected interface.
Status	Lists the current utilization status of each IPv6 formatted address currently in use by this access point's selected interface.
Address Type	Lists whether the address is <i>unicast</i> or <i>multicast</i> in its utilization over the selected access point interface.

Preferred Lifetime (Seconds)	Lists is the time in seconds (relative to when the packet is sent) the IPv6 formatted addresses remains in a preferred state on the selected interface. The preferred lifetime must always be less than or equal to the valid lifetime.
Valid Lifetime (Seconds)	Displays the time in seconds (relative to when the packet is sent) the IPv6 formatted address remains in a valid state on the selected interface. The valid lifetime must always be greater than or equal to the preferred lifetime.

6. Select the **Link Local Address & Traffic Report** tab to assess data traffic and errors discovered in transmitted and received IPv6 formatted data packets.

This screen has the following information:

The **Link Local Address** table:

Address	Lists the IPv6 local link address. IPv6 requires a link local address assigned to every interface the IPv6 protocol is enabled on, even when one or more routable addresses are assigned.
Status	Lists the IPv6 local link address utilization status and its current availability.
Preferred Lifetime (Seconds)	Lists is the time in seconds (relative to when the packet is sent) the local link addresses remains in the preferred state on the selected interface. The preferred lifetime must always be less than or equal to the valid lifetime.
Valid Lifetime (Seconds)	Displays the time in seconds (relative to when the packet is sent) the local link addresses remains in the valid state on the selected interface. The valid lifetime must always be greater than or equal to the preferred lifetime.

The **Traffic** table displays the following information:

Packets In	Lists the number of IPv6 formatted data packets received on the selected access point interface since the screen was last refreshed.
Packets Out	Lists the number of IPv6 formatted data packets transmitted on the selected access point interface since the screen was last refreshed.
Bytes In	Displays the number of octets (bytes) with no errors received by the selected interface.
Bytes Out	Displays the number of octets (bytes) with no errors sent by the selected interface.
Bad Packets Received	Displays the number of bad IPv6 formatted packets received through the interface.
Bad CRC	Displays the CRC error. The CRC is the 4 byte field at the end of every frame. The receiving station uses it to interpret if the frame is valid. If the CRC value computed by the interface does not match the value at the end of frame, it is considered as a bad CRC.

Collisions	Displays the number of collisions over the selected interface. Excessive collisions occur when the traffic load increases to the point a single Ethernet network cannot handle it efficiently. A late collision is any collision that occurs after the first 64 octets of data have been sent. Late collisions are not normal, and usually the result of out of specification cabling or a malfunctioning device.
-------------------	---

The **Receive Errors** table displays the following information:

Receive Length Errors	Displays the number of IPv6 length errors received at the interface. Length errors are generated when the received IPv6 frame length was either less or over the Ethernet standard.
Receive Over Errors	Displays the number of IPv6 overflow errors received. Overflows occur when a packet size exceeds the allocated buffer size.
Receive Frame Errors	Displays the number of IPv6 frame errors received at the interface. A frame error occurs when data is received, but not in an expected format.
Receive FIFO Errors	Displays the number of IPv6 FIFO errors received at the interface. First-in First-out queueing is an algorithm that involves buffering and forwarding of packets in the order of arrival. FIFO entails no priority. There is only one queue, and all IPv6 formatted packets are treated equally. An increase in FIFO errors indicates a probable hardware malfunction.
Receive Missed Errors	Displays the number of missed IPv6 formatted packets. Packets are missed when the hardware received FIFO has insufficient space to store an incoming packet.

The **Transmit Errors** table displays the following information:

Transmit Errors	Displays the number of IPv6 formatted data packets with errors transmitted on the interface.
Transmit Aborted Errors	Displays the number of IPv6 formatted packets aborted on the interface because a clear-to-send request was not detected.
Transmit Carrier Errors	Displays the number of IPv6 formatted carrier errors on the interface. This generally indicates bad Ethernet hardware or bad cabling.
Transmit FIFO Errors	Displays the number of IPv6 formatted FIFO errors transmitted at the interface. First-in First-Out queueing is an algorithm that involves the buffering and forwarding of packets in the order of arrival. FIFO uses no priority. There is only one queue, and all packets are treated equally. An increase in the number of FIFO errors indicates a probable hardware malfunction.

Transmit Heartbeat Errors	Displays the number of IPv6 formatted heartbeat errors. This generally indicates a software crash, or packets stuck in an endless loop.
Transmit Window Errors	Displays the number of IPv6 formatted window errors transmitted. TCP uses a sliding window flow control protocol. In each TCP segment, the receiver specifies the amount of additional received data (in bytes) the receiver is willing to buffer for the connection. The sending host can send only up to that amount. If the sending host transmits more data before receiving an acknowledgment, it constitutes a window error.

7. Click **Refresh** to update the statistics counters to their latest value.

AP Interface Multicast Groups Joined

Multicast groups scale to a larger set of destinations by not requiring prior knowledge of who or how many destinations there are. Multicast devices use their infrastructure efficiently by requiring the source to send a packet only once, even if delivered to a large number of devices. Devices replicate a packet to reach multiple receivers only when necessary.

Access Points are free to join or leave a multicast group at any time. There are no restrictions on the location or members in a multicast group. A host may be a member of more than one multicast group at any given time and does not have to belong to a group to send messages to members of a group.

To view the Access Point's multicast group memberships on the selected interface:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Interfaces** menu.
5. Select the **Multicast Groups Joined** tab.
The **Statistics > AP > Interfaces > Multicast Groups Joined** displays in the right-hand pane.

This table displays the following information:

Group	Lists the name of existing multicast groups whose current members share multicast packets with one another on this selected interface as a means of collective interoperation.
Users	Lists the number of devices currently interoperating on this interface in each listed multicast group. Any single device can be a member of more than one group at a time.

AP Interface Network Graph

The **Network Graph** displays statistics the access point continuously collects for its interfaces. Even when the interface statistics graph is closed, data is still collected. Display the interface statistics graph periodically for assessing the latest interface information. Up to three different stats can be selected and displayed within the graph.


To view a detailed graph for an interface, select an interface and drop it on to the graph. The graph displays Port Statistics as the Y-axis and the Polling Interval as the X-axis. Use the **Polling Interval** from-down menu to define the increment data is displayed on the graph.

To view the Interface Statistics graph:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

- Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
- Select the **Interfaces > Network Graph** tab.
The **Statistics > AP > Interfaces > Network Graph** screen displays in the right-hand pane.

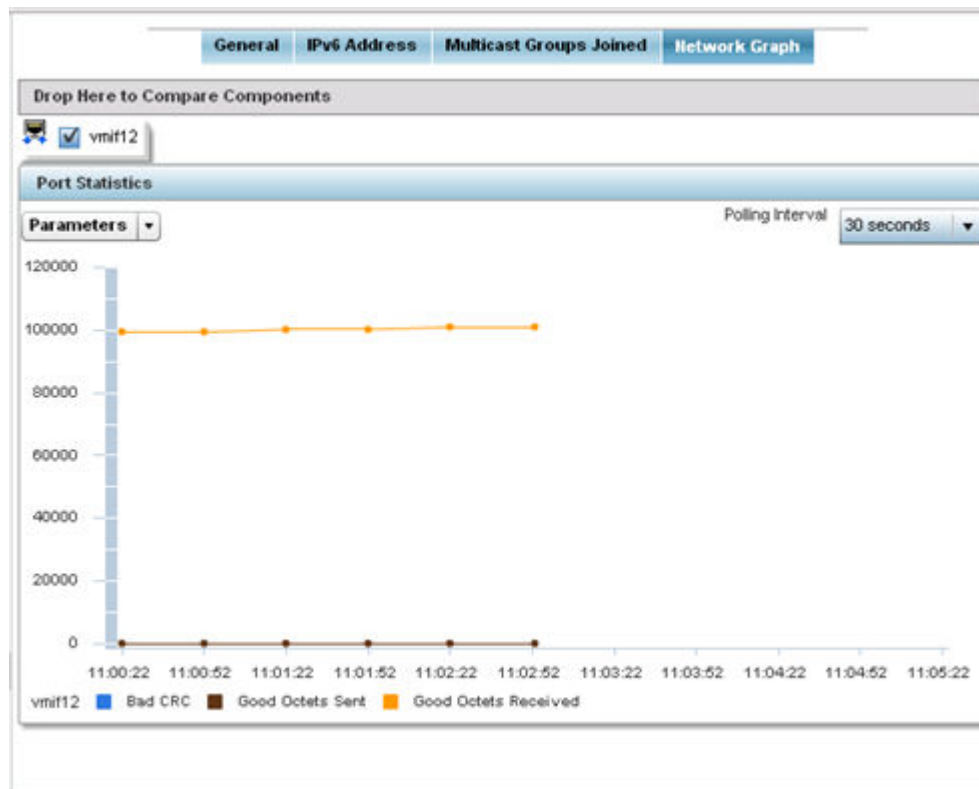

- Use the **Parameters** drop-down menu to specify what is trended in the graph.

AP RTLS

The RTLS (*real time locationing system*) enables accurate location determination and presence detection capabilities for Wi-Fi-based devices, Wi-Fi-based active RFID tags and passive RFID tags. While the operating system does not support locationing locally, it does report the locationing statistics of both Aeroscout and Ekahau tags.

To review a selected access point's RTLS statistics:

- Select the **Statistics** menu from the Web UI.
- Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
- Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
- Select the **RTLS** tab.

The **Statistics > AP > RTLS** screen is displayed.

Aeroscout	
Engine IP	0.0.0.0
Engine Port	0
Send Count	0
Recv Count	0
Tag Reports	0
Nacks	0
Acks	0
Lbs	0
AP Status	0
AP Notifications	0
Send Errors	0
Error Message Count	0

Ekahau	
Tag Reports	0

[Refresh](#)

Review the following *Aeroscout tags* related statistics:

Engine IP	Lists the IP address of the Aeroscout locating engine.
Engine Port	Displays the port number of the Aeroscout engine.
Send Count	Lists the number location determination packets sent by the locating engine.
Recv Count	Lists the number location determination packets received by the locating engine.
Tag Reports	Displays the number of tag reports received from locating equipped radio devices supporting RTLS.
Nacks	Displays the number of Nack (no acknowledgement) frames received from RTLS supported radio devices providing locating services.
Acks	Displays the number of Ack (acknowledgment) frames received from RTLS supported radio devices providing locating services.
Lbs	Displays the number of LBS (<i>location based service</i>) frames received from RTLS supported radio devices providing locating services.
AP Status	Provides the status of peer APs providing locating assistance.
AP Notifications	Displays a count of the number of notifications sent to access points that may be available to provide RTLS support.

Send Errors	Lists the number of send errors received by the RTLS initiating access point.
Error Message Count	Displays a cumulative count of error messages received from RTLS enabled access point radios.

Review the following *Ekahau tags* related statistics:

Tag Reports	Displays the number of tag reports received from locating equipped radio devices supporting RTLS.
--------------------	---

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP PPPoE

The **PPPoE** statistics screen displays stats derived from an access point's access to high-speed data and broadband networks. PPPoE uses standard encryption, authentication, and compression methods as specified by the PPPoE protocol. PPPoE enables access points to establish a point-to-point connection to an ISP over an existing Ethernet interface.




Note

The WiNG 7.1 release does not support PPPoE on AP505 and AP510 model access points. This feature will be supported in future releases.

To review a selected access point's PPPoE statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **PPPoE**.

The **Statistics > AP > PPPoE** screen is displayed.

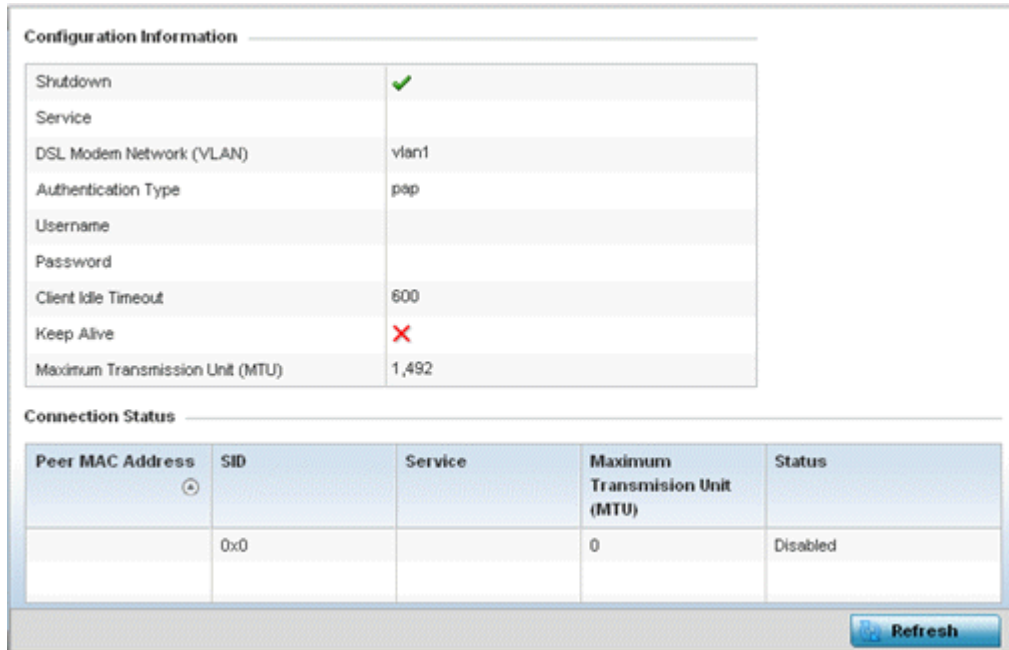

5. The **Configuration Information** field screen displays the following:

Shutdown	Displays whether a high speed client mode point-to-point connection has been enabled using the PPPoE protocol.
Service	Lists the 128 character maximum PPPoE client service name provided by the service provider.
DSL Modem Network (VLAN)	Displays the PPPoE VLAN (client local network) connected to the DSL modem. This is the local network connected to DSL modem.
Authentication Type	Lists authentication type used by the PPPoE client whose credentials must be shared by its peer access point. Supported authentication options include None, PAP, CHAP, MSCHAP, and MSCHAP-v2.
Username	Displays the 64 character maximum username used for authentication support by the PPPoE client.
Password	Displays the 64 character maximum password used for authentication by the PPPoE client.
Client Idle Timeout	The access point uses the listed timeout so it does not sit idle waiting for input from the PPPoE client and the server, that may never come.

Keep Alive	If a keep alive is utilized, the point-to-point connect to the PPPoE client is continuously maintained and not timed out.
Maximum Transmission Unit (MTU)	Displays the PPPoE client <i>maximum transmission unit</i> (MTU) from 500 - 1,492. The MTU is the largest physical packet size in bytes a network can transmit. Any messages larger than the MTU are divided into smaller packets before being sent. A PPPoE client should be able to maintain its point-to-point connection for this defined MTU size.

6. Refer to the **Connection Status** field.

The Connection Status table lists the MAC address, SID, Service information MTU and status of each route destination peer. To provide this point-to-point connection, each PPPoE session learns the Ethernet address of a remote PPPoE client, and establishes a session. PPPoE uses both a discover and session phase to identify a client and establish a point-to-point connection. By using such a connection, a Wireless WAN failover is available to maintain seamless network access if the access point's wired WAN were to fail.

7. Select **Refresh** to update the screen's statistics counters to their latest values.

AP OSPF

OSPF (*Open Shortest Path First*) is a *link-state* IGP (*interior gateway protocol*). OSPF routes IP packets within a single routing domain (autonomous system), like an enterprise LAN. OSPF gathers link state information from neighbor routers and constructs a network topology. The topology determines the routing table presented to the Internet Layer which makes routing decisions based solely on the destination IP address found in IP packets.

Refer to the following for detailed descriptions of the tabs available within the OSPF statistics screen:

- [AP OSPF Summary](#) on page 1148
- [AP OSPF Neighbors](#) on page 1150
- [AP OSPF Area Details](#) on page 1152
- [AP OSPF Route Statistics](#) on page 1154
- [AP OSPF Interface](#) on page 1158
- [AP OSPF State](#) on page 1159

AP OSPF Summary

Use the **OSPF Summary** screen to review router ID, area border router, shortest path and stub router connection assignments.

To view OSPF statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **OSPF** menu.

The **Statistics > AP > OSPF > Summary** screen displays by default.

General	
Router ID	
RFC 1583 compliant	
RFC 2328 compliant	
External LSAs	
External LSA CheckSum	#0000
Opaque LSA origination	
Opaque AS LSA checksum	#0000
Opaque LSA	
Opaque AS LSAs	
Shutdown Due Time	
Gracefull shutdown	
LSA refresh timer(sec)	
Number of OSPF areas	

ABR/ASBR Details	
ASBR	
ABR	
ABR Type	

SPF

[Refresh](#)

The **Summary** screen describes the following information fields:

General	The general field displays the router ID assigned for this OSPF connection, RFC compliance information and LSA data. OSPF version 2 was originally defined within RFC versions 1583 and 2328. The general field displays whether compliance to these RFCs have been satisfied. The OSPF LSA (<i>Link-State Advertisement</i>) Throttling feature provides a dynamic mechanism to slow down link-state advertisement updates in OSPF during times of network instability. It also allows faster OSPF convergence by providing LSA rate limiting in milliseconds. LSA information is provided for both external and opaque LSAs. Opaque LSAs carrying type-length-value elements. These extensions allow OSPF to run completely out of band of the data plane network. This means that it can also be used on non-IP networks, such as optical networks.
ABR/ ASBR	Lists ASBR (<i>Autonomous System Boundary Router</i>) data relevant to OSPF routing, including the ASBR, ABR and ABR type. An ABR (<i>Area Border Router</i>) is a router that connects one or more areas to the main backbone network. It is considered a member of all areas it is connected to. An ABR keeps multiple copies of the link-state database in memory, one for each area to which that router is connected. An ASBR is a router connected to more than one Routing protocol and exchanges routing information with routers in other protocols. ASBRs typically also run an exterior routing protocol (for example, BGP), or use static routes, or both. An ASBR is used to distribute routes received from other, external ASs throughout its own autonomous system. Routers in other areas use ABR as next hop to access external addresses. Then the ABR forwards packets to the ASBR announcing the external addresses.
SPF	Refer to the SPF field to assess the status of the SFF (<i>shortest path forwarding</i>) execution, last SPF execution, SPF delay, SPF due in, SPF hold multiplier, SPF hold time, SPF maximum hold time and SPF timer due flag.
Stub Router	The summary screen displays information relating to stub router advertisements and shutdown and startup times. An OSPF stub router advertisement allows a new router into a network without immediately routing traffic through the new router and allows a graceful shut down or reload a router without dropping packets that are destined for other networks. This feature introduces three configuration options that allow you to configure a router that is running the OSPF protocol to advertise a maximum or infinite metric to all neighbors.

5. Select **Refresh** to update the statistics counters to their latest values.

AP OSPF Neighbors

OSPF establishes neighbor relationships to exchange routing updates with other routers. An access point supporting OSPF sends hello packets to discover neighbors and elect a designated router. The hello packet includes link state information and list of neighbors. OSPF is savvy with layer 2 topologies. If on a point-to-point link, OSPF knows it is sufficient, and the link stays up. If on a broadcast link, the router waits for election before determining if the link is functional.

Request Count	Lists the connection request count (hello packets) to connect to the router interface, discover neighbors and elect a designated router
Retransmit Count	Lists the connection retransmission count attempted in order to connect to the router interface, discover neighbors and elect a designated router. A DR (<i>designated router</i>) is the router interface elected among all routers on a particular multi-access network segment, generally assumed to be broadcast.
Dead Time	Lists the dead time between neighbors in the network topology that are currently utilizing the listed router ID.
Self Neighbor State	Displays the self-neighbor status assessment used to discover neighbors and elect a designated router.
Source Address	Displays the single source address used by all neighbor routers to obtain topology and connection status. This form of multicasting significantly reduces network load.
Summary Count	Routes that originate from other areas are called summary routes. Summary routes are not flooded in a totally stubby or NSSA totally stubby area.

6. Select **Refresh** to update the statistics counters to their latest values.

AP OSPF Area Details

An OSPF network is subdivided into routing areas (with 32 bit area identifiers) to simplify administration and optimize traffic utilization. Areas are logical groupings of hosts and networks, including routers having interfaces connected to an included network. Each area maintains a separate link state database whose information may be summarized towards the rest of the network. An OSPF Area contains a set of routers exchanging LSAs with others in the same area. Areas limit LSAs and encourage aggregate routes. Areas are identified by 32-bit IDs, expressed either in decimal, or octet-based dot-decimal notation.

To view OSPF area statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **OSPF** menu.
5. Select the **Area Details** tab.

The **Statistics > AP > OSPF > Area Details** screen is displayed.

NSSA LSA	Routers in a NSSA (<i>Not-so-stubby-area</i>) do not receive external LSAs from Area Border Routers, but are allowed to send external routing information for redistribution. They use type 7 LSAs to tell the ABRs about these external routes, which the Area Border Router then translates to type 5 external LSAs and floods as normal to the rest of the OSPF network. Redistribution into an NSSA area creates a special type of LSA known as TYPE 7, which can exist only in an NSSA area. An NSSA ASBR generates this LSA, and an NSSA ABR router translates it into type 5 LSA which gets propagated into the OSPF domain.
Opaque Area link CSUM	Displays the Type-10 opaque link area checksum with the complete contents of the LSA. Type-10 Opaque LSAs are not flooded beyond the borders of their associated area.
Opaque link CSUM	Displays a Type-10 opaque link checksum with the complete contents of the LSA.

6. Select **Refresh** to update the statistics counters to their latest values.

AP OSPF Route Statistics

Refer to the **Routes** tab to assess the status of OSPF


- [AP OSPF Border Routers](#) on page 1154.
- [AP OSPF External Routes](#) on page 1155.
- [AP OSPF Network Routes](#) on page 1156.
- [AP OSPF Router Routes](#) on page 1157.

AP OSPF Border Routers

To view OSPF border routers statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **OSPF** menu.
5. Select the **Routes** tab.

The **Statistics > AP > Routes > Border Routers** screen displays by default.

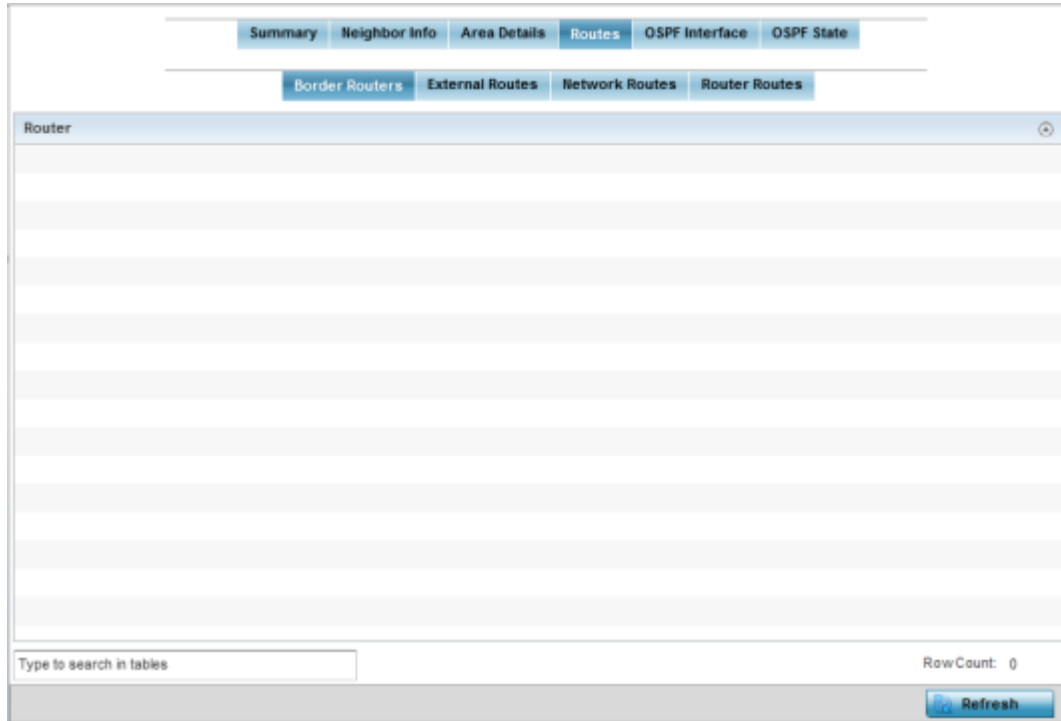

An ABR (*area border router*) connects (links) more than one area. Usually an ABR is used to connect non-backbone areas to the backbone. If OSPF virtual links are used an ABR will also be used to connect the area using the virtual link to another non-backbone area. Border Routers use internal OSPF routing table entries to an ABR or ASBR (*Autonomous System Boundary Router*). Border routers maintain an LSDB for each area supported. They also participate in the backbone.


6. Select **Refresh** to update the statistics counters to their latest values.

AP OSPF External Routes

To view OSPF external route statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **OSPF** from the displayed menu.
5. Select the **Routes > External Routes** tab.

The **Statistics > AP > Routes > External Routes** screen is displayed.

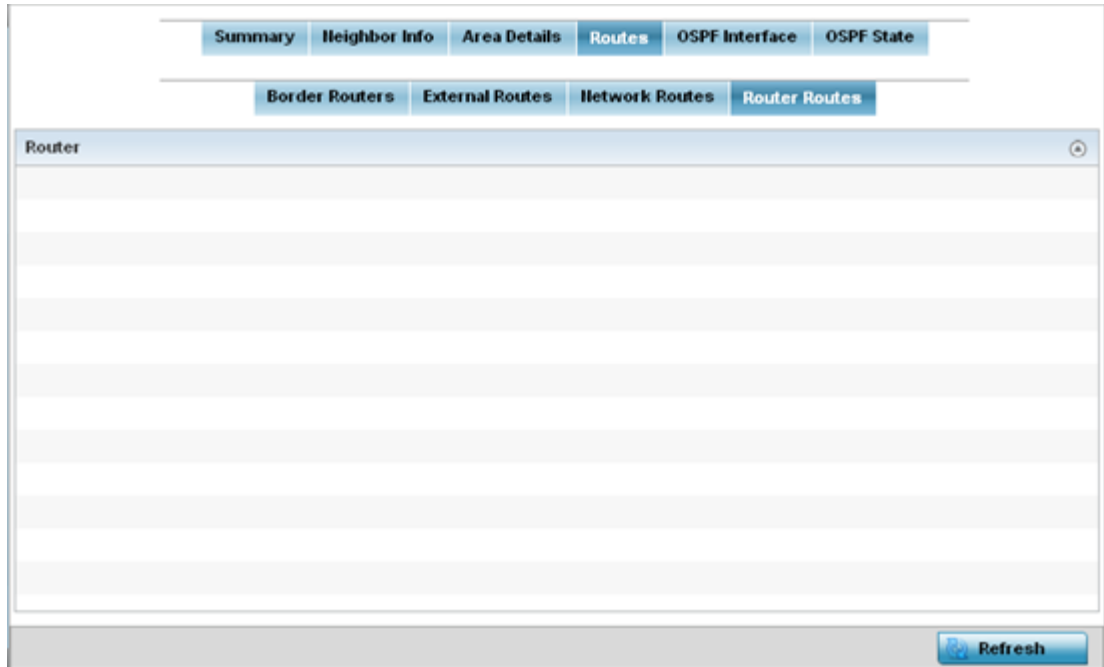

An internal (or *router*) route connects to one single OSPF area. All of its interfaces connect to the area in which it is located and does not connect to any other area.

7. Select **Refresh** to update the statistics counters to their latest values.

AP OSPF Interface

An **OSPF Interface** is the connection between a router and one of its attached networks. An interface has state information associated with it, which is obtained from the underlying lower level protocols and the routing protocol itself. A network interface has associated a single IP address and mask (unless the network is an unnumbered point-to-point network). An interface is sometimes also referred to as a link.

To view OSPF interface statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **OSPF** menu.
5. Select the **OSPF Interface** tab.

The **Statistics > AP > OSPF > OSPF Interface** screen is displayed.

To view OSPF state statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **OSPF** menu.
5. Select the **OSPF State** tab.

The **Statistics > AP > OSPF > OSPF State** screen is displayed

Summary	Neighbor Info	Area Details	Routes	OSPF Interface	OSPF State
OSPF state		Running			
OSPF ignore state count		0			
OSPF ignore state monitor timeout		360			
OSPF ignore state timeout		60			
OSPF max ignore state count		5			
OSPF max routes		256			
OSPF routes received		0			

The **OSPF State** tab describes the following:

OSPF state	Displays the OSPF link state amongst neighbors within the OSPF topology. Link state information is maintained in a LSDB (<i>link-state database</i>) which is a tree image of the entire network topology. Identical copies of the LSDB are periodically updated through flooding on all OSPF supported nodes. Flooding is the part of the OSPF protocol that distributes and synchronizes the link-state database between OSPF routers.
OSPF ignore state count	Lists the number of times state requests have been ignored between the access point and its peers within this OSPF supported broadcast domain.
OSPF ignore state monitor timeout	Displays the timeout that, when exceeded, prohibits an access point from detecting changes to the OSPF link state.
OSPF max ignore state count	Displays whether an OSPF state timeout is being ignored and not utilized in the transmission of state update requests amongst neighbors within the OSPF topology.

OSPF max routes	States the maximum number of routes negotiated amongst neighbors within the OSPF topology.
OSPF routes received	Lists the routes received and negotiated amongst neighbors within the OSPF topology.

6. Select **Refresh** to update the statistics counters to their latest values.

AP Bluetooth

The AP7602, AP7612, AP7632, AP7662, AP8432 and AP8533 model access points utilize a built in Bluetooth chip for specific Bluetooth functional behaviors in a WiNG managed network.

These platforms can use their Bluetooth classic enabled radio to sense other Bluetooth enabled devices and report device data (MAC address, RSSI and device calls) to an ADSP server for intrusion detection. If the device presence varies in an unexpected manner, ADSP can raise an alarm.

AP8432 and AP8533 model access points support Bluetooth beaconing to emit either iBeacon or Eddystone- URL beacons. The access point's Bluetooth radio sends non-connectable, undirected LE (*low-energy*) advertisement packets on a periodic basis. These advertisement packets are short, and they are sent on Bluetooth advertising channels that conform to already-established iBeacon and Eddystone-URL standards. Portions of the advertising packet are still customizable, however.



Note

The WiNG 7.1 release does not support Bluetooth on AP505 and AP510 model access points. This feature will be supported in future releases.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Bluetooth**.
The **Statistics → AP → Bluetooth** screen is displayed.

Bluetooth Radio Statistics	
Name	bluetooth1
Alias	ap81xx-711630:B1
Radio State	Off
Off Reason	no BT/BLE radio found
Radio MAC	00-00-00-00-00-00
Hostname	ap81xx-711630
Device MAC	B4-C7-99-71-16-30
AP Location	r12
Radio Mode	BT-Sensor
Beacon Period	1,000
Beacon Type	Eddystone-URL1
Last Error	

[Refresh](#)

This screen displays the following access point's bluetooth information:

Name	Lists the administrator assigned name of the access point's Bluetooth radio.
Alias	If an alias has been defined for the AP it is listed here. The alias value is expressed in the form of <hostname>: B<bluetooth_radio_number>. If the administrator has defined a hostname for the AP, it is used in place of the AP's default hostname.
Radio State	Displays the current operational state (<i>On/Off</i>) of the Bluetooth radio.
Off Reason	If the Bluetooth radio is <i>offline</i> , this field states the reason.
Radio MAC	Lists the Bluetooth radio's factory-encoded MAC address serving as this device's hardware identifier on the network.
Hostname	Lists the AP's hostname as its network identifier.
Device MAC	Lists the AP's factory-encoded MAC address serving as this device's hardware identifier on the network.
AP Location	Lists the AP's administrator-assigned deployment location.
Radio Mode	Lists an Access Point's Bluetooth radio functional mode as either bt sensor or 1e -beacon.
Beacon Period	Lists the Bluetooth radio's beacon transmission period from 100 -10,000 milliseconds.
Beacon Type	Lists the type of beacon currently configured.
Last Error	Lists descriptive text on any error that is preventing the Bluetooth radio from operating.

5. This screen displays the following:

Tunnel Name	Displays the name of each listed L2TPv3 tunnel assigned upon creation. Each listed tunnel name can be selected as a link to display session data specific to that tunnel. The Sessions screen displays cookie size information as well as pseudowire information specific to the selected tunnel. Data is also available to define whether the tunnel is a trunk session and whether tagged VLANs are used. The number of transmitted, received and dropped packets also display to provide a throughput assessment of the tunnel connection. Each listed session name can also be selected as a link to display VLAN information specific to that session. The VLAN Details screen lists those VLANs used an access point interface in L2TP tunnel establishment.
Local Address	Lists the IP address assigned as the local tunnel end point address, not the tunnel interface's IP address. This IP is used as the tunnel source IP address. If a local address is not specified, the source IP address is chosen automatically based on the tunnel peer IP address.
Peer Address	Lists the IP address of the L2TP tunnel peer establishing the tunnel connection.
Tunnel State	States whether the tunnel is Idle (not utilized by peers) or is currently active.
Peer Host Name	Lists the assigned peer hostname used as matching criteria in the tunnel establishment process.
Peer Control Connection ID	Displays the numeric identifier for the tunnel session. This is the peer pseudowire ID for the session. This source and destination IDs are exchanged in session establishment messages with the L2TP peer.
Control Connection ID	Displays the router ID(s) sent in tunnel establishment messages with a potential peer device.
Up Time	Lists the amount of time the L2TP connection has remained established amongst peers sharing the L2TPv3 tunnel connection. The Up Time is displayed in a Days: Hours: Minutes: Seconds: format. If D:0 H:0 M:0 S:0 is displayed, the tunnel connection is not currently established.
Encapsulation Protocol	Displays either IP or UDP as the peer encapsulation protocol. The default setting is IP. UDP uses a simple transmission model without implicit handshakes. Tunneling is also called encapsulation. Tunneling works by encapsulating a network protocol within packets carried by the second network.
Critical Resource	Lists critical resources for this tunnel. Critical resources are device IP addresses on the network (gateways, routers etc.). These IP addresses are critical to the health of the network. These device addresses are pinged regularly by access points. If there's a connectivity issue, an event is generated stating a critical resource is unavailable.

VRRP Group	Lists a VRRP group ID (if utilized). A VRRP group is only enabled when the establishment criteria is set to <i>vrrp-master</i> . A VRRP master responds to ARP requests, forwards packets with a destination link MAC layer address equal to the virtual router MAC layer address, rejects packets addressed to the IP associated with the virtual router and accepts packets addressed to the IP associated with the virtual router.
Establishment Criteria	Displays the tunnel establishment criteria for this tunnel. Tunnel establishment involves exchanging 3 message types (SCCRQ, SCCRP and SCCN) with the peer. Tunnel IDs and capabilities are exchanged during the tunnel establishment with the host.

6. Select **Refresh** to update the screen's statistics counters to their latest value.

AP VRRP

The **VRRP** screen displays VRRP (*Virtual Router Redundancy Protocol*) configuration statistics supporting router redundancy in a wireless network requiring high availability.

To review a selected access point's VRRP statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **VRRP**.

The **Statistics > AP > L2TPv3 Tunnels** screen is displayed.

The screenshot displays the VRRP statistics interface. It is divided into two main sections: Global Error Status and Router Operations Summary.

Global Error Status

Authentication mismatch	0
Packets with invalid checksum	0
Packets with invalid type	0
Packets with invalid VRID	0
Packets with TTL Errors	0
Last protocol error reason	None
Packets with length Error	0
Packets with invalid version	0

Router Operations Summary

VRID	Virtual IP Address	Master IP Address	Interface Name	Version	State

At the bottom of the screen, there are three buttons: **Clear Router Status**, **Clear Global Error Status**, and **Refresh**.

5. Refer to the **Global Error Status** field to review the various sources of packet errors logged during the implementation of the virtual route.

Errors include the mismatch of authentication credentials, invalid packet checksums, invalid packet types, invalid virtual route IDs, TTL errors, packet length errors and invalid (non matching) VRRP versions.

6. Refer to the **Router Operations Summary** for the following status:

VRRP ID	Lists a numerical index (1 - 254) used to differentiate VRRP configurations. The index is assigned when a VRRP configuration is initially defined. This ID identifies the virtual router a packet is reporting status for.
Virtual IP Address	Lists the virtual interface IP address used as the redundant gateway address for the virtual route.
Master IP Address	Displays the IP address of the elected VRRP master. A VRRP master (once elected) responds to ARP requests, forwards packets with a destination link layer MAC address equal to the virtual router MAC address, rejects packets addressed to the IP associated with the virtual router and accepts packets addressed to the IP associated with the virtual router.
Interface Name	Displays the interfaces selected on the access point to supply VRRP redundancy failover support.
Version	Display VRRP version 3 (RFC 5798) or 2 (RFC 3768) as selected to set the router redundancy. Version 3 supports sub-second (centisecond) VRRP failover and support services over virtual IP.
State	Displays the current state of each listed virtual router ID.

7. Select **Clear Router Status** to clear the Router Operations Summary table to zero and begin new data collections.
8. Select **Clear Global Error Status** to clear the Global Error Status table values to zero and begin new data collections.
9. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Critical Resources


The **Critical Resources** screen displays device IP addresses on the network (gateways, routers etc.). These IP addresses are critical to the health of the access point managed network. Critical resources are pinged regularly by the access point. If there's a connectivity issue, an event is generated stating a critical resource is unavailable. Each device's VLAN, ping mode and state is displayed for the administrator.

To review a selected access point's critical resource statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Critical Resource** from the left-hand side of the UI.

The **Statistics > AP > Critical Resource** screen is displayed in the right-hand pane.

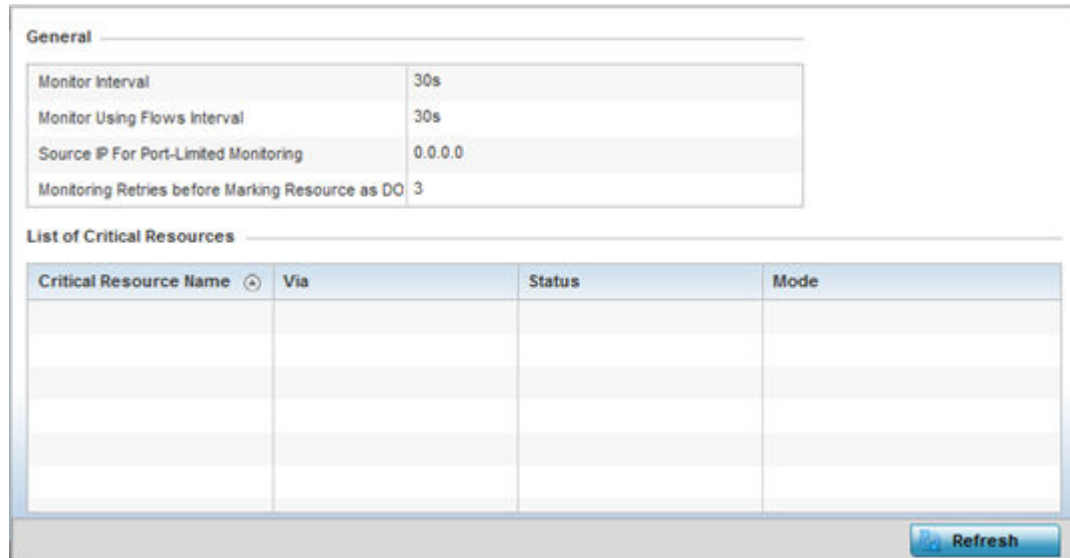

Refer to the **General** field to assess the **Monitor Interval** and **Monitor Using Flows Interval** used to poll for updates from the critical resource IP listed for **Source IP For Port Limited Monitoring**. **Monitoring Retries before Marking resource as DOWN** are the number of retry connection attempts permitted before this listed resource is defined as down (offline).

Refer to the following **List of Critical Resources** stats:

Critical Resource Name	Lists the name of the critical resource monitored by the access point. Critical resources are device IP addresses on the network (gateways, routers etc.). These IP addresses are critical to the health of the network. These device addresses are pinged regularly by access points. If there's a connectivity issue, an event is generated stating a critical resource is unavailable.
Via	Lists the VLAN used by the critical resource as a virtual interface. the VLAN displays as a link than can be selected to list configuration and network address information in greater detail.
Status	Defines the operational state of each listed critical resource VLAN interface (Up or Down).
Error Reason	Provides an error status as to why the critical resource is not available over its designated VLAN.
Mode	Defines the operational state of each listed critical resource (up or down).

5. Select **Refresh** to update the statistics counters to their latest values.

AP LDAP Agent Status

When LDAP has been specified as an external resource (as opposed to local access point RADIUS resources) to validate PEAP-MS-CHAP v2 authentication requests, user credentials and password information needs to be made available locally to


successfully connect to the external LDAP server. Up to two LDAP Agents (primary and secondary external resources) can be defined as external resources for PEAP-MS-CHAP v2 authentication requests.

For more information on setting LDAP agents as part of the RADIUS server policy, see [Configuring RADIUS Server Policy](#) on page 945.

To view access point LDAP agent statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **LDAP Agent Status** from the left-hand side of the UI.

The **Statistics** → **AP** → **LDAP Agent Status** screen is displayed in the right-hand pane.

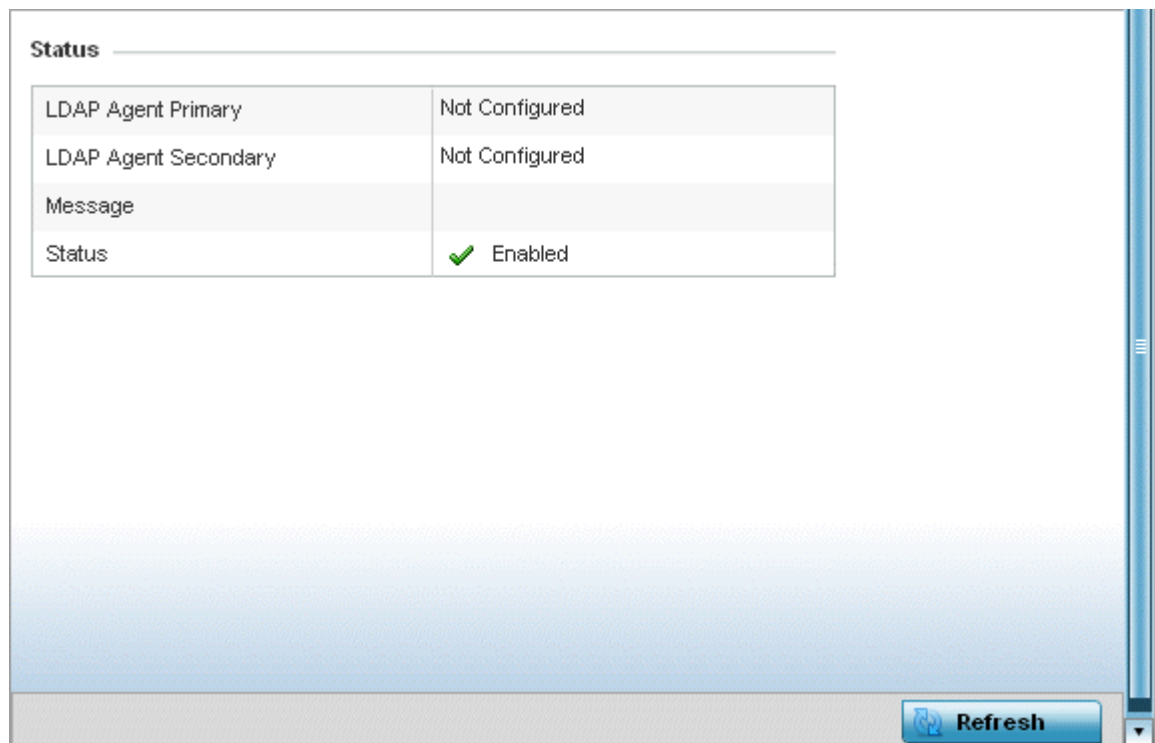

Status	
LDAP Agent Primary	Not Configured
LDAP Agent Secondary	Not Configured
Message	
Status	✔ Enabled

Refresh

The LDAP Agent Status screen displays the following:

LDAP Agent Primary	Lists the primary IP address of a remote LDAP server resource used by the controller or service platform to validate PEAP-MS-CHAP v2 authentication requests. When a RADIUS server policy's data source is set to LDAP, this is the first resource for authentication requests.
LDAP Agent Secondary	Lists the secondary IP address of a remote LDAP server resource used by the controller or service platform to validate PEAP-MS-CHAP v2 authentication requests. When a RADIUS server policy's data source is set to LDAP, this is the second resource for authentication requests.
Message	Displays any system message generated in the controller or service platform's connection with the primary or secondary LDAP agent. If there's a problem with the username and password used to connection to the LDAP agent it would be listed here.
Status	Displays whether the controller or service platform has successfully joined the remote LDAP server domain designated to externally validate PEAP-MS-CHAP v2 authentication requests.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP MiNT Links

Wireless controllers and APs use the MiNT protocol as the primary means of device discovery and communication for AP adoption and management. MiNT provides a mechanism to discover neighbor devices in the network, and exchange packets between devices regardless of how these devices are connected (L2 or L3).

MiNT Links are automatically created between controllers and APs during adoption using MLCP (*MiNT Link Creation Protocol*). They can also be manually created between a controller and AP (or) between two APs. MiNT links are manually created between controllers while configuring a cluster.

Level 2 (or) remote MiNT links are controller aware links, and requires IP network for communication. This level 2 MiNT links at access points are intended for remote Adaptive AP deployment and management from NOC. With Level2 MiNT links, access points are only aware of the controllers and not about other APs. Level 2 MiNT links also provide partitioning, between APs deployed at various remote sites.

To view access Mint link statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **Mint Links** from the left-hand side of the UI.

The **Statistics > AP > Mint Links** screen is displayed in the right-hand pane.

name	listening	forced	unused	level	type	dis	devs	secure	local ip	natted	cost	hello seq num	hello interval	adj hold time	static	dyna mic	misp	rim	cont rol vlan	clustering
ip-172	✗	✗	✗	2	ipv4	unkno			172.16	✗	100	4	15	46	✗	✗	✓	✗	✗	✗
vlan-5	✗	✗	✗	1	vlan	68.8A				✗	10	3	4	13	✗	✗	✓	✗	✗	✗
vlan-1	✗	✗	✗	1	vlan	B.19.E				✗	10	7	4	13	✗	✗	✓	✗	✗	✗
ip-172	✗	✗	✗	2	ipv4	unkno			172.16	✗	100	4	15	46	✗	✗	✓	✗	✗	✗

Type to search in tables Row Count: 4

[Refresh](#)

The **Mint Links** screen lists the **name** of the impacted VLAN or link in the form of a link that can be selected to display more granular information about that VLAN. A green check mark or a red X defines whether the listed VLAN is listening to traffic, forced to stay up or unused with the Mint link. The **level** column specifies whether the listed Mint link is traditional switching link (level 2) or a routing link (level 3). The **type** column defines whether the listed Mint link is a VLAN or an IPv4 or IPv6 type network address. The **dis** column lists how each link was discovered.

Refer to the **secure** column to assess whether the listed links are isolated between peers. The **local ip** column lists the IP address assigned as the link's end point address, not the interface's IP address. The **natted** column lists whether the link is NAT enabled or disabled for modifying network address information in IP packet headers in transit. The **cost** column defines the cost for a packet to travel from its originating port to its end point destination.

The **hello seq number** and **hello interval** columns define the interval between hello keep alive messages between link end points. While the **adj hold time** sets the time after the last hello packet when the connected between end points is defined as lost.

The **static** and **dynamic link** columns state whether each listed link is static route using a manually configured route entry, or a dynamic route characterized by its destination. The **rim** column defines whether the listed link is managed remotely. The **control vlan** column states whether the listed link has enabled as a control VLAN. Lastly, the **clustering column** states whether listed link members discover and establish connections to other peers and provide self-healing in the event of cluster member failure.

- If needed, select a **Mint link** from the **name** column to display more granular information for that link.

Mint Links

name	vlan-10
level	1
cost	10
hello interval	4
adj hold time	13

Adjacencies

neighbor	state	up time	last hello
08.19.E3.6E	up	546,679	2
12.3B.65.87	up	546,679	0
19.43.53.00	up	546,679	3
4D.1B.B2.10	up	546,679	0
68.64.0A.8F	up	546,679	0

Refresh Exit

The first table lists the Mint link's **name** and **level** specifying whether the Mint link is traditional switching link (level 2) or a routing link (level 3). The **cost** defines the cost for a packet to travel from its originating port to its end point destination. The **hello** interval lists the time between hello keep alive messages between link end points. The **adj** hold time sets the time after the last hello packet when the connected between end points is defined as lost.

The **Adjacencies** table lists **neighbor** devices by their hardware identifiers and operational **state** to help determine their availability as Mint link end points and peers. The **up time** lists the selected link's detection on the network and the last hello lists when the last hello message was exchanged.

- Periodically, select **Refresh** to update the screen's data counters to their latest values.

AP Guest Users

A captive portal is an access policy for providing guests temporary and restrictive access to the wireless network. A captive portal configuration provides secure authenticated access using a standard Web browser. Captive portals provide authenticated access by capturing and re-directing a wireless user's Web browser session to a captive portal login page where the user must enter valid credentials to access to the network. Captive portals can have their access durations set by an administrator to either provide temporary access to the access point managed network or provide access without limitations.

For information on setting captive portal duration and authentication settings, refer to [Captive Portal Policy](#) on page 893.

Configured Downlink Rate (kbps)	Specifies the download speed configured for the listed guest user. When bandwidth is available, the user can download data at the specified rate (in kilobytes per second). If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the defined reduced downlink rate. For more information, refer to Defining User Pools on page 940.
Configured Uplink Rate (kbps)	Specifies the upload speed dedicated to the listed guest user. When bandwidth is available, the user is able to upload data at the specified rate (in kilobytes per second). If a guest user has a bandwidth based policy and exceeds the specified data limit, their speed is throttled to the reduced uplink rate. For more information, refer to Defining User Pools on page 940.
Current Downlink Rate (Kbps)	Lists the listed guest user's current downlink rate in kbps. Use this information to assess whether this user's configured downlink rate is adequate for their session requirements and whether their reduced downlink rate need adjustment if the configured downlink rate is exceeded. For more information, refer to Defining User Pools on page 940.
Current Uplink Rate (Kbps)	Lists the listed guest user's current uplink rate in kbps. Use this information to assess whether this user's configured uplink rate is adequate for their session requirements and whether their reduced uplink rate need adjustment if the configured uplink rate is exceeded. For more information, refer to Defining User Pools on page 940.

5. Click **Refresh** to update the statistics counters to their latest values.

AP GRE Tunnel

Generic Routing Encapsulation (GRE) is one of the available tunneling mechanisms which uses IP as the transport protocol and can be used for carrying many different passenger protocols. The tunnels behave as virtual point-to-point links that have two endpoints identified by the tunnel source and tunnel destination addresses at each endpoint.

Use the GRE Tunnel screen to view information on the traffic flow in a *Generic Routing Encapsulation* (GRE) tunnel.

To view the access point's GRE Tunnel statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **GRE Tunnel**.

The **Statistics > AP > GRE Tunnels** screen displays in the right-hand pane.

GRE Tunnels	
GRE State	
Peer IP Address	
Tunnel Id	
Total Packet Received	
Total Packet Sent	
Total Packet Dropped	

This screen describes the following:

GRE State	Displays the current operational state of the GRE tunnel.
Peer IP Address	Displays the IP address of the peer device on the remote end of the GRE tunnel.
Tunnel ID	Displays the session ID of an established GRE tunnel. This ID is only viable while the tunnel is operational and does not carry to subsequent sessions.
Total Packets Received	Displays the total number of packets received from a peer at the remote end of the GRE tunnel.
Total Packets Sent	Displays the total number of packets sent from this controller or service platform to a peer at the remote end of the GRE tunnel.
Total Packets Dropped	Lists the number of packets dropped from tunneled exchanges between this controller or service platform and a peer at the remote end of the VPN tunnel

AP Dot 1X


Dot1x (or 802.1x) is an IEEE standard for network authentication. Devices supporting Dot1x allow the automatic provision and connection to the wireless network without launching a Web browser at login. When within range of a Dot1x network, a device automatically connects and authenticates without needing to manually login.

To view the Dot1x statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Dot1x** from the left-hand side of the UI.

The **Statistics > AP > Dot1X** screen is displayed.

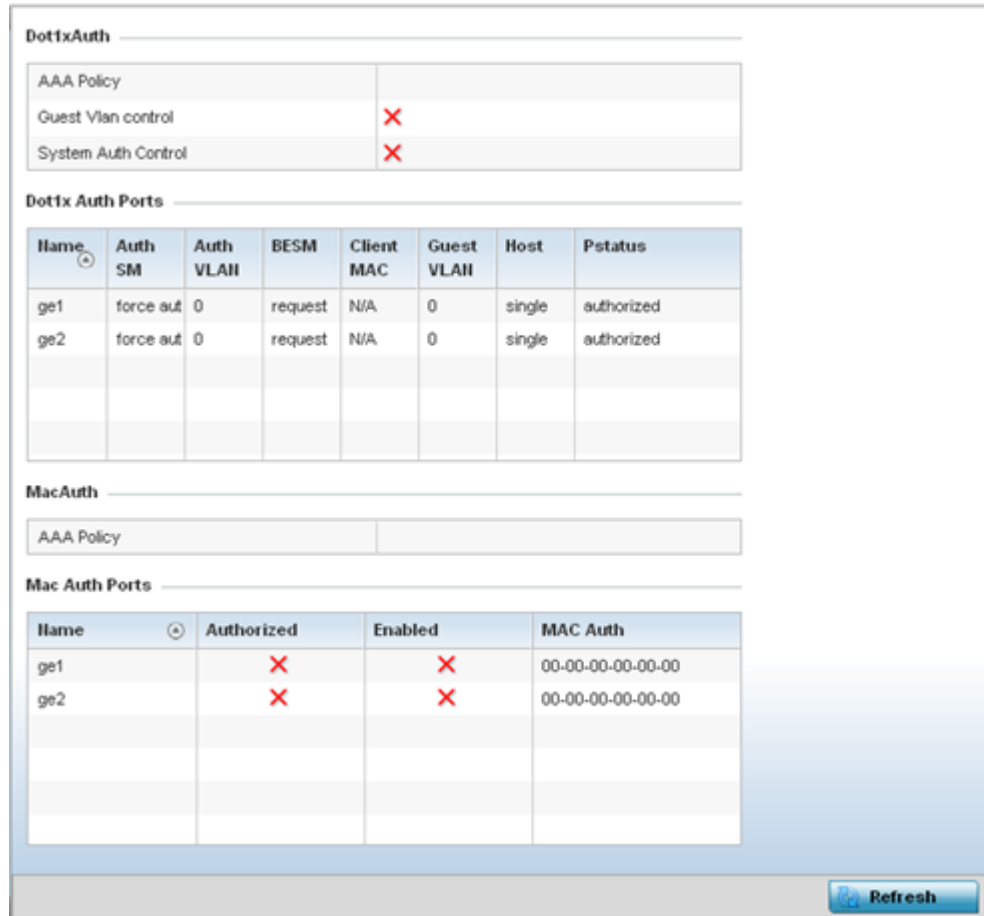

Refer to the following **Dot1xAuth** statistics:

AAA Policy	Lists the AAA policy currently being utilized for authenticating user requests.
Guest VLAN Control	Lists whether guest VLAN control has been allowed (or enabled). This is the VLAN traffic is bridged on if the port is unauthorized and guest VLAN globally enabled. A green checkmark designates guest VLAN control as enabled. A red X defines guest VLAN control as disabled.
System Auth Control	Lists whether Dot1x authorization is globally enabled for the controller or service platform. A green checkmark designates Dot1x authorization globally enabled. A red X defines Dot1x as globally disabled.

Review the following **Dot1x Auth Ports** utilization information:

Name	Lists the controller or service platform GE ports subject to automatic connection and authentication using Dot1x.
Auth SM	Lists whether Dot1x authentication is forced over the listed port.
Auth VLAN	Lists the numeric VLAN ID used as a virtual interface for authentication requests over the listed port.
BESM	Lists whether an authentication request is pending on the listed port.
Client MAC	Lists the MAC address of requesting clients seeking authentication over the listed port.
Guest VLAN	Lists the guest VLAN utilized for the listed port. This is the VLAN traffic is bridged on if the port is unauthorized and guest VLAN globally enabled.
Host	Lists whether the host is a single entity or not.
Pstatus	Lists whether the listed port has been authorized for Dot1x network authentication.

Refer to the **MacAuth** table to assess the AAA policy applied to MAC authorization requests.

Review the following **MAC Auth Ports** utilization information:

Name	Lists the controller or service platform GE ports subject to automatic connection and MAC authentication using Dot1x.
Authorized	Lists whether MAC authorization using Dot1x has been authorized (permitted) on the listed GE port. A green checkmark designates Dot1x authorization as authorized. A red X defines authorization as disabled.
Enabled	Lists whether MAC authorization using Dot1x has been or enabled) on the listed GE port. A green checkmark designates Dot1x authorization as allowed. A red X defines authorization as disabled.
MAC Auth	Lists the port's factory encoded MAC address.

5. Select **Refresh** to update the screen's statistics counters to their latest value.

AP Network

Use the **Network** screens to view information impacting access point ARP (hardware address determination), routing, bridging, IGMP, DHCP Cisco and link layer discovery utilization statistics.

For more information, refer to the following:

- [AP Network ARP Entries](#) on page 1177
- [AP Network Route Entries](#) on page 1178
- [AP Network Default Routes](#) on page 1180
- [AP Network Bridge](#) on page 1182
- [AP Network IGMP](#) on page 1184
- [AP Network MLD](#) on page 1186
- [AP Network Traffic Shaping](#) on page 1188

- [AP Network DHCP Options](#) on page 1190
- [AP Network Cisco Discovery Protocol](#) on page 1191
- [AP Network Link Layer Discovery Protocol](#) on page 1192
- [AP Network IPv6 Neighbor](#) on page 1193
- [AP Network MSTP](#) on page 1195

AP Network ARP Entries

ARP (*Address Resolution Protocol*) is a protocol for mapping an IP address to a device address recognized in the local network. An address is 32 bits long. In an Ethernet local area network, however, addresses for attached devices are 48 bits long. (The physical machine address is also known as a MAC address.) A table, usually called the ARP cache, is used to maintain a correlation between each MAC address and its corresponding IP address. ARP provides the protocol rules for making this correlation and providing address conversion in both directions.

To view the ARP entries on the network statistics screen:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **ARP Entries**.

The **Statistics > AP > Network > ARP Entries** screen is displayed.

IP Address	ARP MAC Address	Type	VLAN
172.168.6.10	00-16-C7-86-A2-40	Dynamic	vlan1

Type to search in tables Row Count: 1

[Refresh](#)

The **ARP Entries** screen displays the following:

IP Address	Displays the IP address of the client being resolved on behalf of the controller or service platform.
ARP MAC Address	Displays the MAC address of the device where an IP address is being resolved.
Type	Defines whether the entry was added statically or created dynamically in respect to network traffic. Entries are typically static.
VLAN	Displays the name of the VLAN ID where the IP address was found.

6. Select the **Refresh** button to update the screen's statistics counters to their latest values.

AP Network Route Entries

The **Route Entries** screen displays the destination subnet, gateway, and interface for routing packets to a defined destination. When an existing destination subnet does not meet the needs of the network, add a new destination subnet, subnet mask and gateway.

To view route entries:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Route Entries**.

The **Statistics > AP > Network > IPv4 Route Entries** screen is displayed.

Destination	FLAGS	Gateway	Interface
172.168.6.0/24	C	direct	vlan1
default	CG	172.168.6.10	vlan1

Type to search in tables Row Count: 2


[Refresh](#)

The **IPv4 Route Entries** screen provides the following information:

Destination	Displays the IPv4 formatted address of the destination route address.
Distance	Lists the hop distance to a desired route. Devices regularly send neighbors their own assessment of the total cost to get to all known destinations. A neighboring device examines the information and compares it to their own routing data. Any improvement on what's already known is inserted in that device's own routing tables. Over time, each networked device discovers the optimal next hop for each destination.
Route	Lists the IPv4 formatted IP address used for routing packets to a defined destination.
Flags	The flag signifies the condition of the direct or indirect route.
Gateway	Displays the gateway IP address used to route packets to the destination subnet.
Interface	Displays the name of the controller interface or VLAN utilized by the destination subnet.
Metric	Lists the metric (or cost) of the route to select (or predict) the best route. The metric is computed using a routing algorithm, and covers information bandwidth, network delay, hop count, path cost, load, MTU, reliability, and communication cost.

6. Select the **IPv6 Route Entries** tab to review route data for IPv6 formatted traffic.

The **IPv6 Route Entries** stats display in the right-hand pane.

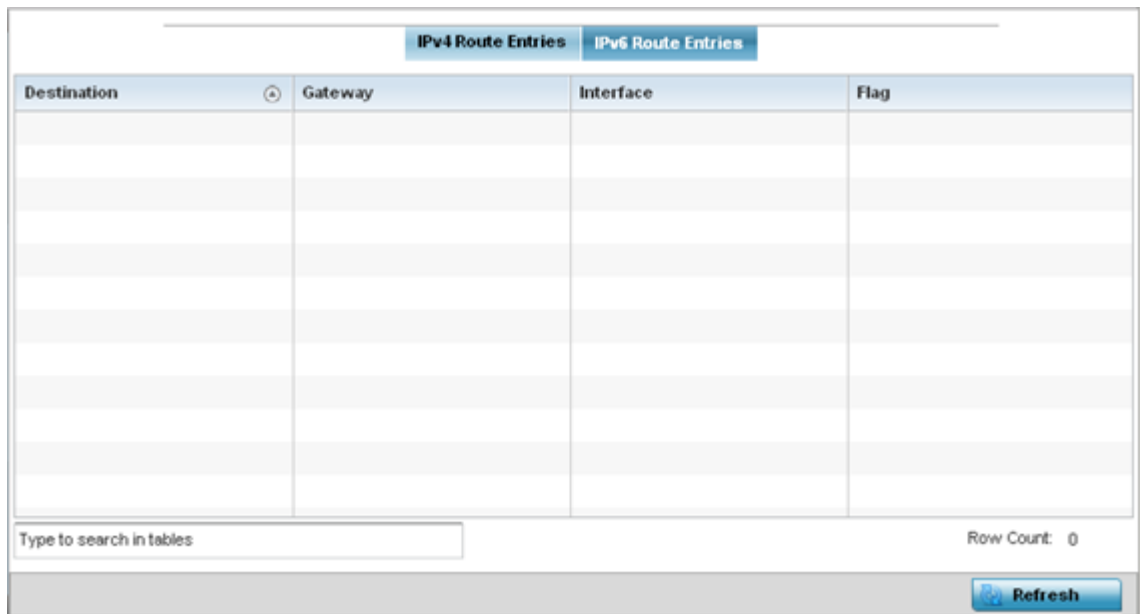

The **IPv6 Route Entries** screen provides the following information:

Destination	Displays the IPv6 formatted address of the destination route address. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
Gateway	Displays the gateway IP address used to route packets to the destination subnet.
Interface	Displays the name of the controller interface or VLAN utilized by the destination subnet.
Flag	The flag signifies the condition of the direct or indirect route.

7. Select **Refresh** to update the display to the latest values.

AP Network Default Routes

In an IPv6 supported environment unicast routing is always enabled. A controller or service platform routes IPv6 formatted traffic between interfaces as long as the interfaces are enabled for IPv6 and ACLs allow IPv6 formatted traffic. However, an administrator can add a default routes as needed.

Static routes are manually configured. They work fine in simple networks. However, static routes with topology changes require an administrator to manually configure and modify the corresponding route revisions. Default routes are useful, as they forward packets that match no specific routes in the routing table.

To view access point's default routes:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Route Entries**.

The **Statistics > AP > Network > IPv4 Default Routes** screen is displayed.

only. A bridge and a controller are very similar, since a controller is a bridge with a number of ports.

The **Bridge** screen provides details about the IGS (*Integrate Gateway Server*), which is a router connected to an access point. The IGS performs the following:

- *Issues IP addresses*
- *Throttles bandwidth*
- *Permits access to other networks*
- *Times out old logins*

This screen also provides information about the MRouter (*Multicast Router*), which is a router program that distinguishes between multicast and unicast packets and how they should be distributed along the Multicast Internet. Using an appropriate algorithm, a multicast router instructs a switching device what to do with the multicast packet.

To view an access point's Bridge statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Bridge**.

The **Statistics > AP > Bridge** stats is displayed in the right-hand pane.

Bridge Name	MAC Address	Interface	VLAN	Forwarding
1	B4-C7-99-71-16-30	ge1	38	forward
1	B4-C7-99-71-16-30	ge1	37	forward
1	B4-C7-99-57-F5-F0	ge1	39	forward
1	00-23-68-31-29-EC	ge1	1	forward
1	00-16-C7-86-A2-07	ge1	38	forward
1	5C-0E-8B-34-71-10	ge1	1	forward
1	5C-0E-8B-34-78-54	ge1	36	forward
1	B4-C7-99-58-64-A0	ge1	1	forward
1	B4-C7-99-58-64-A0	ge1	36	forward
1	5C-0E-8B-0E-3C-40	ge1	40	forward
1	00-A0-F8-66-E9-0F	ge1	1	forward
1	5C-0E-8B-0E-3C-40	ge1	37	forward
1	00-23-68-31-29-EC	ge1	1	forward

Type to search in tables Row Count: 55

[Refresh](#)

This screen displays the following:

Bridge Name	Displays the numeric ID of the network bridge.
MAC Address	Displays the MAC address (factory encoded hardware identifier) of the bridge.
Interface	Displays the interface (access point physical port name) where the bridge transferred packets. Supported access points models have different port configurations.
VLAN	Displays the VLAN the bridge is using as a virtual interface within the network.
Forwarding	Displays whether the bridge is forwarding packets and is in a forwarding state. A bridge can only forward packets.

6. Select **Refresh** to update the counters to their latest values.

AP Network IGMP

IGMP is a protocol used for managing members of IP multicast groups. An access point listens to IGMP network traffic and forwards IGMP multicast packets to radios on which interested hosts are connected. On the wired side of the network, the access point floods all the wired interfaces. IGMP reduces unnecessary multicast traffic floods within the network and help reduce administrative overhead.

To view a AP-managed network's IGMP configuration:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **IGMP**.

Group			
VLAN	Group Address	Port Members	Version

Multicast Router (MRouter)						
VLAN	Learn Mode	Port Members	Mint IDs	Query Interval	Version	
10	pim-dvmrp	ge2		10	3	

[Refresh](#)

The **Group** field describes the following:

VLAN	Displays the group VLAN where the multicast transmission is conducted.
Group Address	Displays the Multicast Group ID supporting the statistics displayed. This group ID is the multicast address hosts are listening to.
Port Members	Displays the ports on which multicast clients have been discovered. For example, ge1, radio1, etc. Ports can vary somewhat amongst supported controller and service platform models.
Version	Displays each listed group IGMP version compatibility as either version 1, 2 or 3.

The **Multicast Router (MRouter)** field describes the following:

VLAN	Displays the group VLAN where the multicast transmission is conducted.
Learn Mode	Displays the learning mode used by the router as either Static or PIM-DVMRP .
Port Members	Displays the physical ports on which multicast clients have been discovered by the multicast router. For example, ge1, radio1, etc. Ports can vary somewhat amongst supported controller and service platform models.
MiNT IDs	Lists MiNT IDs for each listed VLAN. MiNT provides the means to secure access point profile communications at the transport layer. Using MiNT, an access point can be configured to only communicate with other authorized (MiNT enabled) access points of the same model.

Query Interval	Lists the IGMP query interval implemented when the querier functionality is enabled. The default value is 60 seconds.
Version	Lists the multicast router IGMP version compatibility as either version 1, 2 or 3. The default setting is 3.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Network MLD

MLD snooping enables a controller, service platform or Access Point to examine MLD packets and make forwarding decisions based on content. MLD is used by IPv6 devices to discover devices wanting to receive multicast packets destined for specific multicast addresses. MLD uses multicast listener queries and multicast listener reports to identify which multicast addresses have listeners and join multicast groups.

MLD snooping caps the flooding of IPv6 multicast traffic on controller, service platform or Access Point VLANs. When enabled, MLD messages are examined between hosts and multicast routers and to discern which hosts are receiving multicast group traffic. The controller, service platform or Access Point then forwards multicast traffic only to those interfaces connected to interested receivers instead of flooding traffic to all interfaces.

To view network MLD statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **MLD**.
The **Statistics > AP > MLD** stats is displayed in the right-hand pane.

The screenshot shows two tables in a network configuration interface. The first table is titled "Multicast Listener Discovery (MLD) Group" and has columns for VLAN, Group Address, Port Members, and Version. The second table is titled "IPv6 Multicast Router (MRouter)" and has columns for VLAN, MINT IDs, Learn Mode, Port Members, Query Interval, and Version. A "Refresh" button is located at the bottom right of the interface.

The **Multicast Listener Discovery (MLD) Group** field describes the following:

VLAN	Displays the group VLAN where the MLD groups multicast transmission is conducted.
Group Address	Displays the Multicast Group ID supporting the statistics displayed. This group ID is the multicast address hosts are listening to.
Port Members	Displays the ports on which MLD multicast clients have been discovered. For example, ge1, radio1, etc. Ports can vary somewhat amongst supported controller and service platform models.
Version	Displays each listed group's version compatibility as either version 1, 2 or 3.

The **IPv6 Multicast Router (MRouter)** field describes the following:

VLAN	Displays the group VLAN where the multicast transmission is conducted.
MINT IDs	Lists MiNT IDs for each listed VLAN. MiNT provides the means to secure communications at the transport layer. Using MiNT, a controller or service platform can be configured to only communicate with other authorized (MiNT enabled) devices.
Learn Mode	Displays the learning mode used by the router as either Static or PIM-DVMRP .
Port Members	Displays the physical ports on which multicast clients have been discovered by the multicast router. For example, ge1, radio1, etc. Ports can vary somewhat amongst supported controller and service platform models.

Query Interval	Lists the query interval implemented when the querier functionality is enabled. The default value is 60 seconds.
Version	Lists the multicast router version compatibility as either version 1, 2 or 3. The default setting is 3.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Network Traffic Shaping

Traffic shaping regulates network data transfers to ensure a specific performance level. Traffic shaping delays the flow of packets defined as less important than prioritized traffic streams. Traffic shaping enables traffic control out an interface to match its flow to the speed of a remote target's interface and ensure traffic conforms applied policies. Traffic can be shaped to meet downstream requirements and eliminate network congestion when data rates are in conflict.

Apply traffic shaping to specific applications to apply application categories. When application and ACL rules are conflicting, an application takes precedence over an application category, then ACLs.

- [Traffic Shaping - Status](#) on page 1188
- [Traffic Shaping - Statistics](#) on page 1188

Traffic Shaping - Status

To view network Access Point traffic shaping status:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Traffic Shaping**.
The **Statistics > AP > Traffic Shaping > Status** screen displays by default.
The status screen simply lists the AP's current traffic shaping operational status.
6. Select **Refresh** to update the screen's statistics counters to their latest values.


Traffic Shaping - Statistics

To view network Access Point traffic shaping statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Traffic Shaping**.

The **Statistics > AP > Traffic Shaping > Statistics** screen is displayed.

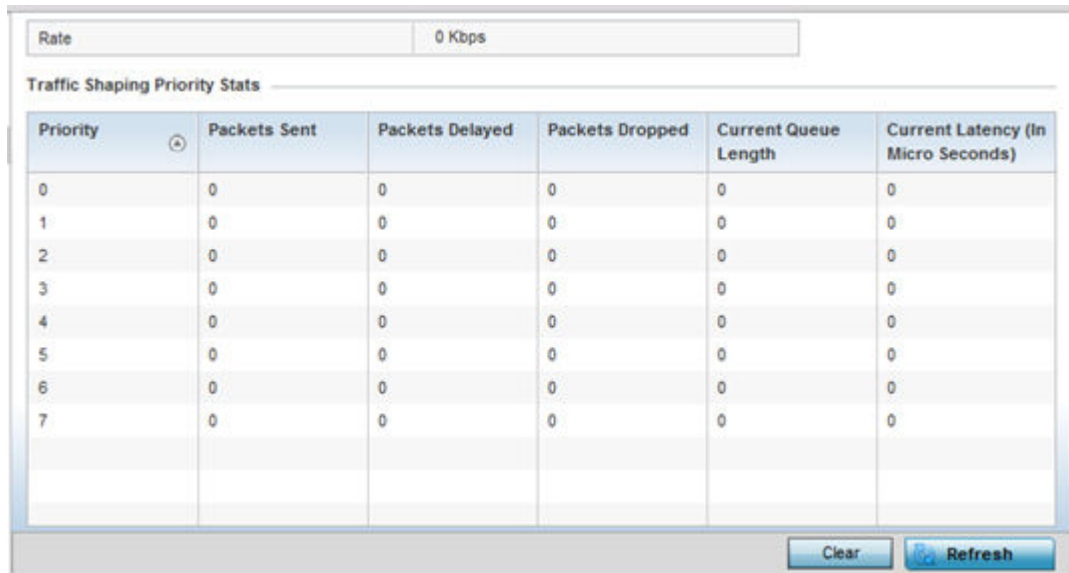

This screen displays the following information:

Rate	The rate configuration controls the maximum traffic rate sent or received on an interface. Consider this form of rate limiting on interfaces at the edge of a network to limit traffic into or out of the network. Traffic within the set limit is sent and traffic exceeding the set limit is dropped or sent with a different priority.
Priority	Lists the traffic shaper queue priority. There are 8 queues (0 - 7), and traffic is queued in each based on incoming packets 802.1p markings.
Packets Sent	Provides a baseline of the total number of packets sent to assess packet delays and drops as a result of the filter rules applied in the traffic shaping configuration.
Packets Delayed	Lists the packets defined as less important than prioritized traffic streams and delayed as a result of traffic shaping filter rules applied.
Packets Dropped	Lists the packets defined as less important than prioritized traffic streams, delayed and eventually dropped as a result of traffic shaping filter rules applied.
Current Length	Lists the packet length of the data traffic shaped to meet downstream requirements.
Current Latency	Traffic shaping latency is the time limit after which packets start dropping as a result of the traffic prioritization filter rules applied.

This screen describes the following:

Server Information	Displays the DHCP server hostname used on behalf of the access point.
Image File	Displays the image file name. BOOTP or the bootstrap protocol can be used to boot diskless clients. An image file is sent from the boot server. The file contains the operating system image. DHCP servers can be configured to support BOOTP.
Configuration	Displays the name of the configuration file on the DHCP server.
Legacy Adoption	Displays legacy (historical) device adoption information on behalf of the access point.
Adoption	Displays pending (current) adoption information on behalf of an access point.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Network Cisco Discovery Protocol

CDP is a proprietary Data Link Layer network protocol implemented in Cisco networking equipment, and used to share information about network devices.

To view an access point's CDP statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **Cisco Discovery Protocol**.

The **Statistics > AP > Network > Cisco Discovery Protocol** screen displays in the right-hand pane.

message is the IPv6 address of the device sending the neighbor solicitation. The data portion of the NA includes the link layer address of the node sending the neighbor advertisement.

Neighbor solicitation messages also verify the availability of a neighbor once its the link layer address is identified. When a node wants to verify the reachability of a neighbor, the destination address in a neighbor solicitation message is the unicast address of the neighbor.

A neighbor is interpreted as reachable when an acknowledgment is returned indicating packets have been received and processed. If packets are reaching the device, they're also reaching the next hop neighbor, providing a confirmation the next hop is reachable.

To view an access point's IPv6 neighbor statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand the **Network** menu from the left-hand side of the UI.
5. Select **IPv6 Neighbor**.

The **Statistics > AP > Network > IPv6 Neighbor Discovery** screen is displayed in the right-hand pane.

IPv6 Address	MAC Address	Type	VLAN

Type to search in tables Row Count: 0

[Refresh](#)

This screen displays the following:

IPv6 Address	Lists an IPv6 IP address for neighbor discovery. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the neighbor discovery protocol via CMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet Layer configuration parameters. IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons.
MAC Address	Lists the factory encoded hardware MAC address of the neighbor device using an IPv6 formatted IP address as its network identifier.
Type	Displays the device type for the neighbor solicitation. Neighbor solicitations request the link layer address of a target node while providing the sender's own link layer address to the target. Neighbor solicitations are multicast when the node needs to resolve an address and unicast when the node seeks to verify the reachability of a neighbor. Options include Host , Router and DHCP Server .
VLAN	Lists the virtual interface (from 1 - 4094) used for the required neighbor advertisements and solicitation messages used for neighbor discovery.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Network MSTP

MSTP provides an extension to RSTP to optimize the usefulness of VLANs. MSTP allows for a separate spanning tree for each VLAN group, and blocks all but one of the possible alternate paths within each spanning tree topology.

If there's just one VLAN in the Access Point managed network, a single spanning tree works fine. However, if the network contains more than one VLAN, the network topology defined by single STP would work, but it's possible to make better use of the alternate paths available by using an alternate spanning tree for different VLANs or groups of VLANs.

MSTP includes all of its spanning tree information in a single BPDU format. BPDUs are used to exchange information bridge IDs and root path costs. Not only does this reduce the number of BPDUs required to communicate spanning tree information for each VLAN, but it also ensures backward compatibility with RSTP. MSTP encodes additional region information after the standard RSTP BPDU as well as a number of MSTI messages. Each MSTI messages conveys spanning tree information for each instance. Each instance can be assigned a number of configured VLANs. The frames assigned to these VLANs operate in this spanning tree instance whenever they are inside the MST region. To avoid conveying their entire VLAN to spanning tree mapping in each BPDU, the Access Point encodes an MD5 digest of their VLAN to an instance table in the MSTP BPDU. This digest is used by other MSTP supported devices to determine if the neighboring device is in the same MST region as itself.

To view an access point's MSTP statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand the **Network** menu from the left-hand side of the UI.

5. Select **MSTP**.

The **Statistics > AP > Network > MSTP** screen is displayed in the right-hand pane.

The screenshot displays the MSTP configuration and bridge details for an access point. It is divided into three sections: MST Config, MST Bridge, and MST Bridge Port Detail.

MST Config

CFG Name	My Name
Digest	0xac36177f50283cd4b83821d8ab26de62
Format ID	0
Name	1
Revision	0

MST Bridge

BPDU Filter	BPDU Guard	Bridge Admin Cisco	Bridge Enabled	Bridge Oper Cisco	CIST Bridge ID	CIST Bridge Priority	CIST Reg Root ID
✗	✗	✗	✗	✗	1: CIST Brk	32,768	1: CIST Reg Root Id E

MST Bridge Port Detail

Name	Role	Send MSTP	State	Type	Admin BPDU Filter	Admin BPDU Guard	Admin Edge	Admin P2P MAC	Admin Root Guard
ge1	4	MSTP	Forwan	0	2	2	✗	✗	✗
ge10	4	STP	Forwan	0	2	2	✗	✗	✗
ge2	4	MSTP	Forwan	0	2	2	✗	✗	✗
ge3	4	MSTP	Forwan	0	2	2	✗	✗	✗

A **Refresh** button is located at the bottom right of the screen.

The **MST Config** field displays the name assigned to the MSTP configuration, its digest, format ID, name and revision.

The **MST Bridge** field lists the filters and guards that have been enabled and whether Cisco interoperability if enabled.

The **MST Bridge Port Detail** field lists specific controller or service platform port status and their current state.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP DHCPv6 Relay & Client

DHCPv6 is a networking protocol for configuring IPv6 hosts with IP addresses, IP prefixes or other configuration attributes required on an IPv6 network. DHCPv6 relay agents receive messages from clients and forward them a DHCPv6 server. The server sends responses back to the relay agent and the relay agent sends the responses to the client on the local link.

To view the access point's DHCPv6 relay configuration:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).


The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Select **DHCPv6 Relay & Client**.

The **Statistics > Controller > DHCP Relay & Client** screen displays in the right-hand pane.

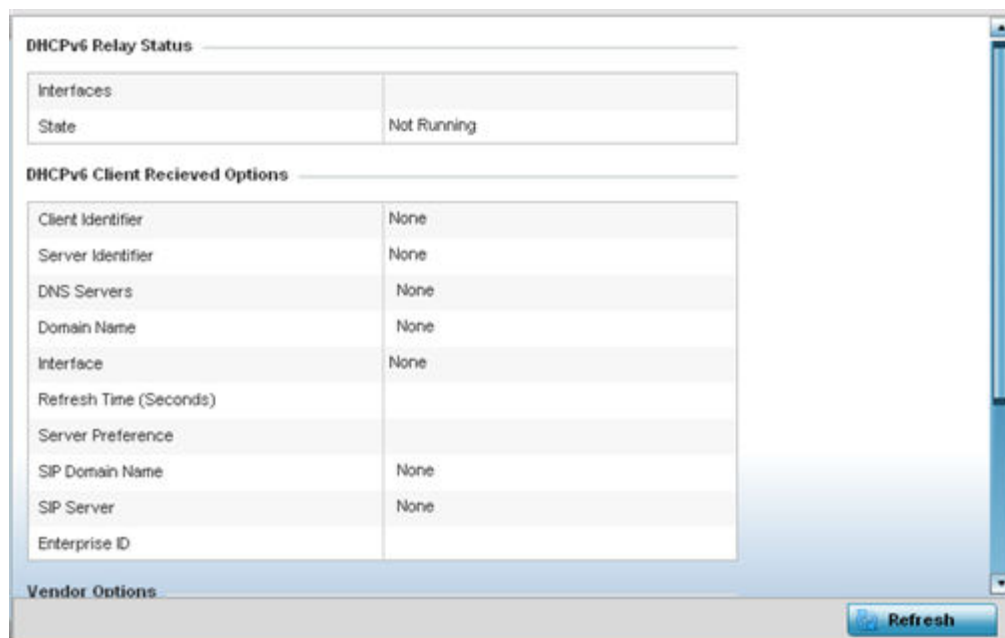

The **DHCP Relay Status** table defines the following:

Interfaces	Displays the access point interface used for DHCPv6 relay.
State	Displays the current operational state of the DHCPv6 server to assess its availability as a viable IPv6 provisioning resource.

The **DHCPv6 Client Received Options** table defines the following:

Client Identifier	Lists whether the reporting client is using a <i>hardware address</i> or <i>client identifier</i> as its identifier type within requests to the DHCPv6 server.
Server Identifier	Displays the server identifier supporting client DHCPv6 relay message reception.
DNS Servers	Lists the DNS server resources supporting relay messages received from clients.
Domain Name	Lists the domain to which the remote server resource belongs.
Interface	Displays the interfaces dedicated to client DHCPv6 relay message reception.
Refresh Time (Seconds)	Lists the time (in seconds) since the data populating the DHCPv6 client received options table has been refreshed.
Server Preference	Lists the preferred DHCPv6 server resource supporting relay messages received from clients.
SIP Domain Name	Lists the SIP domain name supporting DHCPv6 client telephone extensions or voice over IP systems.
SIP Server	Displays the SIP server name supporting DHCPv6 telephone extensions or voice over IP systems.
Enterprise ID	Lists the enterprise ID associated with DHCPv6 received client options.

Refer to the **Vendor Options** table for the following:

Code	Lists the relevant numeric DHCP vendor code.
Data	Lists the supporting data relevant to the listed DHCP vendor code.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP DHCP Server

Access points' utilize an internal DHCP server. DHCP can provide IP addresses automatically to requesting wireless clients. DHCP is a protocol that includes mechanisms for IP address allocation and delivery of host-specific configuration parameters (IP address, network mask gateway, etc.) from a DHCP server to a client.

To review DHCP server statistics, refer to the following:


- [AP DHCP - General](#) on page 1199
- [AP DHCP - Bindings](#) on page 1200
- [AP DHCP - Networks](#) on page 1201

AP DHCP - General

To view **General** DHCP status and binding information:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **DHCP Server** menu.

The **Statistics > AP > DHCP Server > General** screen displays by default in the right-hand pane.

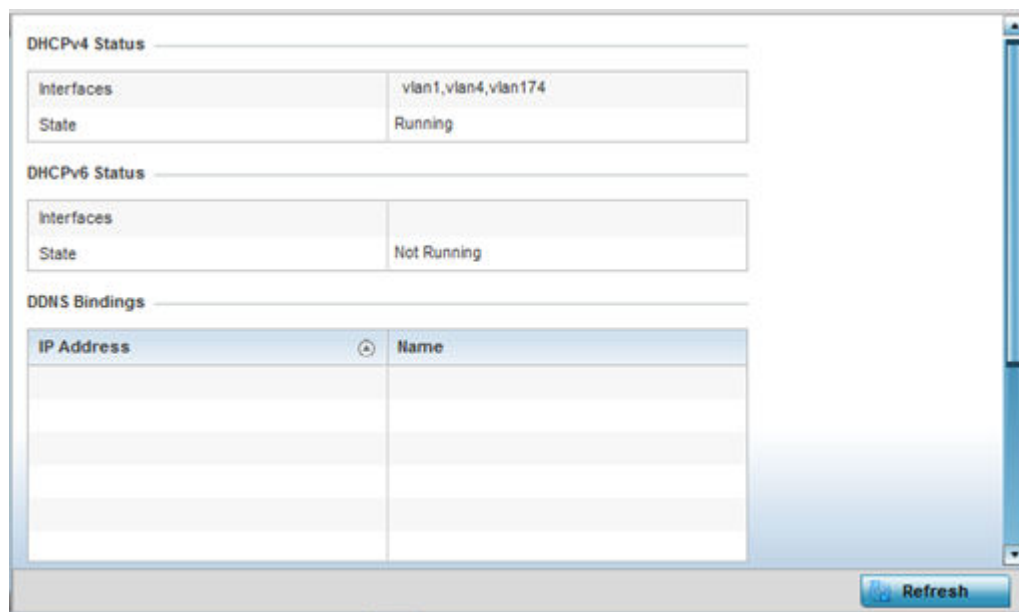

The **DHCPv4 Status** and **DHCPv6 Status** tables defines the following:

Interfaces	Displays the access point interface used with the DHCPv4 or DHCPv6 resource for IP address provisioning.
State	Displays the current operational state of the DHCPv4 or DHCPv6 server to assess its availability as a viable IP provisioning resource.

The **DDNS Bindings** table displays the following:

IP Address	Displays the IP address assigned to the requesting client.
Name	Displays the domain name mapping corresponding to the listed IP address.

The **DHCP Manual Bindings** table displays the following:

IP Address	Displays the IP address for clients requesting DHCP provisioning resources.
Client Id	Displays the client's ID used to differentiate requesting clients.

AP DHCP - Bindings

The **DHCP Binding** displays DHCP binding information such as expiry time, client IP addresses and their MAC address.

Access points build and maintain a DHCP snooping table (DHCP binding database). An access point uses the snooping table to identify and filter untrusted messages. The DHCP binding database keeps track of DHCP addresses assigned to ports, as well as filtering DHCP messages from untrusted ports. Incoming packets received on untrusted ports, are dropped if the source MAC address does not match the MAC in the binding table.

To view a network's DHCP Bindings:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **DHCP Server** menu.
5. Select **Bindings**.

The **Statistics > AP > DHCP Server > Bindings** screen displays by default in the right-hand pane.

Expiry Time	IP Address	DHCP MAC Address
Wed Dec 9 17:23:10 2015	172.168.7.197	00-06-F6-69-60-C2
Thu Dec 10 00:38:37 2015	172.168.7.198	B4-C7-99-6C-86-ED

Type to search in tables Row Count: 2

This screen displays the following:

Expiry Time	Displays the expiration of the lease used by the devices requesting controller or service platform DHCP resources.
IP Address	Displays the IP address of each listed device requesting DHCP services.
DHCP MAC Address	Displays the MAC address of each device requesting DHCP services.

6. Select a table entry and select **Clear** to remove the client from the list of devices requesting DHCP services.
7. Select **Clear All** to remove all listed clients from the list of requesting clients.
8. Select the **Refresh** button to update the screen's statistics counters to their latest values.

AP DHCP - Networks

A controller, service platform or access point's DHCP server maintains a pool of IP addresses and client configuration parameters (default gateway, domain name, name servers, etc). On receiving a valid client request, the DHCP server assigns an IP address, a lease (the validity of time), and other IP configuration parameters to a client on an administrator assigned lease basis.

The **Networks** screen provides network pool information, such as the subnet for the addresses you want to lease from the pool, the pool name, used addresses and the total number of addresses available for lease to a requesting client.

To view the DHCP Server's Networks information:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **DHCP Server** menu.
5. Select **Networks**.

The **Statistics > AP > DHCP Server > Networks** screen displays in the right-hand pane.

Name	Subnet Address	Used Addresses	Total Addresses
vlan1	192.168.1.0/24	0	19

This screen displays the following:

Name	Displays the name of the virtual network from which IP addresses can be issued to DHCP client requests on the listed controller or service platform interface.
Subnet Address	Displays the subnet for the IP addresses used from the network pool.
Used Addresses	Displays the number of host IP addresses allocated by the DHCP server.
Total Addresses	Displays the total number of IP addresses available in the network pool for requesting clients.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Firewall

A *firewall* is a wireless network security mechanism designed to block unauthorized access while permitting authorized device communications. Firewalls use a set of *permit* or *deny* filters to manage access point resource requests based on a set of administrator defined rules.

The access point's firewall statistics are partitioned into the following:

- [Packet Flows](#)
- [Denial of Service](#)
- [IP Firewall Rules](#)
- [MAC Firewall Rules](#)
- [NAT Translations](#)
- [DHCP Snooping](#)

AP Firewall Packet Flows


The **Packet Flows** screen displays data traffic packet flow utilization. The chart represents the different protocol flows supported, and displays a proportional view of the flows in respect to their percentage of data traffic utilized.

The **Total Active Flows** graph displays the total number of flows supported. Other bar graphs display for each individual packet type.

To view access point packet flows statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.

The **Statistics > AP > Firewall > Packet Flows** screen displays by default in the right-Hand pane.

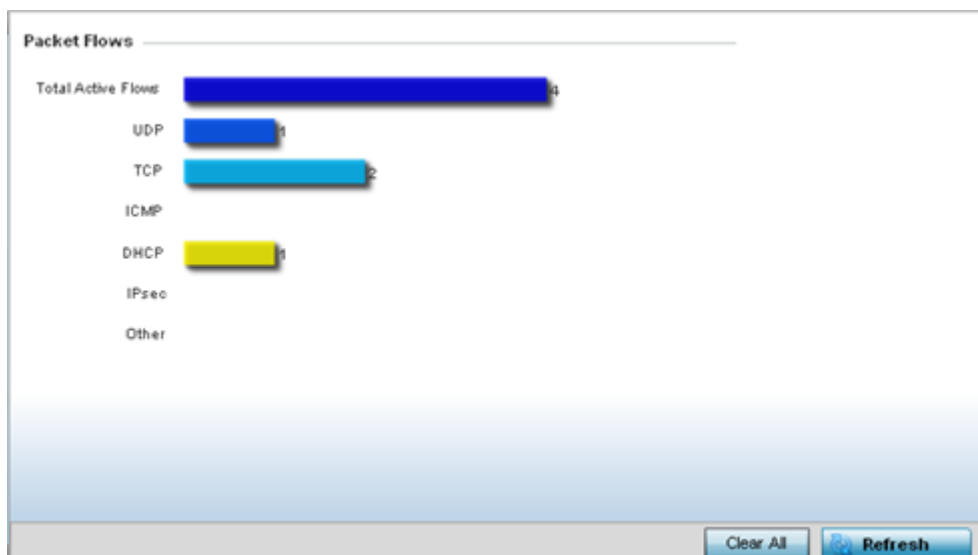

5. Select **Clear All** to revert the statistics counters to zero and begin a new data collection, or select **Refresh** to update the display to the latest values.

AP Denial of Service

A DoS attack or distributed denial-of-service attack is an attempt to make a computer resource unavailable to its intended users. Although the means to carry out a DoS attack may vary, it generally consists of concerted efforts to prevent an Internet site or service from functioning efficiently.

One common method involves saturating the target's machine with external communications requests, so it cannot respond to legitimate traffic or responds so slowly as to be rendered effectively unavailable. DoS attacks are implemented by either

forcing the targeted computer(s) to reset, or consume its resources so it can't provide its intended service.

The DoS screen displays the types of attack, number of times it occurred and the time of last occurrence.

To view an access point's DoS attack configuration:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.
5. Select **Denial of Service**.

The **Statistics > AP > Firewall > Denial of Service** screen displays in the right-hand pane.

Attack Type	Count	Last Occurrence
Ascend	0	Never
BroadcastMulticast ICMP	0	Never
Chargen	0	Never
Fraggle	0	Never
FTP Bounce	0	Never
Router Solicit	0	Never
Invalid Protocol	0	Never
LAND	0	Never
Router Advertisement	0	Never
Smurf	0	Never
Snork	0	Never
Source Route	0	Never
IP Spoof	0	Never
TCP Bad Sequence	0	Never

Row Count: 25

Buttons: Clear All, Refresh

This screen displays the following:

Attack Type	Displays the DoS attack type.
Count	Displays the number of times the access point's firewall has detected each listed DoS attack.
Last Occurrence	Displays when the attack event was last detected by the access point firewall.

6. Select **Clear All** to revert the statistics counters to zero and begin a new data collection.
7. Select the **Refresh** button to update the screen's statistics counters to their latest values.

AP IPv4 Firewall Rules

Create firewall IP address rules to let any computer send or receive traffic from, programs, system services, computers or users. IP firewall rules can be created to provide one of the three actions listed below:

- *Allow a connection.*
- *Allow a connection only if it is secured through the use of Internet Protocol security.*
- *Block a connection.*

Rules can be created for either *inbound* or *outbound* traffic.

To view an access point's IP firewall rules:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.
5. Select **IP Firewall Rules**.

The **Statistics > AP > Firewall > IP Firewall Rule** screen displays in the right-hand pane.

Precedence	Friendly String	Hit Count
10	permit tcp any any rule-precedence	0
11	permit udp any eq 67 any eq dhcp	0
20	deny udp any range 137 138 any r	0
21	deny ip any 224.0.0.0/4 rule-prece	0
22	deny ip any host 255.255.255.255	0
100	permit ip any any rule-precedence	0

Type to search in tables Row Count: 6

[Refresh](#)

This screen displays the following:

Precedence	Displays the precedence (priority) applied to packets. Every rule has a unique precedence value between 1 - 5000. You cannot add two rules with the same precedence value.
Friendly String	This is a string that provides more information as to the contents of the rule.
Hit Count	Displays the number of times each WLAN ACL has been triggered.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP IPv6 Firewall Rules

IPv6 provides enhanced identification and location information for computers on networks routing traffic across the Internet. These hosts require firewall packet protection unique to IPv6 traffic, as IPv6 addresses are composed of eight groups of four hexadecimal digits separated by colons. IPv6 hosts can configure themselves automatically when connected to an IPv6 network using the ND protocol via ICMPv6 router discovery messages. When first connected to a network, a host sends a link-local router solicitation multicast request for its configuration parameters; routers respond to such a request with a router advertisement packet that contains Internet layer configuration parameters.

Firewall rules can use one of the three following actions based on a rule criteria:

- *Allow an IPv6 formatted connection.*
- *Allow a connection only if it is secured through the use of IPv6 security.*
- *Block a connection and exchange of IPv6 formatted packets.*

To view an access point's existing IPv6 firewall rules:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of its connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.


4. Expand the **Firewall** menu.
5. Select **IPv6 Firewall Rules**.

The **Statistics > AP > Firewall > IPv6 Firewall Rules** screen displays in the right-hand pane.

To view the access point's MAC Firewall Rules:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.
5. Select **MAC Firewall Rules**.

The **Statistics > AP > Firewall > MAC Firewall Rules** screen displays in the right-hand pane.

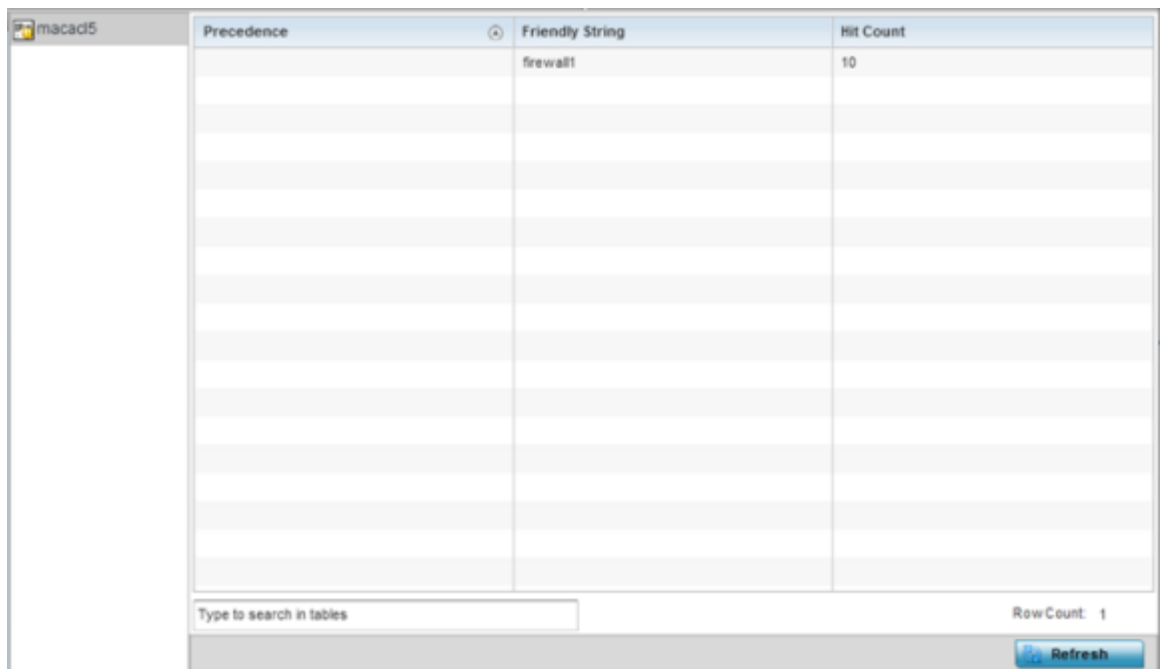

Precedence	Friendly String	Hit Count
	firewall	10

macad5

Type to search in tables

Row Count: 1

Refresh

This screen displays the following:

Precedence	Displays the precedence value, which are applied to packets. The rules within an ACL list are based on their precedence values. Every rule has a unique precedence value between 1 and 5000. You cannot add two rules with the same precedence value.
Friendly String	This string provides more information as to the contents of the rule. This is for information purposes only.
Hit Count	Displays the number of times each WLAN ACL has been triggered.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP NAT Translations

NAT is a technique to modify network address information within IP packet headers in transit. This enables mapping one IP address to another to protect wireless controller managed network address credentials. With typical deployments, NAT is used as an IP

masquerading technique to hide private IP addresses behind a single, public facing, IP address.

NAT can provide a profile outbound Internet access to wired and wireless hosts connected to either an access point or a wireless controller. Many-to-one NAT is the most common NAT technique for outbound Internet access. Many-to-one NAT allows an access point or wireless controller to translate one or more internal private IP addresses to a single, public facing, IP address assigned to a 10/100/1000 Ethernet port or 3G card.

To view the Firewall's NAT translations:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.
5. Select **NAT Translations**.

The **Statistics > AP > Firewall > NAT Translations** screen displays in the right-hand pane.

	Protocol	Forward Source IP	Forward Source Port	Forward Dest IP	Forward Dest Port	Reverse Source IP	Reverse Source Port	Reverse Dest IP	Reverse Dest Port
◆	tcp	157.235.91.9	4,441	10.233.89.68	22	172.168.1.11	22	157.235.91.9	4,441
◆	tcp	157.235.91.9	4,250	10.233.89.68	22	172.168.1.11	22	157.235.91.9	4,250
◆	tcp	10.233.89.67	2,625	10.233.89.68	22	172.168.1.11	22	10.233.89.67	2,625
Type to search in tables									
									Row Count: 3
Refresh									

This screen displays the following information:

Protocol	Displays the IP translation protocol as either TCP , UDP or ICMP .
Forward Source IP	Displays the internal network IP address for forward facing NAT translations.

Forward Source Port	Displays the internal network port for forward facing NAT translations.
Forward Dest IP	Displays the external network destination IP address for forward facing NAT translations.
Forward Dest Port	Displays the external network destination port for forward facing NAT translations.
Reverse Source IP	Displays the internal network IP address for reverse facing NAT translations.
Reverse Source Port	Displays the internal network port for reverse facing NAT translations.
Reverse Dest IP	Displays the external network destination IP address for reverse facing NAT translations.
Reverse Dest Port	Displays the external network destination port for reverse facing NAT translations.

6. Select **Refresh** to update the screen's statistics counters to their latest values.

AP DHCP Snooping

When DHCP servers are allocating IP addresses to requesting clients on the LAN, DHCP snooping can be configured to better enforce LAN security by allowing only clients with specific IP/MAC addresses.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Firewall** menu.
5. Select **DHCP Snooping**.

The **Statistics > AP > Firewall > DHCP Snooping** screen displays in the right-hand pane.

MAC Address	Node Type	IP Address	Netmask	VLAN	Lease Time	Time Elapsed Since Last Update
00-16-C7-86-A	router,dhcp-sei	172.168.6.10		1		7h 58m 44s
00-16-C7-86-A	router,dhcp-sei	38.38.38.1		38		9h 33m 43s
00-40-96-A8-4f	dhcp-client,wir	38.38.0.245	16	38	1d 0h 0m 0s	9h 33m 43s
B4-C7-99-73-B	switch-SVI	172.168.6.137		1		7h 58m 44s

Type to search in tables Row Count: 4

This screen displays the following information:

MAC Address	Displays the MAC address of the client requesting DHCP resources from the access point.
Node Type	Displays the NetBios node with an IP pool from which IP addresses can be issued to client requests on this interface.
IP Address	Displays the IP address used for DHCP discovery, and requests between the DHCP server and DHCP clients.
Netmask	Displays the subnet mask used for DHCP discovery, and requests between the DHCP server and DHCP clients.
VLAN	Displays the virtual interface used for a new DHCP configuration.
Lease Time	When a DHCP server allocates an address for a requesting DHCP client, the client is assigned a lease (which expires after a designated interval defined by the administrator). The lease is the time an IP address is reserved for re-connection after its last use. Using short leases, DHCP can dynamically reconfigure networks in which there are more computers than available IP addresses. This is useful, for example, in education and customer environments where client users change frequently. Use longer leases if there are fewer users.
Time Elapsed since Last Update	Displays the amount of time elapsed since the DHCP server was last updated.

6. Select **Clear All** to revert the counters to zero and begin a new data collection.
7. Select **Refresh** to update the screen's counters to their latest values

AP IPv6 Neighbor Snooping

IPv6 snooping bundles layer 2 IPv6 hop security features, such as IPv6 ND inspection, IPv6 address glean and IPv6 device tracking. When IPv6 ND is configured on a device, packet capture instructions redirect the ND protocol and DHCP for IPv6 traffic up to the controller for inspection.

A database of connected IPv6 neighbors is created from the IPv6 neighbor snoop. The database is used by IPv6 to validate the link layer address, IPv6 address and prefix binding of the neighbors to prevent spoofing and potential redirect attacks.

Access Points listen to IPv6 formatted network traffic and forward IPv6 packets to radios on which the interested hosts are connected.

To review IPv6 neighbor snooping statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).

The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points.

The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand the **Firewall** menu.
5. Select **IPv6 Neighbor Snooping**.

The **Statistics > AP > Firewall > IPv6 Neighbor Snooping** screen displays in the right-hand pane.

MAC Address	Node Type	IPv6 Address	VLAN	Mint Id	Snoop Id	Time Elapsed Since Last Update
10-0B-A9-35-B3-C	ipv6	fe80::11c2:5073:6a	30	4D.84.A2.70	8,896	6s
24-77-03-9D-5B-2f	tentative,ipv6	fe80::9cb9:9f20:6e	30		6,880	3m 59s
30-F7-C5-4F-31-2f	tentative,ipv6	fe80::d5:3c9e:223	666		5,856	1m 30s
44-6D-57-08-1A-D	ipv6	fe80::d1d0:2904:2	30	4D.18.84.BC	9,984	11s
60-67-20-A5-B8-2	tentative,ipv6	fe80::4c41:8be:cc	30		1,664	2m 21s
6C-71-D9-54-92-1f	ipv6	fe80::c5e9:48af:a8	100	4D.84.A2.70	10,560	14s
78-FD-94-05-8C-0	tentative,ipv6	fe80::10e4:458d:8	666		4,736	3m 51s
84-3A-4B-AC-68-5	ipv6	fe80::6135:21a7:bf	30		6,400	32m 28s
84-3A-4B-AC-68-5	ipv6	2601:646:8d00:b1	30		14,208	32m 28s
8C-70-5A-B5-60-D	ipv6	fe80::dd98:f6b6:a8	30	4D.84.A2.70	5,857	1s
B4-B6-76-AC-EC-2	tentative,ipv6	fe80::794a:fb8f:78	30		9,312	4m 59s
C4-D9-87-38-A6-7	ipv6	fe80::6d2a:ed2f:2c	30		6,272	5m 23s
CC-3D-82-B2-2B-C	ipv6	fe80::b01d:c01c:c	30		544	43m 54s
E4-1F-13-6A-5C-6	ipv6	fe80::a8f3:2769:73	6		7,968	3m 44s
F8-16-54-7B-1E-Ef	tentative,ipv6	fe80::98c0:60fa:7e	30		9,888	3m 10s

Type to search in tables Row Count: 16

This screen displays the following information:

MAC Address	Displays the hardware encoded MAC address of an IPv6 client reporting to the controller or service platform.
Node Type	Displays the NetBios node type from an IPv6 address pool from which IP addresses can be issued to requesting clients.

IPv6 Address	Displays the IPv6 address used for DHCPv6 discovery and requests between the DHCPv6 server and DHCP clients.
VLAN	Displays the controller or service platform virtual interface ID used for a new DHCPv6 configuration.
Mint Id	Lists MiNT IDs for each listed VLAN. MiNT provides the means to secure communications at the transport layer. Using MiNT, a device can be configured to only communicate with other authorized (MiNT enabled) devices of the same model.
Snoop Id	Lists the numeric snooping session ID generated when Access Points listen to IPv6 formatted network traffic and forward IPv6 packets to radios.
Time Elapsed Since Last Update	Displays the amount of time elapsed since the DHCPv6 server was last updated.

6. Select **Clear Neighbors** to revert the counters to zero and begin a new data collection.
7. Select **Refresh** to update the screen's counters to their latest values.

AP VPN

IPsec VPN provides a secure tunnel between two networked peer access points. Administrators can define which packets are sent within the tunnel, and how they are protected. When a tunneled peer sees a sensitive packet, it creates a secure tunnel and sends the packet through the tunnel to its remote peer destination.

Tunnels are sets of SA between two peers. SAs define the protocols and algorithms applied to sensitive packets and specify the keying mechanisms used by tunneled peers. SAs are unidirectional and exist in both the *inbound* and *outbound* direction. SAs are established per the rules and conditions of defined security protocols (AH or ESP).

Crypto maps combine the elements comprising IPsec SAs. Crypto maps also include *transform sets*. A transform set is a combination of security protocols, algorithms and other settings applied to IPsec protected traffic. One crypto map is utilized for each IPsec peer, however for remote VPN deployments one crypto map is used for all the remote IPsec peers.

The IKE protocol is a key management protocol standard used in conjunction with IPsec. IKE enhances IPsec by providing additional features, flexibility, and configuration simplicity for the IPsec standard. IKE automatically negotiates IPsec SAs, and enables secure communications without time consuming manual pre-configuration.

VPN statistics are partitioned into the following:

- [IKESA](#)
- [IPsec](#)

AP VPN IKESA

The **IKESA** screen allows for the review of individual peer security association statistics.

AP VPN IPsec

To view an access point's IPsec VPN statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **VPN** menu.
5. Select **IPsec**.

The **Statistics > AP > VPN > IPsec** screen displays in the right-hand pane.

Peer	Local IP Address	Protocol	State	SPI In	SPI Out	Mode
172.168.7.197	172.168.6.137	esp	VALID	C99E4AAB	A9DC8ACE	Tunnel

Type to search in tables Row Count: 1

Clear All Refresh

Review the following VPN peer security association statistics:

Peer	Lists IP addresses for peer IDs for peers sharing SAs for tunnel interoperability. When a peer sees a sensitive packet, it creates a secure tunnel and sends the packet through the tunnel to its destination.
Local IP Address	Displays each listed peer's local tunnel end point IP address. This address represents an alternative to an interface IP address.
Protocol	Lists the security protocol used with the VPN IPsec tunnel connection. SAs are unidirectional, existing in each direction and established per security protocol. Options include ESP and AH .
State	Lists the state of each listed peer's security association.
SPI In	Lists SPI status for incoming IPsec tunnel packets. SPI tracks each connection traversing the IPsec VPN tunnel and ensures they are valid.

SPI Out	Lists SPI status for outgoing IPsec tunnel packets. SPI tracks each connection traversing the IPsec VPN tunnel and ensures they are valid.
Mode	Displays the IKE mode as either Main or Aggressive . IPsec has two modes in IKEv1 for key exchanges. The Aggressive mode requires three messages be exchanged between the IPSEC peers to setup the SA. The Main mode requires six messages.

6. Select **Clear All** to clear each peer of its current status and begin a new data collection.
7. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Certificates

The SSL protocol ensures secure transactions between Web servers and browsers. SSL uses a third-party CA to identify one (or both) ends of a transaction. A browser checks the certificate issued by the server before establishing a connection.

This screen is partitioned into the following:

- [AP Certificates Trustpoints](#) on page 1216
- [AP Certificates RSA Keys](#) on page 1218

AP Certificates Trustpoints

Each certificate is digitally signed by a trustpoint. The trustpoint signing the certificate can be a *certificate authority, corporate* or *individual*. A trustpoint represents a CA/identity pair containing the identity of the CA, CA-specific configuration parameters and an association with an enrolled identity certificate.

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Certificates** menu.

The **Statistics > AP > Certificates > Trustpoints** screen displays by default right-hand pane.

The screenshot shows a 'Certificate Details' window with the following data:

Subject Name	CN=AP8132-B4-C7-99-73-BE-2C
Alternate Subject Name	
Issuer Name	CN=AP8132-B4-C7-99-73-BE-2C
Serial Number	6a
RSA Key Used	default_rsa_key
IS CA	✗ No
Is Self Signed	✓ Yes
Server Certificate Present	✓ Yes
CRL Present	✗ No

Validity

Valid From	08:23:2012 06:30:35 UTC
Valid Until	08:23:2013 06:30:35 UTC

Certificate Authority (CA) Details

Subject Name	
Alternate Subject Name	
Issuer Name	

Refresh

The **Certificate Details** field displays the following:

Subject Name	Describes the entity to which the certificate is issued.
Alternate Subject Name	Lists alternate subject information about the certificate as provided to the certificate authority.
Issuer Name	Displays the name of the organization issuing the certificate.
Serial Number	Lists the unique serial number of the certificate.
RSA Key Used	Displays the name of the key pair generated separated, or automatically when selecting a certificate.
IS CA	Indicates whether this certificate is an authority certificate (Yes/No).
Is Self Signed	Displays whether the certificate is self-signed (Yes/No).
Server Certification Present	Displays whether a server certification is present or not (Yes/No).
CRL Present	Displays whether a CRL is present (Yes/No). A CRL contains a list of subscribers paired with digital certificate status. The list displays revoked certificates along with the reasons for revocation. The date of issuance and the entities that issued the certificate are also included.

The **Validity** field displays the following:

Valid From	Displays the certificate's issue date.
Valid Until	Displays the certificate's expiration date.

The **Certificate Authority (CA) Details** field displays the following:

Subject Name	Displays information about the entity to which the certificate is issued.
Alternate Subject Name	This section provides alternate information about the certificate as provided to the certificate authority. This field is used to provide more information that supports information provided in the <i>Subject Name</i> field.
Issuer Name	Displays the organization issuing the certificate.
Serial Number	Lists the unique serial number of each certificate issued.

The **Certificate Authority Validity** field displays the following:

Validity From	Displays the date when the validity of a CA began.
Validity Until	Displays the date when the validity of a CA expires.

Review the *Certificate Authority (CA) Details* and *Validity* information to assess the subject and certificate duration periods.

- Periodically select the **Refresh** button to update the screen's statistics counters to their latest values.

AP Certificates RSA Keys

RSA is an algorithm for public key cryptography. It's the first algorithm known to be suitable for signing, as well as encryption.

The *RSA Keys* screen displays a list of RSA keys installed in the selected access point. RSA Keys are generally used for establishing a SSH session, and are a part of the certificate set used by RADIUS, VPN and HTTPS.

To view the access point's RSA Key details:

- Select the **Statistics** menu from the Web UI.
- Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
- Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
- Expand the **Certificates** menu.
- Select **RSA Keys**.

The **Statistics > AP > Certificates > RSA Keys** screen displays by default right-hand pane.

RSA Key Details

Size: 1,024

RSA Public Key

```
-----BEGIN PUBLIC KEY-----
MIG1MA0GCsqqGSib3DQEBAQUAA4GNADCBgQD3HABCZl2G2FVn9Wwabgk76VUO
ksECRPLdq8YDhdKv7+3UR8MXHO5cJz1IRIT6kAeJHvEa3c2B6zWcoNal9K2DaS
9CbJco+KHvZ+i2puwO1f4zkLfk6mYT+6qguJPPJcnw2ehCTaiVCJO3+qggFlicu7
M4Jz+xlGid19yMhtwIDAQAB
-----END PUBLIC KEY-----
```

Refresh

The **RSA Key Details** field describes the size (in bits) of the desired key. If not specified, a default key size of 1024 is used.

The **RSA Public Key** field describes the public key used for encrypting messages. This key is known to everyone.

- Periodically select **Refresh** to update the screen's statistics counters to their latest values.

AP WIPS

A WIPS monitors the wireless network's radio spectrum for the presence of unauthorized access points, and take measures to prevent an intrusion. Unauthorized attempts to access an access point managed WLAN is generally accompanied by anomalous behavior as intruding clients try to find network vulnerabilities. Basic forms of this behavior can be monitored and reported without a dedicated WIPS. When the parameters exceed a configurable threshold, a SNMP trap is generated that reports the results via management interfaces.

The **WIPS** screens provide details about blacklisted devices (unauthorized access points) intruding the network. Details include the name of the blacklisted client, the time when the client was blacklisted, the total time the client remained in the network, etc. The screen also provides WIPS event details.

For more information, see:

- [AP WIPS Client Blacklist](#) on page 1219
- [AP WIPS Events](#) on page 1220

AP WIPS Client Blacklist

The access point's **Client Blacklist** displays blacklisted clients detected by this access point using WIPS. Blacklisted clients are not allowed to associate to this access point.

To view the WIPS client blacklist for this access point:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **WIPS** menu.

The **Statistics > AP > WIPS > Client Blacklist** screen displays by default right-hand pane

Event Name	Blacklisted Client	Time Blacklisted	Total Time	Time Left
dos-eapoi-start-storm	44-55-44-55-44-55	Thu Jun 10 2010 12:26:28 PM	2h 0m 0s	1h 0m 0s
null-probe-response	44-55-44-55-44-55	Thu Jun 10 2010 12:26:28 PM	40m 0s	20m 0s

Type to search in tables Row Count: 2

[Refresh](#)

This screen displays the following:

Event Name	Displays the name of the detected wireless intrusion resulting in a blacklisting of the client.
Blacklisted Client	Displays the MAC address of the unauthorized and blacklisted device intruding this access point's radio coverage area.
Time Blacklisted	Displays the time when the client was blacklisted by this access point.
Total Time	Displays the time the unauthorized (now blacklisted) device remained in this access point's WLAN.
Time Left	Displays the time the blacklisted client remains on the list.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP WIPS Events

Periodically review the **WIPS Events** screen to assess whether any new or existing events require additional administration to protect the security of authorized devices. Events are listed by name, detecting AP, originating device, detector radio and time. The reporting AP can be selected to review that AP's configuration in greater detail.

To view an access point's WIPS Events statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **WIPS** menu.
5. Select **WIPS Events**.

The **Statistics > AP > WIPS > WIPS Events** screen displays by default right-hand pane.

Event Name	Reporting AP	Originating Device	Detector Radio	Time Reported
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 08:08:39 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 10:16:36 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 6 2015 04:24:30 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 27 2015 03:14:12 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 08:03:12 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 08:01:12 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 10:47:57 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Wed May 6 2015 10:53:57 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Tue May 26 2015 03:07:07 AM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Mon May 25 2015 08:10:27 PM
ad-hoc-violation	ap7502-BC1340	00-10-18-A9-56-5D	1	Mon May 25 2015 10:59:44 AM
ad-hoc-violation	ap7502-BC1340	60-03-08-A7-93-E0	1	Fri May 15 2015 01:22:14 AM

Type to search in tables Row Count: 97

This screen displays the following information:

Event Name	Displays the name of the detected wireless intrusion event.
Originating Device	Displays the MAC address of the intruder device.
Reporting AP	Displays the hostname of the AP reporting each intrusion. The access point displays as a link that can be selected to provide configuration and network address information in greater detail.
Detector Radio	Displays the number of the detecting access point radio.
Time Reported	Displays the time when the intrusion event was detected.

6. Select **Clear All** to reset the statistics counters to zero and begin a new data collection.
7. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Sensor Servers

Sensor Servers allow the monitor and download of data from multiple access points in sensor mode and remote locations using Ethernet TCP/IP or serial communication.

Bonjour provides a method to discover services on a LAN. Bonjour allows users to set up a network without any configuration. Services such as printers, scanners and file-sharing servers can be found using Bonjour. Bonjour only works within a single broadcast domain. However, with a special DNS configuration, it can be extended to find services across broadcast domains.

To view the Bonjour service statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen).
The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points.
The Access Point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Bonjour Services** from the left-hand side of the UI.

The **Statistics > AP > Bonjour Services** screen displays.

Service Name	Instance Name	IP Address	Port	Vlan	Vlan Type	Expiry
_airplay_tcp.local	Apple TV (2)_airplay_tcp	32.32.32.101	7,000	32	Local	Sun Mar 9 00:59:04 2014
_lpp_tcp.local	Brother MFC-8510DN_lpp	32.32.32.103	631	32	Local	Sun Mar 9 01:41:34 2014
_lpp_tcp.local	HP MFP M425dn Service Z	32.32.32.106	631	41	Local	Sun Mar 9 01:13:46 2014
_lpp_tcp.local	HP MFP M425dn Service ;	32.32.32.106	631	32	Local	Sun Mar 9 00:56:34 2014
_raop_tcp.local	B6782E2D922E@Apple TV	32.32.32.101	5,000	32	Local	Sun Mar 9 00:59:04 2014
_universal_sub_lpp_tcp	Brother MFC-8510DN_lpp	32.32.32.103	631	32	Local	Sun Mar 9 01:41:34 2014
_universal_sub_lpp_tcp	HP MFP M425dn Service ;	32.32.32.106	631	32	Local	Sun Mar 9 00:56:34 2014
Type to search in tables						
						Row Count: 7
Refresh						

Refer to the following Bonjour service utilization stats:

Service Name	Lists the services discoverable by the Bonjour gateway. Services can either be <i>pre-defined</i> Apple services (scanner, printer, etc.) or an alias not available on the predefined list.
Instance Name	Lists the name of each Bonjour service instance (session) utilized by the controller or service platform.
IP Address	Lists the network IP address utilized by the listed Bonjour service providing resources to the controller or service platform.
Port	Displays the port used to secure a connection with the listed Bonjour service.

Vlan	Lists the VLAN(s) on which a listed Bonjour service is routable.
Vlan Type	Lists the VLAN type as either a <i>local</i> /bridging mode or a <i>shared tunnel</i> .
Expiry	Lists the expiration date of the listed Bonjour service, and its availability to discover resources on the LAN.

5. Select **Refresh** to update the screen’s statistics counters to their latest values.

AP Captive Portal

A *captive portal* forces HTTP clients, requesting network access, to use a special Web page for authentication before using the access point provisioned Internet. A captive portal turns a Web browser into a client authenticator. This is done by intercepting packets regardless of the address or port, until the user opens a browser and tries to access the Internet. At that time, the browser is redirected to a Web page.

To view an access point's captive portal statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Captive Portal**.

The **Statistics > AP > Captive Portal** screen displays.

Client MAC	Client IP	Client IPv6	Captive Portal	Port Name	Authentication	WLAN	VLAN	Remaining Time
54-44-08-3E-00-98	0.0.0.0		ALPHANET-GUEST-		User Redirect	GUEST-ACCESS-REGISTR	666	0s

Type to search in tables Row Count: 1

[Refresh](#)

This screen displays the following information:

Client MAC	Displays the requesting client's MAC address. The MAC displays as a link that can be selected to display client configuration and network address information in greater detail.
Client IP	Displays the requesting client's IPv4 address.
Client IPv6	Displays the requesting client's IPv6 formatted IP address.
Captive Portal	Displays the captive portal name that each listed client is utilizing for guest access to access point resources.
Port Name	Lists the access point port name supporting the captive portal connection with the listed client MAC address.
Authentication	Displays the authentication status of the requesting client.
WLAN	Displays the name of the WLAN utilizing the access point managed captive portal.
VLAN	Displays the name of the access point VLAN the requesting client uses as virtual interface for captive portal sessions.
Remaining Time	Displays the time after which the client is disconnected from the captive portal managed Internet.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Network Time

NTP (*Network Time Protocol*) is central to networks that rely on their controller or service platform to supply system time to managed devices. Without NTP, system time is unpredictable, which can result in data loss, failed processes and compromised security. With network speed, memory, and capability increasing at an exponential rate, the accuracy, precision, and synchronization of network time is essential in an enterprise network. The controller or service platform can optionally use a dedicated server to supply system time. The controller or service platform can also use several forms of NTP messaging to sync system time with authenticated network traffic.

The **Network Time** screen provides detailed statistics of an associated NTP Server of an access point. Use this screen to review the statistics for each access point.

The Network Time statistics screen consists of two tabs:

- [AP NTP Status](#) on page 1225
- [AP NTP Association](#) on page 1227

AP NTP Status

To view an access point's NTP Status:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.

This screen displays the following:

Delay Time	Displays the round-trip delay (in seconds) for broadcasts between the NTP server and the access point.
Display	Displays the time difference between the peer NTP server and the access point's clock.
Offset	Displays the calculated offset between the access point and the NTP server. The access point adjusts its clock to match the server's time value. The offset gravitates towards zero, but never completely reduces its offset to zero.
Poll	Displays the maximum interval between successive messages in seconds to the nearest power of two.
Reach	Displays the status of the last eight SNTP messages. If an SNTP packet is lost, the lost packet is tracked over the next eight SNTP messages.
Reference IP Address	Displays the address of the time source the access point is synchronized to.
Server IP Address	Displays the numerical IP address of the SNTP resource (server) providing SNTP updates to the access point.
State	Displays the NTP association status. This can be one of the following: <ul style="list-style-type: none"> • Synced – Indicates the controller or service platform is synchronized to this NTP server. • Unsynced – Indicates the controller or service platform has chosen this master for synchronization. However, the master itself is not yet synchronized to UTC. • Selected – Indicates this NTP master server will be considered the next time the controller or service platform chooses a new master to synchronize with. • Candidate – Indicates this NTP master server may be considered for selection the next time the controller or service platform chooses a NTP master server. • Configured – Indicates this NTP server is a configured server.
Status	Displays how many hops the access point is from its current NTP time source.
Time	Displays the time of the last statistics update.

6. Select **Refresh** to update the screen's statistics counters to their latest values


AP Load Balancing

An access point's traffic load can be viewed graphically and filtered to display different load attributes. The access point's entire load can be displayed, as well as the separate loads on the 2.4 and 5 GHz radio bands. Operating channels can also be filtered. Each element can either be displayed individually or collectively in the graph.

To view the access point's load balance in a filtered graph format:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Load Balancing**.

The **Statistics > AP > Load Balancing** screen is displayed.

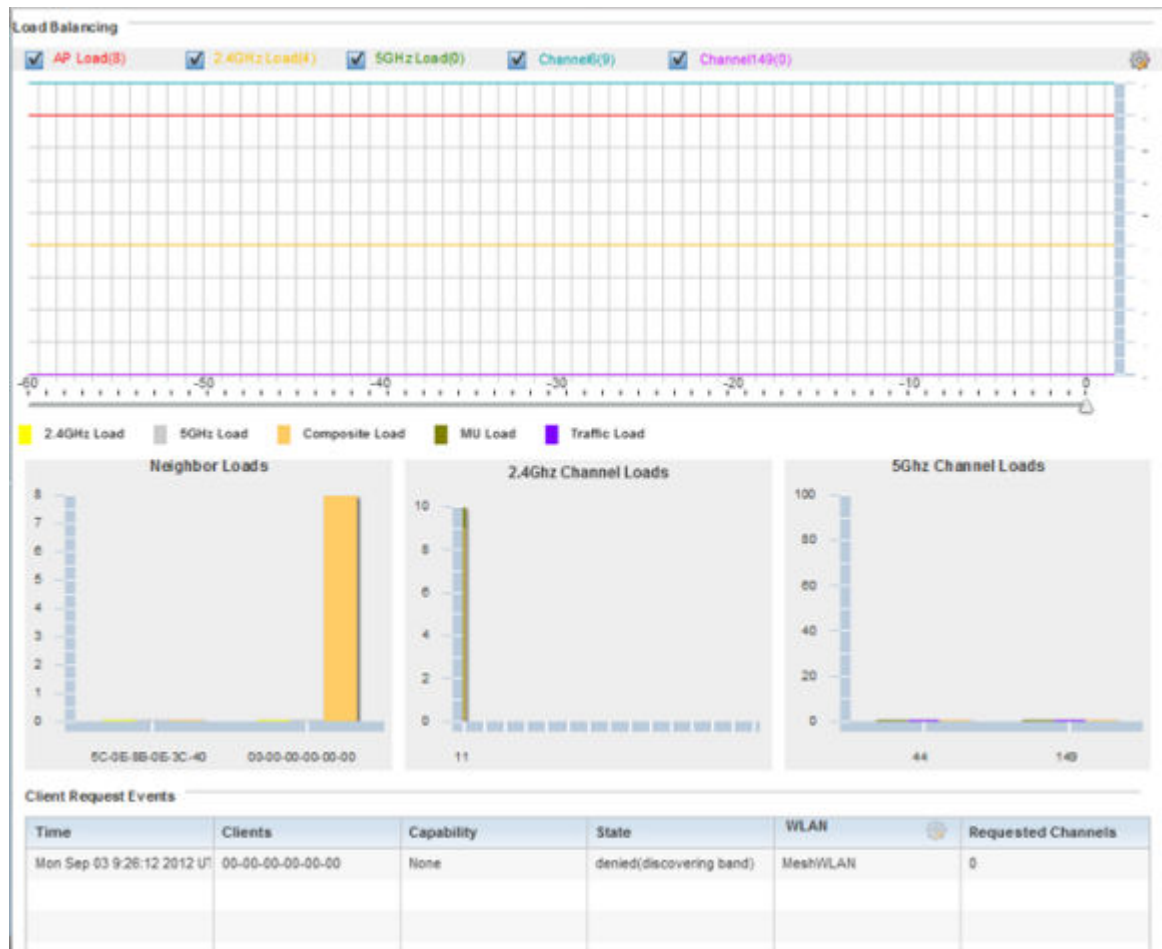

The **Load Balancing** screen displays the following:

Load Balancing	Select any of the options to display any or all of the following information in the graph below: AP Load , 2.4GHz Load , 5GHz Load , and Channel1 . The graph section displays the load percentages for each of the selected variables over a period of time, which can be altered using the slider below the upper graph.
Client Requests Events	The Client Request Events displays the <i>Time</i> , <i>Client</i> , <i>Capability</i> , <i>State</i> , <i>WLAN</i> and <i>Requested Channels</i> for all client request events on the access point. All supported access point models support up to 256 clients per access point.

5. Select **Refresh** to update the screen's statistics counters to their latest values.

AP Environment Statistics

An AP 8132 sensor module is a USB environmental sensor extension to an AP 8132 model access point. It provides a variety of sensing mechanisms, allowing the monitoring and reporting of the AP 8132's radio coverage area. The output of the sensor's detection mechanisms are viewable using either the Environmental Sensor screen.

For more information, refer to the following:


- [AP Light Sensor](#) on page 1230.
- [AP Temperature Sensor](#) on page 1231.
- [AP Motion Sensor](#) on page 1232.
- [AP Humidity Sensor](#) on page 1234.

AP Light Sensor

To view an AP 8132 model access point's environmental light statistics:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of its connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Select **Environment**. The **Statistics > AP 8132 > Environment > Light** tab displays by default.

Additional **Temperature**, **Motion** and **Humidity** tabs available for unique sensor reporting. Each of these sensor measurements helps the administrator determine whether the AP 8132's immediate deployment area is occupied by changes in the access point's environment.

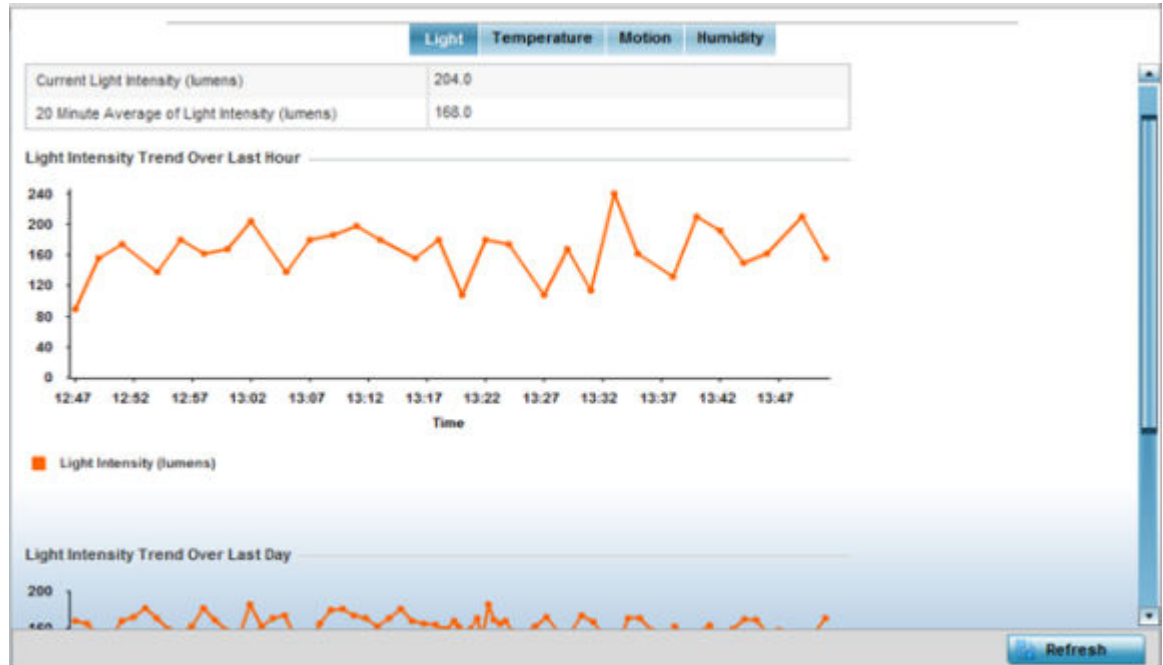

5. Refer to the **Light** table to assess the sensor's detected light intensity within the AP 8132 immediate deployment area.

Light intensity is measured by the sensor in lumens. The table displays the **Current Light Intensity (lumens)** and the **20 Minute Average of Light Intensity (lumens)**. Compare these two items to determine whether the AP 8132's deployment location remains consistently lit, as an administrator can power off the access point's radios when no activity is detected in the immediate deployment area.

6. Refer to the **Light Intensity Trend Over Last Hour** graph to assess the fluctuation in lighting over the last hour. Use this graph to assess the deployment areas light intensity of particular hours of the day as needed to conjunction with the daily graph immediately below it.
7. Refer to the **Light Intensity Trend Over Last Day** graph to assess whether lighting is consistent across specific hours of the day. Use this information to help determine whether the AP 8132 can be upgraded or powered off during specific hours of the day.
8. Select **Refresh** at any time to update the screen's statistics counters to their latest values.

AP Temperature Sensor

To view an AP 8132 model access point's environmental temperature:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.

4. Expand the **Environment** menu.
5. Select the **Temperature** tab.

The **Statistics > AP 8132 > Environment > Temperature** tab displays.



6. Refer to the **Temperature** table to assess the sensor's detected temperature within the AP 8132's immediate deployment area.

Temperature is measured in centigrade. The table displays the **Current Temperature (centigrade)** and the **20 Minute Average Temperature (centigrade)**. Compare these two items to determine whether the AP 8132's deployment location remains consistently heated.

7. Refer to the **Temperature Trend Over Last Hour** graph to assess the fluctuation in ambient temperature over the last hour. Use this graph in combination with the Light and Motions graphs (in particular) to assess the deployment area's activity level.
8. Refer to the **Temperature Trend Over Last Day** graph to assess whether deployment area temperature is consistent across specific hours of the day. Use this information to help determine whether the AP 8132 can be upgraded or powered off during specific hours of the day.
9. Select **Refresh** at any time to update the screen's statistics counters to their latest values.


AP Motion Sensor

To view an AP 8132 model access point's deployment area motion activity:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.

3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Environment** menu.
5. Select the **Motion** tab.

The **Statistics > AP 8132 > Environment > Motion** tab displays.

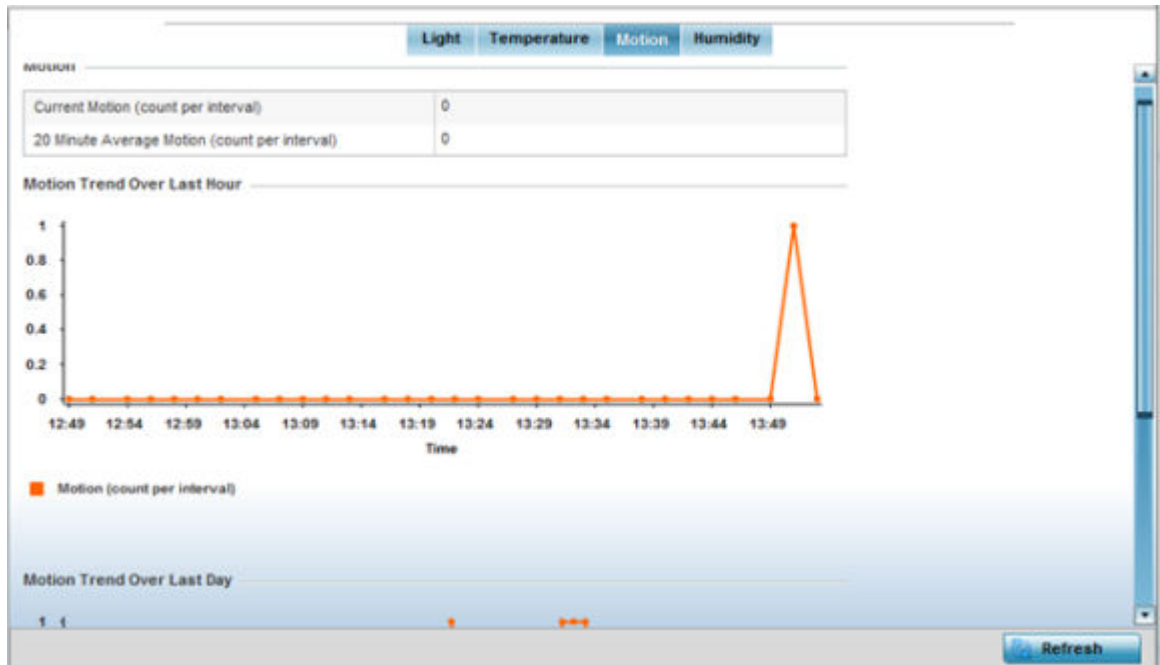

6. Refer to the **Motion** table to assess the sensor's detected movement within the AP 8132's immediate deployment area.

Motion is measured in intervals. The table displays the **Current Motion (count per interval)** and the **20 Minute Average Motion (count per interval)**. Compare these two items to determine whether the AP 8132's deployment location remains consistently occupied by client users.


7. Refer to the **Motion Trend Over Last Hour** graph to assess the fluctuation in user movement over the last hour. Use this graph in combination with the Light and Temperature graphs (in particular) to assess the deployment area's activity level.
8. Refer to the **Motion Trend Over Last Day** graph to assess whether deployment area user movement is consistent across specific hours of the day. Use this information to help determine whether the AP 8132 can be upgraded or powered off during specific hours of the day.
9. Select **Refresh** at any time to update the screen's statistics counters to their latest values.

AP Humidity Sensor

To view an AP 8132 model access point's deployment area humidity:

1. Select the **Statistics** menu from the Web UI.
2. Expand the **System** node from the navigation pane (on the left-hand side of the screen). The System node expands to display the RF Domains created within the managed network.
3. Expand an **RF Domain** node, and select one of it's connected access points. The access point's statistics menu displays in the right-hand side of the screen, with the **Health** tab selected by default.
4. Expand the **Environment** menu.
5. Select the **Humidity** tab.

The **Statistics > AP 8132 > Environment > Humidity** tab displays.

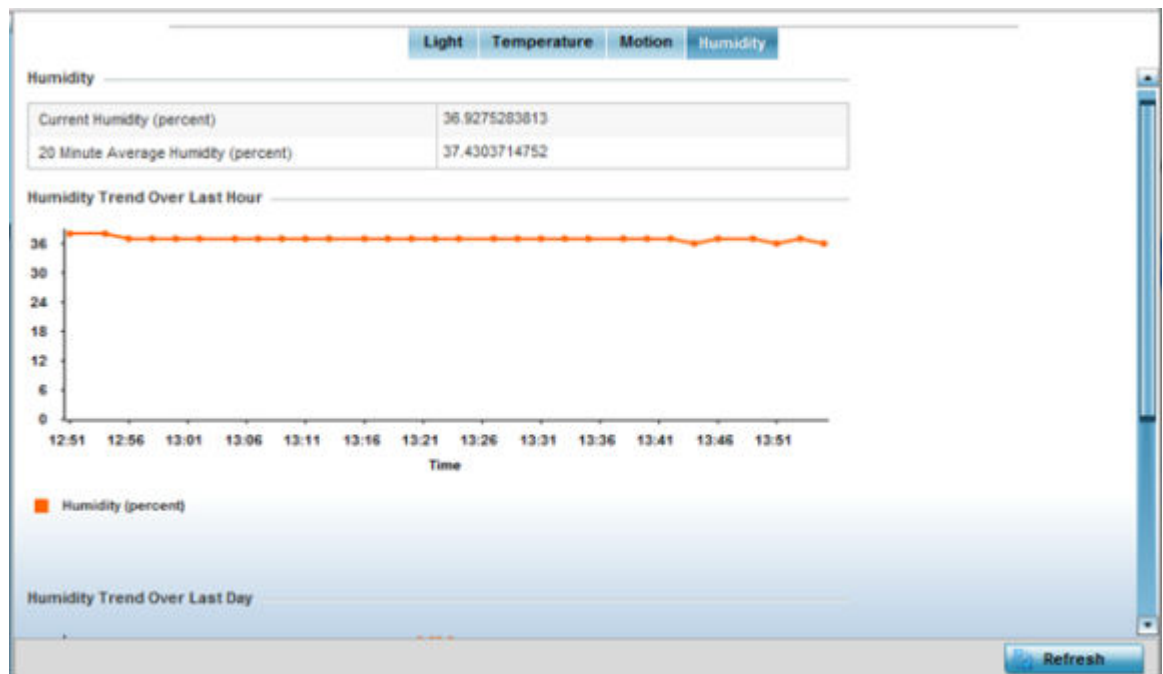

6. Refer to the **Humidity** table to assess the sensor's detected humidity fluctuations within the AP 8132's immediate deployment area.

Humidity is measured in percentage. The table displays the **Current Humidity (percent)** and the **20 Minute Average Humidity (percent)**. Compare these two items to determine whether the AP 8132's deployment location remains consistently humid (often a by-product of temperature).

7. Refer to the **Humidity Trend Over Last Hour** graph to assess the fluctuation in humidity over the last hour. Use this graph in combination with the Temperature and Motions graphs (in particular) to assess the deployment area's activity levels.
8. Refer to the **Humidity Trend Over Last Day** graph to assess whether deployment area humidity is consistent across specific hours of the day. Use this information to

help determine whether the AP 8132 can be upgraded or powered off during specific hours of the day.

9. Select **Refresh** at any time to update the screen's statistics counters to their latest values.

AP IOT Imagotag

WiNG access points listed in the following note support SES-imagotag's ESL tags. An Imagotag-enabled AP recognizes the ESL communicator and facilitates communication between communicator and tags. To enable an AP as an infrastructure device facilitating communication between the ESL communicator and tags, an Imagotag policy is applied either to the AP's self (standalone AP) or to the AP's profile (adopted AP). Use this option to view the configuration of the ESL communicator.



Note

Imagotag support is available on AP360i/e, AP310i/e, AP410i/e, AP460i/e, AP505i, AP510i/e, AP560i, AP560h, and AP-8432.



Note

For information on enabling IOT Imagotag on an access point, see [Configure Imagotag Policy](#) on page 957

To view an access point's ESL communicator configuration:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen). Expand an RF Domain, select a controller or service platform, and select one of its connected access points.

3. Select **IOT Imagotag** from the AP's statistics menu.

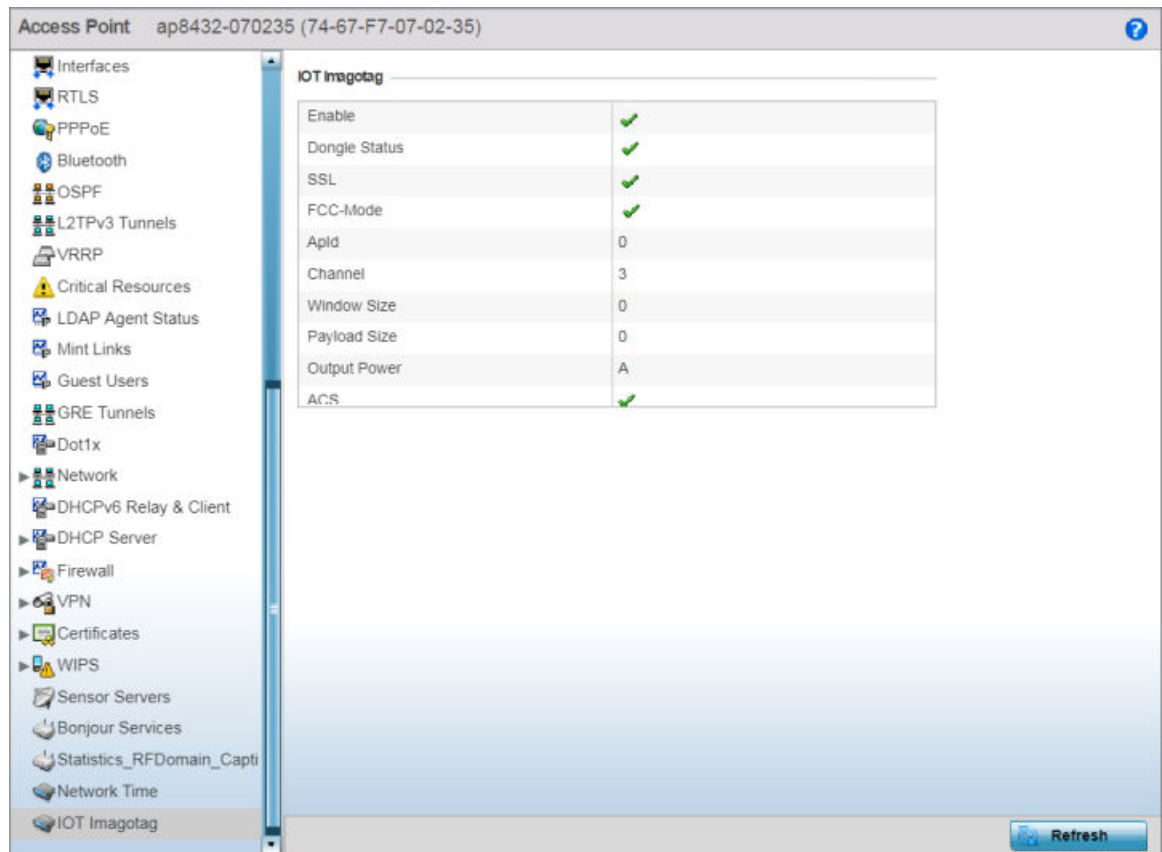


Figure 437: Statistics → Access Point → IOT Imagotag screen

4. Review the following IOT Imagotag details:

Enable	Displays the status of the policy: Enabled/Disabled. A green check mark indicates that the policy is enabled. A red cross mark indicates that the policy is disabled.
Dongle Status	Displays the ESL communicator (USB Dongle) status - Connected/Disconnected.
SSL	Displays if SSL (<i>Secure Socket Layer</i>) encryption mode of communication is enabled or not. A green check mark indicates that this option is enabled. A red cross mark indicates that this option is disabled.
FCC-Mode	Displays if FCC compatibility mode is enabled or not on the ESL communicator. A green check mark indicates that this option is enabled. A red cross mark indicates that this option is disabled.
ApId	Displays the Imagotag enabled AP's ID.
Channel	Displays the channel assigned for ESL communicator to tag communication in the 2.4 GHz band.
Window Size	Displays the transmission window size set for messages exchanged between ESL communicator and tags.

Payload Size	Displays the maximum payload size in packets exchanged between ESL communicator and tags.
Output Power	Displays the maximum output power set for the ESL communicator.
ACS	Displays if ACS (<i>Auto-Channel Selection</i>) status - Enabled/Disabled.

Wireless Client Statistics

Wireless Client statistics display read-only stats for a client selected from its connected access point, controller or service platform topology. Client stats help administrate client performance within an access point, controller or service platform managed network. Use this information to assess if configuration changes are required to improve client throughput.

Wireless client stats can be administrated using the following:

- [Client Health](#) on page 1237.
- [Client Details](#) on page 1240.
- [Client Traffic](#) on page 1244.
- [Client WMM TSPEC](#) on page 1247.
- [Client Association History](#) on page 1248.
- [Client Graph](#) on page 1249.

Client Health

The **Health** screen displays performance information of a selected wireless client, in respect to the client's connected access point radio and managing controller, service platform or access point.

To view the health of a wireless client:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen).
Expand an RF Domain, select a controller, an access point, then a connected client.
3. Select **Health**.

The **Statistics > Wireless Client > Health** screen displays by default.

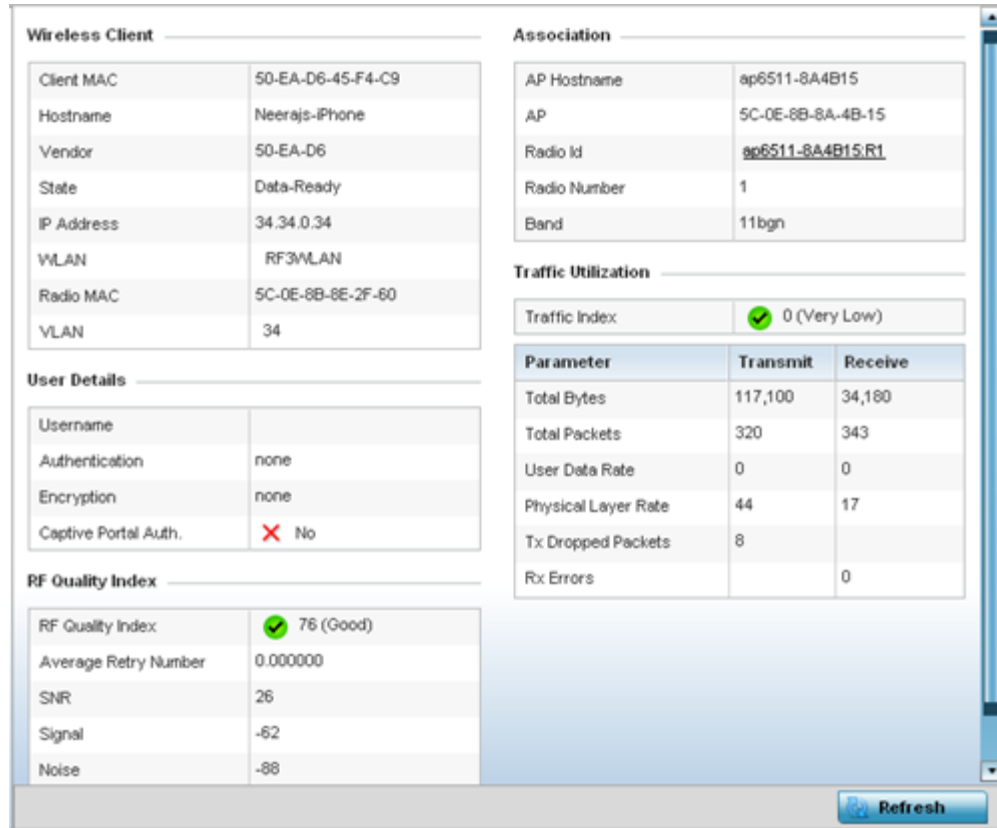


Figure 438: Wireless Client - Statistics - Health Screen

Refer the tables below for wireless client related data.

The **Wireless Client** field displays the following:

Client MAC	Displays the factory encoded MAC address of the selected wireless client.
Hostname	Lists the hostname assigned to the client when initially managed by the controller, service platform or access point.
Vendor	Displays the vendor name (manufacturer) of the wireless client.
State	Displays the current operational state of the wireless client. The client's state can be idle , authenticated , roaming , associated or blacklisted .
IP Address	Displays the IP address the selected wireless client is currently utilizing as a network identifier.
WLAN	Displays the client's connected access point WLAN membership. This is the WLAN whose QoS settings should account for the client's radio traffic objective.
Radio MAC	Displays the access point radio MAC address the wireless client is connected to on the network.
VLAN	Displays the VLAN ID the access point has defined for use as a virtual interface with the client.

The **User Details** field displays the following:

Username	Displays the unique name of the administrator or operator supporting the client's managing controller, service platform or access point.
Authentication	Lists the authentication scheme applied to the client for interoperation with the access point.
Encryption	Lists the encryption scheme applied to the client for interoperation with the access point.
Captive Portal Authentication	Displays whether captive portal authentication is enabled for the client as a guest access medium to the controller or service platform managed network.

The **RF Quality Index** field displays the following:

RF Quality Index	Displays information on the RF quality for the selected wireless client. The RF quality index is the overall effectiveness of the RF environment as a percentage of the connect rate in both directions, as well as the retry and error rate. RF quality index can be interpreted as: <ul style="list-style-type: none"> • 0 – 20 (Very poor quality) • 20 – 40 (Poor quality) • 40 – 60 (Average quality) • 60 – 100 (Good quality)
Retry Rate	Displays the average number of retries per packet. A high number indicates possible network or hardware problems.
SNR	Displays the SNR ratio of the connected wireless client.
Signal	Displays the power of the radio signals in - dBm.
Noise	Displays the disturbing influences on the signal by interference of signals in - dBm.
Error Rate	Displays the number of received bit rates altered due to noise, interference and distortion. It is a unit-less performance measure.

The **Association** field displays the following:

AP Hostname	Lists the administrator assigned device name of the client's connected access point.
AP	Displays the MAC address of the client's connected access point.
Radio	Lists the target access point that houses the radio. Select the access point to view performance information in greater detail.
Radio ID	Lists the hardware encoded MAC address the radio uses as a hardware identifier that further distinguishes the radio from others within the same device.
Radio Number	Displays the access point's radio number (either 1, 2 or 3) to which the selected client is associated.
Radio Type	Displays the radio type. The radio can be <i>802.11b</i> , <i>802.11bg</i> , <i>802.11bgn</i> , <i>802.11a</i> or <i>802.11an</i> .

The **Traffic Utilization** field displays statistics on the traffic generated and received by the selected client. This area displays the traffic index, which measures how efficiently the traffic medium is utilized. It's defined as the percentage of current throughput relative to the maximum possible throughput.

Traffic indices are:

- *0 – 20* (Very low utilization)
- *20 – 40* (Low utilization)
- *40 – 60* (Moderate utilization)
- *60 and above* (High utilization)

This table displays the following:

Total Bytes	Displays the total bytes processed by the access point's connected wireless client.
Total Packets	Displays the total number of packets processed by the wireless client.
User Data Rate	Displays the average user data rate in both directions.
Physical Layer Rate	Displays the average packet rate at the physical layer in both directions.
Tx Dropped Packets	Displays the number of packets dropped during transmission.
Rx Errors	Displays the number of errors encountered during data transmission. The higher the error rate, the less reliable the connection or data transfer between the client and connected access point.

4. Select **Refresh** to update the screen's statistics counters to their latest values.

Client Details

The **Details** screen provides granular performance, network address, connection and association information for a selected wireless client.

To view the details screen of a connected wireless client:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen).
Expand an RF Domain, select a controller, an access point, then a connected client.
3. Select **Details**.

The **Statistics > Wireless Client > Details** screen is displayed.

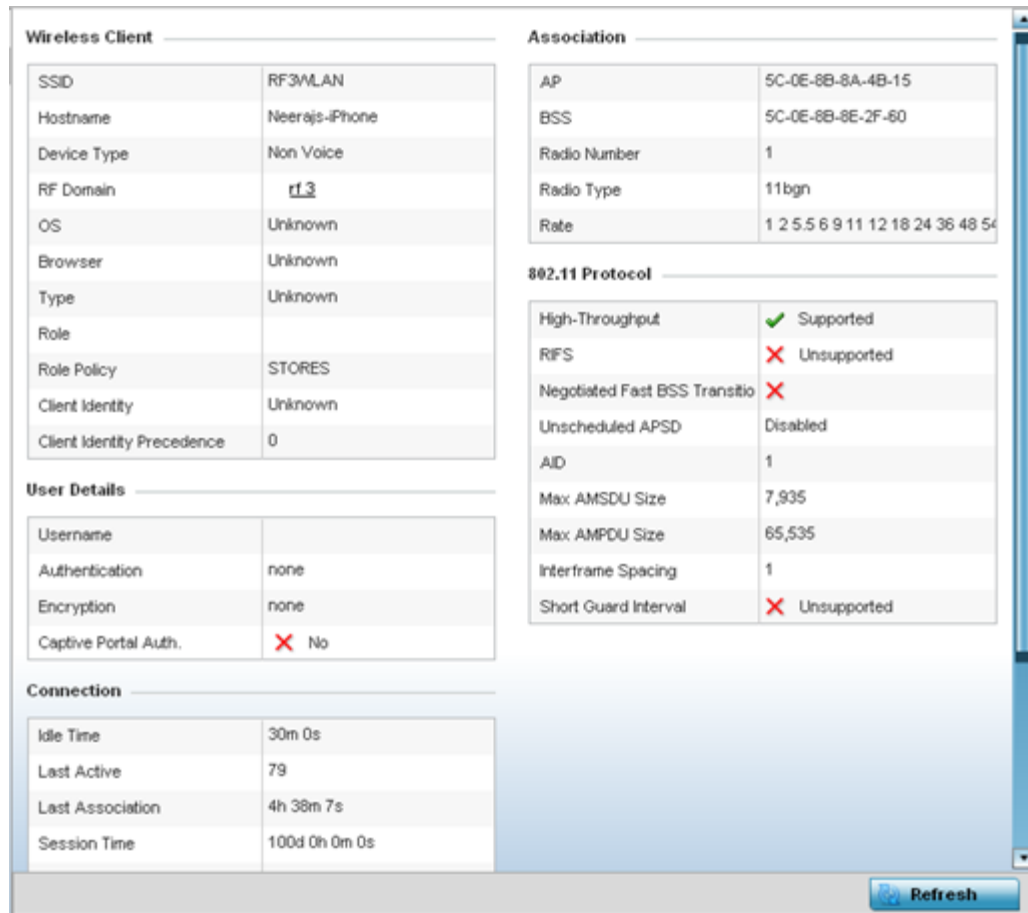


Figure 439: Wireless Client Detailed Statistics Screen

The **Wireless Client** field displays the following:

SSID	Displays the client's SSID.
Hostname	Lists the hostname assigned to the client when initially managed by the controller, service platform or access point managed network.
Device Type	Displays the client device type providing the details to the operating system.
RF Domain	Displays the RF Domain to which the connected client is a member via its connected access point, controller or service platform. The RF Domain displays as a link that can be selected to display RF Domain member, configuration and network address information in greater detail.
OS	Lists the client's operating system (Android, etc.).
Browser	Displays the browser type used by the client to facilitate its wireless connection.
Type	Lists the client manufacturer (or vendor).
Role	Lists the client's defined role in the controller, service platform or access point managed network.

Role Policy	Lists the user role set for the client as it became a controller, service platform or access point managed device.
Client Identity	Displays the unique vendor identity (Android, Windows, etc.) of the listed device as it appears to its adopting controller or service platform.
Client Identity Precedence	Lists the numeric precedence this client uses in establishing its identity amongst its peers.
Protected Management Frames	A green checkmark defines management frames as protected between this client and its associated access point radio. A red X states that management frames are disabled for the client and its connected radio.
Transmit Power Management	Lists the number power management frames exchanged between this client and its connected access point radio. Lists zero when disabled.

The **User Details** field displays the following:

Username	Displays the unique name of the administrator or operator managing the client's connected access point, controller or service platform.
Authentication	Lists the authentication scheme applied to the client for interoperation with its connected access point radio.
Encryption	Lists the encryption scheme applied to the client for interoperation with its connected access point radio.
Captive Portal Auth.	Displays whether captive portal authentication is enabled. When enabled, a restrictive set of access permissions may be in effect.

The **Connection** field displays the following:

Idle Time	Displays the time for which the wireless client remained idle.
Last Active	Displays the time in seconds the wireless client was last interoperating with its connected access point.
Last Association	Displays the duration the wireless client was in association with its connected access point.
Session Time	Displays the duration for which a session can be maintained by the wireless client without it being dis-associated from its connected access point radio.
SM Power Save Mode	Displays whether this feature is enabled on the wireless client. The SM (<i>spatial multiplexing</i>) power save mode allows an 802.11n client to power down all but one of its radios. This power save mode has two sub modes of operation: static operation and dynamic operation .

Power Save Mode	Displays whether this feature is enabled or not. To prolong battery life, the 802.11 standard defines an optional <i>Power Save Mode</i> , which is available on most 802.11 clients. End users can simply turn it on or off via the card driver or configuration tool. With power save off, the 802.11 network card is generally in receive mode listening for packets and occasionally in transmit mode when sending packets. These modes require the 802.11 NIC to keep most circuits powered-up and ready for operation.
WMM Support	Displays whether WMM is enabled or not in order to provide data packet type prioritization between the access point and connected client.
40 MHz Capable	Displays whether the wireless client has 802.11n channels operating at 40 MHz.
Max Physical Rate	Displays the client's maximum data rate at the physical layer.
Max User Rate	Displays the maximum client's permitted user data rate.
MC2UC Streams	Lists the number of multicast to unicast data streams detected.

The **Association** field displays the following:

AP	Displays the MAC address of the wireless client's connected access point.
BSS	Displays the BSS (<i>Basic Service Set</i>) the access point belongs to. A BSS is a set of stations that can communicate with one another.
Radio Number	Displays the access point radio number the wireless client is connected to.
Radio Type	Displays the radio type. The radio can be 802.11b , 802.11bg , 802.11bgn , 802.11a or 802.11an .
Rate	Displays the permitted data rate for controller managed access point and client interoperation.

The **802.11 Protocol** field displays the following:

High-Throughput	Displays whether high throughput is supported. High throughput is a measure of successful packet delivery over a communication channel.
RIFS	Displays whether RIFS is supported. RIFS is a required 802.11n feature that improves performance by reducing the amount of dead time between OFDM transmissions.
Negotiated Fast BSS Transition	Lists whether Fast BSS transition is negotiated. This indicates support for a seamless fast and secure client handoff between two access points, controllers or service platforms.
Unscheduled APSD	Displays whether APSD is supported. APSD defines an unscheduled service period, which is a contiguous period of time during which the access point is expected to be awake.

AID	Displays the AID (<i>Association ID</i>) established by an AP. 802.11 association enables the access point to allocate resources and synchronize with a client. A client begins the association process by sending an association request to an access point. This association request is sent as a frame. This frame carries information about the client and the SSID of the network it wishes to associate. After receiving the request, the access point considers associating with the client, and reserves memory space for establishing an AID for the client.
Max AMSDU Size	Displays the maximum size of AMSDU. AMSDU is a set of Ethernet frames to the same destination that are wrapped in a 802.11n frame. This values is the maximum AMSDU frame size in bytes.
Max AMPDU Size	Displays the maximum size of AMPDU. AMPDU is a set of Ethernet frames to the same destination wrapped in an 802.11n MAC header. AMPDUs are used in noisy environments to provide reliable packet transmission. This value is the maximum AMPDU size in bytes.
Interframe Spacing	Displays the time interval between two consecutive Ethernet frames.
Short Guard Interval	Displays the guard interval in micro seconds. Guard intervals prevent interference between data transmissions. The guard interval is the space between characters being transmitted. The guard interval eliminates ISI (<i>inter-symbol interference</i>). ISI occurs when echoes or reflections from one character interfere with another character. Adding time between transmissions allows echo's and reflections to settle before the next character is transmitted. A shorter guard interval results in shorter character times which reduces overhead and increases data rates by up to 10%.

4. Select **Refresh** to update the screen's statistics counters to their latest values.


Client Traffic

The **Traffic** screen provides an overview of client traffic utilization in both the transmit and receive directions. This screen also displays a RF quality index.

To view the traffic statistics of a wireless clients:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen).
Expand an RF Domain, select a controller, an access point, then a connected client.
3. Select **Traffic**.

The **Statistics > Wireless Client > Traffic** screen is displayed.

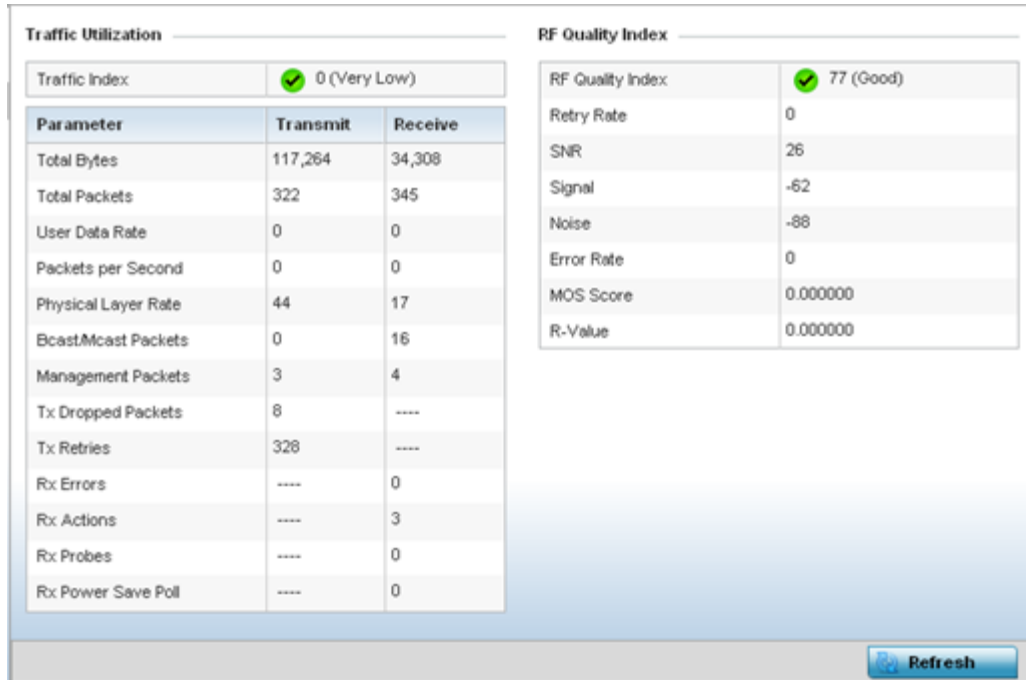

The **Traffic Utilization** statistics employs an index, which measures how efficiently the traffic medium is used. It's defined as the percentage of current throughput relative to the maximum possible throughput. The traffic indices are:

- 0 – 20 (Very low utilization)
- 20 – 40 (Low utilization)
- 40 – 60 (Moderate utilization)
- 60 and above (High utilization)

This screen also provides the following:

Total Bytes	Displays the total bytes processed (in both directions) by the access point's connected client.
Total Packets	Displays the total number of data packets processed (in both directions) by the access point's connected wireless client.
User Data Rate	Displays the average user data rate.
Packets per Second	Displays the packets processed per second.
Physical Layer Rate	Displays the data rate at the physical layer level.
Bcast/Mcast Packets	Displays the total number of broadcast/management packets processed by the client.
Management Packets	Displays the number of management (overhead) packets processed by the client.
Tx Dropped Packets	Displays the client's number of dropped packets while transmitting to its connected access point.
Tx Retries	Displays the total number of client transmit retries with its connected access point.

Rx Errors	Displays the errors encountered by the client during data transmission. The higher the error rate, the less reliable the connection or data transfer between client and connected access point.
Rx Actions	Displays the number of receive actions during data transmission with the client's connected access point.
Rx Probes	Displays the number of probes sent. A probe is a program or other device inserted at a key juncture in a for network for the purpose of monitoring or collecting data about network activity.
Rx Power Save Poll	Displays the power save using the PSP (<i>Power Save Poll</i>) mode. Power Save Poll is a protocol, which helps to reduce the amount of time a radio needs to be powered. PSP allows the WiFi adapter to notify the access point when the radio is powered down. The access point holds any network packet to be sent to this radio.

The **RF Quality Index** area displays the following information:

RF Quality Index	Displays information on the RF quality of the selected wireless client. The RF quality index is the overall effectiveness of the RF environment as a percentage of the connect rate in both directions as well as the retry rate and the error rate. The RF quality index value can be interpreted as: <ul style="list-style-type: none"> • 0 – 20 (Very low utilization) • 20 – 40 (Low utilization) • 40 – 60 (Moderate utilization) • 60 and above (High utilization)
Retry Rate	Displays the average number of retries per packet. A high number indicates possible network or hardware problems.
SNR (dBm)	Displays the connected client's SNR. A high SNR could warrant a different access point connection to improve performance.
Signal (dBm)	Displays the power of the radio signals in - dBm.
Noise (dBm)	Displays the disturbing influences on the signal in - dBm.
Error Rate (ppm)	Displays the number of received bit rates altered due to noise, interference and distortion. It is a unit-less performance measure.
MOS Score	Displays average voice call quality using the MOS (<i>Mean Opinion Score</i>) call quality scale. The MOS scale rates call quality on a scale of 1-5, with higher scores being better. If the MOS score is lower than 3.5, it's likely users will not be satisfied with the voice quality of their call.
R-Value	<i>R-value</i> is a number or score used to quantitatively express the quality of speech in communications systems. This is used in digital networks that carry VoIP (<i>Voice over IP</i>) traffic. The R-value can range from 1 (<i>worst</i>) to 100 (<i>best</i>) and is based on the percentage of users who are satisfied with the quality of a test voice signal after it has passed through a network from a source (transmitter) to a destination (receiver). The R-value scoring method accurately portrays the effects of packet loss and delays in digital networks carrying voice signals.

4. Select **Refresh** to update the screen's statistics counters to their latest values.

Client WMM TSPEC


The 802.11e TSPEC (*Traffic Specification*) provides a set of parameters that define the characteristics of the traffic stream, (operating requirement and scheduling etc.). The sender's TSPEC specifies parameters available within packet flows. Both sender and the receiver use TSPEC.

The TSPEC screen provides the information about TSPEC counts and TSPEC types utilized by the selected wireless client.

To view the TSPEC statistics:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen).
Expand an RF Domain, select a controller, an access point, then a connected client.
3. Select **WMM TPSEC**.

The **Statistics > Wireless Client > WMM TPSEC** screen is displayed.

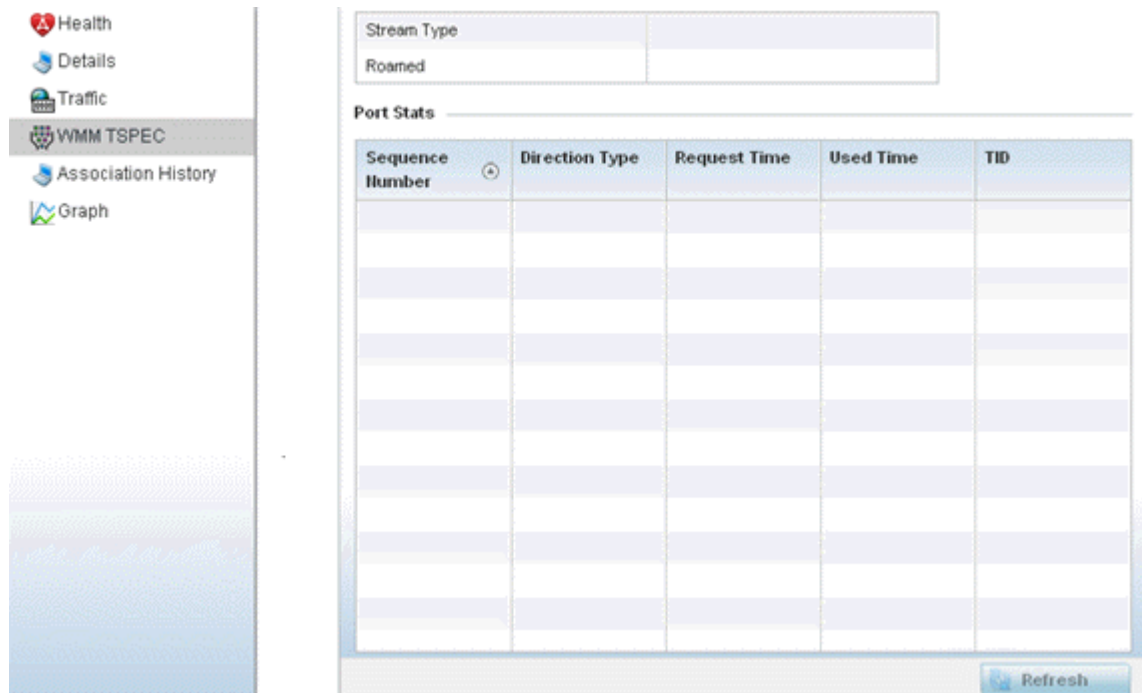

The top portion of the screen displays the TSPEC stream type and whether the client has roamed.

The **Ports Stats** field displays the following:

Sequence Number	Lists the system assigned sequence number that's unique to this WMM TPSEC uplink or downlink data stream.
Direction Type	Displays whether the WMM TPSEC data stream is in the uplink or downlink direction.

Channel	Lists the channel shared by both the access point and client for interoperation, and to avoid congestion with adjacent channel traffic.
Band	Lists the 2.4 or 5GHz radio band this clients and its connect access point are using for transmit and receive operations.
Time	Lists the historical connection time between each listed access point and this client.


5. Select **Refresh** to update the screen to it's latest values.

Client Graph

Use the **Graph** to assess a connected client's radio performance and diagnose performance issues that may be negatively impacting performance. Up to three selected performance variables can be charted at one time. The graph uses a Y-axis and a X-axis to associate selected parameters with their performance measure.

To view a graph of this client's statistics:

1. Select the **Statistics** menu from the Web UI.
2. Select **System** from the navigation pane (on the left-hand side of the screen). Expand an RF Domain, select a controller, an access point, then a connected client.
3. Select **Graph**.
4. Use the **Parameters** drop-down menu to define from 1- 3 variables assessing signal noise, transmit or receive values.
5. Use the **Polling Interval** drop-down menu to define the interval the chart is updated. Options include **30 seconds**, **1 minute**, **5 minutes**, **20 minutes** or **1 hour**. The default value is *30 seconds*.

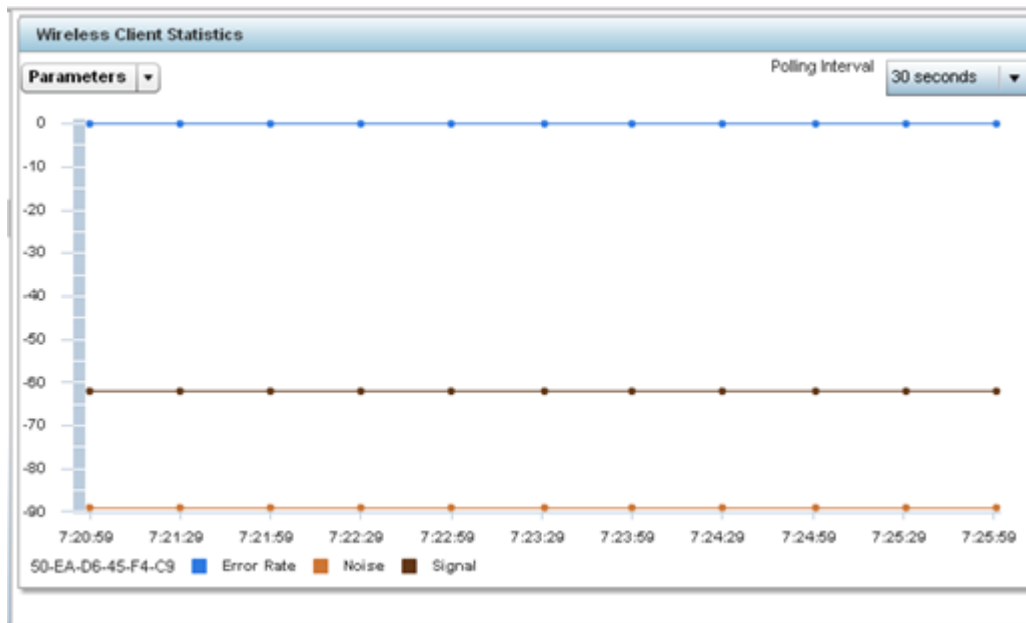

6. Select an available point in the graph to list the selected performance parameter, and display that parameter's value and a time stamp of when it occurred.



WiNG Events

WiNG outputs an event message for configuration changes and status updates to enable an administrator to assess the success or failure of specific configuration activities. Use the information in this chapter to review system generated event messages and their descriptions.

Each listed event can have customized notification settings defined and saved as part of an event policy. Thus, policies can be configured and administrated in respect to specific sets of client association, authentication/encryption, and performance events. Once policies are defined, they can be mapped to device profiles strategically as the likelihood of an event applies to particular devices. By default, there is no enabled event policy and one needs to be created and implemented.

For more information on the UI's descriptions of events, refer to [Fault Management](#) on page 982.



WiNG Event Messages

Event	Description
ADOPT-SERVICE SNMP_SUCCESS 6	SNMP framework success
ADOPT-SERVICE SNMP_FAILURE 6	SNMP framework failure
ADOPT-SERVICETUT_TEMPERATURE_ALARM_RAISED ([str])	Temperature alarm raised on sensor
ADOPT-SERVICE TUT_TEMPERATURE_ALARM_CLEARED ([str])	Temperature alarm cleared on sensor
ADOPT-SERVICE TUT_TEMPERATURE_ALARM_CLEARED ([str])	Temperature alarm cleared on sensor
ADOPT-SERVICE TUT_FAN_ALARM_CLEARED 5 IPX ([str])	Fan alarm cleared on ID
ADOPT-SERVICE TUT_PWRCTRL_ALARM_RAISED 5 IPX ([str])	Power controller alarm raised
ADOPT-SERVICE TUT_PWRCTRL_ALARM_CLEARED 5 IPX ([str])	Power controller alarm cleared
ADOPT-SERVICE TUT_LINE_POWER_ALARM_RAISED 5 IPX ([str]) Line power alarm raised on id [str]	Line power alarm raised
ADOPT-SERVICE TUT_LINE_POWER_ALARM_CLEARED 5 IPX ([str]) Line power alarm cleared on id [str]	Line power alarm cleared
ADOPT-SERVICE TUT_WLAN_CLIENT_ASSOC 6 IPX ([str]) Client [str] on interface index [str] associated	Client associated
ADOPT-SERVICE TUT_WLAN_CLIENT_DISASSOC 6 IPX ([str]) Client [str] on interface index [str] disassociated with status code [str], [str]	Client disassociated

Event	Description
ADOPT-SERVICE TUT_WLAN_CLIENT_ASSOC_FAILURE 3 IPX ([str]) Association failed for Client [str] on interface index [str] with status code [str], [str]	Association failed for client on specified interface index
ADOPT-SERVICE TUT_WLAN_CLIENT_AUTH 6 IPX ([str])	Client on interface index authenticated
ADOPT-SERVICE TUT_WLAN_CLIENT_DEAUTH 6 IPX ([str])	Client on interface index deauthenticated with status code
ADOPT-SERVICE TUT_WLAN_CLIENT_AUTH_FAILURE 3 IPX ([str])	Authentication failed for client on interface index with status code
ADOPT-SERVICE TUT_RADIO_ADAPTIVE_POWER_CHANGE 5 IPX ([str])	Interface with operational status and power levels
ADOPT-SERVICE TUT_RF_MONITOR_MODE_CHANGE 5 IPX ([str])	RF monitor status changed to on interface
ADOPT-SERVICE IPX_EVENT_FAILURE 3 IPX ([str])	Failed to raise WiNG event
AP NO_IMAGE_FILE [str] firmware image is not present on controller	Access Point firmware not on controller
AP IMAGE_PARSE_FAILURE Format of [str] firmware image on controller is invalid	Invalid Access Point firmware file
AP LEGACY_AUTO_UPDATE Legacy Access Point [str] [mac] being updated	Legacy Access Point updated
AP AP_ADOPTED [str] [mac] adopted	Access Point adopted
AP AP_UNADOPTED [str] [mac] un- adopted	Access Point unadopted
AP AP_RESET_DETECTED 6 [str] [mac] reset itself	Access Point reset detected
AP AP_RESET_REQUEST 6 [str] [mac] reset request	Access Point user requested reset
AP AP_TIMEOUT 6 str] [mac] timed out, reset sent to AP	Access Point timed out
AP ADOPTED Access Point([qstr]/[qstr]/ [dev]) at rf-domain:[qstr] adopted and configured. Radios: Count=[str], Bss: [str]	Access Point adopted and configured
AP UNADOPTED Access Point([qstr]/[qstr]/ [dev]) at rf-domain:[qstr] unadopted. Radios: Count=[str], Bss: [str]	Access Point unadopted
AP ADOPTED_TO_CONTROLLER Joined successfully with controller [qstr]([str])	Access Point adopted to controller

Event	Description
AP ONLINE Access Point [dev] is now online. Offline Reason is [str]. Offline count is [int]	Access Point online
AP OFFLINE Access Point [dev] is now offline. Offline Reason is [str]. Offline count is [int]	Access Point offline
AP OFFLINE Device [dev]([str]) is offline, last seen:[int] minutes ago on switchport [str]	Adopted device offline
AP RESET Reset Access Point mac [dev], [str]	Access Point reset
AP ADOPTION_REDIRECTED Access Point([qstr]/[qstr]/[dev]) cdp:[qstr] lldp:[qstr] redirected to the controller host/pair [qstr] - [qstr]	Access Point redirected
AP AP_AUTOUP_TIMEOUT 4 AUTOUPGRADE: [str] mac [str] Autoupgrade timed out	Time out while auto upgrading an AP
AP AP_AUTOUP_REBOOT 5 AUTOUPGRADE: [str] mac [str] Autoupgrade rebooting	Rebooting AP after upgrade
AP AP_AUTOUP_NO_NEED 6 AUTOUPGRADE: [str] mac [str] ver [str] Autoupgrade not required or not available	Auto upgrade not initiated
AP AP_AUTOUP_NEEDED 6 AUTOUPGRADE: [str] mac [str] ver [str] Autoupgrade will be applied	Auto upgrade is initiated on AP
AP AP_AUTOUP_DONE 5 AUTOUPGRADE: [str] mac [str] Autoupgrade complete	Auto upgrade successful
AP AP_AUTOUP_FAIL 4 AUTOUPGRADE: [str] mac [str] Autoupgrade failed	Failed auto upgrade attempt
AP AP_AUTOUP_VER 6 AUTOUPGRADE: version [str] available for [str] equipment	Available Access Point firmware versions for auto upgrade
AAA RADIUS_DISCONNECT_MSG Received Radius dynamic authorization Disconnect Message for [qstr] from server [qstr]	Received RADIUS disconnect request
AAA RADIUS_VLAN_UPDATE6 Assigning Radius server specified vlan [uint] to client [qstr] on wlan [qstr]	Client VLAN updated by RADIUS
AAA RADIUS_SESSION_NOT_STARTED5 Radius server indicates session time has not started for client [qstr]	Start time from RADIUS resource not yet valid
AAA RADIUS_SESSION_EXPIRED5 Radius server indicates session has already expired for client [qstr]	Session time from RADIUS resource already expired

Event	Description
ADV-WIPS ADV-WIPS-EVENT-1 4 Detected DoS Deauthentication attack against [mac] [str]	DoS Deauthentication attack
ADV-WIPS ADV-WIPS-EVENT-2 4 Detected DoS Disassociation attack against [mac] [str]	DoS disassociation attack
ADV-WIPS ADV-WIPS-EVENT-3 4 Detected DoS EAP failure spoof attack by [mac] [str]	EAP failure spoof attack
ADV-WIPS ADV-WIPS-EVENT-10 4 Detected ID-Theft out of sequence attack for [mac] [str]	ID theft out of sequence attack
ADV-WIPS ADV-WIPS-EVENT-11 4 Detected possible ID-Theft EAPoL Success spoof attack by [mac] [str]	Possible ID theft EAPoL success spoof attack
ADV-WIPS ADV-WIPS-EVENT-12 4 Detected possible WLAN-Jack attack by [mac] [str]	Possible WLAN jack attack
ADV-WIPS ADV-WIPS-EVENT-13 4 Detected possible ESSID-Jack attack against [mac] [str]	Possible ESSID jack attack
ADV-WIPS ADV-WIPS-EVENT-14 4 Detected possible Monkey-Jack attack by [mac] [str]	Possible monkey jack attack
ADV-WIPS ADV-WIPS-EVENT-16 4 Detected possible NULL Probe Response attack by [mac] [str]	Possible NULL probe response attack
ADV-WIPS ADV-WIPS-EVENT-105 4 Sanctioned MU [mac] detected associated with unsanctioned/neighbor AP [str]	Sanctioned MU detected associated with unsanctioned/neighbor AP
ADV-WIPS ADV-WIPS-EVENT-109 4 Multicast all systems traffic found from [mac] [str]	Multicast all systems traffic
ADV-WIPS ADV-WIPS-EVENT-110 4 Multicast all routers traffic found from [mac] [str]	Multicast all routers traffic
ADV-WIPS ADV-WIPS-EVENT-111 4 Multicast OSPF all traffic found from [mac] [str]	Multicast OSPF all traffic
ADV-WIPS ADV-WIPS-EVENT-112 4 Multicast OSPF Designated Routers traffic found from [mac] [str]	Multicast OSPF designated routers traffic
ADV-WIPS ADV-WIPS-EVENT-113 4 Multicast RIP-2 Routers traffic found from [mac] [str]	Multicast RIP 2 routers traffic

Event	Description
ADV-WIPS ADV-WIPS-EVENT-114 4 Multicast IGRP Routers traffic found from [mac] [str]	Multicast IGRP routers traffic
ADV-WIPS ADV-WIPS-EVENT-115 4 Multicast DHCP Server Relay Agent traffic found from [mac] [str]	Multicast DHCP server relay agent traffic
ADV-WIPS ADV-WIPS-EVENT-116 4 Multicast VRRP Agent traffic found from [mac] [str]	Multicast VRRP agent traffic
ADV-WIPS ADV-WIPS-EVENT-117 4 Multicast HSRP Agent traffic found from [mac] [str]	Multicast HSRP agent traffic
ADV-WIPS ADV-WIPS-EVENT-118 4 Multicast IGMP traffic found from [mac] [str]	Multicast IGMP traffic
ADV-WIPS ADV-WIPS-EVENT-119 4 Detected NETBIOS traffic from [mac] [str]	Detected NETBIOS traffic
ADV-WIPS ADV-WIPS-EVENT-120 4 Detected STP traffic from [mac] [str]	Detected STP traffic
ADV-WIPS ADV-WIPS-EVENT-113 4 Multicast RIP-2 Routers traffic found from [mac] [str]	Multicast RIP 2 routers traffic
ADV-WIPS ADV-WIPS-EVENT-121 4 Detected IPX traffic from [mac] [str]	Detected IPX traffic
ADV-WIPS ADV-WIPS-EVENT-142 4 Detected possible Probe Response attack by [mac] [str]	Possible probe response attack
ADV-WIPS ADV-WIPS-EVENT-221 4 Detected Invalid Management Frames from [mac] [str]	Invalid management frames
ADV-WIPS ADV-WIPS-EVENT-26 4 Detected DoS RTS flood attack against [mac] [str]	DoS RTS flood attack
ADV-WIPS ADV-WIPS-EVENT-222 4 Detected Invalid Channel Advertisement for [mac] [str]	Invalid channel advertisement
ADV-WIPS ADV-WIPS-EVENT-63 4 Detected Windows ZERO Configuration Memory Leak on [mac] [str]	Windows ZERO configuration memory leak
ADV-WIPS ADV-WIPS-EVENT-220 4 Detected Unauthorized Bridge [mac] [str]	Unauthorized bridge
AP SW_CONN_LOST 0 Lost connectivity with controller after config update. Rebooting and reverting to older working configuration	Controller connectivity lost

Event	Description
AAA RADIUS_DISCON_MSG5 Received Radius dynamic authorization Disconnect Message for [qstr] from server [qstr]	Received RADIUS disconnect request
AAA RADIUS_VLAN_UPDATE6 Assigning Radius server specified vlan [uint] to client [qstr] on wlan [qstr]	Client VLAN updated by RADIUS resource
AAA RADIUS_SESSION_NOT_STARTED5 Radius server indicates session time has not started for client [qstr]	Start time from RADIUS resource not yet valid
AAA RADIUS_SESSION_EXPIRED5 Radius server indicates session has already expired for client [qstr]	Session time from RADIUS resource already expired
CAPTIVE-PORTAL AUTH_SUCCESS6 Captive-portal authentication success for client [mu] ([qstr-ip]) user [qstr]	Authentication success
ADV-WIPS ADV-WIPS-EVENT-26 4 Detected DoS RTS flood attack against [mac] [str]	DoS RTS flood attack
ADV-WIPS ADV-WIPS-EVENT-222 4 Detected Invalid Channel Advertisement for [mac] [str]	Invalid channel advertisement
ADV-WIPS ADV-WIPS-EVENT-63 4 Detected Windows ZERO Configuration Memory Leak on [mac] [str]	Windows ZERO configuration memory leak
ADV-WIPS ADV-WIPS-EVENT-220 4 Detected Unauthorized Bridge [mac] [str]	Unauthorized bridge
AP SW_CONN_LOST 0 Lost connectivity with controller after config update. Rebooting and reverting to older working configuration	Controller connectivity lost
AAA RADIUS_DISCON_MSG5 Received Radius dynamic authorization Disconnect Message for [qstr] from server [qstr]	Received RADIUS resource disconnect request
AAA RADIUS_VLAN_UPDATE6 Assigning Radius server specified vlan [uint] to client [qstr] on wlan [qstr]	Client VLAN updated by RADIUS
AAA RADIUS_SESSION_NOT_STARTED5 Radius server indicates session time has not started for client [qstr]	Start time from RADIUS resource not yet valid
AAA RADIUS_SESSION_EXPIRED5 Radius server indicates session has already expired for client [qstr]	Session time from RADIUS resource already expired
CAPTIVE-PORTAL AUTH_SUCCESS6 Captive-portal authentication success for client [mu] ([qstr-ip]) user [qstr]	Authentication success

Event	Description
CAPTIVE-PORTAL AUTH_FAILED6 Captive-portal authentication failed for client [mu] ([qstr-ip])	Authentication failed
CAPTIVE-PORTAL SESSION_TIMEOUT6 Captive-portal session timed out for client [mu] ([qstr-ip])	Session timed out
CAPTIVE-PORTAL CLIENT_DISCONNECT 6 Captive-portal session disconnected for client [mu] ([qstr-ip])	Client disconnected
CAPTIVE-PORTAL PURGE_CLIENT6 Captive-portal: Purge client [mu] by new client [mu] for user [qstr]	Client purged
CAPTIVE-PORTAL FLEX_LOG_ACCESS 6 [qstr]: [qstr] allowed access for client [mu] ([qstr-ip])	Flex log access granted for client
CAPTIVE-PORTAL INACTIVITY_TIMEOUT 6 Captive-portal session cleared for client [mu] ([qstr-ip]) after inactivity timeout	Client timed out due to inactivity
CAPTIVE-PORTAL ALLOW_ACCESS6 Captive-portal allow access for client [mu] ([qstr-ip])	Client allowed access
CAPTIVE-PORTAL CLIENT_REMOVED6 Captive-portal session removed for client [mu] ([qstr-ip]) on policy change/admin action	Client removed due to admin changes
CAPTIVE-PORTAL PAGE_CRE_FAILED3 Page creation failed for policy [qstr], file [qstr], Error [qstr]	Page creation failure
CAPTIVE-PORTAL DATA_LIMIT_EXCEED6 Data limit exceed, Usage:[int] KBytes, Action:[str], client [mu] ([ip])	Client data limit exceeded
CAPTIVE-PORTAL VLAN_SWITCH6 Client [mu] ([ip]) switching from vlan [int] to vlan [int]	Client VLAN switch
CAPTIVE-PORTAL SERVER_MONITOR_STATE_CHANGE6 Captive-portal policy [qstr]: service monitor [str] server status changing from [qstr] to [qstr]	Captive portal server monitor state changed
CAPTIVE-PORTAL NO_SERVICE_PAGE_SENT6 Captive-portal sent no service page to client [mu] ([ip]) as [str] server is down	No service page sent to client
CERTMGR RSA_KEY_ACTIONS_SUCCESS 6 [str] of RSA key [str] successful	Successful completion of RSA key related actions (import, export etc.)
CERTMGR RSA_KEY_ACTIONS_FAILURE 3 [str] of RSA key [str] failed: [str]	Failure of RSA key related actions (import, export etc.)

Event	Description
CERTMGR CA_CERT_ACTIONS_SUCCESS 6 [str] of CA certificate for trustpoint [str] successful	Successful completion of CA certificate related actions (import, export etc.)
CERTMGR CA_CERT_ACTIONS_FAILURE 3 [str] of CA certificate for trustpoint [str] failed: [str]	Failure of CA certificate actions (import, export etc.)
CERTMGR SRV_CERT_ACTIONS_SUCCESS 6 [str] of Server Certificate of trustpoint [str] successful	Successful completion of server certificate actions (import, export etc.)
CERTMGR SVR_CERT_ACTIONS_FAILURE 3 [str] of Server Certificate of trustpoint [str] failed: [str]	Failure of server certificate actions (import, export etc.)
CERTMGR CSR_EXPORT_SUCCESS 6 Export of Certificate Signing Request for [str] successful	Successful export of certificate signing request
CERTMGR CSR_EXPORT_FAILURE 3 Export of Certificate Signing Request for [str] failed: [str]	Failed to export certificate signing request
CERTMGR CRL_ACTIONS_SUCCESS 6 [str] of CRL for trustpoint [str] successful	Successful completion of certificate revocation list action
CERTMGR CRL_ACTIONS_FAILURE 3 [str] of CRL for trustpoint [str] failed: [str]	Certificate revocation list action failure
CERTMGR DELETE_TRUSTPOINT_ACTION 6 Deletion of trustpoint [str] successful	Deletion of trustpoint
CERTMGR IMPORT_TRUSTPOINT 6 Import of Trustpoint [str] [str]	Import of trustpoint
CERTMGR EXPORT_TRUSTPOINT 6 Export of Trustpoint [str] [str]//	Export of trustpoint
CERTMGR CERT_EXPIRY 4 [str] certificate for trustpoint [str] [str]	Certificate expiration
CERTMGR CA_KEY_ACTIONS_SUCCESS 6 [str] of CA private key for trustpoint [str] successful	Successful completion of CA private key actions
CERTMGR CA_KEY_ACTIONS_FAILURE 3 [str] of CA private key for trustpoint [str] failed: [str]	Failure of CA private key actions
CLUSTER CMASTER_CFG_UPDATE_FAIL 3 Cluster master config update to [str] failed, Err: [str]	Cluster master config update failed
CLUSTER MAX_EXCEEDED 4 Max cluster members ([uint]) exceeded, clustering will not function properly until corrected	Max cluster count exceeded
CLUSTER STATE_CHANGE 4 Active cluster member changed. Present active [str]. Previous active [str].	Active cluster membership change

Event	Description
CLUSTER STATE_CHANGE_INACTIVE 4 Member [str] (load[int]) changing state from Active to Standby. New member [str] standby load [int].	Cluster member change from active to standby
CLUSTER STATE_CHANGE_ACTIVE 4 Member [str] (load[int]) changing state from Standby to Active. New member [str] standby load [int]	Cluster member change from standby to active
CLUSTER STATE_RETAIN_ACTIVE 4 Member [str] (load[int]) retaining Active state. New member [str] standby load [int]	Cluster member retaining active state
CRM CRITICAL_RESOURCE_UP5 Critical Resource [str] is UP	Critical resource is up
CRM CRITICAL_RESOURCE_DOWN 5 Critical Resource [str] is DOWN	Critical resource is down
CERTMGR-LITE INVALIDCACERT 5 CA Certificate imported for the trustpoint [str] is invalid	CA certificate is invalid
CERTMGR-LITE INVALIDSERVCERT 5 Server Certificate imported for the trustpoint [str] is invalid	Server certificate is invalid
CERTMGR-LITE INVALIDCERTCRL 5 Certificate Crl Imported for trustpoint [str] is invalid	CRL is invalid
CERTMGR-LITE CERTEXPIRED 5 [str] Certificate of trustpoint [str] is expired//	Certificate is expired
CERTMGR-LITE INVALIDCERTKEY 5 Private key imported for trustpoint [str] is not valid	Private key is invalid
CERTMGR-LITE INVALIDRSAKEY 5 Rsakey imported is not valid [str] is invalid//	RSA key import operation
CERTMGR-LITE KEYDECRYPTFAILE 4 Rsakey cannot be decrypted with the password provided	RSA key cannot be decrypted with provided password
CERTMGR-LITE CERTIMPORTED 6 [str] Certificate imported for the trustpoint [str]	Certificate imported for trustpoint
CERTMGR-LITE CERTKEYIMPORTED 6 Private key imported for the trustpoint [str]	Private key imported for trustpoint
CERTMGR-LITE RSAKEYIMPORTED 6 Rsakey imported with the name [str]	RSA key imported
CERTMGR-LITE DELETETRUSTPOINT 6 Trustpoint [str] is deleted	Trustpoint deleted
CERTMGR-LITE DELETERSAKEY 6 Rsakey [str] is deleted	RSA Key deleted

Event	Description
CERTMGR-LITE CERTREQUESTGEN 6 Certificate request generated for the trustpoint [str]	Certificate requested generated
CERTMGR-LITE CERTSELSIGNEDGEN 6 Selfsigned certificate generated for the trustpoint [str]	Self signed certificate generated
CERTMGR-LITE RSAKEYGEN 6 Rsa key [str] generated	RSA key generated
CERTMGR-LITE ERROR 5 [str]	Certificate manager general error
CERTMGR-LITE CERT_EXPIRY4 [str] certificate for trustpoint [str] [str]	Certificate about to expire
CERTMGR CERT_RENEW_FAILED1 Certificate renew in field failed reason [str]	Certificate renew failure reason
DHCP SVR DHCP SVR_STOP 6 DHCP server is stopped	DHCP server stopped
DIAG WD_RESET_SYS 2 The system has been RESET by the Watchdog	Log watchdog reset
DIAG CPU_USAGE_TOO_HIGH 4 CPU Usage too high. Limit of [int]*(0.1%) exceeded. Current CPU usage is [int]*(0.1%)	Log CPU load detected as too high
DIAG CPU_USAGE_TOO_HIGH_RECOVER 4 CPU Usage too high recover. Limit is [int]*(0.1%)	Current CPU usage is too high
DIAG CPU_LOAD 4 [str] minute average load limit exceeded, value is [str]% limit is [str]% (top processes: [str])	CPU average load limit exceeded
DIAG RAM_USAGE 6 [str], pid [uint], has exceeded ram usage limit [uint].[uint]%, now using [uint].[uint]%	Log processor RAM usage has exceeded RAM limit
DIAG MEM_USAGE_TOO_HIGH 6 Memory Usage too high. Current Usage is [int]*(0.1%). Memory Usage Threshold is [int]*(0.1%)	Memory usage too high
DIAG MEM_USAGE_TOO_HIGH_RECOVER 6 Memory Usage too high recover. Current Usage is [int]*(0.1%). Memory Usage Threshold is [int]*(0.1%)	Memory usage detected as too high
DIAG BUF_USAGE 6 [uint] byte buffer usage greater than expected, [uint] used, warning level [uint]	Log buffer usage greater than anticipated
DIAG HEAD_CACHE_USAGE 6 socket buffer head cache usage is greater than expected, usage [uint], warning level [uint]	Log head cache usage greater than anticipated
DIAG IP_DEST_USAGE 6 IP destination cache usage is greater than expected, usage [uint], warning level [uint]	Log destination cache usage greater than anticipated

Event	Description
DIAG FREE_RAM 6 Free RAM, [str]% is less than limit [str]%. Top Memory process: [str]/[uint] using [uint].[uint]%, [str]/[uint] using [uint].[uint]%, [str]/[uint] using [uint].[uint]%	Log RAM space less than limit
DIAG FREE_FLASH_DISK 4 Free [str] file system space, [str]% is less than limit [str]%	Log free disk space less than limit
DIAG DISK_USAGE 4 Disk usage too high	Log disk usage too high
"DIAG NEW_LED_STATE 6 LED state message [str] from module [str]	Log LED message from module
DIAG FREE_FLASH_INODES 4 [uint] Free INodes on [str] file system is less than limit [uint]	Log INodes less than system limit
DIAG FREE_NVRAM_DISK 4 Free [str] file system space, [str]% is less than limit [str]%	Log file system space less than limit
DIAG FREE_NVRAM_INODES 4 [uint] Free INodes on [str] file system is less than limit [uint]	Log free INodes on file system less than limit
DIAG FREE_RAM_DISK 4 Free [str] file system space, [str]% is less than limit [str]%	Log free file system space less than limit
DIAG FREE_RAM_INODES 4 [uint] Free INodes on [str] file system is less than limit [uint]	LOG_FREE_VARFS_INODES
DIAG FD_COUNT 4 FD Usage [uint] is over limit [uint]	HUMM
DIAG DISK_USAGE 4 Disk usage too high	Log disk utilization usage too high
DIAG NEW_LED_STATE 6 LED state message [str] from module [str]	Log LED state message from module
DIAG LED_IDENTIFY 6 LED identify sequence [str]	Log identification sequence
"DHCP SVR RELAY_NO_IFACE 4 Dhcp relay cannot be allowed on interface [str] as it does not exist	No interface for DHCP relay
DHCP SVR RELAY_IFACE_NO_IP 4 Dhcp relay cannot be allowed on interface [str] as it does not have an IP address	No IP address on DHCP relay interface
DHCP SVR RELAY_START 6 DHCP relay agent started on [str]	DHCP relay agent started
DHCP SVR RELAY_STOP 6 DHCP relay agent stopped	DHCP relay agent stopped
DHCP SVR DHCP SVR_START 6 DHCP server is started	DHCP server started
DIAG FAN_UNDERSPEED 4 Fan [str] under speed: [uint] RPM is under limit [uint] RPM	Fan speed under set RPM limit

Event	Description
DIAG ELAPSED_TIME 7 Elapsed time since last diag run appears to be zero	Log elapsed time since last diagnostic run
DIAG AUTOGEN_TECH_SPRT 6 Auto generated tech-support dump file [str] [str]	Log generation of tech support dump file
DIAG POE_INIT_FAIL 3 Could not initialize the PoE manager	Log PoE manager initialization failure
DIAG POE_POWER_LEVEL 4 POE power consumption is [uint]W which exceeds [uint]% of [uint]W power budget	Log power consumption exceeds power budget limit
DIAG POE_READ_FAIL 3 Could not read from the PoE	Log PoE read failure
DIAG POE_STATE_CHANGE 4 port [uint] POE state changed to [str]	Log PoE state change
DIAG RAID_DEGRADED 4 RAID array is degraded	Log RAID array degraded
DIAG RAID_ERROR 4 RAID array management error [uint]	Log RAID array management error
DIAG PWRSPPLY_FAIL 4 Power supply failure, no longer redundant	Log power supply failure
DIAG HDD_FAILING 4 HDD is failing	Log HDD failure
DIAG UNDER_VOLTAGE 4 Voltage [str]V under low limit [str]V	Log voltage sensor under low limit
DIAG OVER_VOLTAGE 4 Voltage [str]V over high limit [str]V	Log voltage sensor over high limit
DIAG LOW_TEMP 6 Temp sensor [str] [str]C under low limit [str]C	Log temperature sensor under low limit
DIAG HIGH_TEMP 4 Temp sensor [str] [str]C over high limit [str]C	Log temperature sensor over high limit
DIAG OVER_TEMP 0 Temp sensor [str] [str]C over maximum limit [str]C Shutdown switch	Log temperature sensor over max limit
DIAG WD_STATE_CHANGE 6 Watchdog is now [str]	Log watchdog state
DOT1X DOT1X_SUCCESS 6 Client [qstr] 802.1x/EAP authentication success on interface [qstr]//802.1x authentication successful	802.1X authentication successful
DOT1X DOT1X_FAILED 5 Client [qstr] failed 802.1x/EAP authentication on interface [qstr]//802.1x authentication failure	802.1X authentication failed
DOT11 COUNTRY_CODE 5 Country of operation configured to [str]	Country of operation configured

Event	Description
DOT11 COUNTRY_CODE_ERROR 1 Error setting country of operation. [str]	Error setting country of operation
DOT11 CLIENT_ASSOCIATED 6 Client [qstr] associated to wlan [qstr] ssid [qstr] on radio [qstr]	Client associated event
DOT11 CLIENT_DISASSOCIATED 6 Client [qstr] disassociated from wlan [qstr] radio [qstr]: [str] (reason code:[uint])	Client disassociated
DOT11 CLIENT_DENIED_ASSOC 5 Client [qstr] denied association on radio [qstr] [str]: [str]	Client denied association
DOT11 CLIENT_ASSOC_IGNORED 6 Client [qstr] ignored association on radio [qstr] [str]: [str]	Client ignored association
DOT11 WPA_WPA2_SUCCESS 6 Client [qstr] completed [str] handshake on wlan [qstr] radio [qstr]	Client completed WPA/WPA2 handshake
DOT11 WPA_WPA2_FAILED 5 Client [qstr] failed [str] handshake on wlan [qstr] radio [qstr]	Client failed WPA/WPA2 handshake
DOT11 WPA_WPA2_KEY_ROTATION 6 Rotating wpa/wpa2 group keys on wlan [qstr] /	Rotating WPA/WPA2 group keys on WLAN
DOT11 TKIP_MIC_FAIL_REPORT 5 TKIP message integrity check failure reported by [mac] on wlan [qstr]	TKIP MIC failure report
DOT11 TKIP_MIC_FAILURE 5 TKIP message integrity check failed in packet from [mac] on wlan [qstr]	TKIP MIC check failed
DOT11 TKIP_CNTRMEAS_START 4 Initiating TKIP countermeasures on wlan [qstr] ssid [qstr]	TKIP countermeasures initiated
DOT11 TKIP_CNTRMEAS_END 4 TKIP countermeasures ended on wlan [qstr] ssid [qstr] //	TKIP countermeasures ended
DOT11 EAP_SUCCESS 6 Client [qstr] 802.1x/EAP (type:[str]) authentication success on wlan [qstr] radio [qstr] username [str]	EAP authentication success
DOT11 EAP_FAILED 5 Client [qstr] failed 802.1x/EAP authentication on wlan [qstr] radio [qstr]	EAP authentication failure
DOT11 EAP_CLIENT_TIMEOUT 5 Client [qstr] timeout attempting 802.1x/EAP authentication on wlan [qstr] radio [qstr]	EAP authentication timed out
DOT11 EAP_SERVER_TIMEOUT 5 Radius server [str] timeout authenticating client [qstr] on wlan [qstr] radio [qstr]	RADIUS server timed out

Event	Description
DOT11 EAP_CACHED_KEYS 6 Key Cache used for client [qstr] on wlan [qstr] radio [qstr]. Skipping 802.1x	Key cache used for authentication
DOT11 EAP_OPP_CACHED_KEYS 6 Opportunistic Key Cache used for client [qstr] on wlan [qstr] radio [qstr]. Skipping 802.1x.	Opportunistic key caching used for authentication
DOT11 EAP_PREAUTH_SUCCESS 6 Client [qstr] 802.1x/EAP (type:[str]) pre-authentication success on wlan [qstr] bss [mac]	EAP pre authentication success
DOT11 EAP_PREAUTH_FAILED 5 Client [qstr] failed 802.1x/EAP pre-authentication on wlan [qstr] bss [mac]	EAP pre-authentication failed
DOT11 EAP_PREAUTH_CLIENT_TIMEOUT 5 Client [qstr] timeout attempting 802.1x/EAP pre-authentication on wlan [qstr]	EAP pre-authentication client timeout detected
DOT11 EAP_PREAUTH_SERVER_TIMEOUT 5 Radius server [qstr] timeout pre-authenticating client [qstr] on wlan [qstr]	EAP pre-authentication server timeout detected
DOT11 FT_ROAM_SUCCESS 6 Client [qstr] fast bss transition roam to wlan [qstr] ssid [qstr] on radio [qstr]	Client fast BSS transition roam to WLAN SSD ID on radio
DOT11 GAL_RX_REQUEST 6 Received request to validate [qstr] on global assoc-list [qstr] from [qstr] on rf-domain [qstr]	Received request to validate global association request for RF Domain
DOT11 GAL_TX_RESPONSE 6 Sending global assoc-list [qstr] response for [qstr] to [qstr] on rf-domain [qstr], result: [str]	Sending global association response for RF Domain
DOT11 GAL_VALIDATE_REQ 6 Sending global assoc-list validation request to controller for [qstr]	Sending global association list validation to controller
DOT11 GAL_VALIDATE_FAILED 6 Received global assoc-list validation failure for [qstr]	Received global association list validation failures
DOT11 GAL_VALIDATE_SUCCESS 6 Received global assoc-list validation success for [qstr]	Received global association list validation successes
FWU FWUDONE 6 Firmware update successful, new version is [str]	Update successfully completed
FWU FWUABORTED 6 Firmware update aborted	Update aborted
FWU FWUNONEED 6 Firmware update not required, running and update versions same [str]	Update not required, running and update version are the same
FWU FWUSYSERR 3 Firmware update unsuccessful, system cmd [str] failed	Update unsuccessful, system cmd failed

Event	Description
FWU FWUBADCONFIG 3 Firmware update unsuccessful, unable to read configuration file	Update unsuccessful, unable to read config file
FWU FWUSERVERUNDEF 3 Firmware update unsuccessful, update server undefined	Update unsuccessful, server undefined
FWU FWUFILEUNDEF 3 Firmware update unsuccessful, update file undefined	Update unsuccessful, update file undefined
FWU FWUSERVERUNREACHABLE 3 Firmware update unsuccessful, server [str] unreachable	Update unsuccessful, server unreachable
FWU FWUCOULDNTGETFILE 3 Firmware update unsuccessful, couldn't get file, [str] //	Update unsuccessful, could not get file
FWU FWUVERMISMATCH 3 Firmware update unsuccessful, version mismatch, expected [str], actual [str] //	Update unsuccessful, version mismatch
FWU FWUPRODMISMATCH 3 Firmware update unsuccessful, product mismatch, expected [str], actual [str]	Update unsuccessful, product mismatch
FWU FWUCORRUPTEDFILE 3 Firmware update unsuccessful, corrupted firmware file	Update unsuccessful, corrupted file
FWU FWUSIGNMISMATCH 3 Firmware update unsuccessful, signature mismatch, [str]	Update unsuccessful, signature mismatch
FWU FWUUNSUPPORTEDHW 3 Firmware update unsuccessful, unsupported hardware	Update unsuccessful, unsupported hardware version
FWU FWUUNSUPPORTEDMODELNUM 3 Firmware update unsuccessful, unsupported FIPS model number	Update unsuccessful, unsupported FIPS model number
ISDN_EMERG 0 Emergency: [str]	ISDN emergency
ISDN_ALERT 1 Alert: [str]	ISDN alert
ISDN_CRIT 2 Critical: [str]	ISDN critical
ISDN_ERR 3 Error: [str]	ISDN error
ISDN_WARNING 4 Warning: [str]	ISDN warning
ISDN_NOTICE 5 Notice: [str]	ISDN notice
ISDN_INFO 6 Info: [str]	ISDN information
ISDN_DEBUG 7 Debug: [str]	ISDN debug
L2TPV3 L2TPV3_TUNNEL_UP 5 L2TPV3 tunnel [str] is UP	L2TPV3 tunnel is up
L2TPV3 L2TPV3_TUNNEL_DOWN 5 L2TPV3 tunnel [str] is DOWN	L2TPV3 tunnel is down

Event	Description
LICMGR LIC_INSTALLED 6 [str] license installed	License installation
LICMGR LIC_INSTALL_DEFAULT 6 [str] default license installed, count: [int]	Default license installation
LICMGR LIC_INSTALL_COUNT 6 [str] license installed, count: [int]	License count
LICMGR LIC_REMOVED 6 [str] license removed	License removed
LICMGR LIC_INVALID 3 [str] license invalid Error: [str]	License installation failed
MESH MESH_LINK_UP 5 Mesh link up between radio [qstr] and radio [qstr]	Mesh link up
MESH MESH_LINK_DOWN 5 Mesh link down between radio [qstr] and radio [qstr]	Mesh link down
MGMT LOG_KEY_DELETED 4 Rsakey [str] associated with ssh is deleted so ssh is restarted with default rsa key	RSA key associated with SSH is deleted
MGMT LOG_KEY_RESTORED 6Rsakey [str] associated with ssh is added so ssh is restarted with new key	RSA key associated with SSH is added
MGMT LOG_TRUSTPOINT_DELETED 4 Trustpoint [str] associated with https is deleted or expired so https is restarted with default trustpoint	Trustpoint associated with HTTPS is deleted
MGMT LOG_HTTP_START 5 [str] started in external mode	Web server started in external mode
MGMT LOG_HTTP_LOCAL_START 5 thttpd started in localhost mode	Web server started in local mode
MGMT LOG_HTTPS_START 5 stunnel started	Secure Web server started
MGMT LOG_HTTPS_WAIT 5 waiting for thttpd to start	Waiting for Web server to start
MGMT LOG_HTTP_INIT 5 [str] status started is [uint] and external mode is [uint]	Web server started
MESH MESHPOINT_LOOP_PREVENT_ON 4 Meshpoint [qstr] loop prevention on (port [str]), wired traffic is blocked	Wired traffic is blocked
MESH MESHPOINT_LOOP_PREVENT_OFF 4 Meshpoint loop prevention off (port [str]), all wired traffic is allowed	Wired traffic is allowed
MESH MESHPOINT_ROOT_CHANGE 6 Meshpoint [qstr] root changed from [mac] to [mac] via next hop [mac]	Meshpoint root changed

Event	Description
MESH MESHPOINT_PATH_CHANGE 6 Meshpoint [qstr] next hop changed from [mac] to [mac] for [mac]	Meshpoint next hop changed
NSM IFUP 4 Interface [str] is up	Interface up
NSM IFDOWN 4 Interface [str] is down	Interface down
NSM DHCP_IP 6 Interface [str] acquired IP address [ip]/[uint] via DHC	Interface assigned DHCP IP address
NSM DHCPDEFRT 6 Default route with gateway [ip] learnt via DHC	Default route learnt via DHCP
NSM DHCP_IP_CHG 5 Interface [str] changed DHCP IP - old IP: [ip]/[uint], new IP: [ip]/[uint]	DHCP Interface IP changed
NSM DHCPNODEFRT 5 Interface [str] lost its DHCP default route	Interface no default route
NSM IF_IP_CFG 3 Interface [str] IP address [str] Interface [str]	Interface IP address
NSM DHCP_ERR 3 Both, DHCP client and server are configured for interface [str]. DHCP Client has been enabled on the interface and dhcp server is shut down	DHCP server-client config conflict
NSM DHCP_IP_NOADD 5 Interface [str] lost its DHCP IP address to interface [str]'s overlapping static configured IP address	DHCP IP overlaps static IP address
NSM DHCPLEASEXP 5 Interface [str] lost its DHCP IP address [ip] due to lease expiration	Interface DHCP lease expired
NSM DHCP_NAK 5 Interface [str] lost its DHCP IP address [ip], DHCP NAK response from server	DHCP Server returned DHCP NAK response
NSM NSM_NTP 6 Look up host [str] [str]//	Translate host name
NSM IF_FAILOVER 5 Interface [str] failover to Interface [str]	Interface failover
NSM IF_FAILBACK 5 Interface [str] failback to Interface [str]	Interface failback
PM PROCSTART 6 Starting process [str]	Process started
PM PROC_RSTRT 3 Process [str] is not responding. Restarting process	Process restarted
PM PROC_MAX_RSTRT 1 Process [str] reached its maximum number of allowed restarts	Process reached max number of restarts
PM PROC_SYS_RSTRT 0 Process [str] reached its maximum number of allowed restarts. Rebooting the system.	Process reached max restarts. Rebooting system.

Event	Description
PM PROCSTOP 5 Process [str] has been stopped	Process has been stopped
PM PROCID 5 Process [str] changed its PID from [int] to [int]	Process changed PID
PM STARTUPCOMPLETE 5 System startup complete	System startup completed
PM PROCNORESP 4 Process [str] is not responding ([uint]/[uint])	Process is not responding
RADCONF RADIUSDSTART 6 Radius Server Started	RADIUS server started
RADCONF RADIUSDSTOP 6 Radius Server Stopped	RADIUS server stopped
RADCONF COULD_NOT_STOP_RADIUSD 3 radiusd could not be stopped	RADIUS server failed to stop
RADIO RADIO_STATE_CHANGE 5 Radio [qstr] changing state from [qstr] to [qstr]	Radio state changed
RADIO RADAR_SCAN_STARTED 6 Radar scan on primary channel [uint] freq [uint] MHz for a duration [uint] secs on radio [qstr]	Radar scan started
RADIO RADAR_SCAN_COMPLETED 6 Radar scan done on primary channel [uint] freq [uint] MHz on radio [qstr]	Radar scan completed
RADIO RADAR_DETECTED 4 Radar found on channel [uint] freq [uint] MHz	Radar detected
RADIO RADAR_DET_INFO 4 Radar info: Radio: [qstr]. New channel: [uint] freq [uint] MHz. Scan time: [uint] secs	Radar info
RADIO RESUME_HOME_CHANNEL 6 Operation on home channel [uint] freq [uint] MHz resumes on radio [qstr] after earlier radar detect	Radio resuming on home channel
RADIO ACS_SCAN_STARTED 6 ACS scan started on radio [qstr]	ACS scan started
RADIO ACS_SCAN_COMPLETE 6 ACS scan done, channel [uint] selected on radio [qstr]	ACS scan complete
RADIO_ANTENNA_ERROR 3 antenna type [str] in is not supported on radio [uint] of device [str]	Invalid (unsupported) antenna detected on this radio
RADIO CHANNEL_COUNTRY_MISMATCH 3 Channel [str] not valid in country of operation [str] for [str] [str]	Channel and country of operation mismatch
SYSTEM HTTP_ERR 3 [str] did not start	Web server did not start

Event	Description
SYSTEM LOGIN_FAIL_BAD_ROLE 3 Log-in failed - [qstr] is an undefined user role - user [qstr] from [qstr]	Failed login attempt - no such user role
SYSTEM LOGOUT 6 Logged out user [qstr] with privilege [qstr] from [qstr]	Logout event
SYSTEM WARM_START 6 System Warm Start Reason : [str] Timestamp: [str]	System warm start
SYSTEM WARM_START_RECOVER 6 Warm Start Recover. Reason: [str] Timestamp: [str]	System wam start recovery
SYSTEM COLD_START 6 System Cold start. System came up at [str]	System cold start
SYSTEM SERVER_UNREACHABLE 5 Server not reachable, trying authentication using local database .	Authentication using the local database
SYSTEM PERIODIC_HEART_BEAT 3 Periodic Heart Beat. Interval:[int]. Ip address [str].	Periodic heartbeat detected
SYSTEM CONFIG_COMMIT 6 Configuration commit by user [qstr] ([str]) from [qstr]	Configuration commit
SYSTEM CONFIG_REVISION 6 Configuration revision updated to [str] from [str]	Configuration updated
SYSTEM SYSTEM_AUTOUP_ENABLE 6 Autoupgrade enabled for [str]	Auto upgrade module is enabled
SYSTEM SYSTEM_AUTOUP_DISABLE 6 Autoupgrade disabled for [str]	Auto upgrade module is disabled
SYSTEM MAAT_LIGHT 5 MAAT Light module [str]	Notice on action on RIM radio(s) from Maat Light module
SYSTEM DEVUP_RFD_FAIL 4 Upgrade failed on mac [str] in RF domain [str]	Upgrade for device failed on rf-domain manager
SMTPNOT SMTPAUTH 5 Authentication failure for user: [str] on server [str].//	User authentication failure
SMTPNOT NET 5 Network error contacting server: [str].	Cannot contact server
SMTPNOT SMTPINFO 6 [str].	SMTP information notice
SMTPNOT CFG 5 Error reading configuration file.	Cannot read configuration
SMTPNOT CFGINC 5 Incomplete Configuration.	Incomplete configuration
SMTPNOT SMTPERR 5 [str].	SMTP 5XX errors
SMTPNOT PROTO 5 Protocol Error: [str].	SMTP protocol errors
SYSTEM PROC_STOP 6 Stopping process [qstr]	Stopping process

Event	Description
SYSTEM CLOCK_RESET 6 System clock reset, Time: [str]	System clock reset
SYSTEM LOGIN 5 Successfully logged in user [qstr] with privilege [qstr] from [qstr]	Successful login
SYSTEM LOGIN_FAIL 3 Log-in failed for user [qstr] from [qstr]	Failed login attempt - user authentication failed
SYSTEM LOGIN_FAIL_ACCESS 3 Log-in failed - user [qstr] is not allowed access from [qstr]	Failed login attempt - access violation
VRRP VRRP_STATE_CHANGE 5 [str]: VRRP Group [uint] transitioned to [str] state	VRRP state transition
VRRP VRRP_VIP_SUBNET_MISMATCH 2 VRRP Group [uint] VIP [ip] does not overlap with any of the interface addresses	VRRP IP not overlapping with interface addresses
VRRP VRRP_MONITOR_CHANGE 5 [str]: VRRP Group [uint] monitored [str] state change to [str]; priority change from [uint] to [uint]	VRRP monitor link state change
WIPS UNSANCTIONED_AP_ACTIVE 6 Unsolicited AP [mac] vendor [str] on channel [int] with rssi [int] active from [str]	Unsolicited AP active
WIPS UNSANCTIONED_AP_INACTIVE 6 Unsolicited AP [mac] vendor [str] inactive from [str]	Unsolicited AP inactive
WIPS UNSANCTIONED_AP_STATUS_CHANGE 6 Unsolicited AP [mac] vendor [str] status has been administratively changed	Unsolicited AP changed state
WIPS ROGUE_AP_ACTIVE 4 Rogue AP [mac] vendor [str] on channel [int] with vlan [int] and rssi [int] active from [str] //	Rogue AP active
WIPS ROGUE_AP_INACTIVE 4 Rogue AP [mac] vendor [str] inactive from [str]	Rogue AP inactive
WIPS AIR_TERMINATION_INITIATED 4 Air termination of [mac] vendor [str] on channel [int] initiated	Air termination initiated
WIPS AIR_TERMINATION_ENDED 4 Air termination of [mac] vendor [str] ended	Air termination ended



AP3000 Features

[AP3000/X Series Radios and 6 GHz Support](#) on page 1271

AP3000/X Series Radios and 6 GHz Support

The AP3000/X series access points are Wi-Fi 6E tri-radio access points with support for multiple Extreme Networks operating systems. The AP3000/X series access points include the following AP models:

- AP3000 — Indoor access point
- AP3000X — Indoor access point with optional external antenna.

The AP3000/X series access points offer two radios in three modes:

Table 13: AP3000/X Operating Modes

Mode	Radio 1 (2x2)	Radio 2 (2x2)	Radio Definitions
1 (Default)	g/n/ax	a/n/ac/ax	2.4 GHz and 5 GHz
2	ax6	a/n/ac/ax	5 GHz and 6 GHz
3	Dedicated Sensor (2.4 GHz or 6GHz)	Dedicated Sensor (5 GHz)	

- Radio 1:
 - sensor
 - b/g
 - g/n
 - b/g/n
 - g/n/ax (Default)
 - client-bridge
 - mesh
 - ax6
- Radio 2:
 - sensor
 - a/n/ac

- a/n/ac/ax (Default)
- client-bridge

**Note**

When configuring sensor mode, set both Radio 1 and Radio 2 to **sensor** at the same time.

**Note**

The World-Wide Universal Access Points 6 GHz radios support only the following Wi-Fi Alliance (WFA) 6E Compliant network authentication methods:

- OWE (Opportunistic Wireless Encryption) for Open Networks
- WPA3-Personal
- WPA3-Enterprise
- WPA3-Enterprise 192-bit mode
- WPA3-Compatibility

**Note**

WPA3-Compatibility is *not* WFA compliant. WPA3-Compatibility supports both WPA2 Personal and WPA3 Personal on the same network. If a WPA3-Compatibility network is assigned to 6 GHz radio, only WPA3 Personal is assigned, thus making the network compliant.

ExtremeCloud IQ requires that your 6 GHz radio network assignment be WFA 6E compliant. It rejects network configuration changes that result in 6 GHz radio network assignments that are not compliant. It might be necessary to redefine your networks when configuring the 6 GHz radio on the Universal Access Points.

For the AP3000/X, before changing the Radio 1 configuration from 2.4 GHz to 6 GHz, ensure that the AP is assigned a WFA 6E compliant network.

**Note**

For all Extreme Networks access points, use the Extreme Networks certified ACC-WIFI-MICRO-USB console cable. Other MICRO-USB console cables have not been certified by Extreme Networks.

Related Topics

[AP3000X Professional Install Settings](#) on page 1272

AP3000X Professional Install Settings

The AP3000X supports two configurable external antennas. The same antenna can be used for both the 2.4 GHz radio and the 5 GHz radio, when the AP is in 2.4 GHz / 5 GHz

mode. When the AP is in 6 GHz / 5GHz mode, only the 5 GHz radio is supported. The 25-85392-01R adapter is required.

**Note**

The AP must be part of an AP3000X device group to display the **Professional Install** dialog.

Professional install

Radio 1/2 Port 2.4/5G-1 Antenna Type ML-2452-APA2-01 3.17/4.9dBi Omni


Radio 1/2 Port 2.4/5G-2 Antenna Type ML-2452-APA2-01 3.17/4.9dBi Omni

Radio 1 Attenuation 0

Radio 2 Attenuation 0

CLOSE

Figure 440: AP3000X Professional Install Settings

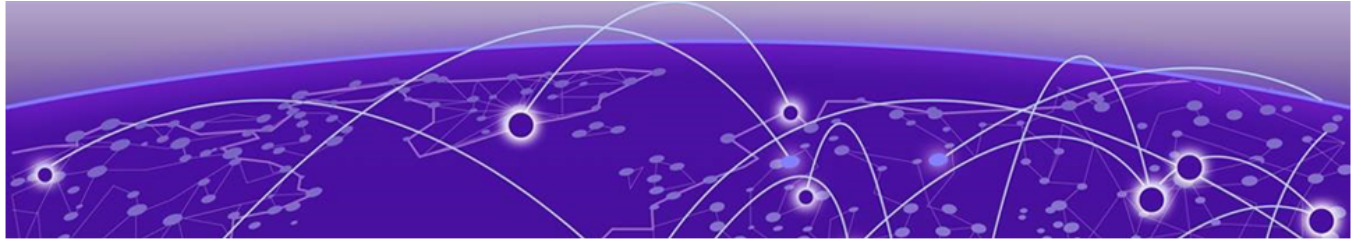

AP5010 Features

[AP5010 Radios and 6 GHz Support](#) on page 1274

[AP5010 Power Management](#) on page 1276

AP5010 Radios and 6 GHz Support

The AP5010 access points are Wi-Fi 6E tri-radio access points with support for multiple Extreme Networks operating systems.

The AP5010 access points offer three radios:

- Radio 1 —
 - 4x4 WLAN Service 2.4 GHz, Or
 - 2x2 WLAN Tri-Band Sensor, 2.4 GHz, 5.0 GHz, 6.0 GHz

Radio modes:

- sensor
- b/g
- g/n
- b/g/n
- g/n/ax
- client-bridge
- Radio 2 — 4x4 WLAN Service 5.0 GHz

Radio modes:

- a/n/ac
- a/n/ac/ax
- client-bridge
- Radio 3 — 4x4 WLAN Service 6.0 GHz

Radio modes:

- ax6
- client-bridge

AP5010 series access points support the following:

- IEEE 802.11ax Orthogonal Frequency-Division Multiple Access (OFDMA) multi-user access.

- Out of Band discovery on the 6 GHz band. APs that provide WLAN service on the 6 GHz band include Reduced Neighbor Report IE in all 2.4 GHz and 5 GHz beacons and probe responses. Out of Band discovery helps clients find 6 GHz SSIDs and channel information that comes from 2.4 GHz and 5 GHz beacons of co-located access points.
- Wi-Fi Alliance (WFA) 6E Compliant network authentication methods.

**Note**

The World-Wide Universal Access Points 6 GHz radios support only the following Wi-Fi Alliance (WFA) 6E Compliant network authentication methods:

- OWE (Opportunistic Wireless Encryption) for Open Networks
- WPA3-Personal
- WPA3-Enterprise
- WPA3-Enterprise 192-bit mode
- WPA3-Compatibility

**Note**

WPA3-Compatibility is *not* WFA compliant. WPA3-Compatibility supports both WPA2 Personal and WPA3 Personal on the same network. If a WPA3-Compatibility network is assigned to 6 GHz radio, only WPA3 Personal is assigned, thus making the network compliant.

ExtremeCloud IQ requires that your 6 GHz radio network assignment be WFA 6E compliant. It rejects network configuration changes that result in 6 GHz radio network assignments that are not compliant. It might be necessary to redefine your networks when configuring the 6 GHz radio on the Universal Access Points.

**Note**

For all Extreme Networks access points, use the Extreme Networks certified ACC-WIFI-MICRO-USB console cable. Other MICRO-USB console cables have not been certified by Extreme Networks.

Related Topics

[AP5010 Power Management](#) on page 1276

AP5010 Power Management

AP5010 Power Source Feature Restrictions

Depending on the power source that is reported to ExtremeCloud IQ, the AP5010 has the following restrictions.

Table 14: AP5010 feature restrictions related to the power source provided to the AP

Power Status	High	Normal	Low	Normal
Power Source	802.3BT	802.3AT	802.3AF	Power Supply
PSE= OFF	OFF	OFF	OFF All 3 Radios operate 2x2 Maximum Tx 10 dBm	OFF
PSE=Auto	ON	OFF	OFF	OFF
USB=OFF	OFF	OFF	OFF	
USB=Auto	ON	ON All 3 Radios operate 3x3	OFF	ON All 3 Radios operate 4x4

Table 15: Low Power Mode Feature Restrictions for AP5010

AP Model	Power Profile	2.4 GHz Radio	5 GHz Radio	6 GHz Radio	Dual 5GHz	USB	PSE
AP5010	802.3af	10 2x2	10 2x2	10 2x2	N/A	OFF	OFF

Related Topics

[AP5010 Radios and 6 GHz Support](#) on page 1274



AP505 and AP510: Dual Mode Capability

[Understanding Dual Mode Capability](#) on page 1277

Understanding Dual Mode Capability

The WiNG 7, 802.11ax APs (AP5xx, AP4xx, and AP3xx) are capable of operating in the **Distributed** and **Centralized** mode. The *Centralized* mode of operation is ideally suited for dense localized deployments, while the *Distributed* mode supports scaled-out deployments. For a newly-manufactured, out-of-the-box AP the mode of operation is *not specified*.

Refer to the following sections for more information:

- [Auto-discovery of AP's Mode of Operation](#) on page 1277
- [Manually-setting AP's Mode of Operation](#) on page 1278

Auto-discovery of AP's Mode of Operation

When a newly-manufactured AP boots up for the first time it goes through the following procedure:

1. The AP runs the discovery image to determine its mode of operation.
2. If the AP finds Distributed discovery methods, it reboots into the '*Distributed*' mode.
3. If the AP finds Centralized discovery methods, it reboots into the '*Centralized*' mode.
4. The AP then tries to discover and adopt to an adopter. The following adoption scenarios are possible for the two modes of operation:
 - AP in Distributed mode — can adopt to a WiNG VC, WiNG Controller or ExtremeCloud Appliance
 - AP in Centralized mode — can adopt to ExtremeCloud Appliance



Note

If the AP (Centralized or Distributed) adopts to ExtremeCloud Appliance, its final mode of operation is determined by the type of site in which the AP is placed. If it is placed in a Distributed site, its mode is set to 'Distributed'. If placed in a 'Centralized site', its mode is set to 'Centralized'. For more information on ExtremeCloud Appliance adoption and configuration, please refer to the ExtremeCloud Appliance User Guide available at <https://extremenetworks.com/documentation>.

**Note**

If the AP fails to adopt to any of the above mentioned adopters, you can manually set the AP to the **Standalone** mode. For more information, see [Manually-setting AP's Mode of Operation](#) on page 1278.

**Note**

For information on how to reset the mode of operation of an AP adopted to a WiNG VC or Controller, see [Resetting an AP's Mode of Operation](#) on page 1280.

Manually-setting AP's Mode of Operation

You will need to manually set the AP's mode of operation if:

- the AP boots up for the first time and is unable to discover and adopt to any of the following adopter options: **WiNG (VC)**, **WiNG Controller**, **ExtremeCloud Appliance**.
- you want to deploy the AP as a **Standalone/WiNG** or as **WiNG Virtual Controller**.

You can either use the AP's CLI or GUI to set the mode of operation.

Using CLI to Set AP's Mode of Operation

To manually set the AP's mode of operation using its CLI:

1. Access the AP's CLI through SSH or console using default credentials.

Use the AP's Primary or Secondary (ZEROCONF) IP address to do an SSH.

Primary IP address - This is the DHCP provided IP address.

Secondary IP address - This is the ZEROCONF IP address '169.254. xx.yy'. Where, 'xx' and 'yy' are the last two octets of the AP's MAC address in decimal format. Note, the AP's MAC address will be printed on the box.

For example:

If AP's MAC address is: **00:C0:23:00:F0:0A**

The secondary IP address will be: **169.254.240.10**

You will be presented with the following message:

```
AP adoption discovery process in progress...
To cancel and boot in Standalone mode, type (s):
```

2. Type 's' to move into the 'Standalone/WiNG' mode.

```
AP adoption discovery process in progress...
To cancel and boot in Standalone mode, type (s): s

AP booting in Standalone mode...
```

The AP will reboot immediately. After reboot, you will be presented with the WiNG login prompt.

3. Use the following default credentials to login:

username: admin

password: admin123

Using GUI to Set AP's Mode of Operation

To manually set the AP's mode of operation using its GUI:


1. Access the AP's GUI through a Web browser (<http://<AP-IP-ADDRESS>>).
Point the Web browser to the AP's Primary or Secondary (ZEROCONF) IP address.
Primary IP address - This is the DHCP provided IP address.
Secondary IP address - This is the ZEROCONF IP address '169.254. xx.yy'. Where, 'xx' and 'yy' are the last two octets of the AP's MAC address in decimal format. Note, the AP's MAC address will be printed on the box.

For example:

If AP's MAC address is: **00:C0:23:00:F0:0A**


The secondary IP address will be: **169.254.240.10**

You will be presented with the following screen:

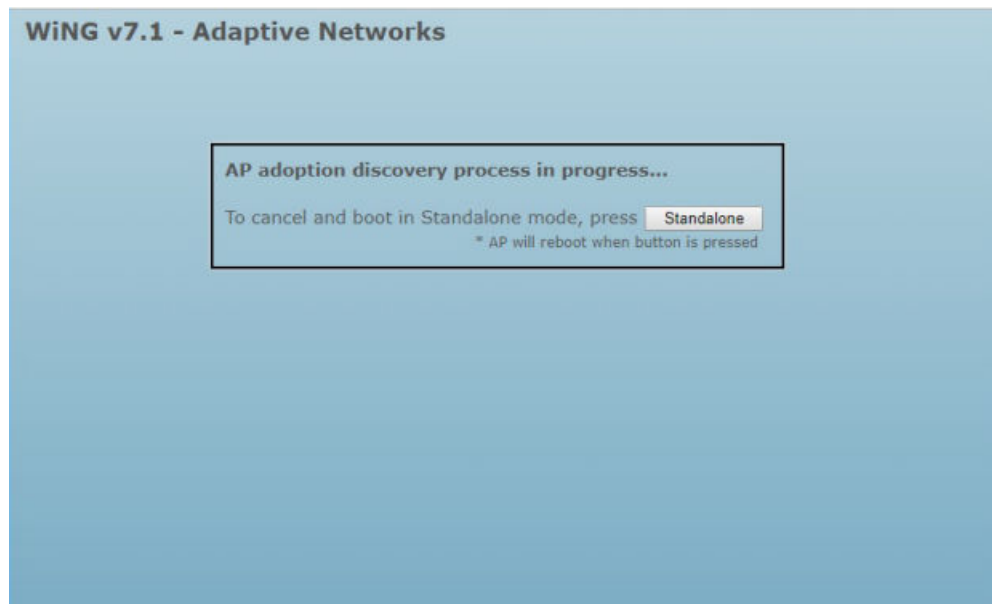

2. Click the **Standalone** button to move into the Standalone/WiNG mode.

The following screen displays:

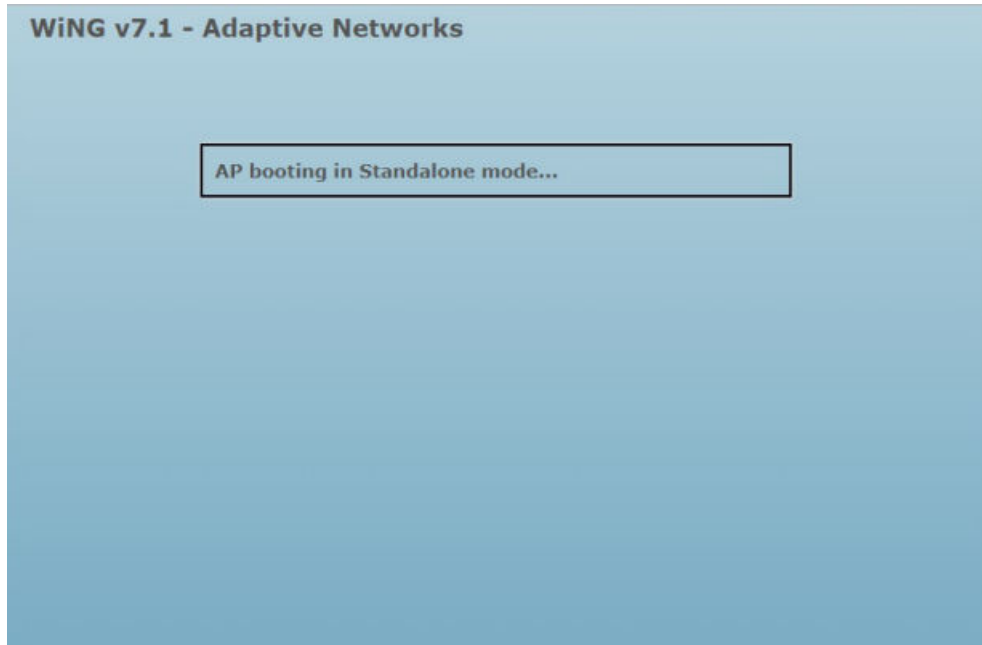

3. After the AP has rebooted, use the following default credentials to login:

username: admin

password: admin123

Resetting an AP's Mode of Operation

This section describes how to reset an adopted or standalone AP's mode of operation.

Once an AP's mode of operation is set to 'Centralized' or 'Distributed', and the AP is in the adopted state, you can reset the AP's mode of operation through the adopter.

For information on resetting the mode of operation of an AP adopted to WiNG VC/ Controller or a Standalone AP, refer to [Resetting Distributed AP's Mode of Operation](#) on page 1281.

For information on AP adopted to ExtremeCloud Appliance, please refer to the ExtremeCloud Appliance User Guide available at <https://extremenetworks.com/documentation>.

*Resetting Distributed AP's Mode of Operation***Resetting mode of operation of an AP adopted to WiNG VC or WiNG Controller**

To revert an AP5xx, AP4xx or AP3xx, adopted to a WiNG VC or WiNG Controller, to factory-default mode of operation (that is, mode not specified) issue the following command on the WiNG VC/Controller:

```
#factory-reset deep <AP-HOSTNAME>
```

**Note**

The <AP-HOSTNAME> parameter represents the host name of the AP on which the command is to be implemented.

The AP's adoption status is lost, it reboots immediately with its mode of operation not specified.

Resetting a standalone AP's mode of operation

To reset a standalone AP to the 'Centralized' mode, on the AP, issue the following command:

```
#operational-mode centralized
#reload
```

Or

Follow the steps below to reset the AP to factory-default mode of operation (that is, mode not specified).

1. Access the AP's console.
2. Enter the following login credentials:

username	resetDeep (with 'D' in upper case)
password	FactoryDefaultDeep (with 'F', 'D' and 'D' in upper case)

**Note**

The AP reboots in the temporary 'Centralized' mode.

Resetting Centralized AP's Mode of Operation

This section describes how to revert the mode of operation of an AP operating in the 'Centralized' mode.

If the AP boots up in the 'Centralized' mode, use the following command to reset the mode of operation to factory-default setting (that is, not specified). Issue the command on the AP.

```
#cset factoryDefault deep
```

When you issue the above command, the AP reboots and moves into the discovery mode, where it tries to discover its mode of operation.

To reset the mode of operation to *Distributed*, issue the following command in the AP's configuration context:

```
#cset personality distributed
```

The AP to controller adoption is lost, the AP reboots and moves into adopter discovery mode.



WiNG AP505 and AP510 REV AA Upgrade Procedure

[Introduction](#) on page 1283

[Bulk 'Rev: AA' AP505/AP510 Upgrade through Virtual Controller](#) on page 1284

[Bulk 'Rev:AA' AP5XX Upgrade through WiNG Controller/ExtremeCloud Appliance](#) on page 1288


Introduction

The initial units of AP505 and AP510 model access points have been shipped with a pre-production firmware version loaded. To get these units operational, you will need to upgrade them to the official WiNG 7.1.0.0-138R firmware version.

This chapter describes the procedure to be followed to upgrade 'Rev: AA' AP505/AP510 model access points to the latest image.

How to determine if your AP requires an upgrade?

To begin with, determine if your AP505/AP510 requires a software upgrade. Check the label on the access point box for the 'Hardware Revision Version'. If the revision version reads 'Rev: AA' the access point must be upgraded.

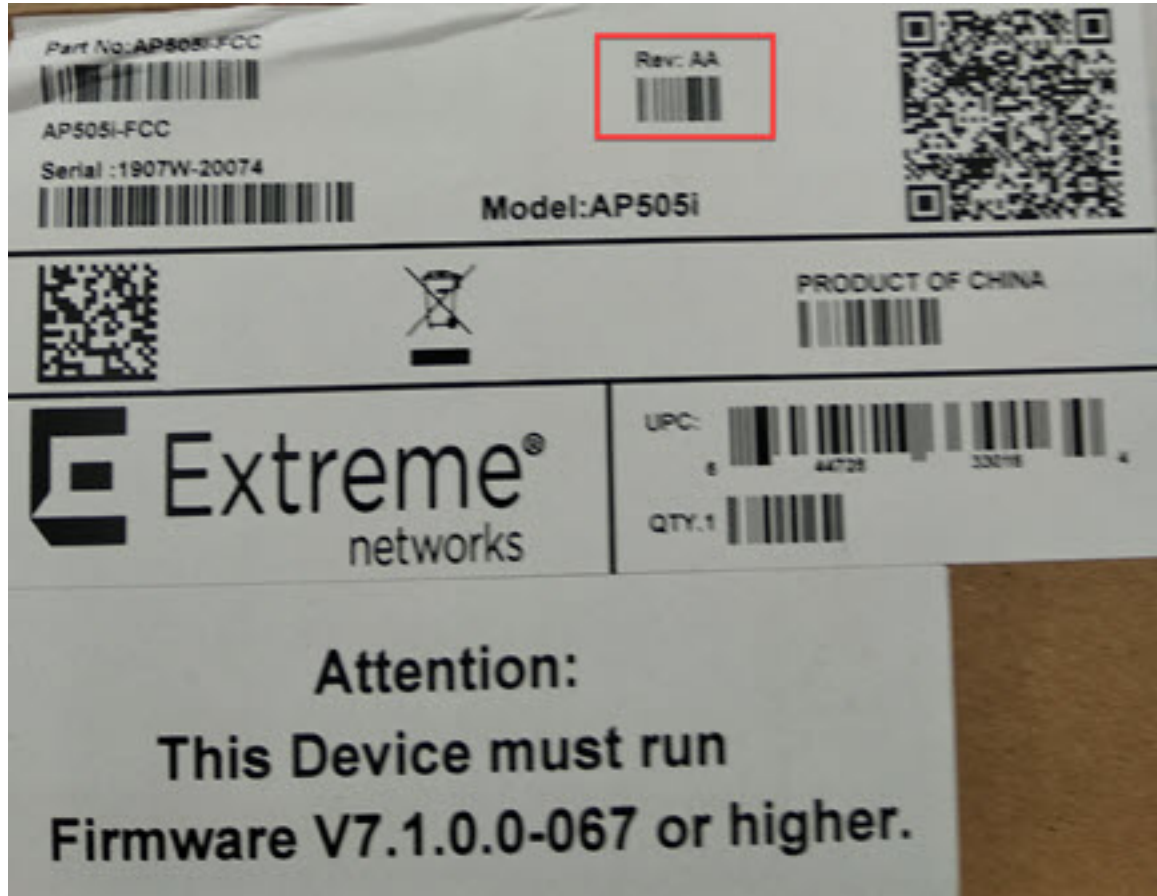

Bulk 'Rev: AA' AP505/AP510 Upgrade through Virtual Controller

This section describes how to do a bulk upgrade of 'Rev: AA' AP505 and AP510 access points in the absence of a WiNG Controller or ExtremeCloud Appliance.

If you have multiple 'Rev: AA' AP505 and AP510 access points and no WiNG Controller or ExtremeCloud Appliance deployed in your network, configure one of the AP as a *Virtual Controller* (VC). Use this virtual controller AP to perform a bulk upgrade of the other APs.

The steps below describe how to perform this task:

1. Set the AP's 'operational-mode' to 'standalone/distributed'. You can either use the AP's CLI or GUI to set the AP's operational mode.



Note

The WiNG 7.1.X AP505 and AP510 model access points have the capability of operating in the following two modes: **Distributed** and **Centralized**. For a newly-manufactured, out-of-the-box AP505 and AP510 access point the mode of operation is *not specified*. The *Centralized* mode of operation is ideally suited for dense localized deployments, while the *Distributed* mode supports scaled-out deployments.

- a. Access the AP's CLI through the console or SSH.

For SSH, use the AP's Primary or Secondary IP address.

Primary IP address - This is the DHCP provided IP address.

Secondary IP address - This is the ZEROCONF IP address printed on the box.

You will be prompted to provide the login credentials. Since, this is a fresh, out-of-box device, you will have to enter the default credentials.

- b. Enter the default credentials admin/admin123.

You will be prompted: **'To enable distributed site operation on this AP, choose d (Distributed):'**

```
BusyBox v1.17.4 (2019-01-24 18:52:35 EST) built-in shell (ash)
Enter 'help' for a list of built-in commands.

AP510i-WR 7.1.0.0-066z interactive shell for service personnel only

AP510i-WR is in the process of discovering adopters.
To enable Distributed site operation on this AP, choose d (Distributed) :
```

- c. Type 'd'.

The following message is displayed:

```
BusyBox v1.17.4 (2019-01-24 18:52:35 EST) built-in shell (ash)
Enter 'help' for a list of built-in commands.

AP510i-WR 7.1.0.0-066z interactive shell for service personnel only

AP510i-WR is in the process of discovering adopters.
To enable Distributed site operation on this AP, choose d (Distributed) : d

AP will reboot now...
```



Note


The AP will reboot in the standalone/distributed operational mode.

- d. Alternately, access the AP's GUI by pointing the Web browser to the AP's Primary or Secondary IP address. (<http://<AP-IP-ADDRESS>>)

Primary IP address - This is the DHCP provided IP address.


Secondary IP address - This is the ZEROCONF IP address printed on the box.

The following message is displayed:

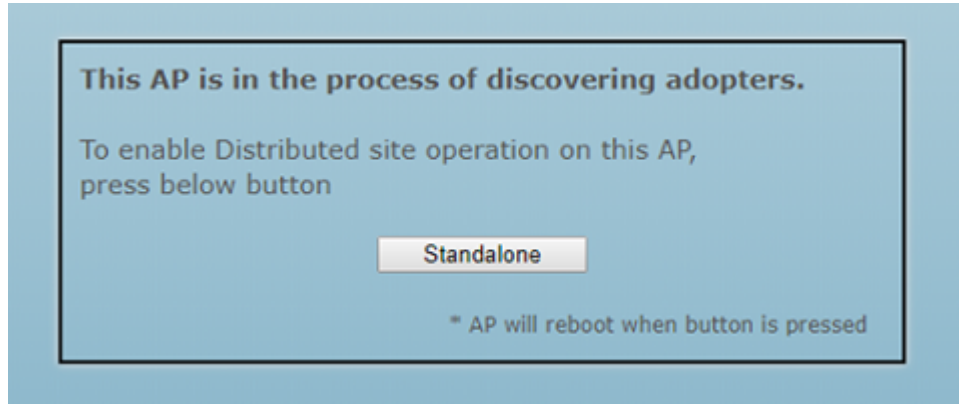

- e. Click on the "Standalone" button.

The following message is displayed:

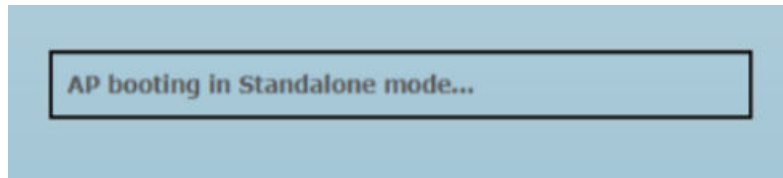

Note

The AP will reboot in the standalone/distributed operational mode.

- 2. After the AP's operational-mode is set to 'standalone/distributed', upgrade it to the 7.1.0.0-138R firmware version.

- a. Access the AP's CLI through the console or SSH.
- b. Enter `admin/admin123` as username/password.

The AP's CLI opens in the user executable mode.

```
ap5xx-xxxxxxx>
```

- c. Enter 'enable' to move into the privileged mode.

```
ap5xx-xxxxxxx>enable
ap5xx-xxxxxxx#
```

- d. Use following command to upgrade AP to the latest firmware:

```
ap5xx-xxxxxxx#upgrade tftp://<hostname|IP>path/filename
```



Note

Ensure that the latest 7.1.0.0-138R image file is available at the specified location.

- e. Reload the AP, after the upgrade.


```
ap5xx-xxxxxxx#reload
```

3. Add the other 'Rev: AA' AP5XXs to the network, in the same VLAN as the first AP that is being configured as a VC.


The APs will reload twice and boot up in the 'Distributed' operational mode.

4. Access the first upgraded AP's GUI, by pointing the Web browser to the AP's Primary (DHCP-provided) or Secondary (ZEROCONF) IP address.


The login page is displayed.

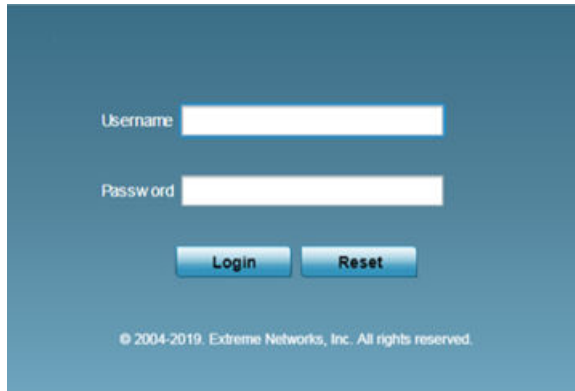

5. Enter credentials admin/admin123.
6. Use the **Initial Setup Wizard** to configure the AP as a Virtual Controller.

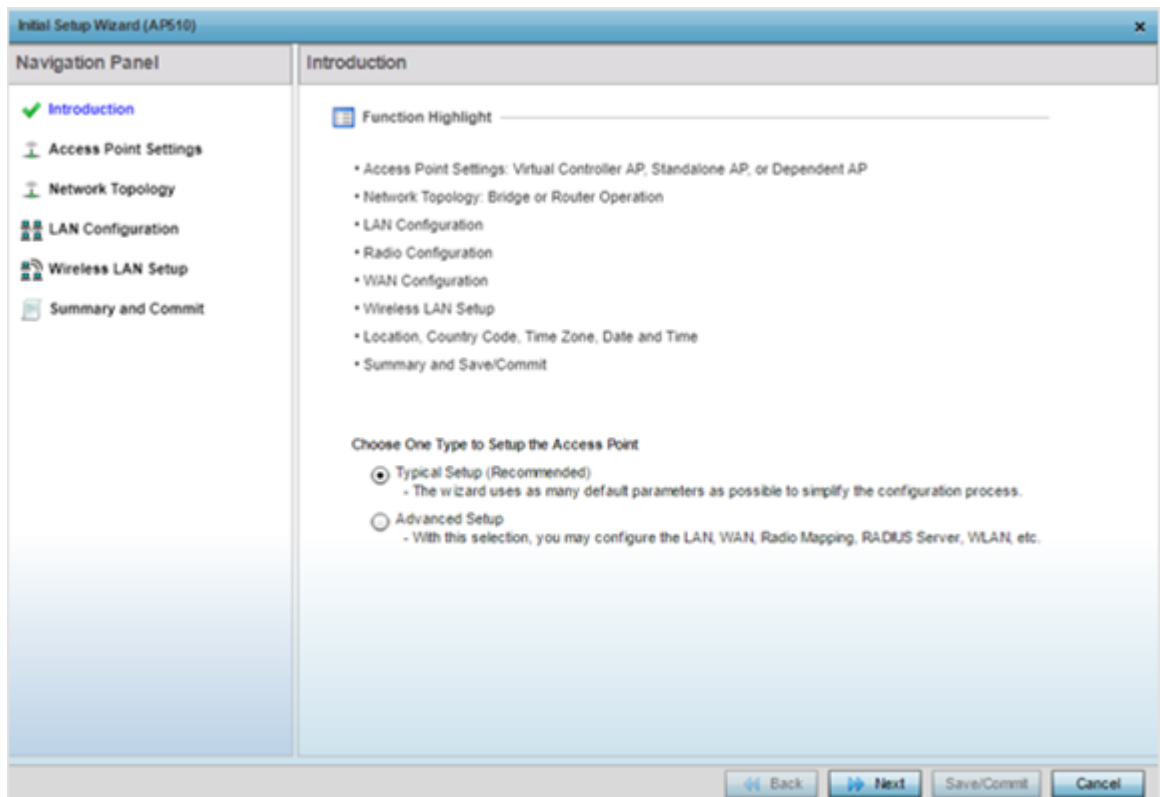

7. Click **Next**.

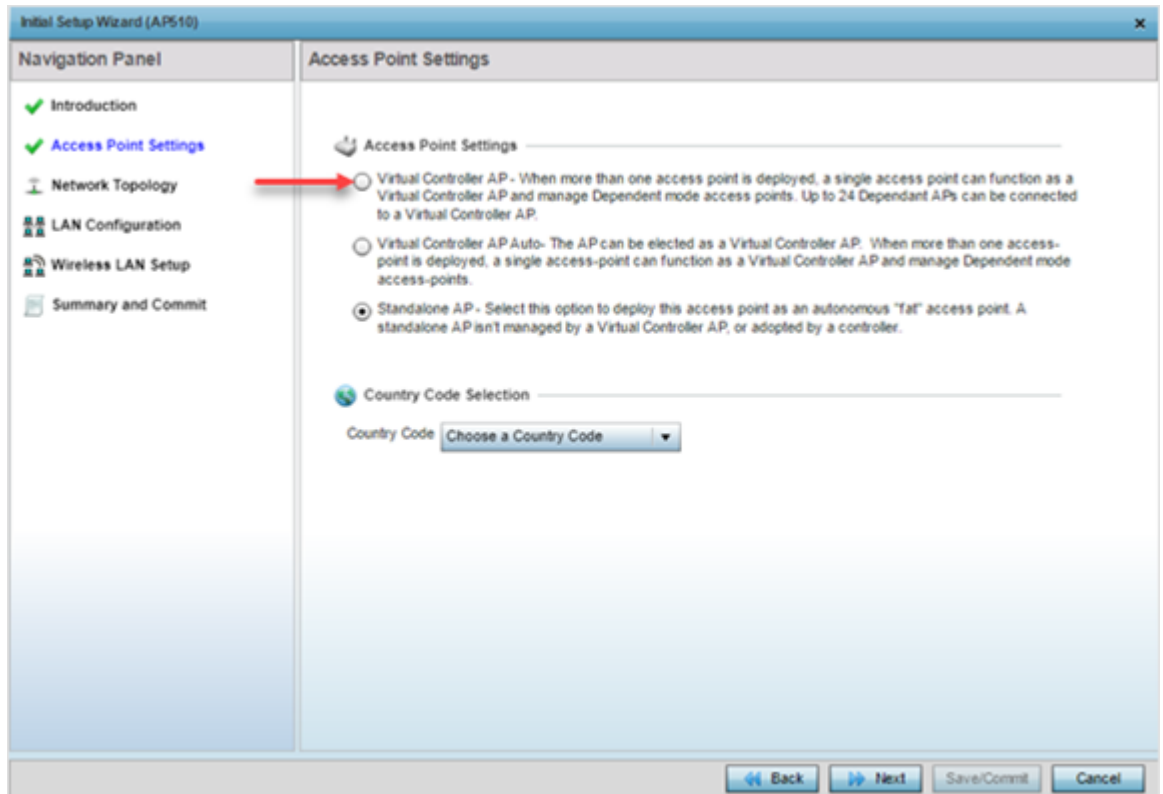

8. On the **Access Point Settings** screen, select the **Virtual Controller AP** radio button. The AP is now configured as a VC. At this point, the other 'Rev: AA' APs in the VLAN will adopt to the virtual controller AP.
9. Use the following CLI command to load the AP image file on to the VC.

```
ap5xx-xxxxxx#device-upgrade load-image ap5XX tftp://<hostname|IP>/path/file
```



Note

Once the AP image file upload is complete, the other adopted APs will be upgraded by the VC AP.

Bulk 'Rev:AA' AP5XX Upgrade through WiNG Controller/ExtremeCloud Appliance

Consider a scenario consisting of multiple 'Rev:AA' AP505/AP510 access points managed by a WiNG Controller or through the ExtremeCloud Appliance. In this case, the 'Rev: AA' APs get upgraded through the controller or ExtremeCloud Appliance.



Note

To be able to adopt and upgrade AP505/AP510 model access points, WiNG Controllers need to be running version WiNG 7.1.0.0 and ExtremeCloud Appliance needs to be running version 4.36.01.

**Note**

The WiNG 7.1.X AP505 and AP510 model access points have the capability of operating in the following two modes: **Distributed** and **Centralized**. For a newly-manufactured, out-of-the-box AP505 and AP510 access point the mode of operation is *not specified*. The *Centralized* mode of operation is ideally suited for dense localized deployments, while the *Distributed* mode supports scaled-out deployments.

1. Deploy the 'Rev: AA' AP505/AP510 access points.
The APs will boot up with the operational-mode not specified.
2. After booting up, the APs run the discovery image to determine their mode of operation.

**Note**

Based on the discovery methods found in the network, the operational-mode is set to either 'Distributed' or 'Centralized'.


3. The APs then try to discover and adopt to an adopter.

**Note**

Based on the network-provided discovery mechanism (that is, DHCP or DNS), the APs discover and adopt either to a WiNG Controller or the ExtremeCloud Appliance.

The following adoption scenarios are possible for the two modes of operation:

- AP in Distributed mode — can adopt to a WiNG VC, WiNG Controller or ExtremeCloud Appliance
 - AP in Centralized mode — can adopt to ExtremeCloud Appliance
4. In case of ExtremeCloud Appliance adoption, the APs will be automatically upgraded to the latest firmware post adoption.
 5. In case of WiNG Controller adoption, the APs will be upgraded by the Controller based on device upgrade settings configured on the Controller (auto upgrade upon adoption or on demand upgrade).

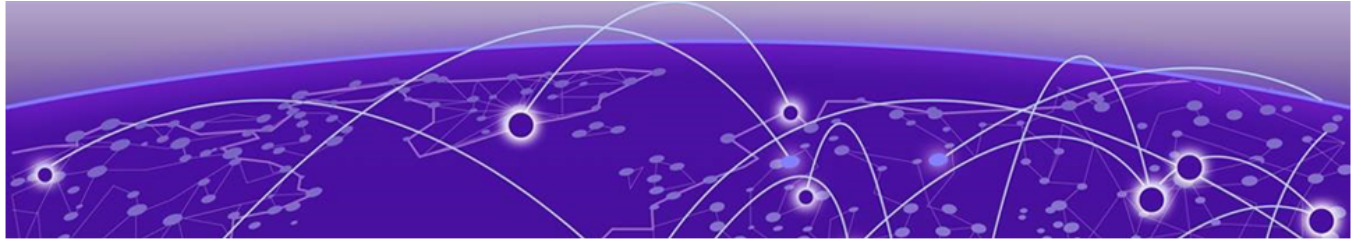

AP Specifications

- [AP3000/X Specifications](#) on page 1290
- [AP5010 Specifications](#) on page 1291
- [AP302W Specifications](#) on page 1292
- [AP305C/CX Specifications](#) on page 1293
- [AP310i/e Specifications](#) on page 1293
- [AP360i/e Specifications](#) on page 1294
- [AP410C Specifications](#) on page 1294
- [AP410i/e Specifications](#) on page 1295
- [AP460C, AP460S6C, and AP460S12C Specifications](#) on page 1296
- [AP460i/e Specifications](#) on page 1296
- [AP505i Specifications](#) on page 1297
- [AP510e Specifications](#) on page 1297
- [AP510i Specifications](#) on page 1298
- [AP560h Specifications](#) on page 1298
- [AP560i Specifications](#) on page 1299

AP3000/X Specifications

The AP3000/X combines powerful 802.11ax Wi-Fi 6E technology, advanced security, and ML/AI cloud management capabilities as an enterprise-class solution in a small, low-power package that allows you to deploy high speed and highly secure Wi-Fi.

Advanced Radio Technology

Dual-Radio Design

- 2.4/5 GHz (2x2:2)
- 5/6 GHz (2x2:2)

Universal Hardware Platform

- On-Premises: WiNG OS (Distributed in a future release on select models), ExtremeCloud™ IQ Controller (Centralized)
- Cloud: ExtremeCloud IQ

Operational Modes

- Mode 1: 2.4 GHz/5 GHz Data Radios

- Mode 2: 5 GHz/6 GHz Data Radios

Designed for harsh environments

- External antennas and extended temperature range -20°C to +55°C

Cellular Coexistence Filter (CCF)

- Minimizes the impact of interference from cellular networks

Fully Functional Wi-Fi with 802.3af

Smart Management Choices

- ExtremeCloud IQ for public, private, and ExtremeCloud Edge cloud management capabilities
- ExtremeCloud IQ Controller for on-premises requirements

The AP3000/X Wi-Fi 6E access point, with two 2x2:2 radios, provides high- efficiency, high-performance 802.11ax aggregate data rates up to 4.8 Gbps in the 6 GHz, 5 GHz, and 2.4 GHz bands. The AP3000/X features a fully functional Multi-Band filter, enabling simultaneous operations with no performance degradation between all the 5 GHz frequencies and the entire range of 6 GHz frequencies (U-NII-5 thru U-NII-8 bands).*

* Country dependent

AP5010 Specifications

The AP5010 is a high-performance 802.11ax Wi-Fi 6E, 6 GHz, 5 GHz band, and 2.4 GHz band access point designed for high-density indoor environments. The access point supports IEEE 802.11ax Orthogonal Frequency-Division Multiple Access (OFDMA) multi-user access.

The access point can be installed indoors on a ceiling rail, on a nonstandard ceiling, or on a wall.

- One multicolor LED status light
- One light sensor located at the top of the device
- Two Ethernet ports - Eth0 and Eth1

Ethernet ports (Eth0 and Eth1) automatically negotiate full-duplex connections with the connecting device.

- Eth0 is 5/2.5/1GE/100 with Power over Ethernet (PoE)
- Eth1 is 2.5/1GE/100 with PoE power sourcing equipment (PSE)

These ports are auto-sensing and adjust to straight-through and crossover standard Cat6 or better Ethernet cables automatically. The access point receives power through an Ethernet connection to the ETH0 port from PSE that is compatible with the 802.3bt and 802.3at standards.

- One USB port

Use the USB port to connect USB-based beacons such as iBeacon and Internet of Things (IoT) devices. Remove the protective cover to access the USB port.

- One micro USB console port
- One reset button
- One Kensington lock

The best practice is to use Kensington locks for locking the device.

AP302W Specifications

- Radio technology:
 - 802.11ax radio, 2×2:2 2.4 GHz
 - 802.11ax radio, 2×2:2 5 GHz
 - Integrated Bluetooth Low Energy (BLE) and Zigbee
- Radio modes:
 - 5 GHz/2.4 GHz – fixed
 - 5 GHz/5 GHz – dual 5 GHz
 - 5 GHz with 2.4 GHz/5 GHz – sensor
- Console port: custom micro-USB cable
- Six, 10/100/1000 Mbps ports:

Rear ports:

 - One Ethernet (ETH) port with Power over Ethernet (PoE) in
 - One pass through port

Bottom ports or user access ports:

 - Two ETH ports
 - One ETH port with power-sourcing-equipment (PSE)
 - One pass through port
- One LED. The LED will be on during reset
- One software reset button
- One Kensington lock
- One USB 2.0 type A connector, supports up to 2.5W
- Power: PoE 802.3at and 802.3af (see power table for details)
- Antennas:
 - Three internal omni-directional 2.4G/5G dual-band antennas
 - One internal omni-directional 5G antenna
- Temperature
 - Operating temperature: 0 °C to +40 °C (+32 °F to +104 °F)
 - Non-operating temperature: -40 °C to +70 °C (-40 °F to +158 °F)
- Enclosure: plastic

AP305C/CX Specifications

- Radios – two built-in dual-band radios
- Kensington® lock
- ETH0 Ethernet port – autosensing 10/100/1000G BASE-T/TX Mbps, with IEEE 802.3af or 802.3at compliant Power over Ethernet (PoE), and requires a Cat5 cable
- Antennas:
 - AP305C – four internal omnidirectional 2.4 GHz/5 GHz dual-band antennas
 - AP305CX – four external omnidirectional 2.4 GHz/5 GHz dual-band antennas

One dual-band antenna is shared between Wi-Fi and Bluetooth Low Energy (BLE)

- Power source – 802.3af and 802.3at power over Ethernet injector
- Trusted Module Platform (TPM) chip for added security
- Operating temperature: +0 °C to +40 °C (+32 °F to +104 °F)
- Storage temperature: -40 °C to +80 °C (-40 °F to +176 °F)

AP310i/e Specifications

AP310i/e is a dual-radio *indoor* model 802.11ax access point. The “i” in AP310i indicates that the access point comes with internal antennas, and the “e” indicates that it comes with external antenna connectors. The access point features one built-in dual-band radio and one band-locked radio, four WiFi internal or external antennas, and one *Bluetooth Low Energy* (BLE) antenna.



Note

The AP310i/e requires a minimum base firmware of WING 7.3.1.

- Two 802.11ax radios (one 2×2 2.4 GHz and 5 GHz radio, and one 2×2 5 GHz radio)
- One 2.4 GHz IoT radio
- Console Port: RJ45
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with *Power over Ethernet* (PoE) In
 - GE2 - One multi-rate GE/2.5 GE Ethernet port
- LED indicators: Six

All LED indicators will be powered on during reset.

- One Reset button
- One Kensington lock
- One safety hanger provision
- One USB 2.0 type A connector
- Power: PoE 802.3at
- Antennas:
 - AP310i: Four WiFi internal antennas and one BLE internal antenna
 - AP310e: Four RP-SMA external antenna ports and one BLE RP-SMA antenna

AP360i/e Specifications

AP360i/e is an *outdoor* model 802.11ax access point with dual band 2×2 system-on-a-chip (SoC) radios. The "i" in AP360i indicates that the access point comes with internal antennas and the "e" in AP360e indicates that it comes with external antenna connectors. The access points feature a dual-band radio, one band-locked radio WiFi radio, one bluetooth radio, four WiFi internal or external antennas, and one Bluetooth Low Energy (BLE) antenna.



Note

The AP360e requires a minimum base firmware of WiNG 7.3.1.

- Radios:
 - Two 802.11ax radios (one 2×2 2.4GHz and 5GHz radio, and one 2×2 5GHz radio)
 - One IoT radio (2.4GHz)
- Console port: RJ45
- Two Ethernet ports:
 - 1×100/1000 Mbps auto-negotiation Ethernet port, RJ45
 - 1×10/100/1000 Mbps auto-negotiation Ethernet port, RJ45
- LEDs: Six. All LEDs will be on during reset
- One reset button
- Power: PoE 802.3af
- Antennas:
 - Four WiFi internal antennas on AP360i and four WiFi external antennas on AP360e
 - One BLE internal antenna on AP360i and one BLE external antenna port on AP360e
- Temperature: -40°C to +60°C (-40°F to +140°F) @ 6000 ft.
- Enclosure: Plastic

AP410C Specifications

- Two LED status lights
- One light sensor located at the top of the device
- Two Ethernet ports - Eth0 and Eth1

Ethernet ports (Eth0 and Eth1) automatically negotiate half- and full-duplex connections with the connecting device.

- Eth0 is 100/1000/2500 BASE-T
- Eth1 is 10/100/1000 BASE-T

These ports are autosensing and adjust to straight-through and crossover standard Cat5 or better Ethernet cables automatically. The access point receives power through an Ethernet connection to the ETH0 port from power sourcing equipment (PSE) that is compatible with the 802.3at and 802.3at standards.

- One USB port

Use the USB port to connect USB-based beacons such as iBeacon and Internet of Things (IoT) devices.

- One micro USB console port

You can order a micro USB console adapter for the AP410C access point [here](#).

- One reset button
- One security slot



Tip

The best practice is to use Kensington® locks for locking the device.

- Operating temperature: 0 °C to +40 °C (+32 °F to +104 °F)
- Storage temperature: -40 °C to +70 °C (-40 °F to +158 °F)
- Relative humidity: 10% to 95% non-condensing

AP410i/e Specifications

AP410i/e is a tri-radio, *indoor* model 802.11ax access point. The “i” in AP410i indicates that the access point comes with *internal* antennas and the “e” indicates that it comes with *external* antenna connectors. The access point features a dual-band radio, two band-locked radios, six WiFi internal or external antennas, and one BLE antenna.



Note

The AP410i/e requires a minimum base firmware of WING 7.3.0.

- Radios: Three 802.11ax radios
 - One 2X2 2.4 GHz radio
 - One 4X4 5 GHz radio
 - One 2X2 2.4 GHz and 5 GHz radio
- One 2.4 GHz IoT radio
- Console Port: RJ45.
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - One multi-rate GE/2.5 GE Ethernet port
- LEDs: Seven – all LEDs will be powered on during reset and will connect to *general purpose input/output* (GPIO) pins
- One Reset button
- One Kensington lock
- One safety hanger provision
- One USB 2.0 type A connector
- Power: PoE 802.3at
- Antennas:
 - AP410i: Six WiFi internal antennas and one BLE internal antenna
 - AP410e: Six RP-SMA external antenna ports and one BLE RP-SMA antenna

AP460C, AP460S6C, and AP460S12C Specifications

AP460C, AP460S6C, and AP460S12C are outdoor access points.

- Radios:
 - Three 802.11a/b/g/n/ac/ax radios (one 4×4 radio, one 2×2 radio, and one 1×1 scanner radio)
 - One Bluetooth Low Energy (BLE) radio
- Two RJ45 Ethernet ports (ETH0 and ETH1):
 - 100/1000/2500 Mbps auto-negotiation RJ45 Ethernet Power over Ethernet (PoE) port
 - 10/100/1000 Mbps auto-negotiation RJ45 Ethernet port
- One micro USB console port
- One reset button

Remove the waterproof screw cap to access the micro USB port and the reset button.

- One standard USB port to connect beacons (iBeacon) and Internet of Things (IoT) devices

Remove the waterproof cap to access the standard USB port.

AP460i/e Specifications

AP460i/e is a tri-radio, *outdoor* model enterprise class 802.11ax access point. The “i” in AP460i indicates that it comes with internal antennas and the “e” in AP460e indicates that the access point comes with external antenna connectors. The access point features a dual-band radio, two band-locked radios, eight WiFi internal or external antennas, and one BLE antenna.



Note

The AP460i/e requires a minimum base firmware of WiNG 7.3.0.

- Radios: Three 802.11ax radios
 - One 2X2 2.4 GHz radio
 - One 4X4 5 GHz radio
 - One 2X2 2.4 GHz and 5 GHz radio
- One 2.4 GHz IoT radio
- Console Port: RJ45
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45
- LEDs: Seven – all LEDs will be powered on during reset and will connect to GPIO pins
- One Reset button

- Power: PoE 802.3at
- Antennas:
 - Eight WiFi internal/external antennas
 - One BLE internal antenna on AP460i
 - One BLE external antenna port on AP460e

AP505i Specifications

AP505i is a next generation, enterprise-class 802.11ax access point. The “i” in AP505i indicates that it comes with internal antennas. The AP505i can be used in stadiums, public venues such as hospitals and hotels, retail industry, and educational institutions. The 802.11ax technology supports more users and *internet of things* (IoT) devices.

- Radios: 2 radios (one band locked at 2.4 GHz and the other band at 5 GHz); 1 IoT radio (2.4 GHz)
- Console port: RJ45
- Two Ethernet ports:
 - GE1 - 10/100/1000/2500 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45, with NO PoE
- LEDs: 6 LEDs; all LEDs will be on during reset
- One reset button
- Power: PoE 802.3at; 12VDC external power in connector
- Antennas:
 - Eight WiFi internal antennas
 - One BLE internal antenna



Note

For more information on the 802.11ax access points, refer to their respective [installation guides](#).

AP510e Specifications

AP510e is a next generation, enterprise-class 802.11ax access point. The AP features a dual-band radio, a band locked radio, and comes with eight (8) WiFi *external* antennas and one BLE antenna.

- Radios: 2 radios (1 dual band, 2.4GHz and 5GHz, and 1 band locked 5GHz); 1 IoT radio (2.4 GHz).
- Console Port: RJ45.
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
- LEDs: 6 – All LEDs will be on during reset
- One Reset button

- Power: PoE 802.3at; 12VDC external power in connector.
- Antennas:
 - Eight WiFi external antennas
 - One BLE internal antenna

AP510i Specifications

AP510i is a next generation, enterprise-class 802.11ax access point. The “i” in AP510i indicates that it comes with internal antennas. The AP features a dual-band radio, a band locked radio, and comes with eight (8) WiFi internal antennas and one BLE antenna.

- Radios: 2 radios; 1 IoT radio (2.4 GHz).
- Console Port: RJ45.
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
- LEDs: 6 – All LEDs will be on during reset
- One Reset button
- Power: PoE 802.3at; 12VDC external power in connector
- Antennas:
 - Eight WiFi internal antennas
 - One BLE internal antenna

AP560h Specifications

AP560h is a dual-radio, cloud-ready, stadium optimized, Wi-Fi 6, 802.11ax outdoor access point with eight internal antennas, supporting two software selectable *30 degree and 70 degree directional* antennas. It is ideally suited for high-density user environments, such as stadiums, large public venues, convention centers and school auditoriums. The AP560h offers flexible deployment options and can be mounted under a seat, to a pole, and a wall, thereby ensuring exceptional mobile user experience.

- Radios: 2 radios; 1 IoT radio (2.4 GHz).
- Console Port: RJ45.
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
- LEDs: 2 – All LEDs will be on during reset
- One Reset button
- Power: PoE 802.3at; 12VDC external power in connector
- Antennas:
 - Eight WiFi internal antennas, supporting the following internal antenna modes:
 - 30°

- 70°
- One BLE internal antenna

AP560i Specifications

AP560i is a cloud-ready, stadium optimized, WiFi 6, 802.11ax outdoor access point with two *internal* antenna. It is ideally suited for high-density user environments, such as stadiums, large public venues, convention centers and school auditoriums. The AP560i offers flexible deployment options and can be mounted under a seat, to a pole, and a wall, thereby ensuring exceptional mobile user experience.

- Radios: 2 radios; 1 IoT radio (2.4 GHz).
- Console Port: RJ45.
- Two Ethernet Ports:
 - GE1 - 10/100/1000/2500/5000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
 - GE2 - 10/100/1000 Mbps auto-negotiation Ethernet port, RJ45, with PoE In
- LEDs: 2 – All LEDs will be on during reset
- One Reset button
- Power: PoE 802.3at; 12VDC external power in connector
- Antennas:
 - Eight WiFi internal antennas
 - One BLE internal antenna



Glossary

AAA

Authentication, Authorization, and Accounting is a system in IP-based networking to control which computer resources specific users can access and to keep track of the activity of specific users over the network.

AAA

AAA (authentication, authorization, and accounting) is a framework for intelligently controlling access to the network, enforcing user authorization policies, and auditing and tracking usage. These combined processes are central for securing wireless client resources and wireless network data flows.

ad hoc mode

An 802.11 networking framework in which devices or stations communicate directly with each other, without the use of an AP.

ARP

Address Resolution Protocol is part of the TCP/IP suite used to dynamically associate a device's physical address (MAC address) with its logical address (IP address). The system broadcasts an ARP request, containing the IP address, and the device with that IP address sends back its MAC address so that traffic can be transmitted.

AS

In OSPF, an Autonomous System is a connected segment of a network topology that consists of a collection of subnetworks (with hosts attached) interconnected by a set of routes. The subnetworks and the routers are expected to be under the control of a single administration. Within an AS, routers may use one or more interior routing protocols and sometimes several sets of metrics. An AS is expected to present to other autonomous systems an appearance of a coherent interior routing plan and a consistent picture of the destinations reachable through the AS. An AS is identified by a unique 16-bit number.

ATM

Asynchronous Transmission Mode is a start/stop transmission in which each character is preceded by a start signal and followed by one or more stop signals. A variable time interval can exist between characters. ATM is the preferred technology for the transfer of images.

BSS

Basic Service Set is a wireless topology consisting of one access point connected to a wired network and a set of wireless devices. Also called an infrastructure network. See also *IBSS (Independent Basic Service Set)*.

Chalet

Chalet is a web-based user interface for setting up and viewing information about a switch, removing the need to enter common commands individually in the CLI.

CHAP

Challenge-Handshake Authentication Protocol is one of the two main authentication protocols used to verify a user's name and password for PPP Internet connections. CHAP is more secure because it performs a three-way handshake during the initial link establishment between the home and remote machines. It can also repeat the authentication any time after the link has been established.

CLI

Command Line Interface. The CLI provides an environment to issue commands to monitor and manage switches and wireless appliances.

DHCP

Dynamic Host Configuration Protocol allows network administrators to centrally manage and automate the assignment of IP addresses on the corporate network. DHCP sends a new IP address when a computer is plugged into a different place in the network. The protocol supports static or dynamic IP addresses and can dynamically reconfigure networks in which there are more computers than there are available IP addresses.

DoS attack

Denial of Service attacks occur when a critical network or computing resource is overwhelmed so that legitimate requests for service cannot succeed. In its simplest form, a DoS attack is indistinguishable from normal heavy traffic. ExtremeXOS software has configurable parameters that allow you to defeat DoS attacks.

DSSS

Direct-Sequence Spread Spectrum is a transmission technology used in Local Area Wireless Network (LAWN) transmissions where a data signal at the sending station is combined with a higher data rate bit sequence, or chipping code, that divides the user data according to a spreading ratio. The chipping code is a redundant bit pattern for each bit that is transmitted, which increases the signal's resistance to interference. If one or more bits in the pattern are damaged during transmission, the original data can be recovered due to the redundancy of the transmission. (Compare with [*FHSS \(Frequency-Hopping Spread Spectrum\)*](#).)

EAP-TLS/EAP-TTLS

EAP-TLS Extensible Authentication Protocol - Transport Layer Security. A general protocol for authentication that also supports multiple authentication methods, such as token cards, Kerberos, one-time passwords, certificates, public key authentication and smart cards.

IEEE 802.1x specifies how EAP should be encapsulated in LAN frames.

In wireless communications using EAP, a user requests connection to a WLAN through an access point, which then requests the identity of the user and transmits that identity to an authentication server such as RADIUS. The server asks the access point for proof of

identity, which the access point gets from the user and then sends back to the server to complete the authentication.

EAP-TLS provides for certificate-based and mutual authentication of the client and the network. It relies on client-side and server-side certificates to perform authentication and can be used to dynamically generate user-based and session-based WEP keys.

EAP-TTLS (Tunneled Transport Layer Security) is an extension of EAP-TLS to provide certificate-based, mutual authentication of the client and network through an encrypted tunnel, as well as to generate dynamic, per-user, per-session WEP keys. Unlike EAP-TLS, EAP-TTLS requires only server-side certificates.

(See also *PEAP (Protected Extensible Authentication Protocol)*.)

ESRP

Extreme Standby Router Protocol is an Extreme Networks-proprietary protocol that provides redundant Layer 2 and routing services to users.

Extreme Defender for IoT

Extreme Defender for IoT provides unique in-line security for mission critical and/or vulnerable IoT devices. Placed between the IoT device and the network, the Defender for IoT solution helps secure and isolate IoT devices protecting them from internal and external hacking attempts, viruses, malware and ransomware, DDoS attacks, and more. Designed to be simple and flexible, Defender for IoT can be deployed over any network infrastructure to enable secure IoT management without significant network changes.

The solution is comprised of the Extreme Defender Application Software and the Defender Adapter (SA201) or AP3912i access point. ExtremeCloud IQ Controller is the supported platform for the Extreme Defender Application.

For more information, see <https://www.extremenetworks.com/product/extreme-defender-for-iot/>.

ExtremeAnalytics for ExtremeCloud IQ - Site Engine

ExtremeAnalytics™ for ExtremeCloud™ IQ - Site Engine, formerly Purview™, is a network powered application analytics and optimization solution that captures and analyzes context-based application traffic to deliver meaningful intelligence about applications, users, locations, and devices. ExtremeAnalytics for ExtremeCloud IQ - Site Engine provides data to show how applications are being used. This can be used to better understand customer behavior on the network, identify the level of user engagement, and assure business application delivery to optimize the user experience. The software also provides visibility into network and application performance allowing IT to pinpoint and resolve performance issues in the infrastructure whether they are caused by the network, application, or server. Learn more at <https://www.extremenetworks.com/product/extremeanalytics-for-extremecloud-iq-site-engine/>.

ExtremeCloud IQ Controller

Extreme Campus Controller has been rebranded to ExtremeCloud IQ Controller. The new ExtremeCloud IQ Controller supports Campus/Centralized sites only.

The ExtremeCloud IQ Controller is a next generation orchestration application offering all the mobility services required for modern unified access deployments offering simplified integration with ExtremeCloud IQ to take advantage of Cloud Visibility into the network. The ExtremeCloud IQ Controller extends the simplified workflows of the ExtremeCloud public cloud application to on-prem/private cloud deployments.

The ExtremeCloud IQ Controller includes comprehensive critical network services for wireless and wired connectivity, wireless device secure onboarding, distributed and centralized data paths, role-based access control through the Application Layer, integrated location services, and IoT device onboarding through a single platform.

Built on architecture with the latest technology, the embedded operating system supports application containers that enable future expansion of value added applications for the unified access edge.

ExtremeCloud IQ - Site Engine

ExtremeCloud™ IQ - Site Engine (formerly known as Extreme Management Center and Netsight), is a web-based control interface that provides centralized visibility into your network. ExtremeCloud IQ - Site Engine reaches beyond ports, VLANs, and SSIDs and provides detailed control of individual users, applications, and protocols. When coupled with wireless and Identity & Access Management products, ExtremeCloud IQ - Site Engine becomes the central location for monitoring and managing all the components in the infrastructure. Learn more at <https://www.extremenetworks.com/product/extremecloud-iq-site-engine/>.

ExtremeCloud™ IQ

ExtremeCloud™ IQ is an industry-leading and visionary approach to cloud-managed networking, built from the ground up to take full advantage of the Extreme Networks end-to-end networking solutions. ExtremeCloud IQ delivers unified, full-stack management of wireless access points, switches, and routers and enables onboarding, configuration, monitoring, troubleshooting, reporting, and more. Using innovative machine learning and artificial intelligence technologies, ExtremeCloud IQ analyzes and interprets millions of network and user data points, from the network edge to the data center, to power actionable business and IT insights, and deliver new levels of network automation and intelligence. Learn more about ExtremeCloud IQ at <https://www.extremenetworks.com/support/documentation/extremecloud-iq/>.

ExtremeControl for ExtremeCloud IQ - Site Engine

ExtremeControl for ExtremeCloud™ IQ - Site Engine, formerly Extreme Access Control™ (EAC), is a set of management software tools that use information gathered by a hardware engine to control policy to all devices on the network. The software allows you to automate and secure access for all devices on the network from a central dashboard, making it easier to roll out security and identity policies across the wired and wireless network. Learn more at <https://www.extremenetworks.com/product/extremecontrol-for-extremecloud-iq-site-engine/>.

ExtremeGuest

ExtremeGuest is a robust and comprehensive guest management and engagement solution that gives unique opportunity to personalize engagement by understanding the customer behavior and interest, and then tailor services based on those insights.

For example, knowing how many customers enter a store, how often they visit, and how much time they spend are all metrics that can be measured through ExtremeGuest. ExtremeGuest can take advantage of social networking behavior to increase patronage, expand brand exposure, and understand client demographics and preferences in a more comprehensive and personal way. Guest onboarding with sponsor approval is supported, allowing a sponsor to approve or deny guest access with a single click.

ExtremeSwitching

ExtremeSwitching is the family of products comprising different switch types: **Modular** (X8 and 8000 series [formerly BlackDiamond] and S and K series switches); **Stackable** (X-series and A, B, C, and 7100 series switches); **Standalone** (SSA, X430, and D, 200, 800, and ISW series); and **Mobile Backhaul** (E4G). Learn more about ExtremeSwitching at <http://www.extremenetworks.com/products/switching-routing/>.

ExtremeWireless

ExtremeWireless products and solutions offer high-density Wi-Fi access, connecting your organization with employees, partners, and customers everywhere they go. The family of wireless products and solutions includes APs, wireless appliances, and software. Learn more about ExtremeWireless at <http://www.extremenetworks.com/products/wireless/>.

ExtremeXOS

ExtremeXOS, a modular switch operating system, is designed from the ground up to meet the needs of large cloud and private data centers, service providers, converged enterprise edge networks, and everything in between. Based on a resilient architecture and protocols, ExtremeXOS supports network virtualization and standards-based SDN capabilities like VXLAN gateway and OpenStack Cloud orchestration. ExtremeXOS also supports comprehensive role-based policy.

FHSS

Frequency-Hopping Spread Spectrum is a transmission technology used in Local Area Wireless Network (LAWN) transmissions where the data signal is modulated with a narrowband carrier signal that 'hops' in a random but predictable sequence from frequency to frequency as a function of time over a wide band of frequencies. This technique reduces interference. If synchronized properly, a single logical channel is maintained. (Compare with *DSSS (Direct-Sequence Spread Spectrum)*.)

IBSS

An IBSS is the 802.11 term for an ad hoc network. See *ad hoc mode*.

IEEE

Institute of Electrical and Electronic Engineers. This technical professional society fosters the development of standards that often become national and international standards. The organization publishes a number of journals and has many local chapters and several large societies in special areas.

MIC

Message Integrity Check (or Code), also called 'Michael', is part of WPA and TKIP. The MIC is an additional 8-byte code inserted before the standard 4-byte ICV appended in by standard WEP to the 802.11 message. This greatly increases the difficulty in carrying out forgery attacks.

Both integrity check mechanisms are calculated by the receiver and compared against the values sent by the sender in the frame. If the values match, there is assurance that the message has not been tampered with.

netmask

A netmask is a string of 0s and 1s that mask, or screen out, the network part of an IP address, so that only the host computer part of the address remains. A frequently-used netmask is 255.255.255.0, used for a Class C subnet (one with up to 255 host computers). The ".0" in the netmask allows the specific host computer address to be visible.

PEAP

Protected Extensible Authentication Protocol is an IETF draft standard to authenticate wireless LAN clients without requiring them to have certificates. In PEAP authentication, first the user authenticates the authentication server, then the authentication server authenticates the user. If the first phase is successful, the user is then authenticated over the SSL tunnel created in phase one using EAP-Generic Token Card (EAP-GTC) or Microsoft Challenged Handshake Protocol Version 2 (MSCHAP V2). (See also [EAP-TLS/EAP-TTLS](#).)

QoS

Quality of Service is a technique that is used to manage network resources and guarantee a bandwidth relationship between individual applications or protocols. A communications network transports a multitude of applications and data, including high-quality video and delay-sensitive data such as real-time voice. Networks must provide secure, predictable, measurable, and sometimes guaranteed services. Achieving the required QoS becomes the secret to a successful end-to-end business solution.

RADIUS

RADIUS is a client/server protocol and software that enables remote access servers to communicate with a central server to authenticate dial-in users and authorize their access to the requested system or service. RADIUS allows a company to maintain user profiles in a central database that all remote servers can share. It provides better security, allowing a company to set up a policy that can be applied at a single administered network point. With RADIUS, you can track usage for billing and for keeping network statistics.

SSL

Secure Socket Layer is a protocol for transmitting private documents using the Internet. SSL works by using a public key to encrypt data that is transferred over the SSL connection. SSL uses the public-and-private key encryption system, which includes the use of a digital certificate.

syslog

A protocol used for the transmission of event notification messages across networks, originally developed on the University of California Berkeley Software Distribution (BSD) TCP/IP system implementations, and now embedded in many other operating systems and networked devices. A device generates a messages, a relay receives and forwards the messages, and a collector (a syslog server) receives the messages without relaying them.

syslog uses the UDP as its underlying transport layer mechanism. The UDP port that has been assigned to syslog is 514. (RFC 3164)

WLAN

Wireless Local Area Network.