




Special Notice

ASN Net Module Removal Procedure

When removing a net module from your ASN, you must lift the module straight up. If you rock the module back and forth or side to side, you can bend the connector pins. When you attempt to reinstall a net module with bent connector pins, you can damage the power supply. Figure 1 shows both the correct and incorrect way to remove a net module.

Incorrect:

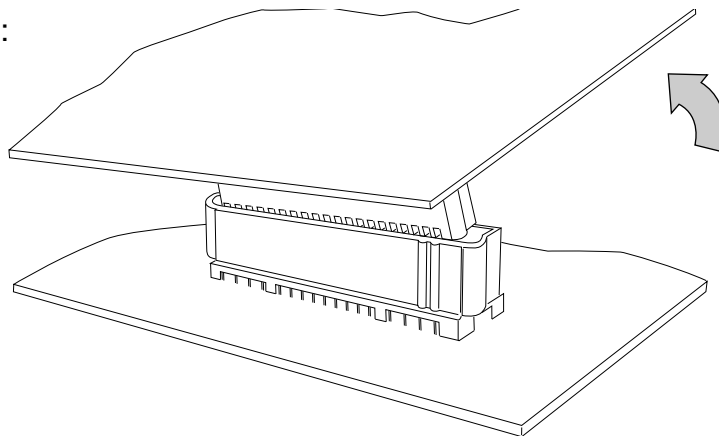

Correct:

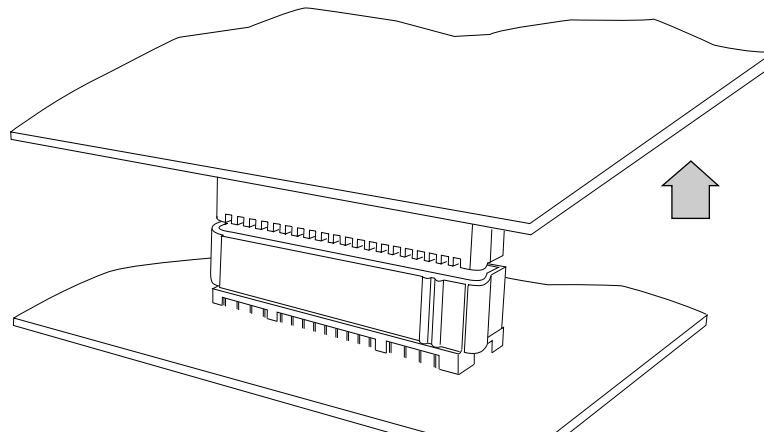


Figure 1. Net Module Removal Technique

