


4220 Series Cloud Managed Switches Quick Reference

Follow these steps to get the switch ready for use.

For complete installation instructions see the *Extreme 4220 Series Cloud Managed Switches Hardware Installation Guide* at www.extremenetworks.com/support/documentation/

Necessary Tools




- 1 #2 Phillips screwdriver
(magnetic screwdriver recommended)
- 2 ESD-protective wrist strap

1 Prepare the Site


The installation site must meet the following requirements:

- Appropriately grounded power receptacles located within 1.8 m (6 ft.).
- A readily accessible device for disconnecting power, such as a breaker or master switch
- Network cabling within reach
- Minimum clearance of at least of 7.6 cm (3.0 in.) on all sides for proper ventilation
- Temperature between 0°C (32°F) and 50°C (122°F) -- or as noted in "Operating Conditions" -- with fluctuations of less than 10°C (18°F) per hour



2 Unpack the Box

Remove the packing material, and then verify that all of the following components are included:

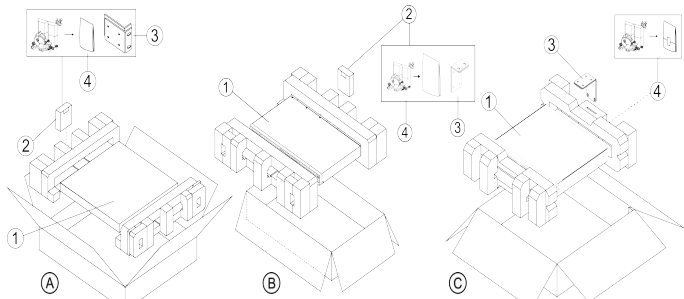

- A: 4220-24P-4X, 4220-48T-4X, 4220-48P-4X, 4220-8MW-40P-4X, 4220-4MW-20P-4X
- B: 4220-24T-4X
- C: 4220-12T-4X, 4220-12P-4X, 4220-4MW-8P-4X, 4220-8X

- 1 Switch
- 2 Accessory box
- 3 2-post Rack Mount Kit (2 rack ears)
- 4 Accessory bag: Screws (8), cable holder, cable holder (slide tail), Rubber feet (4)

If the switch appears to be damaged, contact Extreme Networks. See "Getting Help" for more information. Extreme Networks does not include power input cords with this product.

3 Install the Switch


You can install any 4220 Series switch in a standard 19-inch equipment rack.

Two-Post Mount


The 4220 Series can be installed in a four-post rack, using just the two front posts or two back posts. This procedure uses a two-post mounting kit, which accommodates rack posts 3 inches or 6 inches wide. Rack ears can support both flush and mid-mount.

- 1 Attach a mounting bracket to each side of the switch, using the screws provided. Align each mounting bracket so that the flange (ear) faces the front of the switch to flush-mount, or faces the rear of the switch to mid-mount.


Figure 1 4220 Series: Attach Brackets

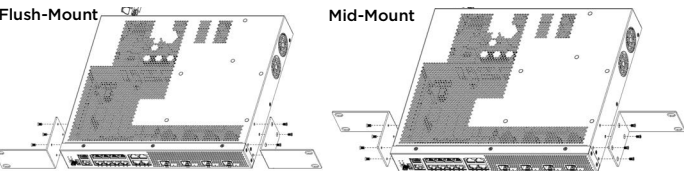

For models 4220-8X, 4220-4MW-8P-4X, 4220-12P-4X, 4220-12T-4X

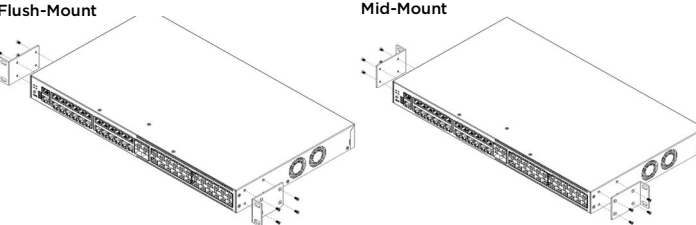


For model 4220-24T-4X

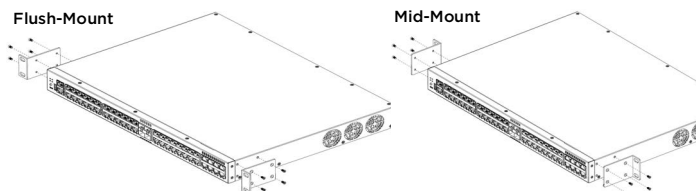


For models 4220-4MW-20P-4X, 4220-8MW-40P-4X, 4220-48P-4X, 4220-48T-4X, 4220-24P-4X

- 2 With the mounting brackets attached, position the switch between the vertical rack rails of the 19-inch rack.
- 3 Fasten the switch securely to the rack rails using four customer-supplied rack screws.


Figure 2 4220 Series: Mount in a Two-Post or Four-Post Rack

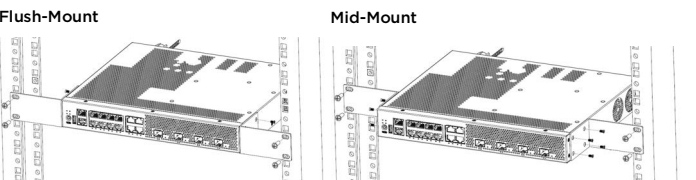

For models 4220-8X, 4220-4MW-8P-4X, 4220-12P-4X, 4220-12T-4X

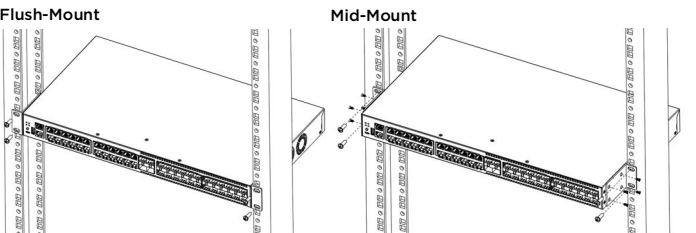

For model 4220-24T-4X

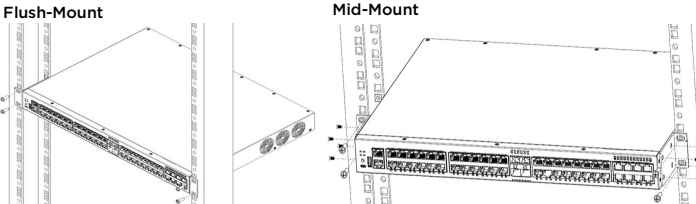

For models 4220-4MW-20P-4X, 4220-8MW-40P-4X, 4220-48P-4X, 4220-48T-4X, 4220-24P-4X

Under Table Mount and Wall Mount

Note: Orientation for wall mounting is limited. The power inlet must face upward. Install the short brackets onto a wall or under a table. Table and wall mounting is supported by models 4220-8X, 4220-4MW-8P-4X, 4220-12P-4X, 4220-12T-4X.

- 1 Use the short brackets as a template and mark the holes to be used. Use two holes per short rack ear.
- 2 Drill the holes and attach the brackets using four wood screws and four anchors that are included in the accessory kit, which can be ordered separately.

Figure 3 Under Table Mount


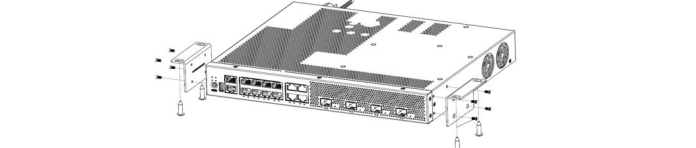


Figure 4 Wall Mount

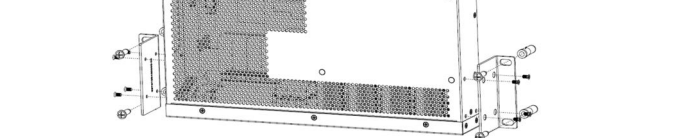

- 3 Attach the short brackets to both sides of the switch.

4 Connect the Power

4220 Series switches run on AC power. Connect the switch to a primary power source.



Note: Installing the system as described in this guide meets the protective earth grounding requirements of the National Electrical Code (NEC), UL/CSA/IEC/EN 62368-1 standards. However, in some cases, it may be necessary to use an alternative grounding method. In these cases, a 14 AWG wire can be connected between the grounding lug on the chassis and a nearby building ground point.

Connecting to the Primary Power Source

To attach the 4220 Series switch to a power source, do the following:

- 1 Connect the AC power cord to the AC power input socket on the power supply and an AC power outlet.
- 2 When power is connected, verify that the switch's PWR LED turns green. If the PWR LED does not turn green, refer to the *Extreme 4220 Series Cloud Managed Switches Hardware Installation Guide* for troubleshooting information.

Model 4220-4MW-20P-4X supports the option to attach an external 550W redundant power supply. Model 4220-8MW-40P-4X supports the option to attach an external 950W redundant power supply. To attach the appropriate RPS to the 4220 Series switch and a power source, see the *Redundant Power Supply Quick Reference*.

5 Update and Configure the Switch

Upgrade to a generally available (GA) version of the software before you use this unit. Switch Engine is the default operating system (OS) for the 4220 Series. To connect the switch to the network, upgrade it, and configure it for use, follow the steps in the *Extreme 4220 Series Cloud Managed Switches Hardware Installation Guide*.

Safety Notices



Caution! Shock hazard!
Disconnect all power inputs before servicing.



Electrical Hazard: Only qualified instructed or skilled personnel should perform installation, repair, or disassembly procedures.

Risques d'électrocution: Seul un personnel qualifié ou expérimenté peut effectuer les procédures d'installation, de réparation ou de démontage.



Warning: Extreme Networks power supplies do not have switches for turning the unit on and off. Before servicing, disconnect all power cords to remove power from the device. Make sure that these connections are easily accessible.

Avertissement: Les alimentations d'Extreme Networks n'ont pas d'interrupteurs pour allumer ou éteindre l'appareil. Avant l'entretien, débranchez tous les cordons d'alimentation pour couper l'alimentation de l'appareil. Assurez-vous que ces connexions sont facilement accessibles.



Warning: A dedicated Listed circuit breaker rated at 15A is to be used for each power supply connection.

Avertissement: Un disjoncteur certifié 15A et dédié à l'installation doit être utilisé pour chaque connexion d'alimentation.

Caution: Before mounting the device, ensure that the rack can support it without compromising stability. Otherwise, personal injury or equipment damage may result.

Caution: Follow appropriate ESD procedures when unpacking and handling the switch. These include unpacking the switch in an ESD-safe environment and wearing appropriate ESD protective gear, such as ESD-safe footwear and ESD wrist straps where appropriate.

Warning: This unit must be installed indoors. The unit, AC power adapter, and its cables are not designed for outdoor use. **The PoE cables must not be distributed outside the building.**

Caution: Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.




Warning: Do not use optical instruments to view the laser output. The use of optical instruments to view laser output increases eye hazard. Use only UL/CSA, IEC/EN60825-1/-2 recognized pluggable modules.

Avertissement: Ne pas utiliser d'instruments optiques pour regarder l'extrémité du laser. L'utilisation d'instruments optiques pour regarder l'extrémité du laser représente un danger pour les yeux. Utilisez uniquement des modules certifiés UL/CSA, IEC/EN60825-1/-2.


Hardware Components

Figure 5 Front Panels for 4220 Series Switches


Models 4220-12P-4X and 4220-12T-4X




Models 4220-24P-4X and 4220-24T-4X




Model 4220-4MW-8P-4X

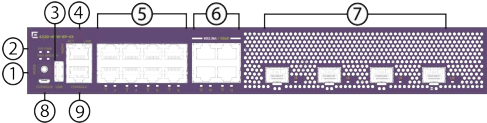


Model 4220-8MW-40P-4X

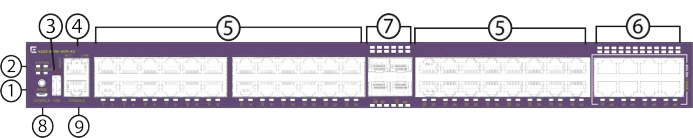


Models 4220-48P-4X and 4220-48T-4X

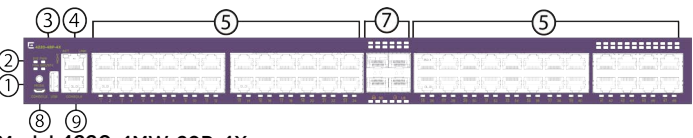

Model 4220-4MW-20P-4X

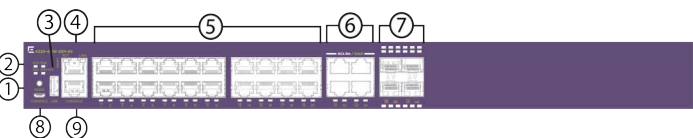

Model 4220-8X

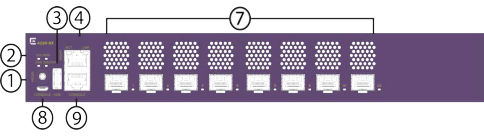

- 1 Mode button
- 2 System LEDs
- 3 USB Type A
- 4 Management port
- 5 10/100/1000BaseT ports (with 802.3at Type 2 PoE+ (30W) on models 4220-12P-4X, 4220-24P-4X, 4220-48P-4X, 4220-4MW-8P-4X, 4220-4MW-20P-4X, and 4220-8MW-40P-4X)
- 6 1G/2.5G/5GBaseT with 802.3bt Type 4 PoE (90W) ports
- 7 1G/10G SFP+ uplink/stack ports
- 8 Micro USB
- 9 Serial Console port

Figure 6 Rear Panels for 4220 Series Switches

Model 4220-8X



Models 4220-12T-4X, 4220-12P-4X, and 4220-4MW-8P-4X



Model 4220-24T-4X



Models 4220-24P-4X, 4220-48T-4X, 4220-48P-4X, 4220-4MW-20P-4X, and 4220-8MW-40P-4X



- 1 Grounding lug
- 2 Power supply power cord input
- 3 Redundant power supply slot behind cover (only on models 4220-4MW-20P-4X and 4220-8MW-40P-4X)

For component details, see the *Extreme 4220 Series Cloud Managed Switches Hardware Installation Guide*.

Operating Conditions

Operating Temperature:

0°C (32°F) to 50°C (122°F) up to 3000 m (10,000 ft)

Storage Temperature:

-40°C to 70°C (-40°F to 158°F)

Operating Relative Humidity:

5% to 95% (non-condensing)

Available Rack-Mount Kits

XN-2P-RMKIT-008	Two-post rack mount kit for the 4220-24T-4X, 4220-24P-4X, 4220-4MW-20P-4X, 4220-8MW-40P-4X, 4220-48P-4X, and 4220-48T-4X switches
XN-2P-RMKIT-009	Two-post rack mount kit for the 4220-8X, 4220-12P-4X, 4220-12T-4X, and 4220-4MW-8P-4X switches
908775-10	Wall mount kit for the 4220-8X, 4220-12P-4X, 4220-12T-4X, and 4220-4MW-8P-4X switches

Interfaces

Each 4220 Series switch has an RJ-45 serial console port, a 10/100/1000BASE-T out-of-band management port, a USB Type B micro console port, a USB Type A storage port, and one fixed AC power supply unit. Some models support an additional external power supply unit. 4220 Series factory switches are pre-loaded with the Switch Engine OS. The following table lists the specific interfaces for each switch.

4220-12P-4X	12 port stackable switch (124W PoE) with 12 10/100/1000BaseT 30W PoE ports, 4 1G/10G SFP+ ports, 1 fixed fan (silent mode supported up to 35°C (95°F), and 1 fixed AC power supply unit.
4220-12T-4X	12 port stackable switch with 12 10/100/1000BaseT ports, 4 1G/10G SFP+ ports, 1 fixed fan (silent mode supported up to 35°C (95°F), and 1 fixed AC power supply unit.
4220-24P-4X	24 port stackable switch (195W PoE) with 24 10/100/1000BaseT 30W PoE ports, 4 1G/10G SFP+ ports, 1 fixed fan, and 1 fixed AC power supply unit.
4220-24T-4X	24 port stackable switch with 24 10/100/1000BaseT ports, 4 1G/10G SFP+ ports, 1 fixed fans, and 1 fixed AC power supply unit.
4220-48P-4X	48 port stackable switch (370W PoE) with 48 10/100/1000BaseT 30W PoE ports, 4 1G/10G SFP+ ports, 3 fixed fans, and 1 fixed AC power supply unit.
4220-48T-4X	48 port stackable switch with 48 10/100/1000BaseT ports, 4 1G/10G SFP+ ports, 2 fixed fans, and 1 fixed AC power supply unit.
4220-4MW-20P-4X	24 port stackable MultiGig switch (370W PoE) with 4 1G/2.5G/5GBaseT 90W PoE ports, 20 10/100/1000BaseT 30W POE ports, 4 1G/10G SFP+ ports, 3 fixed fans, and 1 fixed AC power supply unit with option to add 1 external redundant 550W AC power supply unit.
4220-4MW-8P-4X	12 port stackable MultiGig switch (240W PoE) with 4 1G/2.5G/5GBaseT 90W PoE ports, 8 10/100/1000BaseT 30W PoE ports, 4 1G/10G SFP+ ports, 2 fixed fan (silent mode supported up to 35°C (95°F), and 1 fixed AC power supply unit.
4220-8MW-40P-4X	48 port stackable MultiGig switch (740W PoE) with 8 1G/2.5G/5GBaseT 90W PoE ports, 40 10/100/1000BaseT 30W PoE ports, 4 1G/10G SFP+ ports, 3 fixed fans, and 1 fixed AC power supply unit with option to add 1 external redundant 950W AC power supply unit.
4220-8X	8 port stackable switch with 8 1G/10G SFP+ ports, 1 fixed fan, and 1 fixed AC power supply unit.



Note: Models 4220-12P-4X, 4220-12T-4X, and 4220-4MW-8P-4X support silent mode operation at temperatures up to 35°C (95°F). Silent mode requires 1 RU of free space above the switch. Fans function normally if the temperature is between 35°C (95°F) and 50°C (122°F).

Power Specifications

4220-12P-4X	100-240Vac, 50-60 Hz, 2.0A max.
4220-12T-4X	100-240Vac, 50-60 Hz, 0.6A max.
4220-24P-4X	100-240Vac, 50-60 Hz, 2.5A max.
4220-24T-4X	100-240Vac, 50-60 Hz, 0.6A max.
4220-48P-4X	100-240Vac, 50-60 Hz, 5A max.
4220-48T-4X	100-240Vac, 50-60 Hz, 0.6A max.
4220-4MW-8P-4X	100-240Vac, 50-60 Hz, 3.5A max.
4220-4MW-20P-4X	100-240Vac, 50-60 Hz, 5.0A max. (for IPS) or 54Vdc, 7.0A max.; 12Vdc, 3.5A max. (for RPS)
4220-8MW-40P-4X	100-240Vac, 50-60 Hz, 9.0A max. (for IPS) or 55Vdc, 15.4A max.; 12Vdc, 8.58 A max. (for RPS)
4220-8X	100-240Vac, 50-60 Hz, 0.6A max.

Power Supply Options

RPS-550W	550W external redundant AC power supply, side-to-side (left-to-right) airflow for model 4220-4MW-20P-4X.
RPS-950W	950W external redundant AC power supply, side-to-side (left-to-right) airflow for model 4220-8MW-40P-4X.

Available Console Cables and Bluetooth Adapter

XN-RJ45-USBC-CONSOLE-CBL	RJ45 to USB-C console cable (6ft)
XN-RJ45-USBA-CONSOLE-CBL	RJ45 to USB 2.0 Type A male console cable (6ft)
XN-RJ45-DB9-CONSOLE-CBL	RJ45 to DB9 console cable (6ft)
XN-MICRO-USB-USBA	Micro-USB 2.0 to USB 2.0 Type A cable (6.6 ft)
XN-USB-BT500-ADAPTER	Bluetooth 5.0 USB adapter

Note: Ordered separately

Getting Help

For additional support related to 4220 Series switches or this document, contact Extreme Networks using one of the following methods:

Product Documentation	https://www.extremenetworks.com/support/documentation/
Global Technical Assistance Center (GTAC)	Phone: 1-800-998-2408 (toll-free in U.S. and Canada) or +1-408-579-2826. For the support phone number in your country, visit: https://www.extremenetworks.com/support/contact/

GTAC Knowledge	Get on-demand and tested resolutions from the GTAC Knowledgebase, or create a help case if you need more guidance. Visit: https://gtacknowledge.extremenetworks.com/
The Hub	A forum for Extreme customers to connect with one another, get questions answered, share ideas and feedback, and get problems solved. The community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC. Visit: https://community.extremenetworks.com
Support Portal	Manage cases, downloads, service contracts, product licensing, and training and certifications. Visit: https://support.extremenetworks.com/

Notice

Copyright © 2024 Extreme Networks, Inc. All Rights Reserved.

Legal Notices

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made. The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries. All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners. For additional information on Extreme Networks trademarks, please see: www.extremenetworks.com/company/legal/trademarks/

Warranty

Warranty information for 4220 Series switches is located online at: www.extremenetworks.com/support/policies/

Regulatory and Compliance Information

Federal Communications Commission (FCC) Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
NOTE: This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment uses, generates, and can radiate radio frequency energy and if not installed in accordance with the operator's manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause interference in which case the user will be required to correct the interference at his own expense.
WARNING: Changes or modifications made to this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Industry Canada Notice CAN ICES-3 (A)/NMB-3(A)

This digital apparatus does not exceed the class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.
Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Class A ITE Notice

WARNING: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

Product Safety

This product complies with the following international safety standards:

- UL 62368-1
- UL 60950-1
- CAN/CSA C22.2 No. 62368-1
- CAN/CSA C22.2 No. 60950-1-07
- IEC 62368-1
- IEC 60950-1
- EN 62368-1
- 2014/35/EU
- CNS 15598-1
- GB 4943.1

Optical Module Compliance

Extreme Networks pluggable optical modules and direct-attach cables meet the following regulatory requirements:

- UL and/or CSA registered component for North America
- Class 1 or Class 1M Laser Product
- FCC 21 CFR Chapter 1, Sub-chapter J in accordance with FDA & CDRH requirements
- IEC/EN 60825-1, IEC/EN 60825-2 or later, European Standard

Korea EMC Statement

이 기기는 업무용 환경에서 사용할 목적으로 적

합성평가를 받은 기기로서 가정용 환경에서 사

용하는 경우 전파간섭의 우려가 있습니다.

Australia (RCM)

WARNING: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

Electromagnetic Compatibility (EMC)

This product complies with the following: FCC 47 CFR Part 15 Subpart B Class A (US), ICES-003 (Canada), EN 55032 (ITE Emissions), EN 55035 (ITE Immunity), EN 61000-3-2 (Harmonics), EN 61000-3-3 (Flicker), 2014/30/EU (EMC Directive), EN 300 386 (Telecom), EN 55011 (ISM), RCM (Australia), VCCI (Japan), MSIP KCC (Korea), BSMI (Taiwan), ANATEL (Brazil). CQC (China), TEC (India).

VCCI Notice

This is a Class A product based on the standard of the Voluntary Control Council for Interference by Information Technology Equipment (VCCI). If this equipment is used in a domestic environment, radio disturbance may arise. When such trouble occurs, the user may be required to take corrective actions.

この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。	VCCI－A
------------------------------------------------------------------------------------	--------

Taiwan BSMI 報關義務人

申請人: 愛爾蘭商極進網絡技術行動有限公司台灣分公司

地址: 臺北市松山區南京東路 4 段 126 號 5 樓

警告：在居住环境中, 运行此设

备可能会造成无线电干扰。

警告:為避免電磁干擾, 本產品

不應安裝或使用於住宅環境。

Battery Warning- Taiwan

警告

如果更換不正確之電池型式會有爆炸的風險，

請依製造商說明書處理用過之電池。



Battery Notice
Warning: This product contains a battery used to maintain product information. If the battery should need replacement it must be replaced by Service Personnel. Please contact Technical Support for assistance.
Risk of explosion if battery is replaced by an incorrect type. Dispose of expended battery in accordance with local disposal regulations.
Avertissement: Ce produit renferme une pile servant à conserver les renseignements sur le produit. Le cas échéant, faites remplacer la pile par le personnel du service de réparation. Veuillez communiquer avec l'assistance technique pour du soutien.
Il y a risque d'explosion si la pile est remplacée par un type de pile incorrect. Éliminez les piles usées en conformité aux règlements locaux d'élimination des piles.

Hazardous Substances- China and Taiwan BSMI RoHS

Guidance concerning the China and Taiwan BSMI RoHS (Restriction of Hazardous Substances) directive for this Extreme Networks® product can be found on the following web page:

<https://www.extremenetworks.com/support/restriction-hazardous-substances/>

The page contains tables detailing the presence of substances defined by the RoHS directive.

Hazardous Substances - EU

This product complies with the requirements of Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 and its amendments (EU) 2015/863 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

European Waste Electrical and Electronic Equipment (WEEE) Notice



In accordance with Directive 2012/19/EU of the European Parliament on waste electrical and electronic equipment (WEEE):

- 1** The symbol above indicates that separate collection of electrical and electronic equipment is required.
- 2** When this product has reached the end of its serviceable life, it cannot be disposed of as unsorted municipal waste. It must be collected and treated separately.
- 3** It has been determined by the European Parliament that there are potential negative effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment.
- 4** It is the users' responsibility to utilize the available collection system to ensure WEEE is properly treated.

For information about the available collection system, please contact Extreme Customer Support at +353 61 705500 (Ireland).

Extreme Networks

4220 Series Cloud Managed Switches

Quick Reference

4220-12T-4X

4220-12P-4X

4220-4MW-8P-4X

4220-24T-4X

4220-24P-4X

4220-4MW-20P-4X

4220-48T-4X

4220-48P-4X

4220-8MW-40P-4X

4220-8X

ExtremeCloud™ IQ

Scan to learn more about **ExtremeCloud IQ** and **ExtremeCloud IQ - Site Engine**.

Your new switch can be managed by ExtremeCloud IQ if cloud management is preferred as well as ExtremeCloud IQ - Site Engine if locally deployed management is preferred.



P/N 9037823-00 Rev. AB

