



Switch Engine Release Notes

Software Version 32.3

9037674-00 Rev AB
December 2022



Copyright © 2022 All rights reserved.

Legal Notice

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, see: www.extremenetworks.com/company/legal/trademarks

Open Source Declarations

Some software files have been licensed under certain open source or third-party licenses.

End-user license agreements and open source declarations can be found at: <https://www.extremenetworks.com/support/policies/open-source-declaration/>


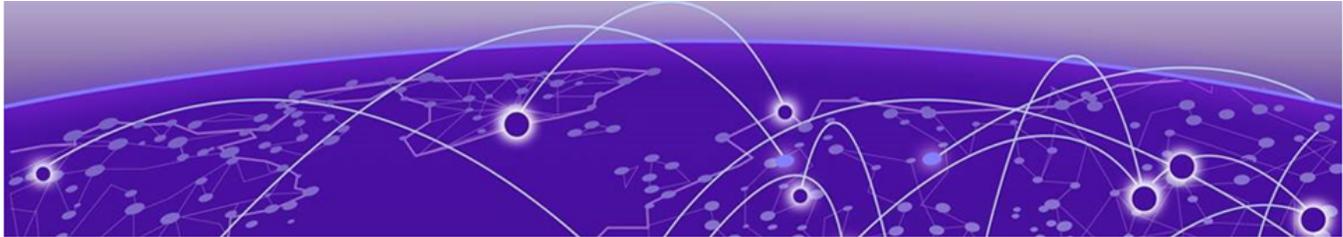


Table of Contents

Preface	5
Conventions.....	5
Text Conventions.....	5
Platform-Dependent Conventions.....	6
Terminology.....	7
Send Feedback.....	7
Help and Support.....	7
Subscribe to Product Announcements.....	8
Related Publications.....	8
Switch Engine Publications.....	8
Open Source Declarations.....	8
Overview	9
Security Information	10
Linux Kernel.....	10
OpenSSL Version.....	10
Upgrading Switch Engine	11
Newly Purchased Switches Require Software Upgrade	12
Default Switch Engine Settings	13
Switch Engine Image File Names	16
New and Corrected Features in Switch Engine 32.3	17
IPv6 transport in IPv4 GRE Tunnel.....	17
Supported Platforms.....	17
New CLI Command.....	17
Auto-generate SSL Certificate for HTTPS.....	18
Automatic Configuration of Default Speed on SFP28 Transceivers.....	18
Supported Platforms.....	18
Dynamic Name Server Limit Enhancement.....	18
Supported Platforms.....	18
ExtremeSwitching 5520 Back-to-front Airflow Support.....	18
Fabric Attach Triggered Signaling.....	19
Limitations.....	19
Supported Platforms.....	19
Flow Monitor Full Support.....	19
Supported Platforms.....	19
New CLI Commands.....	20
Integrated Application Hosting Support for ExtremeSwitching 5720.....	20
Supported Platforms.....	21
Supported CLI Commands.....	21

Link Aggregation Group for Ports Supporting Different Channelization.....	21
Supported Platforms.....	22
LRM/MACsec Adapter Support on ExtremeSwitching 5320 switches.....	22
OSPF Inter-VR Route Redistribution.....	22
Supported Platforms.....	22
New CLI Commands.....	22
Changed CLI Commands.....	22
PIM Multicast Routing Over GRE Tunnels.....	23
Supported Platforms.....	23
Limitations.....	23
New CLI Commands.....	23
Post Login Banner - Managed by ExtremeCloud IQ.....	24
Supported Platforms.....	24
Transceiver Speed MIB Support.....	24
Supported Platforms.....	24
Changing the Network Operating System.....	25
Making Your Initial Network Operating System Selection.....	25
Changing Your Network Operating System.....	26
ExtremeCloud IQ Agent Support.....	27
Extreme Hardware/Software Compatibility and Recommendation Matrices.....	29
Compatibility with ExtremeCloud IQ - Site Engine.....	30
Supported MIBs.....	31
Tested Third-Party Products.....	32
Tested RADIUS Servers.....	32
Extreme Switch Security Assessment.....	33
DoS Attack Assessment.....	33
ICMP Attack Assessment.....	33
Port Scan Assessment.....	33
Limits.....	34
Limits Overview.....	34
Base License Limits.....	36
Premier License Limits.....	64
Notes for Limits Tables.....	70
Open Issues, Known Behaviors, and Resolved Issues.....	72
Open Issues.....	72
Known Behaviors.....	72
Resolved Issues in Switch Engine 32.3.....	73

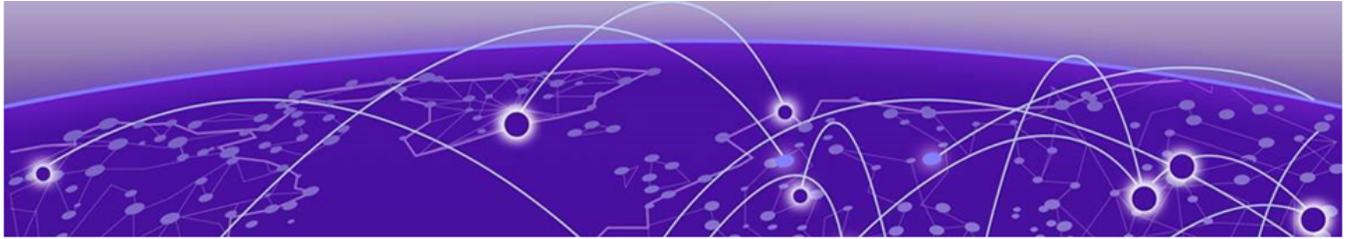

Preface

Read the following topics to learn about:

- The meanings of text formats used in this document.
- Where you can find additional information and help.
- How to reach us with questions and comments.

Conventions

To help you better understand the information presented in this guide, the following topics describe the formatting conventions used for notes, text, and other elements.

Text Conventions

Unless otherwise noted, information in this document applies to all supported environments for the products in question. Exceptions, like command keywords associated with a specific software version, are identified in the text.

When a feature, function, or operation pertains to a specific hardware product, the product name is used. When features, functions, and operations are the same across an entire product family, such as ExtremeSwitching switches or SLX routers, the product is referred to as *the switch* or *the router*.

Table 1: Notes and warnings

Icon	Notice type	Alerts you to...
	Tip	Helpful tips and notices for using the product
	Note	Useful information or instructions
	Important	Important features or instructions
	Caution	Risk of personal injury, system damage, or loss of data
	Warning	Risk of severe personal injury

Table 2: Text

Convention	Description
screen displays	This typeface indicates command syntax, or represents information as it is displayed on the screen.
The words <i>enter</i> and <i>type</i>	When you see the word <i>enter</i> in this guide, you must type something, and then press the Return or Enter key. Do not press the Return or Enter key when an instruction simply says <i>type</i> .
Key names	Key names are written in boldface, for example Ctrl or Esc . If you must press two or more keys simultaneously, the key names are linked with a plus sign (+). Example: Press Ctrl+Alt+Del
Words in italicized type	Italics emphasize a point or denote new terms at the place where they are defined in the text. Italics are also used when referring to publication titles.
NEW!	New information. In a PDF, this is searchable text.

Table 3: Command syntax

Convention	Description
bold text	Bold text indicates command names, keywords, and command options.
<i>italic</i> text	Italic text indicates variable content.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, such as passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member</i> [<i>member</i> . . .].
\	In command examples, the backslash indicates a “soft” line break. When a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Platform-Dependent Conventions

Unless otherwise noted, all information applies to all platforms supported by Switch Engine software, which are the following:

- ExtremeSwitching® switches
- SummitStack™

When a feature or feature implementation applies to specific platforms, the specific platform is noted in the heading for the section describing that implementation in the Switch Engine command documentation (see the Extreme Documentation page at www.extremenetworks.com/documentation/). In many cases, although the command is available on all platforms, each platform

uses specific keywords. These keywords specific to each platform are shown in the Syntax Description and discussed in the Usage Guidelines sections.

Terminology

When features, functionality, or operation is specific to a device family, such as ExtremeSwitching, the family name is used. Explanations about features and operations that are the same across all product families simply refer to the product as the *device*.

Send Feedback

The Information Development team at Extreme Networks has made every effort to ensure that this document is accurate, complete, and easy to use. We strive to improve our documentation to help you in your work, so we want to hear from you. We welcome all feedback, but we especially want to know about:

- Content errors, or confusing or conflicting information.
- Improvements that would help you find relevant information.
- Broken links or usability issues.

To send feedback, do either of the following:

- Access the feedback form at <https://www.extremenetworks.com/documentation-feedback/>.
- Email us at documentation@extremenetworks.com.

Provide the publication title, part number, and as much detail as possible, including the topic heading and page number if applicable, as well as your suggestions for improvement.

Help and Support

If you require assistance, contact Extreme Networks using one of the following methods:

Extreme Portal

Search the GTAC (Global Technical Assistance Center) knowledge base; manage support cases and service contracts; download software; and obtain product licensing, training, and certifications.

The Hub

A forum for Extreme Networks customers to connect with one another, answer questions, and share ideas and feedback. This community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC.

Call GTAC

For immediate support: (800) 998 2408 (toll-free in U.S. and Canada) or 1 (408) 579 2826. For the support phone number in your country, visit: www.extremenetworks.com/support/contact

Before contacting Extreme Networks for technical support, have the following information ready:

- Your Extreme Networks service contract number, or serial numbers for all involved Extreme Networks products
- A description of the failure
- A description of any actions already taken to resolve the problem

- A description of your network environment (such as layout, cable type, other relevant environmental information)
- Network load at the time of trouble (if known)
- The device history (for example, if you have returned the device before, or if this is a recurring problem)
- Any related RMA (Return Material Authorization) numbers

Subscribe to Product Announcements

You can subscribe to email notifications for product and software release announcements, Field Notices, and Vulnerability Notices.

1. Go to [The Hub](#).
2. In the list of categories, expand the **Product Announcements** list.
3. Select a product for which you would like to receive notifications.
4. Select **Subscribe**.
5. To select additional products, return to the **Product Announcements** list and repeat steps 3 and 4.

You can modify your product selections or unsubscribe at any time.


Related Publications

Switch Engine Publications

- [Switch Engine 32.3 Command Reference Guide](#)
- [Switch Engine 32.3 Feature License Requirements](#)
- [Switch Engine 32.3 User Guide](#)
- [Switch Engine 32.3 Release Notes](#)
- [ExtremeXOS and Switch Engine 32.3 SNMP Traps Reference](#)
- [Extreme Hardware/Software Compatibility and Recommendation Matrices](#)
- [Extreme Optics Compatibility](#)
- [Switch Configuration with Chalet for ExtremeXOS 21.x and Later](#)


Open Source Declarations

Some software files have been licensed under certain open source licenses. More information is available at: www.extremenetworks.com/support/policies/open-source-declaration/.

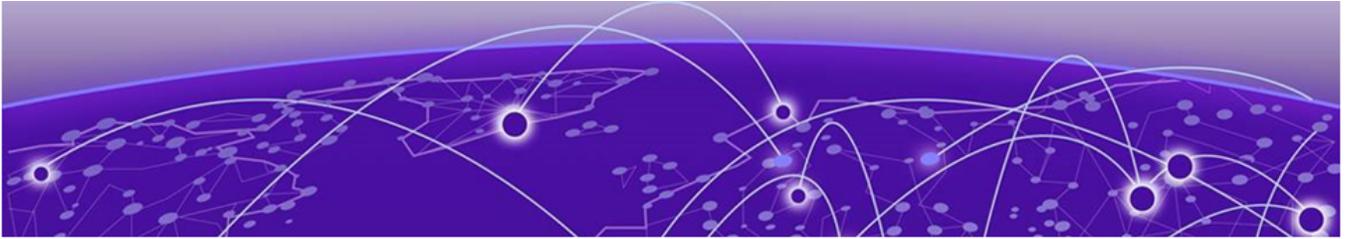

Overview

These release notes document Switch Engine 32.3, which adds features and resolves software deficiencies.

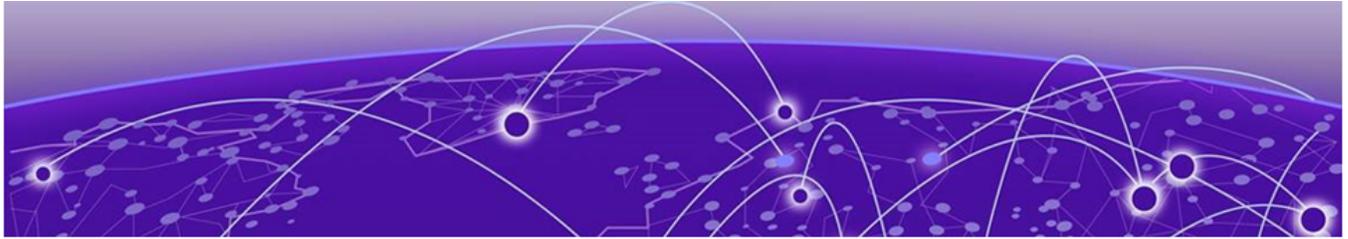

Security Information

[Linux Kernel on page 10](#)

[OpenSSL Version on page 10](#)


The following section covers important security information for Switch Engine 32.3.

Linux Kernel

Switch Engine 32.3 uses Linux Kernel 5.4.

OpenSSL Version

Switch Engine 32.3 uses FIPS openssl-fips-2.0.16.

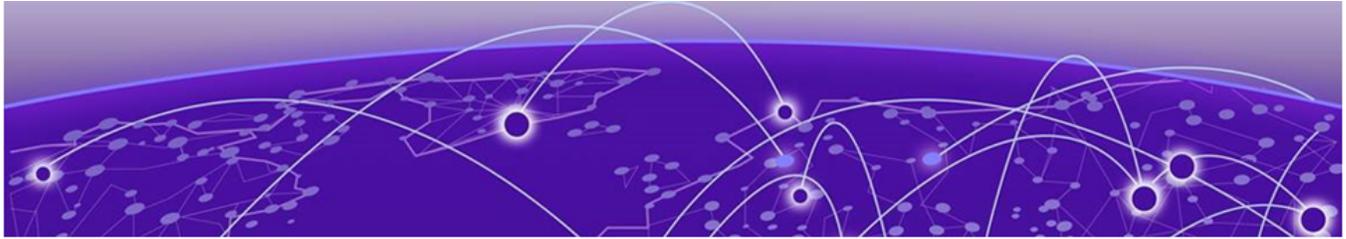

Upgrading Switch Engine

For instructions about upgrading Switch Engine software, see *Software Upgrade and Boot Options* in [Switch Engine 32.3 User Guide](#).

A Switch Engine core image (.xos file) must be downloaded and installed on the alternate (non-active) partition. If you try to download to an active partition, the system displays the following error message: `Error: Image can only be installed to the non-active partition..` A Switch Engine modular software package (.xmod file) can still be downloaded and installed on either the active or alternate partition.



Note


New ExtremeSwitching 5420 and 5520 PoE switches with a Giga device MCU part (switch default ships with supported Switch Engine versions from the factory) will prevent the switch downgrade to older EXOS versions and prevent operating system switchover to unsupported VOSS versions.

The following error message is displayed during the downgrades to older versions:

```
Error: Failed to download image - summit_arm-31.6.1.3.xos does not
include compatible PoE microcontroller support. See the User Guide for
information on installing a newer software release. See the
Hardware/Software Compatibility and Recommendation Matrices to verify the
supported releases.
```

The switch can be identified for the inclusion of the Giga device MCU by checking the PoE firmware revision (5.0 or later) by entering the `show inline-power stats` command (line four):


```
# show inline-power stats
Inline-Power Slot Statistics
Firmware status           : Operational
Firmware revision         : 5.0.0b4
Total ports powered       : 3
Total ports awaiting power : 20
Total ports faulted       : 0
Total ports disabled      : 1
```

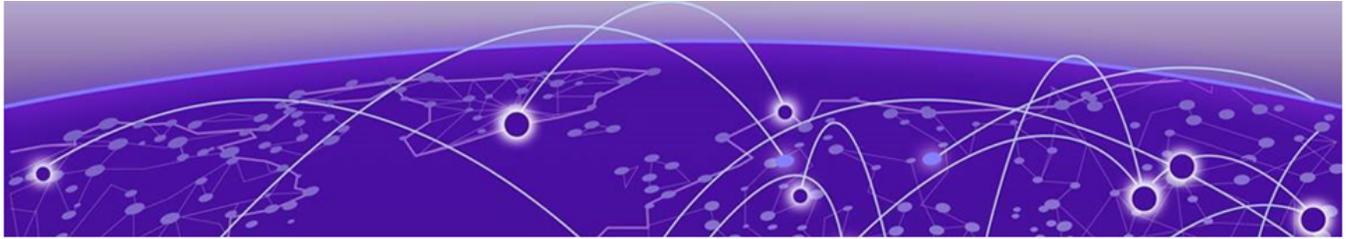

Newly Purchased Switches Require Software Upgrade

Newly delivered switches typically have pre-GA (general availability) Switch Engine software installed. You should promptly upgrade the Switch Engine software to the latest version available by visiting the [Extreme Portal](#).

For information about upgrading the Switch Engine software, see the *Switch Engine Upgrade Process* topic in the *Software Upgrade and Boot Options* chapter of the [Switch Engine 32.3 User Guide](#).

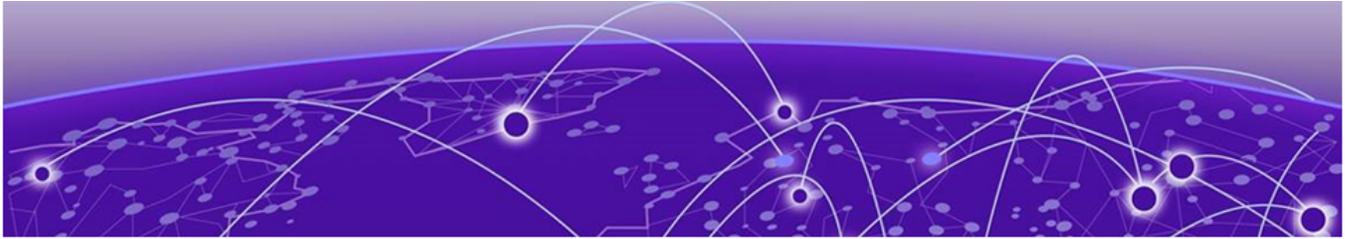

Default Switch Engine Settings

The following table shows the default settings for Switch Engine starting with version 31.6, and shows any changes that have been made to these settings and in what version these changes were made.

Table 4: Default Switch Engine Settings

Feature	31.6 and later
1G behavior in 10G ports (5420 and 5520 series switches)	Autoneg OFF for port when 1G optic is inserted in a 10G port
Account Lockout	After 3 consecutive login failures, account is locked for 5 minutes. ^a
Auto-Discovery for Universal Hardware	Enabled.
AVB	Disabled.
BFD Strict Session Protection	Disabled.
BGP	Disabled.
Bluetooth	Enabled.
BOOTP Relay	Disabled.
CDP	Enabled.
Configuration auto save	Disabled.
Clear-flow	Disabled.
Diagnostics	Admin level privileges required to show diagnostics. ^a
DHCP	Disabled.
DNS Cache Resolver and Analytics	Disabled.
IPFIX	Disabled.
IP NAT	Disabled.
EAPS	Disabled.
EDP	Enabled on management port.
ELRP	Disabled.
ESRP	Disabled.
Extended Edge Switching (VPEX)	Disabled.
ExtremeCloud IQ	Enabled
FEC	Enabled on Native 25Gb ports.


^a If you choose enhanced security mode when initially setting up the switch or after running `unconfigure switch all`.

Table 4: Default Switch Engine Settings (continued)

Feature	31.6 and later
Identity Management	Disabled.
IGMP	Enabled, set to IGMPv2 compatibility mode.
IGMP Snooping	Enabled.
Image Integrity Check	Disabled.
IP Route Compression	Enabled.
ISIS	Disabled.
LLDP	Enabled.
Log	Admin level privileges required to show log. ^a
Logging memory buffer	Generate an event when the logging memory buffer exceeds 90% of capacity. ^a
MAC Security	Disabled.
MLD	Disabled.
MLD Snooping	Disabled.
MPLS	Disabled.
MSRP	Disabled.
MSTP	Enabled.
NetLogin	All types of authentication are disabled.
NTP	Disabled.
ONEPolicy	Disabled.
Policy rule model	Hierarchical (Unless upgrading from 30.5 with a saved configuration set to access list.)
OpenFlow	Disabled.
OSPF	Disabled.
OVSDB	Disabled.
Passwords	Plain text password entry not allowed. ^a
PIM	Disabled.
PIM Snooping	Disabled.
PoE Fast PoE Perpetual PoE	Enabled. Disabled. Disabled.
RADIUS	Disabled for both switch management and network login.
RIP	Disabled.
RMON	Disabled. However, even in the disabled state, the switch responds to RMON queries and sets for alarms and events.
sFlow	Disabled.

Table 4: Default Switch Engine Settings (continued)

Feature	31.6 and later
SNMP server	Disabled. ^a
SSH	Disabled.
Stacking-support	Enabled.
Stacking auto-discovery	Enabled.
STP	Enabled.
Syslog	Disabled.
TACACS	Disabled.
Telnet	Enabled. ^a
VPEX IP Multicast Replication	BPE
VPLS	All newly created VPLS instances are enabled.
Watchdog	Enabled.
Web HTTP server	Enabled. ^a
Web HTTPS server	Disabled. ^a

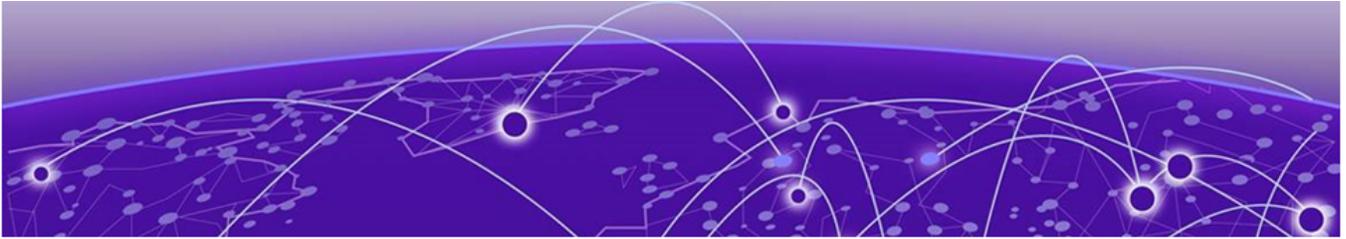


Switch Engine Image File Names

You can identify the appropriate image or module for your platform based on the file name prefix of the image.

Table 5: Switch Engine Image Types (Prefixes)

Switches	Image File Type (Prefix)
ExtremeSwitching 5320, 5420, 5520	summit_arm Example: summit_arm-31.1.0.3.xos
ExtremeSwitching 5720	onie Example: onie-32.1.1.6.x86_64.xos

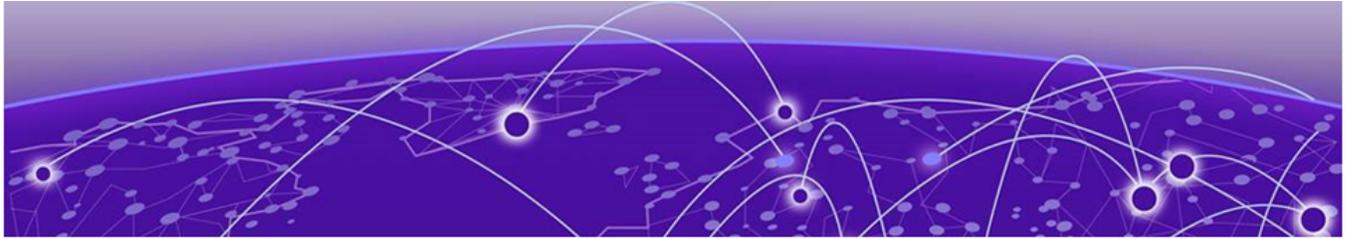

New and Corrected Features in Switch Engine 32.3

- [IPv6 transport in IPv4 GRE Tunnel on page 17](#)
- [Auto-generate SSL Certificate for HTTPS on page 18](#)
- [Automatic Configuration of Default Speed on SFP28 Transceivers on page 18](#)
- [Dynamic Name Server Limit Enhancement on page 18](#)
- [ExtremeSwitching 5520 Back-to-front Airflow Support on page 18](#)
- [Fabric Attach Triggered Signaling on page 19](#)
- [Flow Monitor Full Support on page 19](#)
- [Integrated Application Hosting Support for ExtremeSwitching 5720 on page 20](#)
- [Link Aggregation Group for Ports Supporting Different Channelization on page 21](#)
- [LRM/MACsec Adapter Support on ExtremeSwitching 5320 switches on page 22](#)
- [OSPF Inter-VR Route Redistribution on page 22](#)
- [PIM Multicast Routing Over GRE Tunnels on page 23](#)
- [Post Login Banner - Managed by ExtremeCloud IQ on page 24](#)
- [Transceiver Speed MIB Support on page 24](#)

This section lists the new and corrected features supported in the 32.3 software:

IPv6 transport in IPv4 GRE Tunnel

Version 32.3 adds the ability to transport IPv6 payloads in IPv4 GRE tunnel, allowing the GRE tunnel to be configured with multiple IPv6 addresses. ECMP is also supported for IPv6 destinations reachable via GRE tunnel. IPv6 forwarding can be enabled on the GRE tunnel that has an existing IPv6 address configured, but only one ECMP Nexthop is installed in the hardware.

Supported Platforms

All platforms.

New CLI Command

```
configure tunnel tunnel_name ipv6 tcp adjust-mss [off | on
tcp_mss_value]
```

Auto-generate SSL Certificate for HTTPS

Version 32.3 adds a security enhancement that auto-generates a Secure Socket Layer (SSL) certificate when a web HTTPS is enabled. The certificate is generated with default configurations for the following:

- Key length
- Country-code
- Organization name
- Common name:
- State
- Locality
- Organization unit
- Email

Once the certificate is successfully generated, the HTTPS login will be granted. The generation and validation of the certificate and key behaves in the same way as those that are generated through the command line.

Automatic Configuration of Default Speed on SFP28 Transceivers

Version 32.3 adds automatic configuration of the default speed on non-partitionable native SFP28 ports, based on the inserted optics. This feature can be overwritten by using port configuration commands.

Supported Platforms

ExtremeSwitching 5420 series 25G ports.

Dynamic Name Server Limit Enhancement

Version 32.3 increases the total number of name servers to 16. Previously, there was a maximum of eight DNS servers, which included both dynamic and static servers. Now, there can be eight dynamic and eight static name servers.

Supported Platforms

All ExtremeSwitching platforms.

ExtremeSwitching 5520 Back-to-front Airflow Support

Version 32.3 supports back-to-front airflow for ExtremeSwitching non-PoE switch models. The following switch models support this airflow:

- 5520-24T
- 5520-24X

- 5520-28T
- 5520-48SE

**Note**

There are no changes to existing hardware to support this feature.

**Note**

Only Extreme designated power supplies and fans should be used for back-to-front airflow.

Fabric Attach Triggered Signaling

Version 32.3 adds support for Fabric Attach triggered signaling that replaces LLDP timer triggers to create VLAN/NSI binding. This feature provides faster learning of VLAN/NSI bindings when a switch or link recovers from failure. Fabric Attach triggered signaling of VLAN/NSI mappings occurs when:

- A link between the client and proxy flaps
- A client switch reboots
- A proxy switch reboots
- A link between the server and proxy flaps
- A server switch reboots
- A new VLAN/NSI mapping is added in the client

Limitations

A proxy switch sends out the maximum of 94 VLAN/NSI mapping requests to a server based on the time the mappings are created. Only the first 94 mappings added in the VLAN/NSI DB are sent to the server for approval.

Supported Platforms

All platforms that support Fabric Attach.

Flow Monitor Full Support

Version 32.3 offers full functionality for the Flow Monitor feature, which was introduced in version 32.2 for demonstration purposes only. Flow Monitor provides IP Flow Information Export (IPFIX) and K-Mirror support based on RFC 7011 to collect and export flow records for Universal platforms. Flow Monitor builds on IPFIX by providing additional metering and exporting processes. Flow Monitor enables switches to gather information about flows through different ports on each switch and export the flow records (via UDP) to one or more remote collectors. This information can be used to analyze application and network usage, and monitor real-time network infrastructure.

Supported Platforms

This feature is supported on ExtremeSwitching 5420 and 5520 series switches.

New CLI Commands

The following new commands support Flow Monitor:

```
clear counters flowmon

configure flowmon collector collector_name

configure flowmon group group_name

configure flowmon group group_name [add | delete] collector
collector_name

configure flowmon group group_name [add | delete] key key_name

configure flowmon key key_name ipv4

configure flowmon key key_name ipv6

create flowmon collector collector_name

create flowmon group group_name

create flowmon key key_name

delete flowmon collector collector_name

delete flowmon group group_name

delete flowmon key key_name

disable flowmon

disable flowmon group group_name

enable flowmon

enable flowmon group group_name

show flowmon

show flowmon collector [collector_name | all] detail

show flowmon group group_name | all] detail

show flowmon group group_name template detail

show flowmon key [key_name | all] detail

show flowmon group group_name statistics no-refresh wide
```

Integrated Application Hosting Support for ExtremeSwitching 5720

Beginning with version 32.3, the Integrated Application Hosting (IAH) feature is supported on ExtremeSwitching 5720 series switches with a Premier license. The Integrated Application Hosting

(IAH) feature provides the ability to host guest VMs on Switch Engine-based switches. The IAH infrastructure includes:

- Switch Engine Virtualization Manager component—responsible for guest VM management and control, management of networking connectivity, management of compute resources, and complete isolation of activity from Switch Engine.
- KVM (Kernel Virtual Machine)—Linux kernel feature enabling hardware-accelerated virtualization.
- QEMU (Quick EMUlator)—an open-source emulator and hypervisor.

VMs can be packaged as either OVAs (Open Virtual Appliance) or qcow2 or any QEMU-compatible (including VMDK) disk images. In addition to a Premier license, IAH requires a Solid State Storage Device SSD-120.

Supported Platforms

The ExtremeSwitching 5720 series switch.

Supported CLI Commands

The following commands support the IAH feature:

```
create vm vm_name ova ova_file {memory memory_size} {cpus num_cpus}
create vm vm_name image image_file {memory memory_size} {cpus num_cpus}
start vm vm_name
stop vm vm_name [forceful | graceful]
enable vm vm_name auto-start
disable vm vm_name auto-start
delete vm vm_name
configure vm vm_name {add | delete} ports portlist
configure vm vm_name cpus num_cpus
configure vm vm_name memory memory_size
clear vm storage
open vm vm_name {console}
show vm {vm_name | detail}
show vm vm_name guest interfaces
```

Link Aggregation Group for Ports Supporting Different Channelization

Version 32.3 adds Link Aggregation Group (LAG) support for ports that have different maximum speed capability while operating at the same speed.

Supported Platforms

All ExtremeSwitching platforms.

LRM/MACsec Adapter Support on ExtremeSwitching 5320 switches

Version 32.3 adds LRM/MACsec adapter support for ExtremeSwitching 5320 switches. When an LRM/MACsec adapter is connected to 5320 switches, MACsec will be provided by the native switch port rather than by the adapter. A 10G license must be present to support an LRM/MACsec Adapter with 10G-LRM optics.

OSPF Inter-VR Route Redistribution

Beginning with version 32.3, the Open Shortest Path First (OSPF) Inter-VR route redistribution feature adds support for the redistribution of routes between multiple OSPF instances at the same time in different VRs. OSPF uses Route Manager to install the necessary routes in the route table of the VR where inter-VR redistribution is enabled. An Instance ID can also be configured for OSPF.

Supported Platforms

All platforms.

New CLI Commands

```
configure ospf instanceid instance-identifier
```

```
disable ospf export {vr} vr-name route-type
```

```
enable ospf export {vr} vr-name route-type [policy-map | cost cost type  
ase-type-1 | ase-type-2] {tag number} {exclude-private}
```

```
show ospf inter-vr-export
```

```
show ospf inter-vr-export {detail}
```

Changed CLI Commands

```
configure iproute {ipv4} priority [auto-peering | blackhole | bootp  
| ebgp | host-mobility | ibgp | icmp | isis | isis-level-1 | isis-  
level-1-external | isis-level-2 | isis-level-2-external | mpls | ospf-  
as-external | ospf-extern1 | ospf-extern2 | ospf-inter | ospf-intra |  
rip | static | evpn | ospf-inter-vr] priority {vr vrname}
```

```
show iproute {ipv4} {priority | vlan vlan_name | permanent | ip_address  
netmask | summary} {multicast | unicast} {vr vrname}
```

```
show iproute {ipv4} [{mpls}] [{vlan} name | lsp lsp_name | ipaddress  
netmask | ipNetmask | origin [direct | static | blackhole | rip | bootp  
| icmp | ospf | ospf-intra | ospf-inter | ospf-extern1 | ospf-extern2  
| bgp | ebgp | ibgp | isis | isis | isis-level-1 | isis-level-2 | isis-  
level-1-external | isis-level-2-external | host-mobility | auto-peering
```

```
| mpls | evpn {signaling-protocol [ldp | rsvp-te | static]} | ospf-
inter-vr]] {unicast} {vr vrname}
```

```
show ospf
```

```
unconfigure iproute {ipv4} priority [all | blackhole | bootp | ebgp |
ibgp | icmp | isis | isis-level-1 | isis-level-1-external | isis-level-2
| isis-level-2-external | mpls | ospf-as-external | ospf-extern1 | ospf-
extern2 | ospf-inter | ospf-intra | rip | static | evpn | ospf-inter-vr]
{vr vrname}
```

PIM Multicast Routing Over GRE Tunnels

Version 32.3 adds the ability to configure IPv4 Protocol Independent Multicast (PIM) traffic over GRE tunnels. PIM control packets are exchanged between GRE tunnel endpoints across the GRE tunnel, forming a PIM neighborhood across the GRE tunnel. Similar to IPv4 unicast support on GRE tunnels, multicast data packets are routed from a tenant interface to the far end of the IPv4 GRE tunnel. The IPv4 next-hop for the multicast packets is the IPv4 tunnel IP of the BGP neighbor.

Supported Platforms

ExtremeSwitching 5520 and 5720 series switches.

Limitations

This feature has the following limitations:

- The maximum number of GRE tunnels supported is 64.
- The maximum number of VRs supported is 32.
- Routing across VRs is not supported.
- IPv6 multicast routing over tunnel is not supported.
- MSDP is not supported with this feature.
- This feature is not supported on a stack.

New CLI Commands

The following new CLI commands support this feature:

```
configure pim {ipv4} add {tunnel} [tunnel_name | tunnel all] {sparse |
dense} {passive}
```

```
configure pim {ipv4} delete tunnel [tunnel_name | tunnel all]
```

```
configure pim {ipv4} timer hello_interval jp_interval [{tunnel}
tunnel_name | tunnel all]
```

```
configure pim {ipv4} [{tunnel} tunnel_name | tunnel all] dr-priority
priority
```

```
disable ipmcforwarding {tunnel tunnel_name}
```

```
disable pim {ipv4} ssm tunnel [tunnel_name | tunnel all]

enable ipmcforwarding {tunnel tunnel_name}

enable pim {ipv4} ssm tunnel [tunnel_name | tunnel all]

show pim tunnel

unconfigure pim {ipv4}{tunnel tunnel_name}
```

Post Login Banner - Managed by ExtremeCloud IQ

Beginning with version 32.3, systems managed by ExtremeCloud IQ will receive the following login message at the start of a CLI shell session:

```
Warning: This system is connected to ExtremeCloud IQ!
Do not make changes directly from this CLI unless you know they
do not conflict with configuration managed by ExtremeCloud IQ.
```

Supported Platforms


All Universal platforms.

Transceiver Speed MIB Support

Version 32.3 introduces transceiver speed MIB capabilities support for ExtremeCloud IQ. With this feature, ExtremeCloud IQ will only allow port speeds that are supported by the transceiver to be pushed to the switch. If the transceiver supports more than one speed, the MIB will only report the speed that the operating system supports.

Supported Platforms

All Universal platforms.

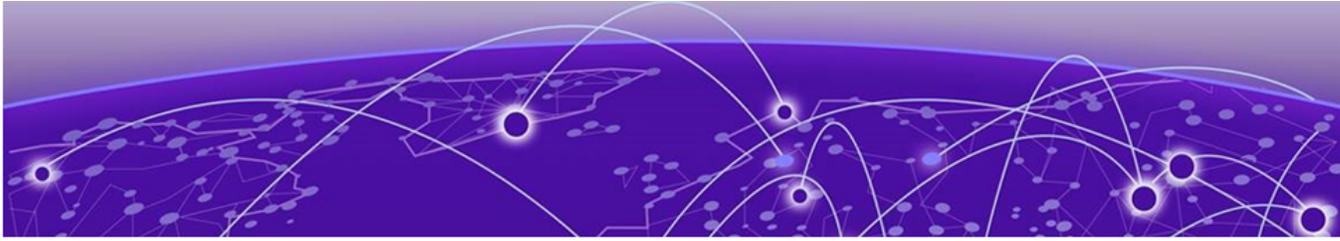

Changing the Network Operating System

ExtremeSwitching Universal Hardware switches can run two different operating systems: Switch Engine (default) or Fabric Engine.

Making Your Initial Network Operating System Selection

You can make your initial selection of the operating system using:

- **ExtremeCloud™ IQ** (see [ExtremeCloud IQ Agent Support](#) on page 27)—You can select your network operating system when purchasing your switch, which associates the switch serial number with your desired network operating system, which then causes the desired network operating system to be loaded during ExtremeCloud onboarding. For more information about using ExtremeCloud IQ, go to <https://www.extremenetworks.com/support/documentation/extremecloud-iq/>.
- **Extreme Management Center**— see [Extreme Management Center User Guide](#)
- **Manually during boot-up:**
 - **Bootloader**—When you see the message `Starting Default Bootloader ...Press` and hold the `<spacebar>` to enter the bootrom, press and hold the **space bar** until the boot menu is displayed (you have 30 seconds):

```
*** 5320-48T-8XE Boot Menu ( 3.4.2.8 ) ***

EXOS: Default
EXOS: Primary 32.1.1.6
EXOS: Secondary 32.1.1.6
EXOS: Primary 32.1.1.6 with default configuration
EXOS: Secondary 32.1.1.6 with default configuration
EXOS: Rescue
Change the switch OS to VOSS
Run Manufacturing Diagnostics
Update bootloader
Reboot system
```

Use the **up** and **down** arrow keys to select `Change the switch OS to VOSS`, and then press **Enter**.



Note

The 5720 Series uses the **GRUB** menu. There is no need to press and hold the **space bar**. Use the **up** and **down** arrow keys to navigate the menu.

- **Safe defaults mode start-up menu**—When the question `Would you like to change the switch OS to VOSS? [y/N/q]` is displayed:
 - For Switch Engine, type `N`.
 - For Fabric Engine, type `y`.

Continue to log onto the switch. For more information about logging onto the switch, see the [Switch Engine 32.3 User Guide](#).

Changing Your Network Operating System

You can change your network operating system selection at any time.



Caution

Changing your network operating systems deletes all configuration files, debug information, logs, events, and statistics information of the previous network operating system.



Note


If you anticipate ever changing the operating system to Fabric Engine, and you want to statically assign IP addresses on the DHCP server, then it is recommended to assign them based on the DHCP client ID. For more information about this issue, see the [Using a BOOTP or DHCP Server](#) topic in the [Switch Engine 32.3 User Guide](#).

- **ExtremeCloud IQ**—See <https://www.extremenetworks.com/support/documentation/extremecloud-iq/>
- **Extreme Management Center**—See [Extreme Management Center User Guide](#)
- **CLI Command**—run the `download [url url {vr vrname} | image [active | inactive] [[hostname | ipaddress] filename {{vr} vrname} {block-size block_size}] {partition} {install {reboot}}` command specifying a VOSS image.



Note

Do *not* use the **active**, **inactive**, and **partition** options. They are not applicable for Fabric Engine.

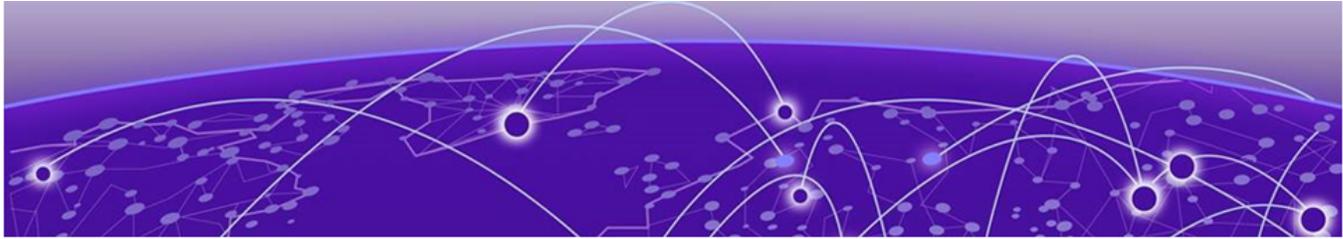

ExtremeCloud IQ Agent Support

Switch Engine supports ExtremeCloud IQ. For network administrators looking for unified management of access points, switches, & routers, ExtremeCloud IQ is a cloud-driven network management application that:

- simplifies network operations through an easy to use and intuitive interface, including minimal touch onboarding of devices
- provides ultimate flexibility in deployment choice, cloud platform choice, OS choice
- offers unlimited data duration for more informed networking decisions



Important

Check the ExtremeCloud IQ release notes to ensure support for your version has been added before upgrading.

This release supports device discovery, basic monitoring, visibility into homogenous stacking, and the ability to configure an optional user-defined virtual router (VR) and address of the server for ExtremeCloud IQ agent to connect to. These values are used instead of any auto-detected values.


For more information about ExtremeCloud IQ, go to <https://www.extremenetworks.com/support/documentation/extremecloud-iq/>.

Table 6: Supported Platforms

Switch Series	Switch Models
ExtremeSwitching 5320	5320-48T-8XE 5320-48P-8XE 5320-24T-8XE 5320-24P-8XE 5320-16P-4XE 5320-16P-4XE-DC
ExtremeSwitching 5420	5420F-8W-16P-4XE 5420F-24P-4XE 5420F-24S-4XE 5420F-24T-4XE 5420F-16MW-32P-4XE 5420F-16W-32P-4XE 5420F-48P-4XE 5420F-48P-4XL 5420F-48T-4XE 5420M-24T-4YE 5420M-24W-4YE 5420M-16MW-32P-4YE 5420M-48T-4YE 5420M-48W-4YE

Table 6: Supported Platforms (continued)

Switch Series	Switch Models
ExtremeSwitching 5520	5520-24T 5520-24W 5520-48T 5520-48W 5520-12MW-36W 5520-24X 5520-48SE
ExtremeSwitching 5720	5720-24MW 5720-24MXW 5720-48MW 5720-48MXW

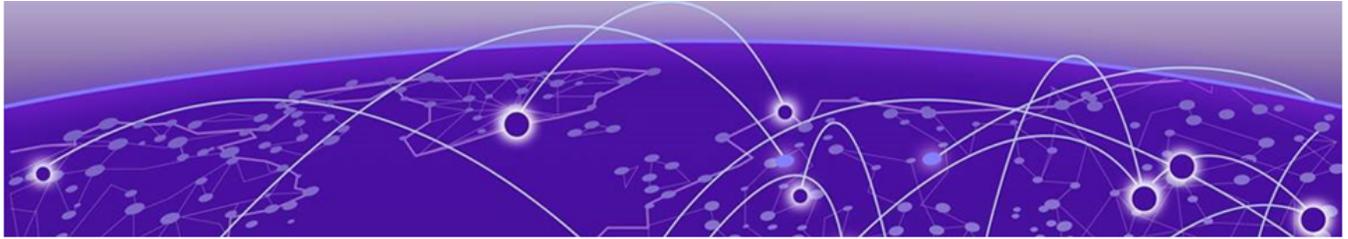


Extreme Hardware/Software Compatibility and Recommendation Matrices

ExtremeXOS and Switch Engine Software Support provides information about the minimum version of software required to support switches.

The Extreme Optics Compatibility website displays supported hardware platforms, technical specifications, and usage considerations for pluggable optical devices (transceivers and cables) used in all Extreme Networks operating environments. To access the site, open <https://optics.extremenetworks.com/EXOS/> in a web browser.

To find the recommended Switch Engine releases for Universal Hardware platforms, see *ExtremeXOS and Switch Engine Release Recommendations*.

The latest versions of this and other Switch Engine guides are at: www.extremenetworks.com/documentation/.

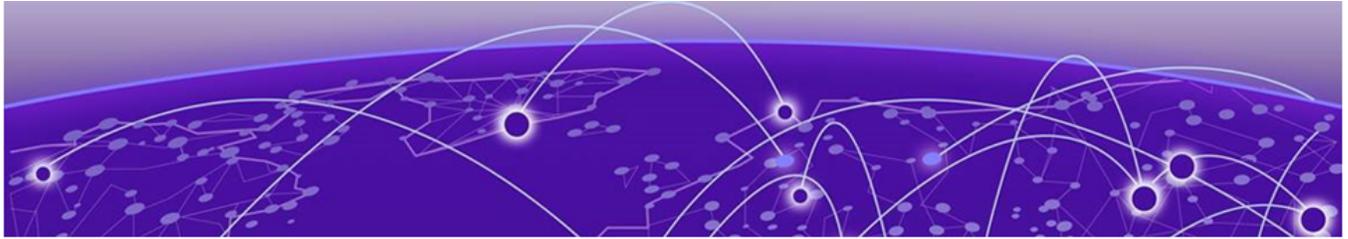


Compatibility with ExtremeCloud IQ - Site Engine

Switch Engine 32.3 is compatible with the version of ExtremeCloud IQ - Site Engine as shown in this table: http://emc.extremenetworks.com/content/common/releasenotes/extended_firmware_support.htm

Switch Engine 32.3 is compatible with ExtremeCloud IQ - Site Engine version 22.3 or later. Older versions (including Extreme Management Center) will not recognize devices running Switch Engine.

The ExtremeCloud IQ - Site Engine version 22.6 and Switch Engine version 32.1 can be used to onboard and manage the 5720 product line in non-production (demo/lab only) environments. For deployment in the production environment, an upgrade is required to both the Switch Engine firmware and the ExtremeCloud IQ - Site Engine version.

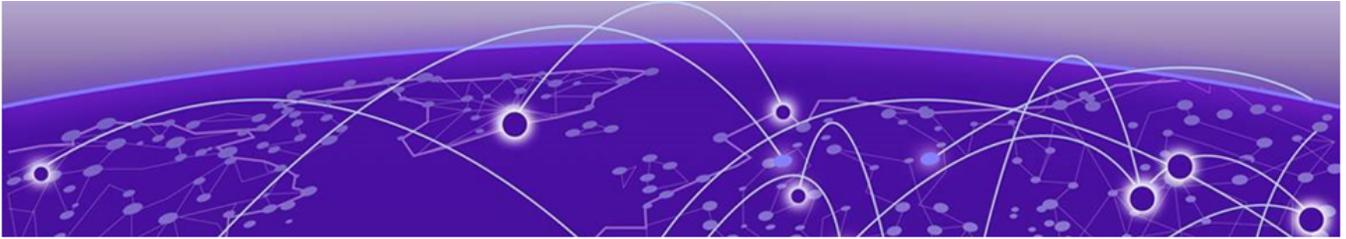


Supported MIBs

The Extreme Networks management information bases (MIBs) are located at www.extremenetworks.com/support/policies/mibs/.

When you provide your serial number or agreement number, the MIBs are available under each release.

For detailed information on which MIBs and SNMP traps are supported, see the *Extreme Networks Proprietary MIBs* and *MIB Support Details* sections in the [Switch Engine 32.3 User Guide](#).

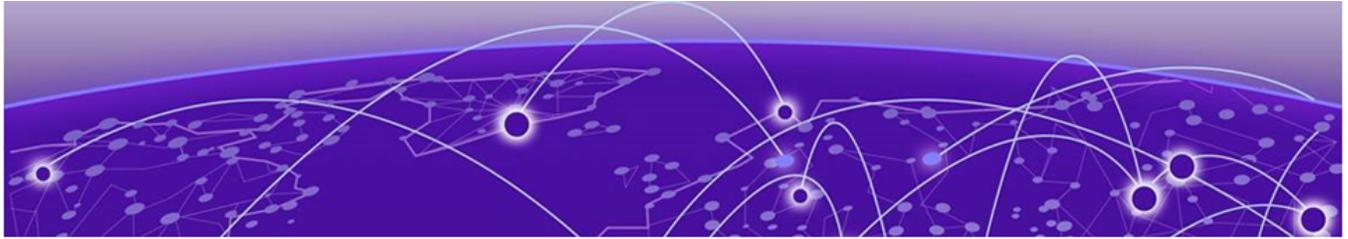


Tested Third-Party Products

The following third-party products have been tested for Switch Engine 32.3.

Tested RADIUS Servers

The following RADIUS servers are fully tested:

- Microsoft—Internet Authentication Server
- Meetinghouse
- FreeRADIUS

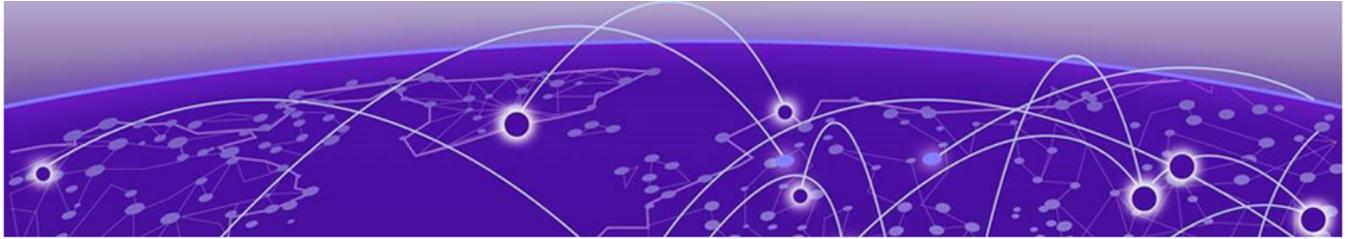

Extreme Switch Security Assessment

DoS Attack Assessment

Tools used to assess DoS attack vulnerability:

- Network Mapper (NMAP)

ICMP Attack Assessment


Tools used to assess ICMP attack vulnerability:

- SSPing
- Twinge
- Nuke
- WinFreeze

Port Scan Assessment

Tools used to assess port scan assessment:

- Nessus

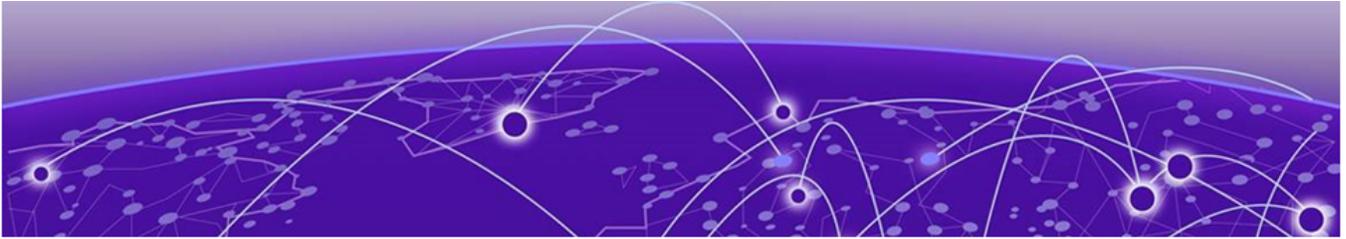

Limits

[Limits Overview](#) on page 34

[Base License Limits](#) on page 36

[Premier License Limits](#) on page 64

[Notes for Limits Tables](#) on page 70

This chapter summarizes the supported limits in Switch Engine 32.3.

Limits Overview

The limits data is grouped by license level that contains the associated features:

- [Base License Limits](#) on page 36
- [Premier License Limits](#) on page 64

The ExtremeSwitching Universal family of switches includes two license levels: Base and Premier.

The following figure illustrates that each license level builds on the features of the license level below it. For example, the Premier license includes all of the features in the Base license, plus the features in the Premier license level.



Figure 1: License Levels for non-Universal and Universal Switches

For more information about licenses, see [Switch Engine 32.3 Feature License Requirements](#).

The following tables summarize tested metrics for a variety of features, as measured in a per-system basis unless otherwise noted. These limits may change, but represent the current status. The contents of this table supersede any values mentioned in the Switch Engine books.

The scaling and performance information shown in the following tables is provided for the purpose of assisting with network design. It is recommended that network architects and administrators design and manage networks with an appropriate level of network scaling “head room.” The scaling and performance figures provided have been verified using specific network topologies using limited switch configurations. There is no guarantee that the scaling and performance figures shown are applicable to all network topologies and switch configurations and are provided as a realistic estimation only. If you experience scaling and performance characteristics that you feel are sufficiently below what has been documented, contact Extreme Networks technical support for additional assistance.

The route limits shown in the following tables for IPv4 and IPv6 routing protocols are software limits only. The actual hardware limits may be higher or lower than the software limits, based on platform. The hardware limits for specific platforms are specified as “IPv4/IPv6 routes (LPM entries in hardware)” in the following tables.

In the Extended Edge Switching architecture, Layer-2, Layer-3, and multicast packet forwarding and filtering operations take place on the controlling bridge. The controlling bridge switch and attached BPEs (V400 Virtual Port Extenders) constitute a single, extended switch system. Therefore, the Extended Edge Switching system assumes the scale and limits from the specific controlling bridge model in use. For applicable limits, see the following tables for the controlling bridge you are using.

Base License Limits

The following table shows supported limits for features in the Base License.

Table 7: Supported Limits for the Base License

Metric	Product	Limit
Access lists (meters)—maximum number of meters.	ExtremeSwitching 5320	6,144 ingress 512 egress
	ExtremeSwitching 5420	6,144 ingress 512 egress
	ExtremeSwitching 5520	2,048 ingress 512 egress
	ExtremeSwitching 5720-MW	6,144 ingress 3,072 egress
	ExtremeSwitching 5720-MXW	6,144 ingress 6,144 egress
Access lists (policies)—suggested maximum number of lines in a single policy file.	ExtremeSwitching 5320, 5420, 5520, 5720	300,000

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Access lists (policies) —maximum number of rules in a single policy file. ^a	ExtremeSwitching 5320-48T/P	8,192 ingress 1,024 egress
	ExtremeSwitching 5320-24T/P, 5320-16P	8,192 ingress 512 egress
	ExtremeSwitching 5420M	18,000 (rules double-wide (160-bit)) ingress 36,000 (rules single-wide (80-bit, default)) ingress 1,024 egress
	ExtremeSwitching 5420F	8,000 (rules double-wide (160-bit)) ingress 16,000 (rules single-wide (80-bit, default)) ingress 1,024 egress
	ExtremeSwitching 5520	9,216 ingress 1,024 egress
	ExtremeSwitching 5720-MW	18,432 (80-bit) ingress 8,192 egress
	ExtremeSwitching 5720-MXW	36,864 (80-bit), 18,432 (160-bit) ingress 12,288 egress
Access lists (policies) —maximum number of rules in a single policy file in first stage (VFP).	ExtremeSwitching 5520, 5720	2,048 ingress only
	ExtremeSwitching 5320-48T/P, 5420	1,024 ingress only
	ExtremeSwitching 5320-16P	512 ingress only
Access lists (slices) —number of ACL slices.	ExtremeSwitching 5720	12 ingress 4 egress
	ExtremeSwitching 5320-48T/P, 5420, 5520	18 ingress 4 egress
	ExtremeSwitching 5320-24T/P, 5320-16P	8 ingress 4 egress

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Access lists (slices) —number of ACL slices in first stage (VFP).	ExtremeSwitching 5320, 5420, 5520, 5720	4 ingress only
ACL Per Port Meters —number of meters supported per port.	ExtremeSwitching 5320, 5420, 5520, 5720	16
ACL port ranges.	ExtremeSwitching 5320, 5420, 5520, 5720	32
Meters Packets-Per-Second Capable.	ExtremeSwitching 5320, 5420, 5520, 5720	N/A
AVB (audio video bridging) —maximum number of active streams.	ExtremeSwitching 5320, 5420 ExtremeSwitching 5520, 5720	1,024 4,096
BFD sessions (Software Mode) —maximum number of BFD sessions.	ExtremeSwitching 5420, 5520, 5720 (default timers—1 sec)	512
BGP (peers) —maximum number of BGP peers.	ExtremeSwitching 5320, 5420, 5520, 5720	2
BGP auto-peering —maximum number of auto-peering nodes and VTEPs.	ExtremeSwitching 5320, 5420, 5520, 5720	64
BGP auto-peering attached IPv4 hosts — maximum number of attached IPv4 hosts.	ExtremeSwitching 5320, 5420, 5520, 5720	64,000
BGP auto-peering attached IPv6 hosts — maximum number of attached IPv6 hosts.	ExtremeSwitching 5320, 5420, 5520, 5720	8,000
BGP auto-peering ECMP —maximum number of equal cost multipath for auto-peering. Note: * Subject to the limitation imposed by the number of physical ports on a switch.	ExtremeSwitching 5720 ExtremeSwitching 5320, 5420, 5520	16* 4*
BGP auto-peering maximum IPv4 prefixes with ECMP —Maximum number of IPv4 Network prefixes with ECMP.	ExtremeSwitching 5320, 5420, 5520, 5720	16,000
BGP auto-peering maximum IPv6 prefixes with ECMP —Maximum number of IPv6 Network prefixes with ECMP.	ExtremeSwitching 5320, 5420, 5520, 5720	254
BGP auto-peering MLAG peers —maximum MLAG peers per AutoBGP node.	ExtremeSwitching 5320, 5420, 5520, 5720	1
BGP auto-peering VRFs —maximum number of VRFs.	ExtremeSwitching 5320, 5420, 5520, 5720	64

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
BGP auto-peering EVPN instances —maximum EVPN instances.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
BOOTP/DHCP relay —maximum number of BOOTP or DHCP servers per virtual router.	ExtremeSwitching 5320, 5420, 5520, 5720	8
BOOTP/DHCP relay —maximum number of BOOTP or DHCP servers per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
BOOTP/DHCP relay —maximum number of DHCPv4/v6 relay agents	ExtremeSwitching 5320, 5420, 5520, 5720	4,000
Connectivity fault management (CFM) —maximum number of CFM domains.	ExtremeSwitching 5320, 5420, 5520, 5720	8
CFM —maximum number of CFM associations.	ExtremeSwitching 5320, 5420, 5520, 5720	256
CFM —maximum number of CFM up end points.	ExtremeSwitching 5320, 5420, 5520, 5720	32
CFM —maximum number of CFM down end points.	ExtremeSwitching 5320, 5420, 5520, 5720	32
CFM —maximum number of CFM remote end points per up/down end point.	ExtremeSwitching 5320, 5420, 5520, 5720	2,000
CFM —maximum number of dot1ag ports.	ExtremeSwitching 5320, 5420, 5520, 5720	128
CFM —maximum number of CFM segments.	ExtremeSwitching 5320, 5420, 5520, 5720	1,000
CFM —maximum number of MIPs.	ExtremeSwitching 5320, 5420, 5520, 5720	256
CLEAR-Flow —total number of rules supported. The ACL rules plus CLEAR-Flow rules must be less than the total number of supported ACLs.	ExtremeSwitching 5320, 5420, 5720	8,192
	ExtremeSwitching 5520	9,215
Data Center Bridging eXchange (DCBX) protocol Type Length Value (TLVs) —maximum number of DCBX application TLVs.	ExtremeSwitching 5320, 5420, 5520, 5720	8

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
DHCPv6 Prefix Delegation Snooping —Maximum number of DHCPv6 prefix delegation snooped entries.	ExtremeSwitching 5320, 5420, 5520, 5720	256 (with underlying protocol RIPng) 128 (with underlying protocol OSPFv3) 1,024 (with static routes)
DHCP snooping entries —maximum number of DHCP snooping entries.	ExtremeSwitching 5320, 5420, 5520, 5720	2,050
Dynamic ACLs —maximum number of ACLs processed per second. Note: Limits are load-dependent.	ExtremeSwitching 5320, 5420, 5520, 5720 with 50 DACLs with 500 DACLs	10 5
EAPS domains —maximum number of EAPS domains. Note: An EAPS ring that is being spatially reused cannot have more than four configured EAPS domains.	ExtremeSwitching 5720 ExtremeSwitching 5320-24T/P, 5320-16P ExtremeSwitching 5320-48T/P, 5420, 5520	128 32 64
EAPSV1 protected VLANs —maximum number of protected VLANs.	ExtremeSwitching 5320-24T/P, 5320-16P ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	1,000 2,000
EAPSV2 protected VLANs —maximum number of protected VLANs.	ExtremeSwitching 5320, 5420, 5520 ExtremeSwitching 5720	500 2,000
ELSM (vlan-ports) —maximum number of VLAN ports.	ExtremeSwitching 5320-24T/P, 5320-16P ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	4,000 5,000
ERPS domains —maximum number of ERPS domains with or without CFM configured.	ExtremeSwitching 5320, 5420, 5520, 5720	32
ERPSv1 protected VLANs —maximum number of protected VLANs.	ExtremeSwitching 5320-24T/P, 5320-16P ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	1,000 2,000
ERPSv2 protected VLANs —maximum number of protected VLANs.	ExtremeSwitching 5320-24T/P, 5320-16P ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	500 2,000
ESRP groups —maximum number of ESRP groups	ExtremeSwitching 5320, 5420, 5520, 5720	32
ESRP domains —maximum number of ESRP domains.	ExtremeSwitching 5320, 5420, 5520, 5720	64

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
ESRP L2 VLANs —maximum number of ESRP VLANs without an IP address configured.	ExtremeSwitching 5320, 5420, 5520, 5720	1,000
ESRP L3 VLANs —maximum number of ESRP VLANs with an IP address configured.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720 ExtremeSwitching 5320-24T/P, 5320-16P	511 509
ESRP (maximum ping tracks) —maximum number of ping tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
ESRP (IP route tracks) —maximum IP route tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
ESRP (VLAN tracks) —maximum number of VLAN tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	1
Extended Edge Switching maximum BPEs —maximum number of attached bridge port extenders (BPEs).	ExtremeSwitching 5520 ExtremeSwitching 5420	48 20
Extended Edge Switching maximum cascade ports —maximum number of upstream ports on bridge port extenders (BPEs).	ExtremeSwitching 5420, 5520	2 on V400-24 and V300 models 4 on V400-48 models
Extended Edge Switching maximum tiers —maximum number of cascade levels (tiers) of bridge port extenders (BPEs).	ExtremeSwitching 5420, 5520	4 (except for V300-8P-2T-W, which support 1 tier)
Extended Edge Switching maximum ring BPEs —maximum number of bridge port extenders (BPEs) in a ring topology.	ExtremeSwitching 5420, 5520	8
Extended Edge Switching maximum VLANs —maximum number of VLANs - Includes all VLANs	ExtremeSwitching 5520 ExtremeSwitching 5420	4,094 1,024
Extended Edge Switching VLAN+ port memberships —maximum number of VLAN+ (extended) port memberships.	ExtremeSwitching 5520 ExtremeSwitching 5420	12,000 in hash mode (default) 131,000 in port-group mode 8,750 in hash mode (default) 131,617 in port-group mode

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Forwarding rate —maximum L3 software forwarding rate.	ExtremeSwitching 5320-48P	19,142 pps
	ExtremeSwitching 5420F-48T	21,585 pps
	ExtremeSwitching 5520-24T	18,838 pps
	ExtremeSwitching 5720-MW	27,000 pps
	ExtremeSwitching 5720-MXW	31,000 pps
FDB (unicast blackhole entries) —maximum number of unicast blackhole FDB entries.	ExtremeSwitching 5320	32,000
	ExtremeSwitching 5420M	65,536
	ExtremeSwitching 5420F	32,768 ^f
	ExtremeSwitching 5520	114,688 ^f
	ExtremeSwitching 5720-MW	163,840 ^f
	ExtremeSwitching 5720-MXW	294,912 ^f
FDB (multicast blackhole entries) —maximum number of multicast blackhole FDB entries.	ExtremeSwitching 5520, 5720-MW	4,096
	ExtremeSwitching 5420	1,024
	ExtremeSwitching 5320	1,000
	ExtremeSwitching 5720-MXW	16,000
FDB (maximum L2 entries) —maximum number of MAC addresses.	ExtremeSwitching 5320	32,000
	ExtremeSwitching 5420M	65,536
	ExtremeSwitching 5420F	32,768 ^g
	ExtremeSwitching 5520	114,688 ^g
	ExtremeSwitching 5720-MW	163,840 ^g
	ExtremeSwitching 5720-MXW	294,912 ^g
FDB (maximum L2 entries) —maximum number of multicast FDB entries.	ExtremeSwitching 5520	4,096
	ExtremeSwitching 5320, 5420	1,024
	ExtremeSwitching 5720	16,000
Identity management —maximum number of Blacklist entries.	ExtremeSwitching 5320, 5420, 5520, 5720	512
Identity management —maximum number of Whitelist entries.	ExtremeSwitching 5320, 5420, 5520, 5720	512
Identity management —maximum number of roles that can be created.	ExtremeSwitching 5320, 5420, 5520, 5720	64
Identity management —maximum role hierarchy depth allowed.	ExtremeSwitching 5320, 5420, 5520, 5720	5
Identity management —maximum number of attribute value pairs in a role match criteria.	ExtremeSwitching 5320, 5420, 5520, 5720	16

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Identity management —maximum number of child roles for a role.	ExtremeSwitching 5320, 5420, 5520, 5720	8
Identity management —maximum number of policies/dynamic ACLs that can be configured per role.	ExtremeSwitching 5320, 5420, 5520, 5720	8
Identity management —maximum number of LDAP servers that can be configured.	ExtremeSwitching 5320, 5420, 5520, 5720	8
Identity management —maximum number of Kerberos servers that can be configured.	ExtremeSwitching 5320, 5420, 5520, 5720	20
Identity management —maximum database memory size.	ExtremeSwitching 5320, 5420, 5520, 5720	512
Identity management —recommended number of identities per switch. Note: Number of identities per switch is for a default identity management database size (512 Kbytes) across all platforms.	ExtremeSwitching 5320, 5420, 5520, 5720	100
Identity management —recommended number of ACL entries per identity. Note: Number of ACLs per identity, based on system ACL limitation.	ExtremeSwitching 5320, 5420, 5520, 5720	20
Identity management —maximum number of dynamic ACL entries configured as an individual dynamic rule, or as an ACL entry in a policy file.	ExtremeSwitching 5320, 5420, 5520, 5720	500
IGMP snooping per VLAN filters —maximum number of VLANs supported in per-VLAN IGMP snooping mode.	ExtremeSwitching 5320, 5420 ExtremeSwitching 5720 ExtremeSwitching 5520	1,500 4,000 2,500
IGMPv1/v2 SSM-map entries —maximum number of IGMPv1/v2 SSM mapping entries.	ExtremeSwitching 5320, 5420, 5520, 5720	500
IGMPv1/v2 SSM-map entries —maximum number of sources per group in IGMPv1/v2 SSM mapping entries.	ExtremeSwitching 5320, 5420, 5520, 5720	50
IGMPv2 subscriber —maximum number of IGMPv2 subscribers per port. ⁿ	ExtremeSwitching 5320, 5420, 5520, 5720	4,000

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
IGMPv2 subscriber—maximum number of IGMPv2 subscribers per switch. ⁿ	ExtremeSwitching 5320, 5420, 5520	20,000
	ExtremeSwitching 5720-MW	45,000
	ExtremeSwitching 5720-MXW	54,000
IGMPv3 maximum source per group—maximum number of source addresses per group.	ExtremeSwitching 5320, 5420, 5520, 5720	250
IGMPv3 subscriber—maximum number of IGMPv3 subscribers per port. ⁿ	ExtremeSwitching 5320, 5420, 5520, 5720	4,000
IGMPv3 subscriber—maximum number of IGMPv3 subscribers per switch. ⁿ	ExtremeSwitching 5320, 5420, 5520	20,000
	ExtremeSwitching 5720-MW	45,000
	ExtremeSwitching 5720-MXW	54,000
IP ARP entries in software—maximum number of IP ARP entries in software. Note: Might be limited by hardware capacity of FDB (maximum L2 entries).	ExtremeSwitching 5320, 5520	74,750 ^h
	ExtremeSwitching 5420M models	24,000
	ExtremeSwitching 5420F models	12,000
	ExtremeSwitching 5720-MW	100,000
	ExtremeSwitching 5720-MXW	221,000
IPv4 ARP entries in hardware with minimum LPM routes—maximum recommended number of IPv4 ARP entries in hardware, with minimum LPM routes present. Assumes number of IP route reserved entries is 100 or less.	ExtremeSwitching 5320	12,000
	ExtremeSwitching 5420M models	24,000
	ExtremeSwitching 5420F models	12,000
	ExtremeSwitching 5520	60,000 ^h
	ExtremeSwitching 5720-MW	80,000 ^h
	ExtremeSwitching 5720-MXW	172,000 ^h
IPv4 ARP entries in hardware with maximum LPM routes—maximum recommended number of IPv4 ARP entries in hardware, with maximum LPM routes present. Assumes number of IP route reserved entries is “maximum.”	ExtremeSwitching 5320	10,000
	ExtremeSwitching 5420M models	21,000
	ExtremeSwitching 5420F models	10,000
	ExtremeSwitching 5520	49,000 ^h
	ExtremeSwitching 5720-MW	70,000 ^h
	ExtremeSwitching 5720-MXW	156,000 ^h

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
IP flow information export (IPFIX) —number of simultaneous flows.	ExtremeSwitching 5320	N/A
	ExtremeSwitching 5420	4,000 (IPv4 and IPv6 flows)
	ExtremeSwitching 5520	32,000 (IPv4 flows) 18,000 (IPv6 flows)
	ExtremeSwitching 5720	257,000 (IPv4 flows) 112,000 (IPv6 flows)
IPv4 remote hosts in hardware with zero LPM routes —maximum recommended number of IPv4 remote hosts (hosts reachable through a gateway) in hardware when LPM routing is not used. Assumes number of IP route reserved entries is 0, and number of IPv4 ARP entries present is 100 or less.	ExtremeSwitching 5320	20,000
	ExtremeSwitching 5320-24T/P, 5320-16P	24,000
	ExtremeSwitching 5420M	36,000
	ExtremeSwitching 5420F	24,000 ^h
	ExtremeSwitching 5520	102,000 ^h
	ExtremeSwitching 5720-MW ExtremeSwitching 5720-MXW (with ALPM enabled)	139,000 ^h 245,000 ^h
IPv4 routes —maximum number of IPv4 routes in software (combination of unicast and multicast routes), including static and from all routing protocols.	ExtremeSwitching 5520	81,000
	ExtremeSwitching 5320, 5420	25,000
	ExtremeSwitching 5720-MW	163,000
	ExtremeSwitching 5720-MXW	288,000
IPv4 routes (LPM entries in hardware) — number of IPv4 routes in hardware.	ExtremeSwitching 5520	81,000 ^q
	ExtremeSwitching 5720-MW	163,000 ^q
	ExtremeSwitching 5720-MXW	288,000 ^q
IPv6 6in4 tunnel —maximum number of IPv6 6in4 tunnels.	ExtremeSwitching 5320, 5420, 5520, 5720	255
IPv6 6to4 tunnel —maximum number of IPv6 6to4 tunnels.	ExtremeSwitching 5320, 5420, 5520, 5720	1 (per virtual router)
IPv6 addresses on an interface —maximum number of IPv6 addresses on an interface.	ExtremeSwitching 5320, 5420, 5520, 5720	255
IPv6 addresses on a switch —maximum number of IPv6 addresses on a switch.	ExtremeSwitching 5320, 5420, 5520, 5720	2,048

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
IPv6 host entries in hardware —maximum number of IPv6 neighbor entries in hardware.	ExtremeSwitching 5320	6,000
	ExtremeSwitching 5420M models	12,000
	ExtremeSwitching 5420F models	6,000
	ExtremeSwitching 5520	18,000 ^s
	ExtremeSwitching 5720-MW	24,000 ^s
	ExtremeSwitching 5720-MXW	78,000 ^s
IPv6 routes in software —maximum number of IPv6 routes in software, including static routes and routes from all routing protocols.	ExtremeSwitching 5520	18,000 ^q
	ExtremeSwitching 5320, 5420	25,000
	ExtremeSwitching 5720-MW	107,000 ^q
	ExtremeSwitching 5720-MXW	213,000 ^q
IPv6 routes (LPM entries in hardware) —maximum number of IPv6 routes in hardware.	ExtremeSwitching 5520	40,000 ^q
	ExtremeSwitching 5420	6,000
	ExtremeSwitching 5720-MW	107,000 ^q
	ExtremeSwitching 5720-MXW	213,000 ^q
IPv6 routes with a mask greater than 64 bits in hardware —maximum number of such IPv6 LPM routes in hardware.	ExtremeSwitching 5320, 5420	256
	ExtremeSwitching 5520	8,192 ^r
	ExtremeSwitching 5720-MW	16,000 ^r
	ExtremeSwitching 5720-MXW	24,000 ^r
IPv6 route sharing in hardware —route mask lengths for which ECMP is supported in hardware.	ExtremeSwitching 5320, 5420	0–64, >64 single path only
	ExtremeSwitching 5520, 5720	0–128 ^r
IP router interfaces —maximum number of VLANs performing IPv4 and/or IPv6 routing. Excludes sub-VLANs.	ExtremeSwitching 5320-48T/P, 5420	1,533
	ExtremeSwitching 5320-24T/P, 5320-16P	509
	ExtremeSwitching 5520, 5720	2,048
IP multicast static routes —maximum number of permanent multicast IP routes.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
IP unicast static routes —maximum number of permanent IP unicast routes.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
IP route sharing (maximum gateways)—Configurable maximum number of gateways used by equal cost multipath OSPF, BGP, IS-IS, static routes, or L2VPNs. Static routes, OSPF, and BGP are limited to 64 ECMP gateways per destination, while IS-IS is limited to 8. L2VPNs are limited to 16 LSPs per pseudowire on platforms that support 32 gateways, and 64 LSPs per pseudowire on platforms that support 64 gateways.	ExtremeSwitching 5320, 5420, 5520	2, 4, or 8
	ExtremeSwitching 5720	2, 4, 8, 16, 32, or 64

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
IP route sharing (total combinations of gateway sets)—maximum number of combinations of sets of adjacent gateways used by multipath OSPF, BGP, IS-IS, or static routes.	ExtremeSwitching 5320	128 (if maximum gateways is 2) 128 (if maximum gateways is 4) 64 (if maximum gateways is 8)
	ExtremeSwitching 5420 Note: The values here represent the maximum attainable ECMP groups of which, due to the RIOT feature, half are reserved for overlay and half for underlay routing. For more information about RIOT, see Switch Engine 32.3 User Guide .	510 (if maximum gateways is 2) 254 (if maximum gateway is 4) 126 (if maximum gateways is 8)
	ExtremeSwitching 5520 Note: The values here represent the maximum attainable ECMP groups of which, due to the RIOT feature, half are reserved for overlay and half for underlay routing. For more information about RIOT, see Switch Engine 32.3 User Guide .	2046 (if maximum gateways is 2) 1022 (if maximum gateway is 4) 510 (if maximum gateways is 8)
	ExtremeSwitching 5720 if maximum gateways is 2 if maximum gateways is 4 if maximum gateways is 8 if maximum gateways is 16 (default) if maximum gateways is 32 if maximum gateways is 64 Note: The values here represent the maximum attainable ECMP groups of which, due to the RIOT feature, half are reserved for overlay and half for underlay routing. For more information about RIOT, see Switch Engine 32.3 User Guide .	2,046 2,046 2,046 1,022 510 254
IP multinetting (secondary IP addresses)—maximum number of secondary IP addresses per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	255
Jumbo frames—maximum size supported for jumbo frames, including the CRC.	ExtremeSwitching 5320, 5420, 5520, 5720	9,216

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Layer-2 IPMC forwarding caches —(IGMP/MLD/PIM snooping) in mac-vlan mode. Note: <ul style="list-style-type: none"> The internal lookup table configuration used is "l2-and-l3". IPv6 and IPv4 L2 IPMC scaling is the same for this mode. Layer-2 IPMC forwarding cache limits—(IGMP/MLD/PIM snooping) in mixed-mode are the same. 	ExtremeSwitching 5320	32,000
	ExtremeSwitching 5420	64,000
	ExtremeSwitching 5520	32,768
	ExtremeSwitching 5720-MW	49,152
	ExtremeSwitching 5720-MXW	81,920
Layer-3 IPv4 Multicast —maximum number of <S,G,V> entries installed in the hardware (IP multicast compression enabled). Note: <ul style="list-style-type: none"> Limit value is the same for MVR senders, PIM Snooping entries, PIM SSM cache, IGMP senders, PIM cache. Assumes source-group-vlan mode as look up key. Layer 3 IPMC cache limit in mixed mode also has the same value. 	ExtremeSwitching 5320	8,000
	ExtremeSwitching 5420M	12,000
	ExtremeSwitching 5420F	6,000
	ExtremeSwitching 5520	43,000
	ExtremeSwitching 5720-MW	61,000
Layer-3 IPv6 Multicast —maximum number of <S,G,V> entries installed in the hardware (IP multicast compression enabled). Note: <ul style="list-style-type: none"> Limit value is the same for MLD sender per switch, PIM IPv6 cache. Assumes source-group-vlan mode as lookup key. 	ExtremeSwitching 5320	4,000
	ExtremeSwitching 5420M	6,000
	ExtremeSwitching 5420F	3,000
	ExtremeSwitching 5520	21,500
	ExtremeSwitching 5720-MW	30,500
	ExtremeSwitching 5720-MXW	55,000

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
<p>Load sharing—maximum number of load sharing groups.</p> <p>Note: The actual number of load-sharing groups that can be configured is limited by the number of physical ports present in the switch or SummitStack.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	128
<p>Load sharing—maximum number of ports per load-sharing group.</p>	For standalone and stacked: ExtremeSwitching 5320, 5420	8
	For standalone: ExtremeSwitching 5520, 5720	32
	For stacked: ExtremeSwitching 5520, 5720	64
<p>Logged messages—maximum number of messages logged locally on the system.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	20,000
<p>MAC-based security—maximum number of MAC-based security policies.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
<p>MAC Locking—Maximum number of MAC locking stations that can be learned on a port.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	64 (static MAC locking stations) 600 (first arrival MAC locking stations)
<p>Meters—maximum number of meters supported.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	2,048
<p>Maximum mirroring instances.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	4 total, 2 egress
<p>Mirroring (filters)—maximum number of mirroring filters.</p> <p>Note: This is the number of filters across all the active mirroring instances.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	128
<p>Mirroring, one-to-many (filters)—maximum number of one-to-many mirroring filters.</p> <p>Note: This is the number of filters across all the active mirroring instances.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	128
<p>Mirroring, one-to-many (monitor port)—maximum number of one-to-many monitor ports.</p>	ExtremeSwitching 5320, 5420, 5520, 5720	16

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
MLAG ports —maximum number of MLAG ports allowed. Note: The number of MLAG ports that can be configured is limited by the number of physical ports present in the system.	ExtremeSwitching 5320	55
	ExtremeSwitching 5720	63
	ExtremeSwitching 5420, 5520	59
	Stacking	1
	Note: Maximum user ports	
MLAG peers —maximum number of MLAG peers allowed.	ExtremeSwitching 5320, 5420, 5520, 5720	2
Multicast listener discovery (MLD) snooping per-VLAN filters —maximum number of VLANs supported in per-VLAN MLD snooping mode.	ExtremeSwitching 5320, 5420	1,500
	ExtremeSwitching 5520	1,000
	ExtremeSwitching 5720	1,500
Multicast listener discovery (MLD)v1 subscribers —maximum number of MLDv1 subscribers per port. ⁿ	ExtremeSwitching 5320, 5420, 5520, 5720	4,000
Multicast listener discovery (MLD)v1 subscribers —maximum number of MLDv1 subscribers per switch. ⁿ	ExtremeSwitching 5320, 5420, 5520	10,000
	ExtremeSwitching 5720-MW	30,000
	ExtremeSwitching 5720-MXW	54,000
Multicast listener discovery (MLD)v2 subscribers —maximum number of MLDv2 subscribers per port. ⁿ	ExtremeSwitching 5320, 5420, 5520, 5720	4,000
Multicast listener discovery (MLD)v2 subscribers —maximum number of MLDv2 subscribers per switch. ⁿ	ExtremeSwitching 5320, 5420, 5520	10,000
	ExtremeSwitching 5720-MW	30,000
	ExtremeSwitching 5720-MXW	54,000
Multicast listener discovery (MLD)v2 maximum source per group —maximum number of source addresses per group.	ExtremeSwitching 5320, 5420, 5520, 5720	200
Multicast listener discovery (MLD) SSM-map entries —maximum number of MLD SSM mapping entries.	ExtremeSwitching 5320, 5420, 5520, 5720	500
Multicast listener discovery (MLD) SSM-MAP entries —maximum number of sources per group in MLD SSM mapping entries.	ExtremeSwitching 5320, 5420, 5520, 5720	50
Network Login —maximum number of clients being authenticated on MAC-based VLAN enabled ports.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Network Login —maximum number of clients being authenticated with policy mode enabled with TCI overwrite enabled.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
Network Login —maximum number of dynamic VLANs.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
Network Login VLAN VSAs —maximum number of VLANs a client can be authenticated on at any given time.	ExtremeSwitching 5320, 5420, 5520, 5720	10
Network Service Identifiers (NSI)/VLAN mappings —maximum number of VLANs to NSI mappings.	ExtremeSwitching 5320, 5420, 5520, 5720	94
Node Alias —maximum number of entries per slot.	ExtremeSwitching 5320, 5420, 5520, 5720	8,192
ONEPolicy Dynamic ACL Rules —maximum number of Dynamic ACLs supported via RADIUS VSA 232 per user in Access-List mode.	ExtremeSwitching 5320, 5420, 5520, 5720	64
ONEPolicy Roles/Profiles —maximum number of policy roles/profiles.	ExtremeSwitching 5320, 5420, 5520, 5720	63

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
ONEPolicy Rules per Role/Profile —maximum number of rules per role/policy.	ExtremeSwitching 5320	IPv4 Rules: 1,024 IPv6 Rules: 0 MAC Rules: 0 L2 Rules: 952
	ExtremeSwitching 5420-F	IPv4 Rules: 512 IPv6 Rules: 512 MAC Rules: 512 L2 Rules: 440
	ExtremeSwitching 5720-MW	IPv4 Rules: 1,536 IPv6 Rules: 1,536 MAC Rules: 1,536 L2 Rules: 1,464
	ExtremeSwitching 5720-MXW	IPv4 Rules: 2,048 IPv6 Rules: 2,048 MAC Rules: 2,048 L2 Rules: 1,976
	ExtremeSwitching 5420-M, 5520	IPv4 Rules: 1,024 IPv6 Rules: 1,024 MAC Rules: 1,024 L2 Rules: 952
ONEPolicy Authenticated Users per Switch —maximum number of authenticated users per switch only with TCI-Overwrite enabled.	ExtremeSwitching 5520, 5720	1,024
	ExtremeSwitching 5320, 5420	512
	Stacking	Depends on the stack nodes, but the maximum is 1,024.
ONEPolicy Authenticated Users per Switch —maximum number of authenticated users per switch with TCI-Overwrite disabled. Note: The maximum values assume 75% utilization of VLAN-XLATE hash table.	Stacking	1,536–65,534
	ExtremeSwitching 5320, 5420	768
	ExtremeSwitching 5720	12,288
	ExtremeSwitching 5520	9,216

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
ONEPolicy Authenticated Users per Port per Switch — maximum number of authenticated users per port per switch with TCI overwrite disabled. Note: The maximum values assume 75% utilization of VLAN-XLATE hash table.	ExtremeSwitching 5320, 5420	768
	ExtremeSwitching 5720	12,288
	ExtremeSwitching 5520	9,216
ONEPolicy Authenticated Users per Port per Switch — maximum number of authenticated users per port with only with TCI-Overwrite enabled.	ExtremeSwitching 5320, 5420	512
	ExtremeSwitching 5520, 5720	1,024
ONEPolicy Permit/Deny Traffic Classification Rules Types —total maximum number of unique permit/deny traffic classification rules types (system/stack).	ExtremeSwitching 5320, 5420-F	1,976
	ExtremeSwitching 5720-MW	6,072
	ExtremeSwitching 5720-MXW	8,120
	ExtremeSwitching 5420-M, 5520	4,024
ONEPolicy Permit/Deny Traffic Classification Rules Types — maximum number of unique MAC permit/deny traffic classification rules types (macsource/macdest).	ExtremeSwitching 5420-M, 5520	1,024
	ExtremeSwitching 5420-F	512
	ExtremeSwitching 5720-MW	1,536
	ExtremeSwitching 5720-MXW	2,048
	ExtremeSwitching 5320	N/A
ONEPolicy Permit/Deny Traffic Classification Rules Types — maximum number of unique IPv6 permit/deny traffic classification rules types (ipv6dest).	ExtremeSwitching 5420-M, 5520	1,024
	ExtremeSwitching 5420-F	512
	ExtremeSwitching 5720-MW	1,536
	ExtremeSwitching 5720-MXW	2,048
	ExtremeSwitching 5320	N/A
ONEPolicy Permit/Deny Traffic Classification Rules Types — maximum number of unique IPv4 permit/deny traffic classification rules (typesipsource / ipdest / ipfrag / udpsourceportIP / udpdestportIP / tcpsourceportIP / tcpdestportIP / ipttl / iptos / iptype).	ExtremeSwitching 5320, 5420-F, 5520	1,024
	ExtremeSwitching 5720-MW	1,536
	ExtremeSwitching 5720-MXW	2,048
	ExtremeSwitching 5420-M	512
ONEPolicy Permit/Deny Traffic Classification Rules Types — maximum number of unique Layer 2 permit/deny traffic classification rules (ethertype/port).	ExtremeSwitching 5320, 5420-M, 5520	952
	ExtremeSwitching 5720-MW	1,464
	ExtremeSwitching 5720-MXW	1,976
	ExtremeSwitching 5420-F	440

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
OnePolicy Maximum number of rules supported in AccessList mode —maximum number of rules in AccessList mode.	ExtremeSwitching 5320, 5420-F	4,024
	ExtremeSwitching 5420-M	8,120
	ExtremeSwitching 5720-MW	12,216
	ExtremeSwitching 5720-MXW	16,312
OSPFv2/v3 ECMP —maximum number of equal cost multipath OSPFv2 and OSPFv3.	ExtremeSwitching 5320, 5420, 5520, 5720	8
OSPFv2 areas —as an ABR, how many OSPF areas are supported within the same switch.	ExtremeSwitching 5320, 5420, 5520, 5720	8
OSPFv2 external routes —recommended maximum number of external routes contained in an OSPF LSDB.	ExtremeSwitching 5520	5,000
	ExtremeSwitching 5720	10,000
	ExtremeSwitching 5320, 5420	4,000
OSPFv2 inter- or intra-area routes —recommended maximum number of inter- or intra-area routes contained in an OSPF LSDB with one ABR in OSPF domain.	ExtremeSwitching 5520, 5720	2,000
	ExtremeSwitching 5320, 5420	1,600
OSPFv2 inter-vr or leaking routes —recommended maximum number of inter-vr routes contained in an OSPF LSDB.	ExtremeSwitching 5520, 5720	2,000
	ExtremeSwitching 5320, 5420	1,600
OSPFv2 interfaces —recommended maximum number of OSPF interfaces on a switch (active interfaces only).	ExtremeSwitching 5320, 5420, 5520, 5720	4
OSPFv2 links —maximum number of links in the router LSA.	ExtremeSwitching 5520, 5720	400
	ExtremeSwitching 5320, 5420	320
OSPFv2 neighbors —maximum number of supported OSPF adjacencies.	ExtremeSwitching 5320, 5420, 5520, 5720	4
OSPFv2 routers in a single area —recommended maximum number of routers in a single OSPF area.	ExtremeSwitching 5520	50
	ExtremeSwitching 5720	100
	ExtremeSwitching 5320, 5420	40
OSPFv2 virtual links —maximum number of supported OSPF virtual links.	ExtremeSwitching 5520, 5720	32
	ExtremeSwitching 5320, 5420	25
OSPFv3 areas —as an ABR, the maximum number of supported OSPFv3 areas.	ExtremeSwitching 5520	16
	ExtremeSwitching 5720	100
	ExtremeSwitching 5320, 5420	12

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
OSPFv3 external routes —recommended maximum number of external routes.	ExtremeSwitching 5520, 5720-MXW	10,000
	ExtremeSwitching 5320, 5420, 5720-MW	7,500
OSPFv3 inter- or intra-area routes —recommended maximum number of inter- or intra-area routes.	ExtremeSwitching 5520	3,000
	ExtremeSwitching 5720	4,000
	ExtremeSwitching 5320, 5420	500
OSPFv3 interfaces —maximum number of OSPFv3 interfaces (active interfaces only).	ExtremeSwitching 5320, 5420, 5520, 5720	4
OSPFv3 neighbors —maximum number of OSPFv3 neighbors.	ExtremeSwitching 5320, 5420, 5520, 5720	4
OSPFv3 virtual links —maximum number of OSPFv3 virtual links supported.	ExtremeSwitching 5520, 5720	16
	ExtremeSwitching 5320, 5420	12
PIM IPv4 (maximum interfaces) —maximum number of PIM active interfaces.	ExtremeSwitching 5320, 5420, 5520, 5720	N/A
PIM IPv4 Limits —maximum number of multicast groups per dynamic rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	180
PIM IPv4 Limits —maximum number of multicast groups per static rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	3,000 (depends on policy file limits)
PIM IPv4 Limits —maximum number of multicast sources per group.	ExtremeSwitching 5320, 5420, 5520, 5720	5,000
PIM IPv4 Limits —maximum number of dynamic rendezvous points per multicast group.	ExtremeSwitching 5320, 5420, 5520, 5720	145
PIM IPv4 Limits —static rendezvous points.	ExtremeSwitching 5320, 5420, 5520, 5720	32
PIM IPv6 (maximum interfaces) —maximum number of PIM active interfaces.	ExtremeSwitching 5320, 5420, 5520, 5720	N/A
PIM IPv6 Limits —maximum number of multicast sources per group.	ExtremeSwitching 5320, 5420, 5520, 5720	1,750
PIM IPv6 Limits —maximum number of multicast groups per dynamic rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	70

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
PIM IPv6 Limits —maximum number of multicast groups per static rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	3,000 (depends on policy file limits)
PIM IPv6 Limits —maximum number of dynamic rendezvous points per multicast group.	ExtremeSwitching 5320, 5420, 5520, 5720	64
PIM IPv6 Limits —maximum number of secondary addresses per interface.	ExtremeSwitching 5320, 5420, 5520, 5720	70
PIM IPv6 Limits —static rendezvous points.	ExtremeSwitching 5320, 5420, 5520, 5720	32
Policy-based routing (PBR) redundancy —maximum number of flow-redirects.	ExtremeSwitching 5320, 5420, 5520, 5720	256 ^o
Policy-based routing (PBR) redundancy —maximum number of next hops per each flow-direct.	ExtremeSwitching 5320, 5420, 5520, 5720	32 ^o
Port-specific VLAN tags —maximum number of port-specific VLAN tags.	ExtremeSwitching 5320, 5420 ExtremeSwitching 5520, 5720	N/A 1,023
Port-specific VLAN tags —maximum number of port-specific VLAN tag ports.	ExtremeSwitching 5320, 5420 ExtremeSwitching 5520, 5720	N/A 4,000
Private VLANs —maximum number of subscribers. Assumes a minimum of one port per network and subscriber VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	36
Private VLANs —maximum number of private VLANs with an IP address on the network VLAN. Note: This limit is dependent on the maximum number of private VLANs in an L2-only environment if the configuration has tagged and translated ports.	ExtremeSwitching 5320, 5420, 5520, 5720	960
Private VLANs —maximum number of private VLANs in an L2-only environment.	ExtremeSwitching 5320, 5420, 5520, 5720	960
Route policies —suggested maximum number of lines in a route policy file.	ExtremeSwitching 5320, 5420, 5520, 5720	10,000
RIP Learned Routes —maximum number of RIP routes supported without aggregation.	ExtremeSwitching 5320, 5420, 5520, 5720	10,000

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
RIP interfaces on a single router —recommended maximum number of RIP routed interfaces on a switch.	ExtremeSwitching 5320, 5420, 5520, 5720	256
RIPng learned routes —maximum number of RIPng routes.	ExtremeSwitching 5320, 5420, 5520, 5720	3,000
Spanning Tree (maximum STPDs) —maximum number of Spanning Tree Domains on port mode EMISTP.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	64
	ExtremeSwitching 5320-24T/P, 5320-16P	32
Spanning Tree PVST+ —maximum number of port mode PVST domains. Note: For all platforms, the maximum number of active ports per PVST domain depends on the maximum number of spanning tree ports supported on given platform. For example, for an ExtremeSwitching switch that supports 256 PVST domains (maximum) and 4,096 STP ports (maximum), the maximum number of active ports per PVST domain would be 16 ports (4,096 ÷ 256).	ExtremeSwitching 5320, 5420, 5520, 5720	128
Spanning Tree —maximum number of multiple spanning tree instances (MSTI) domains.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	64
	ExtremeSwitching 5320-24T/P, 5320-16P	32
Spanning Tree —maximum number of VLANs per MSTI. Note: Maximum number of 10 active ports per VLAN when all 500 VLANs are in one MSTI.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	600
	ExtremeSwitching 5320-24T/P, 5320-16P	256
Spanning Tree —maximum number of VLANs on all MSTP instances.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	1,024
	ExtremeSwitching 5320-24T/P, 5320-16P	512
Spanning Tree (802.1d domains) —maximum number of 802.1d domains per port.	ExtremeSwitching 5320, 5420, 5520, 5720	1
Spanning Tree (number of ports) —maximum number of ports including all Spanning Tree domains.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	4,096
	ExtremeSwitching 5320-24T/P, 5320-16P	2,048

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
Spanning Tree (maximum VLANs) —maximum number of STP-protected VLANs (dot1d and dot1w).	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	1,024
	ExtremeSwitching 5320-24T/P, 5320-16P	600
SSH (number of sessions) — maximum number of simultaneous SSH sessions.	ExtremeSwitching 5320, 5420, 5520, 5720	8
Static MAC multicast FDB entries —maximum number of permanent multicast MAC entries configured into the FDB.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
Syslog servers —maximum number of simultaneous Syslog servers that are supported.	ExtremeSwitching 5320, 5420, 5520, 5720	16
Syslog targets —maximum number of configurable Syslog targets.	ExtremeSwitching 5320, 5420, 5520, 5720	16
Telnet (number of sessions) — maximum number of simultaneous Telnet sessions.	ExtremeSwitching 5320, 5420, 5520, 5720	8
Virtual routers —maximum number of user-created virtual routers that can be created on a switch.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	63
	ExtremeSwitching 5320-24T/P, 5320-16P	16 (local-only VRs)
Virtual router forwarding (VRFs) — maximum number of VRFs that can be created on a switch. Note: * Subject to other system limitations.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	960 *
	ExtremeSwitching 5320-24T/P, 5320-16P	16 (local-only VRs)
Virtual router protocols per VR —maximum number of routing protocols per VR.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	8
	ExtremeSwitching 5320-24T/P, 5320-16P	N/A
Virtual router protocols per switch —maximum number of VR protocols per switch.	ExtremeSwitching 5320-48T/P, 5420, 5520, 5720	64
	ExtremeSwitching 5320-24T/P, 5320-16P	N/A
VLAN aggregation —maximum number of port-VLAN combinations on any one superVLAN and all of its subVLANs.	ExtremeSwitching 5320, 5420, 5520, 5720	1,000
VLANs —includes all VLANs. Note: Only 4,092 user-configurable VLANs are supported. (VLAN 1 is the default VLAN, and 4,095 is the management VLAN, and you may not configure them.)	ExtremeSwitching 5320, 5420, 5520, 5720	4,094

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
VLANs (Layer 2) —maximum number of Layer 2 VLANs.	ExtremeSwitching 5320, 5420, 5520, 5720	4,094
VLANs (Layer 3) —maximum number of VLANs performing IPv4 and/or IPv6 routing. Excludes sub-VLANs.	ExtremeSwitching 5320, 5420, 5520, 5720	2,048
VLAN Port Interfaces (VPIF) —maximum number of VLAN port interfaces.	ExtremeSwitching 5320	53,328
	ExtremeSwitching 5420	60,000
	ExtremeSwitching 5520, 5720	131,585
VLANs (maximum active port-based) —maximum active ports per VLAN when 4,094 VLANs are configured with the default license.	ExtremeSwitching 5520, 5720	32
	ExtremeSwitching 5320, 5420	3
VLANs (maximum active protocol-sensitive filters) —number of simultaneously active protocol filters in the switch.	ExtremeSwitching 5320, 5420, 5520, 5720	16
VLAN translation —maximum number of translation VLANs. Assumes a minimum of one port per translation and member VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	36
VLAN translation —maximum number of translation VLAN pairs with an IP address on the translation VLAN. Note: This limit is dependent on the maximum number of translation VLAN pairs in an L2-only environment if the configuration includes tagged and translated ports.	ExtremeSwitching 5320, 5420, 5520, 5720	960
VLAN translation —maximum number of translation VLAN pairs in an L2-only environment.	ExtremeSwitching 5320, 5420, 5520, 5720	960
VMAN CEP —maximum number of CVIDs. Note: With 75% hash table utilization.	ExtremeSwitching 5320, 5420	768
	ExtremeSwitching 5520, 5720	9,000

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
VRRP (v2/v3-IPv4) (maximum instances) —maximum number of VRRP instances for a single switch. Note: These limits are applicable for Fabric Routing configuration also. Note: Number of groups configured should not exceed the number of individual VRs supported (that is, in normal mode) for that platform type.	Normal Mode (as individual VRs): ExtremeSwitching 5320, 5420, 5520, 5720	511
	Scaled Mode (with groups): ExtremeSwitching 5720	2,048
	ExtremeSwitching 5320, 5420, 5520, Sliced Mode: ExtremeSwitching 5320, 5420, 5520, 5720	1,000 511
VRRP (v3-IPv6) (maximum instances) —maximum number of VRRP instances for a single switch. (VRRP-VRRPv3-IPv6) Note: These limits are applicable for Fabric Routing configuration also. Note: Number of groups configured should not exceed the number of individual VRs supported (that is, in normal mode) for that platform type.	Normal Mode (as individual VRs): ExtremeSwitching 5320, 5420, 5520, 5720	511
	Scaled Mode (with groups): ExtremeSwitching 5720	2,048
	ExtremeSwitching 5320, 5420, 5520,	1,000
VRRP (v2/v3-IPv4/IPv6) (maximum VRID) —maximum number of unique VRID numbers per switch.	ExtremeSwitching 5320, 5420, 5520, 5720	255
VRRP (v2/v3-IPv4/IPv6) (maximum VRIDs per VLAN) —maximum number of VRIDs per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	255
VRRP (v2/v3-IPv4/IPv6) (maximum ping tracks) —maximum number of ping tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
VRRP (maximum ping tracks) —maximum number of ping tracks per VRRP Instance under 128 VRRP instances.	ExtremeSwitching 5320, 5420, 5520, 5720	8 (20 centisecond or 1 second hello interval)
VRRP (v3-IPv6) (maximum ping tracks) —maximum number of ping tracks per VRRP Instance under 128 VRRP instances.	ExtremeSwitching 5320, 5420, 5520, 5720	8 (20 centisecond or 1 second hello interval)

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
VRRP (v2/v3-IPv4/IPv6) (maximum iproute tracks) —maximum number of IP route tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
VRRP (v2/v3-IPv4/IPv6) —maximum number of VLAN tracks per VLAN.	ExtremeSwitching 5320, 5420, 5520, 5720	8
VXLAN —maximum virtual networks. Note: Every VPLS instance/PSTag VLAN reduces this limit by 1. Note: Assumption is all BUM (broadcast/unknown-unicast/multicast) FDB entries are pointing to the same set of RTEPs when all VNETs use explicit flooding. Depends on whether all VNETs use standard or explicit and the number of tenant VLAN ports. Note: On ExtremeSwitching 5520 and 5420 switches, every VNET reduces this limit by 1. Every (VPLS/PSTag VLAN) + port reduces the limit by 1 on all platforms. Every VXLAN Underlay Multicast Tunnel reduces this limit by 1.	ExtremeSwitching 5520, 5720 ExtremeSwitching 5320, 5420	2,048–4,000 200-375
VXLAN —maximum tenant VLANs plus port combinations Note: Every (VPLS/PSTag VLAN) + port reduces the limit by 1.	ExtremeSwitching 5520, 5720 ExtremeSwitching 5320, 5420	4,096 200-375
VXLAN —maximum static MAC to IP bindings. Note: Every FDB entry configured reduces this limit by 1.	ExtremeSwitching 5320, 5420, 5520, 5720	64,000
VXLAN —maximum RTEP IP addresses	ExtremeSwitching 5320, 5420, 5520, 5720	512
VXLAN —maximum virtual networks with dynamic learning and OSPF extensions for VXLAN	ExtremeSwitching 5520, 5720 ExtremeSwitching 5320, 5420	4,000 375

Table 7: Supported Limits for the Base License (continued)

Metric	Product	Limit
VXLAN —or replicator role, maximum number of attached leafs per switch.	ExtremeSwitching 5320, 5420, 5520, 5720	256
XML requests —maximum number of XML requests per second. Note: Limits are dependent on load and type of XML request. These values are dynamic ACL data requests.	ExtremeSwitching 5320, 5420, 5520, 5720	10 with 100 DACLs
XNV authentication —maximum number of VMs that can be processed (combination of local and network VMs).	ExtremeSwitching 5320, 5420, 5520, 5720	2,048
XNV database entries —maximum number of VM database entries (combination of local and network VMs).	ExtremeSwitching 5320, 5420, 5520, 5720	16,000
XNV database entries —maximum number of VPP database entries (combination of local and network VPPs).	ExtremeSwitching 5320, 5420, 5520, 5720	2,048
XNV dynamic VLAN —Maximum number of dynamic VLANs created (from VPPs /local VMs).	ExtremeSwitching 5320, 5420, 5520, 5720	2,048
XNV local VPPs —maximum number of XNV local VPPs.	ExtremeSwitching 5320, 5420, 5520, 5720	2,048 ingress 512 egress
XNV policies/dynamic ACLs —maximum number of policies/dynamic ACLs that can be configured per VPP.	ExtremeSwitching 5320, 5420, 5520, 5720	8 ingress 4 egress
XNV network VPPs —maximum number of XNV network VPPs. ^p	ExtremeSwitching 5320, 5420, 5520, 5720	2,048 ingress 512 egress

Premier License Limits

The following table shows supported limits for features in the Premier License.

Table 8: Supported Limits for the Premier License

Metric	Product	Limit
Anycast RP Using PIM —maximum number of IPv4 Anycast RP set per VR.	ExtremeSwitching 5320, 5420, 5520, 5720	32
Anycast RP Using PIM —maximum number of IPv6 Anycast RP set per VR.	ExtremeSwitching 5320, 5420, 5520, 5720	32
Anycast RP Using PIM —RP peers per Anycast RP set.	ExtremeSwitching 5320, 5420, 5520, 5720	10
BGP (aggregates) —maximum number of BGP aggregates.	ExtremeSwitching 5520, 5720	256
	ExtremeSwitching 5320, 5420	204
BGP (networks) —maximum number of BGP networks.	ExtremeSwitching 5520, 5720	1,024
	ExtremeSwitching 5320, 5420	820
BGP (peers) —maximum number of BGP peers. Note: With default keepalive and hold timers. Note: Each BGPv4/BGPv6 peer handles a maximum of 50 routes. Note: ECMP should not be enabled for BGP.	ExtremeSwitching 5520	128
	ExtremeSwitching 5720	300
	ExtremeSwitching 5320, 5420	100
BGP (peer groups) —maximum number of BGP peer groups.	ExtremeSwitching 5520, 5720	64
	ExtremeSwitching 5320, 5420	50
BGP (policy entries) —maximum number of BGP policy entries per route policy.	ExtremeSwitching 5520, 5720	256
	ExtremeSwitching 5320, 5420	204
BGP (policy statements) —maximum number of BGP policy statements per route policy.	ExtremeSwitching 5520, 5720	1,024
	ExtremeSwitching 5320, 5420	820
BGP multicast address-family routes —maximum number of multicast address-family routes.	ExtremeSwitching 5520, 5720-MXW	25,000
	ExtremeSwitching 5320, 5420, 5720-MW	20,000

Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
BGP (unicast address-family routes) —maximum number of unicast address-family routes.	ExtremeSwitching 5520, 5720-MXW (at default)	25,000
	ExtremeSwitching 5320, 5420, 5720-MW	20,000
	ExtremeSwitching 5720-MW (with ALPM enabled)	163,000
	ExtremeSwitching 5720-MXW (with ALPM enabled)	288,000
	ExtremeSwitching 5520 (with ALPM enabled)	80,000
BGP (non-unique routes) —maximum number of non-unique BGP routes.	ExtremeSwitching 5520, 5720-MXW	25,000
	ExtremeSwitching 5320, 5420, 5720-MW	20,000
BGP ECMP —maximum number of equal cost paths per multipath for BGP and BGPv6.	ExtremeSwitching 5320, 5420, 5520	8
	ExtremeSwitching 5720	64
BGPv6 (unicast address-family routes) —maximum number of unicast address family routes.	ExtremeSwitching 5520, 5720-MW	6,000
	ExtremeSwitching 5720-MW (with ALPM enabled)	107,000
	ExtremeSwitching 5720-MXW	10,000
	ExtremeSwitching 5720-MXW (with ALPM enabled)	213,000
	ExtremeSwitching 5320, 5420	4,800
ExtremeSwitching 5520 (with ALPM enabled)	40,000	
BGPv6 (non-unique routes) —maximum number of non-unique BGP routes.	ExtremeSwitching 5520, 5720-MW	18,000
	ExtremeSwitching 5720-MXW	24,000
	ExtremeSwitching 5320, 5420	14,000
EVPN EVI instances —maximum number of EVI instances.	ExtremeSwitching 5320, 5420, 5520, 5720	1,024
GRE Tunnels —maximum number of GRE tunnels.	ExtremeSwitching 5320, 5420, 5520, 5720	255
IS-IS adjacencies —maximum number of supported IS-IS adjacencies.	ExtremeSwitching 5320, 5420, 5520, 5720	128
IS-IS ECMP —maximum number of equal cost paths per multipath for IS-IS.	ExtremeSwitching 5320, 5420, 5520, 5720	2, 4, or 8
IS-IS interfaces —maximum number of interfaces that can support IS-IS.	ExtremeSwitching 5320, 5420, 5520, 5720	255
IS-IS routers in an area —recommended maximum number of IS-IS routers in an area.	ExtremeSwitching 5320, 5420, 5520, 5720	256

Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
IS-IS route origination —recommended maximum number of routes that can be originated by an IS-IS node.	ExtremeSwitching 5320, 5420, 5520, 5720	20,000
IS-IS IPv4 L1 routes in an L1 router —recommended maximum number of IS-IS Level 1 routes in a Level 1 IS-IS router.	ExtremeSwitching 5320, 5420, 5520, 5720	25,000
IS-IS IPv4 L2 routes —recommended maximum number of IS-IS Level 2 routes.	ExtremeSwitching 5320, 5420, 5520, 5720	25,000
IS-IS IPv4 L1 routes in an L1/L2 router —recommended maximum number of IS-IS Level 1 routes in an L1/L2 IS-IS router.	ExtremeSwitching 5320, 5420, 5520, 5720	20,000
IS-IS IPv6 L1 routes in an L1 router —recommended maximum number of IS-IS Level 1 routes in a Level 1 IS-IS router.	ExtremeSwitching 5320, 5420, 5520, 5720	10,000
IS-IS IPv6 L2 routes —recommended maximum number of IS-IS Level 2 routes.	ExtremeSwitching 5320, 5420, 5520, 5720	10,000
IS-IS IPv6 L1 routes in an L1/L2 router —recommended maximum number of IS-IS Level 1 routes in a L1/L2 router.	ExtremeSwitching 5320, 5420, 5520, 5720	10,000
IS-IS IPv4/IPv6 L1 routes in an L1 router —recommended maximum number of IS-IS Level 1 routes in a Level 1 IS-IS router. The numbers documented are based on 50% IPv4 routes and 50% IPv6 routes.	ExtremeSwitching 5320, 5420, 5520, 5720	20,000
IS-IS IPv4/IPv6 L2 routes in an L2 router —recommended maximum number of IS-IS Level 2 routes in a Level 2 IS-IS router. The numbers documented are based on 50% IPv4 routes and 50% IPv6 routes.	ExtremeSwitching 5320, 5420, 5520, 5720	20,000
IS-IS IPv4/IPv6 L1 routes in an L1/L2 router —recommended maximum number of IS-IS Level 1 routes in a Level 1/Level2 IS-IS router. The numbers documented are based on 50% IPv4 routes and 50% IPv6 routes.	ExtremeSwitching 5320, 5420, 5520, 5720	20,000

Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
L2 VPN: VCCV (pseudowire Virtual Circuit Connectivity Verification) VPNs per switch —maximum number of VCCV enabled VPLS VPNs.	ExtremeSwitching 5520	16
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: VPLS MAC addresses —maximum number of MAC addresses learned by a switch.	ExtremeSwitching 5520	64,000
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: VPLS VPNs —maximum number of VPLS virtual private networks per switch.	ExtremeSwitching 5520	1,023
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: VPLS peers —maximum number of VPLS peers per VPLS instance.	ExtremeSwitching 5520	64
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: LDP pseudowires —maximum number of pseudowires per switch.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: static pseudowires —maximum number of static pseudowires per switch.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
L2 VPN: Virtual Private Wire Service (VPWS) VPNs —maximum number of virtual private networks per switch.	ExtremeSwitching 5520	1,023
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE interfaces —maximum number of interfaces.	ExtremeSwitching 5520	32
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE ingress LSPs —maximum number of ingress LSPs.	ExtremeSwitching 5520	2,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE egress LSPs —maximum number of egress LSPs.	ExtremeSwitching 5520	2,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE transit LSPs —maximum number of transit LSPs.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE paths —maximum number of paths.	ExtremeSwitching 5520	1,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE profiles —maximum number of profiles.	ExtremeSwitching 5520	1,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS RSVP-TE EROs —maximum number of EROs per path.	ExtremeSwitching 5520	64
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS LDP peers —maximum number of MPLS LDP peers per switch.	ExtremeSwitching 5520	128
	ExtremeSwitching 5320, 5420, 5720	N/A

Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
MPLS LDP adjacencies —maximum number of MPLS LDP adjacencies per switch.	ExtremeSwitching 5520	64
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS LDP ingress LSPs —maximum number of MPLS LSPs that can originate from a switch.	ExtremeSwitching 5520	2,048
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS LDP-enabled interfaces —maximum number of MPLS LDP configured interfaces per switch.	ExtremeSwitching 5520	128
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS LDP transit LSPs —maximum number of MPLS transit LSPs per switch.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS LDP egress LSPs —maximum number of MPLS egress LSPs that can terminate on a switch.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS static egress LSPs —maximum number of static egress LSPs.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS static ingress LSPs —maximum number of static ingress LSPs.	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MPLS static transit LSPs —maximum number of static transit LSPs	ExtremeSwitching 5520	4,000
	ExtremeSwitching 5320, 5420, 5720	N/A
MSDP active peers —maximum number of active MSDP peers.	ExtremeSwitching 5320, 5420, 5520, 5720	64
MSDP SA cache entries —maximum number of entries in SA cache.	ExtremeSwitching 5320, 5420F	6,000
	ExtremeSwitching 5420M	8,000
	ExtremeSwitching 5520, 5720	14,000
MSDP maximum mesh groups —maximum number of MSDP mesh groups.	ExtremeSwitching 5320, 5420, 5520, 5720	16
OSPFv2/v3 ECMP —maximum number of equal cost multipath OSPFv2 and OSPFv3.	ExtremeSwitching 5320, 5420, 5520	8
	ExtremeSwitching 5720	64
OSPFv2 areas —as an ABR, how many OSPF areas are supported within the same switch.	ExtremeSwitching 5320, 5420, 5520, 5720	8
OSPFv2 external routes —recommended maximum number of external routes contained in an OSPF LSDB.	ExtremeSwitching 5520	5,000
	ExtremeSwitching 5720	10,000
	ExtremeSwitching 5320, 5420	4,000

Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
OSPFv2 inter- or intra-area routes —recommended maximum number of inter- or intra-area routes contained in an OSPF LSDB with one ABR in OSPF domain.	ExtremeSwitching 5520, 5720	2,000
	ExtremeSwitching 5320, 5420	1,600
OSPFv2 inter-vr or leaking routes —recommended maximum number of inter-vr routes contained in an OSPF LSDB.	ExtremeSwitching 5520, 5720	2,000
	ExtremeSwitching 5320, 5420	1,600
OSPFv2 interfaces —recommended maximum number of OSPF interfaces on a switch (active interfaces only).	ExtremeSwitching 5520, 5720	400
	ExtremeSwitching 5320, 5420	320
OSPFv2 links —maximum number of links in the router LSA.	ExtremeSwitching 5520, 5720	400
	ExtremeSwitching 5320, 5420	320
OSPFv2 neighbors —maximum number of supported OSPF adjacencies.	ExtremeSwitching 5520, 5720	128
	ExtremeSwitching 5320, 5420	96
OSPFv2 routers in a single area —recommended maximum number of routers in a single OSPF area.	ExtremeSwitching 5520	50
	ExtremeSwitching 5720	100
	ExtremeSwitching 5320, 5420	40
OSPFv2 virtual links —maximum number of supported OSPF virtual links.	ExtremeSwitching 5520, 5720	32
	ExtremeSwitching 5320, 5420	25
OSPFv3 areas —as an ABR, the maximum number of supported OSPFv3 areas.	ExtremeSwitching 5520	16
	ExtremeSwitching 5720	100
	ExtremeSwitching 5320, 5420	12
OSPFv3 external routes —recommended maximum number of external routes.	ExtremeSwitching 5520, 5720-MXW	10,000
	ExtremeSwitching 5320, 5420, 5720-MW	7,500
OSPFv3 inter- or intra-area routes —recommended maximum number of inter- or intra-area routes.	ExtremeSwitching 5520	3,000
	ExtremeSwitching 5720	4,000
	ExtremeSwitching 5320, 5420	500
OSPFv3 interfaces —maximum number of OSPFv3 interfaces (active interfaces only).	ExtremeSwitching 5520, 5720	256
	ExtremeSwitching 5320, 5420	192
OSPFv3 neighbors —maximum number of OSPFv3 neighbors.	ExtremeSwitching 5520, 5720	64
	ExtremeSwitching 5320, 5420	48
OSPFv3 virtual links —maximum number of OSPFv3 virtual links supported.	ExtremeSwitching 5520, 5720	16
	ExtremeSwitching 5320, 5420	12


Table 8: Supported Limits for the Premier License (continued)

Metric	Product	Limit
PIM IPv4 (maximum interfaces) —maximum number of PIM active interfaces.	ExtremeSwitching 5320, 5420, 5520, 5720	255
PIM IPv4 Limits —maximum number of multicast groups per dynamic rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	180
PIM IPv4 Limits —maximum number of multicast groups per static rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	3,000 (depends on policy file limits)
PIM IPv4 Limits —maximum number of multicast sources per group.	ExtremeSwitching 5320, 5420, 5520, 5720	5,000
PIM IPv4 Limits —maximum number of dynamic rendezvous points per multicast group.	ExtremeSwitching 5320, 5420, 5520, 5720	145
PIM IPv4 Limits —static rendezvous points.	ExtremeSwitching 5320, 5420, 5520, 5720	32
PIM IPv6 (maximum interfaces) —maximum number of PIM active interfaces.	ExtremeSwitching 5320, 5420, 5520, 5720	255
PIM IPv6 Limits —maximum number of multicast sources per group.	ExtremeSwitching 5320, 5420, 5520, 5720	1,750
PIM IPv6 Limits —maximum number of multicast groups per dynamic rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	70
PIM IPv6 Limits —maximum number of multicast groups per static rendezvous point.	ExtremeSwitching 5320, 5420, 5520, 5720	3,000 (depends on policy file limits)
PIM IPv6 Limits —maximum number of dynamic rendezvous points per multicast group.	ExtremeSwitching 5320, 5420, 5520, 5720	64
PIM IPv6 Limits —maximum number of secondary addresses per interface.	ExtremeSwitching 5320, 5420, 5520, 5720	70
PIM IPv6 Limits —static rendezvous points.	ExtremeSwitching 5320, 5420, 5520, 5720	32

Notes for Limits Tables

^a The table shows the total available. When installing ACL rules bound to a set of ports, rules are replicated for each port if there are ACL counters and counter compression is not enabled, or if the ports are Extended Edge Switching extended ports.

-
- ^c When there are BFD sessions with minimal timer, sessions with default timer should not be used.
 - ^f Effective capacity varies based on actual MAC addresses and VLAN IDs used and hash algorithm selected.
 - ^g Based on "configure forwarding internal-tables more I2".
 - ^h Based on "configure forwarding internal-tables more I3-and-ipmc".
 - ^j The limit depends on setting configured with configure iproute reserved-entries.
 - ^m The IPv4 and IPv6 multicast entries share the same hardware tables, so the effective number of IPv6 multicast entries depends on the number of IPv4 multicast entries present and vice versa.
 - ⁿ If IGMP and MLD are simultaneously configured on the switch, the number of effective subscribers supported are lessened accordingly.
 - ^o The total of all PBR next hops on all flow redirects should not exceed 4,096.
 - ^p The number of XNV authentications supported based on system ACL limitations.
 - ^q Based on "configure forwarding internal-tables more routes".
 - ^r Based on `configure forwarding internal-tables more routes ipv6-mask-length 128`.
 - ^s Based on `configure forwarding internal-tables more I3-and-ipmc` or `configure forwarding internal-tables I2-and-I3`.

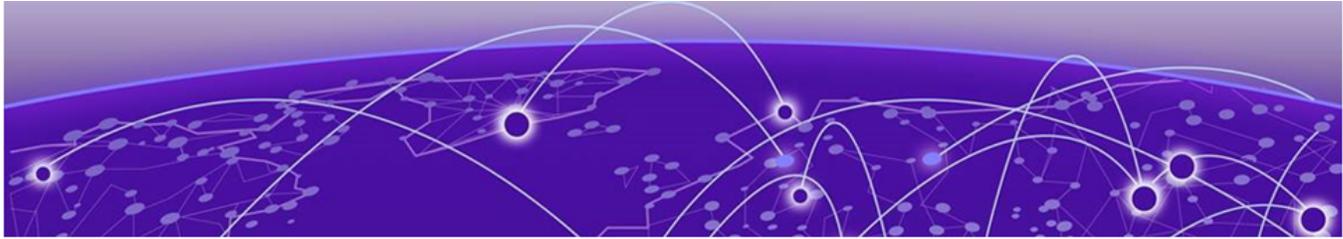

Open Issues, Known Behaviors, and Resolved Issues

[Open Issues on page 72](#)

[Known Behaviors on page 72](#)

[Resolved Issues in Switch Engine 32.3 on page 73](#)

This chapter lists open software issues, limitations in Switch Engine system architecture (known issues), and resolved issues in Switch Engine.

Open Issues

There are no open issues in this release.

Known Behaviors

The following is a limitation in Switch Engine architecture that has yet to be resolved.

Table 9: Known Issues, Platform-Specific, and Feature Change Requests (CRs)

Defect Number	Description
General	
EXOS-32534	After a failover, the https session no longer works via Chalet when the Backup node has become the new Primary node. Workaround: Repeat the failover or restart the switch.
ExtremeSwitching 5720 Series Switches	
EXOS-32940	In an ExtremeSwitching 5720 switch with a VIM-2C installed, when VIM-2C ports are partitioned into 4x10, the partitioned port 51:1 does not show Rx Pkt Count in the show statistics command output

Resolved Issues in Switch Engine 32.3

The following issues were resolved in Switch Engine 32.3. Version 32.3 includes all fixes up to and including versions 31.6, 31.7, 32.1, and 32.2.

Table 10: Resolved Issues, Platform-Specific, and Feature Change Requests (CRs) in 32.3

Defect Number	Description
General	
EXOS-30265	SNMP query on pethPsePortIndex is returning both slot and port information instead of just the port value.
EXOS-31801	Error messages are logged after an upgrade or switch rescue.
EXOS-31968	The outer tag was removed when sending LLDP frames over L2PT.
EXOS-32032	Incorrect values are returned for Tx and Rx power sensor states when polled via SNMP.
EXOS-32042	The error message "Failed to set port dot1p 8" is displayed in the log.
EXOS-32120	The operating system sends a double authentication request for the same client on an LLDP-enabled port.
EXOS-32187	Edge-Safeguard blocked an MLAG port when the MLAG device reboots, with no signs of a loop.
EXOS-32222	ExtremeCloud IQ - Site Engine raises an alarm if a file named EXTRTEST exists with the TFTP server.
EXOS-32264	ARP packets are not sent via the Standby slot when starting the stack with ports disabled.
EXOS-32327	SLPP Guard not disabling the ports if CPU congestion is present.
EXOS-32538	ACL process crash occurs when adding an L2PT profile in VPLS.
EXOS-32580	HAL signal 11 crash occurs.
EXOS-32603	Netlogin web-based URL redirection doesn't work when HTTP is disabled and HTTPS is enabled.
EXOS-32614	The IP address is reversed in the SNMP response message.
EXOS-32776	Switch unresponsive after upgrading from 30.7.1.1patch1-103 to 31.7.1.4 patch1-36 with ONEPolicy configured.
EXOS-32959	Transceiver RxPower values are displayed incorrectly in switch logs.

Table 10: Resolved Issues, Platform-Specific, and Feature Change Requests (CRs) in 32.3 (continued)

Defect Number	Description
ExtremeSwitching 5420 Series Switches	
EXOS-32117	The "Image integrity check" field in the show switch management command output is set to "Unknown".