



Extreme[®]
networks

Extreme SLX-OS YANG Reference Guide, 20.5.1

Supporting ExtremeRouting and ExtremeSwitching
SLX 9740, SLX 9640, SLX 9540, SLX 9250, SLX 9150,
Extreme 8820, Extreme 8720, and Extreme 8520

9037791-00 Rev AA
April 2023



Copyright © 2023 Extreme Networks, Inc. All rights reserved.

Legal Notice

Extreme Networks, Inc. reserves the right to make changes in specifications and other information contained in this document and its website without prior notice. The reader should in all cases consult representatives of Extreme Networks to determine whether any such changes have been made.

The hardware, firmware, software or any specifications described or referred to in this document are subject to change without notice.

Trademarks

Extreme Networks and the Extreme Networks logo are trademarks or registered trademarks of Extreme Networks, Inc. in the United States and/or other countries.

All other names (including any product names) mentioned in this document are the property of their respective owners and may be trademarks or registered trademarks of their respective companies/owners.

For additional information on Extreme Networks trademarks, see: www.extremenetworks.com/company/legal/trademarks

Open Source Declarations

Some software files have been licensed under certain open source or third-party licenses.

End-user license agreements and open source declarations can be found at: <https://www.extremenetworks.com/support/policies/open-source-declaration/>



Table of Contents

Preface.....	9
Text Conventions.....	9
Documentation and Training.....	10
Help and Support.....	11
Subscribe to Product Announcements.....	11
Send Feedback.....	12
About This Document.....	13
What's New in this Document	13
Supported Hardware.....	13
Using YANG.....	15
YANG overview.....	15
Using the SLX-OS YANG Reference Guide.....	15
YANG Modules.....	17
brocade-aaa.....	21
Top-level container	21
brocade-aaa-ext.....	25
RPCs.....	25
brocade-acl-policy.....	26
Top-level container.....	26
brocade-arp.....	27
Top-level container.....	27
RPCs.....	27
brocade-app-telemetry	28
Top-level container.....	28
brocade-beacon.....	29
Top-level container.....	29
brocade-bridge-domain.....	30
Top-level container.....	30
brocade-certutil.....	32
Top-level container.....	32
External augmentations.....	32
brocade-chassis.....	33
Top-level container.....	33
Actions.....	33
brocade-clock.....	35
Top-level container.....	35
External augmentations.....	35
RPCs.....	35
brocade-common-def.....	36
Top-level container.....	36


brocade-control-plane.....	105
Top-level container.....	105
brocade-crypto.....	106
Top-level container.....	106
brocade-crypto-ext.....	107
Top-level container.....	107
brocade-dai.....	110
Top-level container.....	110
brocade-diagnostics.....	111
Top-level container.....	111
brocade-dot1g.....	112
Top-level container.....	112
brocade-dot1x.....	114
Top-level container.....	114
External augmentations.....	114
brocade-entity.....	115
RPCs.....	115
brocade-event-handler.....	116
Top-level container.....	116
brocade-erp	117
Top-level container.....	117
brocade-firmware.....	118
Top-level container.....	118
RPCs.....	124
brocade-firmware-ext.....	126
RPCs.....	126
brocade-ha.....	127
Top-level container.....	127
RPCs.....	127
brocade-hardware.....	128
Top-level container.....	128
brocade-http-config.....	130
Top-level container.....	130
External augmentations.....	130
brocade-http-redirect.....	131
RPCs.....	131
brocade-igmp-snooping.....	132
Top-level container.....	132
External augmentations.....	132
brocade-interface.....	133
Top-level container.....	133
brocade-interface-ext.....	161
RPCs.....	161
brocade-intf-loopback.....	166
Top-level container.....	166
brocade-ip-access-list.....	167
Top-level container.....	167
brocade-ip-administration.....	169
External augmentations.....	169

brocade-ip-config.....	170
External augmentations.....	170
brocade-ip-policy.....	171
Top-level container.....	171
brocade-ipv6-access-list.....	172
Top-level container.....	172
brocade-isis.....	174
External augmentations.....	174
brocade-isis-operational.....	175
Top-level container.....	175
brocade-keychain	185
Top-level container.....	185
brocade-l2sys-operational.....	186
Top-level container.....	186
brocade-lacp.....	187
Top-level container.....	187
External augmentations.....	187
brocade-lag.....	188
Top-level container.....	188
RPCs.....	188
brocade-lfcs.....	190
Top-level container.....	190
External augmentations.....	190
brocade-license.....	191
Top-level container.....	191
brocade-linecard-management.....	192
Top-level container.....	192
brocade-lldp.....	193
External augmentations.....	193
brocade-lldp-ext.....	195
RPCs.....	195
brocade-mac-access-list.....	196
Top-level container.....	196
RPCs.....	197
brocade-mac-address-table.....	198
Top-level container.....	198
RPCs.....	198
brocade-mc-hms-operational.....	200
Top-level container.....	200
brocade-mct.....	204
Top-level container.....	204
brocade-mld-snooping	205
Top-level container.....	205
brocade-mpls.....	206
Top-level container.....	206
RPCs.....	212
brocade-mpls-operational.....	213
Top-level container.....	213
brocade-nameserver.....	235

RPCs.....	235
brocade-netconf-ext.....	236
RPCs.....	236
brocade-nsm-operational.....	237
Top-level container.....	237
brocade-ntp.....	240
Top-level container.....	240
RPCs.....	240
brocade-onie-grub.....	241
Top-level container.....	241
Actions.....	241
brocade-ospf.....	242
External augmentations.....	242
brocade-ospfv3.....	243
External augmentations.....	243
brocade-pim.....	244
External augmentations.....	244
brocade-pim-operational.....	245
Top-level container.....	245
brocade-port-profile	249
Top-level container.....	249
brocade-preprovision	251
Top-level container.....	251
RPC.....	251
brocade-pw-profile.....	252
Top-level container.....	252
brocade-pwm-operational.....	253
Top-level container.....	253
brocade-qos-cee	255
Top-level container.....	255
brocade-qos-cpu.....	256
External augmentations.....	256
brocade-qos-mls.....	257
External augmentations.....	257
brocade-qos-mpls.....	259
Top-level container.....	259
brocade-qos-mqc.....	261
Top-level container.....	261
brocade-qos-operational	263
Top-level container.....	263
brocade-ras.....	264
Top-level container.....	264
RPCs.....	266
brocade-ras-ext.....	267
Top-level container.....	267
External augmentations.....	267
RPCs.....	267
brocade-ras-operational.....	268
Top-level container.....	268

brocade-rbridge-lag.....	271
Top-level container.....	271
brocade-resource-monitor	272
Top-level container.....	272
brocade-rmon.....	273
Top-level container.....	273
brocade-rpf.....	274
Top-level container.....	274
External augmentations.....	274
brocade-rtm.....	275
Top-level Container	275
brocade-sec-services.....	276
Top-level container.....	276
External augmentations.....	277
brocade-sflow.....	278
Top-level container.....	278
External augmentations.....	278
brocade-snmp.....	279
Top-level container.....	279
RPCs	280
brocade-span.....	281
Top-level container.....	281
External augmentations.....	281
brocade-ssm-operational.....	282
Top-level container.....	282
brocade-sysdiag-operational.....	283
Top-level container.....	283
brocade-sysmgr.....	287
External augmentations.....	287
brocade-sysmgr-operational.....	288
Top-level container.....	288
brocade-sysmon.....	290
Top-level container.....	290
brocade-system.....	291
RPCs.....	291
brocade-system-capabilities.....	292
Top-level container.....	292
brocade-system-maintenance	294
Top-level container.....	294
RPCs.....	294
brocade-system-monitor.....	295
Top-level container.....	295
brocade-system-monitor-ext.....	297
RPCs.....	297
brocade-system-watermark.....	298
Top-level container.....	298
brocade-telemetry.....	299
Top-level container.....	299
brocade-terminal.....	301

Top-level container.....	301
brocade-threshold-monitor.....	302
Top-level container.....	302
brocade-tm-stats.....	304
RPCs.....	304
brocade-topology-group.....	305
Top-level container.....	305
brocade-tpvm.....	306
Top-level container.....	306
RPCs.....	309
brocade-tunnels.....	311
Top-level container.....	311
brocade-tunnels-ext.....	313
RPCs.....	313
brocade-uda-access-list	315
Top-level container.....	315
brocade-udld.....	316
External augmentations.....	316
brocade-vcs.....	317
Top-level container.....	317
RPCs.....	317
brocade-vlan.....	319
Top-level container.....	319
brocade-vrf.....	320
Top-level container.....	320
brocade-vrrp.....	324
Top-level Container	324
External augmentations.....	324
brocade-vrrpv3.....	325
Top-level container.....	325
External augmentations.....	325
brocade-vxlan-visibility.....	326
Top-level container.....	326
brocade-xstp-ext.....	328
RPCs.....	328
extreme-config-mgmt	334
Top-level container.....	334
extreme-gNMI	335
Top-level container.....	335
extreme-remote-attestation	336
Top-level container.....	336
extreme-ssl	337
Top-level container.....	337
extreme-tpvm-config.....	338
Top-level container.....	338
extreme-bmc.....	340
Top-level container.....	340

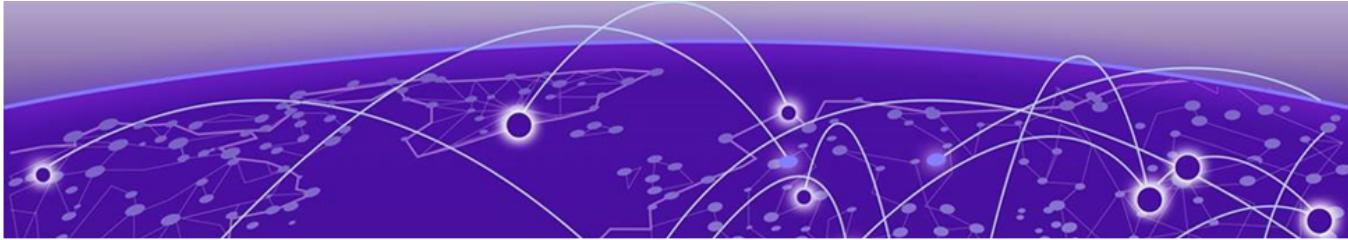

Preface

Read the following topics to learn about:

- The meanings of text formats used in this document.
- Where you can find additional information and help.
- How to reach us with questions and comments.

Text Conventions

Unless otherwise noted, information in this document applies to all supported environments for the products in question. Exceptions, like command keywords associated with a specific software version, are identified in the text.

When a feature, function, or operation pertains to a specific hardware product, the product name is used. When features, functions, and operations are the same across an entire product family, such as ExtremeSwitching switches or SLX routers, the product is referred to as *the switch* or *the router*.

Table 1: Notes and warnings

Icon	Notice type	Alerts you to...
	Tip	Helpful tips and notices for using the product
	Note	Useful information or instructions
	Important	Important features or instructions
	Caution	Risk of personal injury, system damage, or loss of data
	Warning	Risk of severe personal injury

Table 2: Text

Convention	Description
screen displays	This typeface indicates command syntax, or represents information as it is displayed on the screen.
The words <i>enter</i> and <i>type</i>	When you see the word <i>enter</i> in this guide, you must type something, and then press the Return or Enter key. Do not press the Return or Enter key when an instruction simply says <i>type</i> .
Key names	Key names are written in boldface, for example Ctrl or Esc . If you must press two or more keys simultaneously, the key names are linked with a plus sign (+). Example: Press Ctrl+Alt+Del
<i>Words in italicized type</i>	Italics emphasize a point or denote new terms at the place where they are defined in the text. Italics are also used when referring to publication titles.
NEW!	New information. In a PDF, this is searchable text.

Table 3: Command syntax

Convention	Description
bold text	Bold text indicates command names, keywords, and command options.
<i>italic</i> text	Italic text indicates variable content.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{ x y z }	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, such as passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, <i>member</i> [<i>member</i> ...].
\	In command examples, the backslash indicates a “soft” line break. When a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Documentation and Training

Find Extreme Networks product information at the following locations:

[Current Product Documentation](#)

[Release Notes](#)

- [Hardware and software compatibility](#) for Extreme Networks products
- [Extreme Optics Compatibility](#)
- [Other resources](#) such as white papers, data sheets, and case studies

Extreme Networks offers product training courses, both online and in person, as well as specialized certifications. For details, visit www.extremenetworks.com/education/.

Help and Support

If you require assistance, contact Extreme Networks using one of the following methods:

[Extreme Portal](#)

Search the GTAC (Global Technical Assistance Center) knowledge base; manage support cases and service contracts; download software; and obtain product licensing, training, and certifications.

[The Hub](#)

A forum for Extreme Networks customers to connect with one another, answer questions, and share ideas and feedback. This community is monitored by Extreme Networks employees, but is not intended to replace specific guidance from GTAC.

[Call GTAC](#)

For immediate support: (800) 998 2408 (toll-free in U.S. and Canada) or 1 (408) 579 2826. For the support phone number in your country, visit: www.extremenetworks.com/support/contact

Before contacting Extreme Networks for technical support, have the following information ready:

- Your Extreme Networks service contract number, or serial numbers for all involved Extreme Networks products
- A description of the failure
- A description of any actions already taken to resolve the problem
- A description of your network environment (such as layout, cable type, other relevant environmental information)
- Network load at the time of trouble (if known)
- The device history (for example, if you have returned the device before, or if this is a recurring problem)
- Any related RMA (Return Material Authorization) numbers

Subscribe to Product Announcements

You can subscribe to email notifications for product and software release announcements, Field Notices, and Vulnerability Notices.

1. Go to [The Hub](#).
2. In the list of categories, expand the **Product Announcements** list.
3. Select a product for which you would like to receive notifications.

4. Select **Subscribe**.
5. To select additional products, return to the **Product Announcements** list and repeat steps 3 and 4.

You can modify your product selections or unsubscribe at any time.

Send Feedback


The Information Development team at Extreme Networks has made every effort to ensure that this document is accurate, complete, and easy to use. We strive to improve our documentation to help you in your work, so we want to hear from you. We welcome all feedback, but we especially want to know about:

- Content errors, or confusing or conflicting information.
- Improvements that would help you find relevant information.
- Broken links or usability issues.

To send feedback, do either of the following:

- Access the feedback form at <https://www.extremenetworks.com/documentation-feedback/>.
- Email us at documentation@extremenetworks.com.

Provide the publication title, part number, and as much detail as possible, including the topic heading and page number if applicable, as well as your suggestions for improvement.

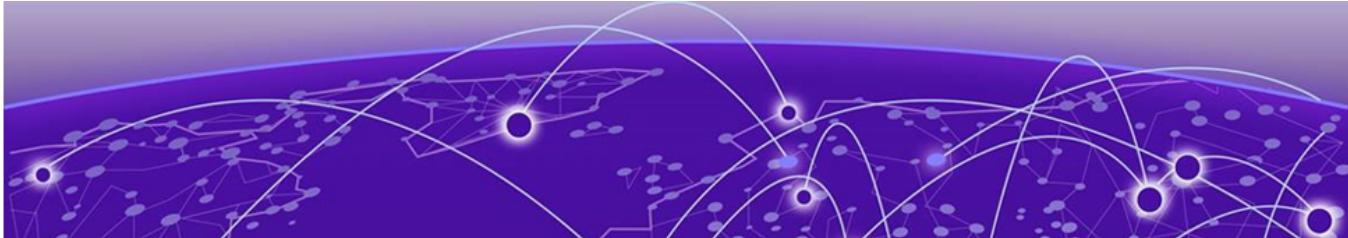

About This Document

[What's New in this Document](#) on page 13
[Supported Hardware](#) on page 13

What's New in this Document

This document is released with the SLX-OS 20.5.1 software release.

For additional information, refer to the *Extreme SLX-OS Release Notes* for this version.

The following YANGs have changed.

- [brocade-common-def](#)
- [brocade-interface](#)
- [brocade-ip-access-list](#)
- [brocade-ipv6-access-list](#)
- [brocade-vrf](#)
- [extreme-bmc](#)

Supported Hardware

SLX-OS 20.5.1 supports the following hardware platforms.

- Extreme 8820
- Extreme 8720
- Extreme 8520
- ExtremeSwitching SLX 9540
- ExtremeSwitching SLX 9250
- ExtremeSwitching SLX 9150

- ExtremeRouting SLX 9740
- ExtremeRouting SLX 9640

**Note**

All configurations and software features that are applicable to SLX 9150 and SLX 9250 devices are also applicable for the Extreme 8520 and Extreme 8720 devices respectively.


All configurations and software features that are applicable to SLX 9740 devices are also applicable for the Extreme 8820 devices.

The "Measured Boot with Remote Attestation" feature is only applicable to the Extreme 8520, Extreme 8720, and Extreme 8820 devices. It is not supported on the SLX 9150 and SLX 9250 devices.

**Note**

Although many software and hardware configurations are tested and supported for this release, documenting all possible configurations and scenarios is beyond this document's scope.

For information about other releases, see the documentation for those releases.

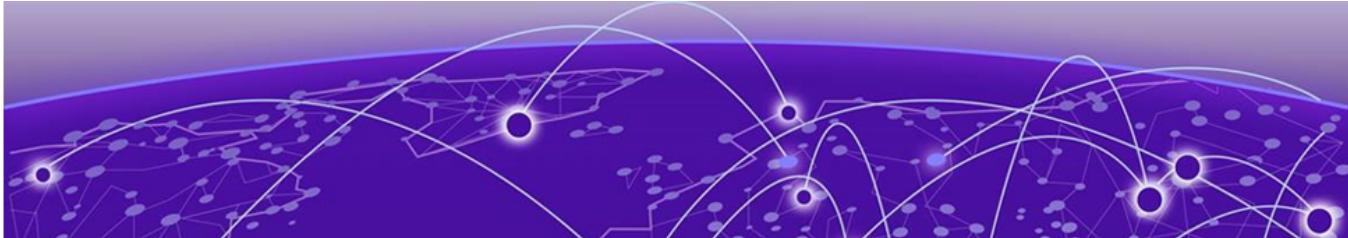

Using YANG

[YANG overview](#) on page 15

[Using the SLX-OS YANG Reference Guide](#) on page 15

YANG overview

Refer to RFC 6020, YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF), for full details of how to use YANG, and for a reference of all the features of the YANG language.

Using the SLX-OS YANG Reference Guide

Each module provides a data model for a specific part of the system. It models the data using one or more of the following entities:

- Top-level nodes and their subtrees
- Subtrees that augment nodes in other YANG modules
- Custom RPCs
- Custom actions that make use of the proprietary action mechanism

The client will receive notification as documented in Notifications section for certain events. (You must register in order to receive notifications from the server.)

For each module, this manual provides a high-level description of what the module does. It also provides the structure of each top-level node, external augmentation, custom RPC, and action.


The **pyang** command with the **-f tree** option is used to illustrate the YANG code. This utility resolves the uses and augments statements to provide an easy-to-read view of the structure of the YANG code. The following example shows part of the module.

```
module:  
  +-rw interface  
  |  +-rw fc-port [name]  
  |    +-rw name          interface-type  
  |    +-rw fc-speed-cfg?  fc-speed-cfg-type  
  |    +-rw fill-word?    fc-fillword-cfg-type  
  |    +-rw vc-link-init? fc-vc-link-init-cfg-type  
  |    +-rw isl-r_rdy-mode? empty  
  |    +-rw trunk-enable? empty  
  |    +-rw shutdown?     empty
```

In addition to showing the structure, the output of the **pyang -f tree** command provides information about each node, as shown in the table below. Field definitions and possible values are shown in the following table.

Table 4: Field descriptions

Field	Value
status	Status of the node can be one of the following values: + Current x Deprecated o Obsolete
status	Type of information can be one of the following values: rw Read-write (The node contains configuration data) -ro Read-only (The node contains operational data) -x RPC statement -n Notification (not supported)
flags	The name of the node can be further modified by one of the following values: (name) Choice node :(name) Case node prefix:name Augmented from external module
name	The following optional values can be used: ? Optional leaf or presence container * Leaf list [keys] Keys for a list
type	The type of the leaf or leaf-list. If the specified type is other than one of the basic types, then the type is defined in a typedef statement in the .yang file.

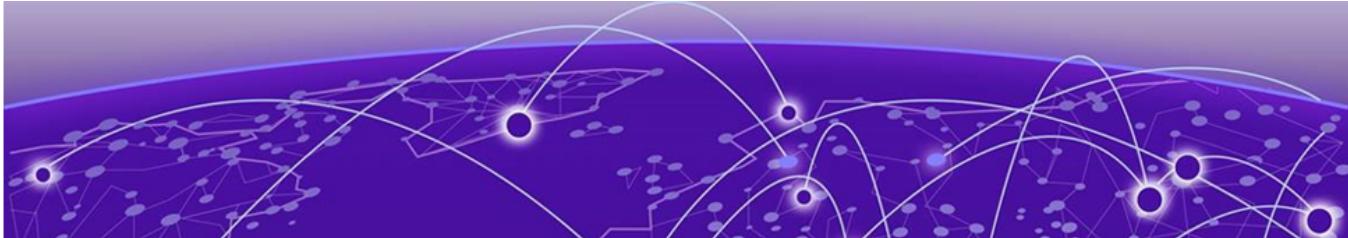

YANG Modules

[brocade-aaa](#) on page 21
[brocade-aaa-ext](#) on page 25
[brocade-acl-policy](#) on page 26
[brocade-arp](#) on page 27
[brocade-app-telemetry](#) on page 28
[brocade-beacon](#) on page 29
[brocade-bridge-domain](#) on page 30
[brocade-certutil](#) on page 32
[brocade-chassis](#) on page 33
[brocade-clock](#) on page 35
[brocade-common-def](#) on page 36
[brocade-control-plane](#) on page 105
[brocade-crypto](#) on page 106
[brocade-crypto-ext](#) on page 107
[brocade-dai](#) on page 110
[brocade-diagnostics](#) on page 111
[brocade-dot1ag](#) on page 112
[brocade-dot1x](#) on page 114
[brocade-entity](#) on page 115
[brocade-event-handler](#) on page 116
[brocade-erp](#) on page 117
[brocade-firmware](#) on page 118
[brocade-firmware-ext](#) on page 126
[brocade-ha](#) on page 127
[brocade-hardware](#) on page 128
[brocade-http-config](#) on page 130
[brocade-http-redirect](#) on page 131
[brocade-igmp-snooping](#) on page 132
[brocade-interface](#) on page 133
[brocade-interface-ext](#) on page 161
[brocade-intf-loopback](#) on page 166
[brocade-ip-access-list](#) on page 167
[brocade-ip-administration](#) on page 169
[brocade-ip-config](#) on page 170

[brocade-ip-policy](#) on page 171
[brocade-ipv6-access-list](#) on page 172
[brocade-isis](#) on page 174
[brocade-isis-operational](#) on page 175
[brocade-keychain](#) on page 185
[brocade-l2sys-operational](#) on page 186
[brocade-lacp](#) on page 187
[brocade-lag](#) on page 188
[brocade-lfs](#) on page 190
[brocade-license](#) on page 191
[brocade-linecard-management](#) on page 192
[brocade-lldp](#) on page 193
[brocade-lldp-ext](#) on page 195
[brocade-mac-access-list](#) on page 196
[brocade-mac-address-table](#) on page 198
[brocade-mc-hms-operational](#) on page 200
[brocade-mct](#) on page 204
[brocade-mld-snooping](#) on page 205
[brocade-mpls](#) on page 206
[brocade-mpls-operational](#) on page 213
[brocade-nameserver](#) on page 235
[brocade-netconf-ext](#) on page 236
[brocade-nsm-operational](#) on page 237
[brocade-ntp](#) on page 240
[brocade-onie-grub](#) on page 241
[brocade-ospf](#) on page 242
[brocade-ospfv3](#) on page 243
[brocade-pim](#) on page 244
[brocade-pim-operational](#) on page 245
[brocade-port-profile](#) on page 249
[brocade-preprovision](#) on page 251
[brocade-pw-profile](#) on page 252
[brocade-pwm-operational](#) on page 253
[brocade-qos-cee](#) on page 255
[brocade-qos-cpu](#) on page 256
[brocade-qos-mls](#) on page 257
[brocade-qos-mpls](#) on page 259
[brocade-qos-mqc](#) on page 261
[brocade-qos-operational](#) on page 263
[brocade-ras](#) on page 264
[brocade-ras-ext](#) on page 267
[brocade-ras-operational](#) on page 268

[brocade-rbridge-lag](#) on page 271
[brocade-resource-monitor](#) on page 272
[brocade-rmon](#) on page 273
[brocade-rpf](#) on page 274
[brocade-rtm](#) on page 275
[brocade-sec-services](#) on page 276
[brocade-sflow](#) on page 278
[brocade-snmp](#) on page 279
[brocade-span](#) on page 281
[brocade-ssm-operational](#) on page 282
[brocade-sysdiag-operational](#) on page 283
[brocade-sysmgr](#) on page 287
[brocade-sysmgr-operational](#) on page 288
[brocade-sysmon](#) on page 290
[brocade-system](#) on page 291
[brocade-system-capabilities](#) on page 292
[brocade-system-maintenance](#) on page 294
[brocade-system-monitor](#) on page 295
[brocade-system-monitor-ext](#) on page 297
[brocade-system-watermark](#) on page 298
[brocade-telemetry](#) on page 299
[brocade-terminal](#) on page 301
[brocade-threshold-monitor](#) on page 302
[brocade-tm-stats](#) on page 304
[brocade-topology-group](#) on page 305
[brocade-tpvm](#) on page 306
[brocade-tunnels](#) on page 311
[brocade-tunnels-ext](#) on page 313
[brocade-uda-access-list](#) on page 315
[brocade-udld](#) on page 316
[brocade-vcs](#) on page 317
[brocade-vlan](#) on page 319
[brocade-vrf](#) on page 320
[brocade-vrrp](#) on page 324
[brocade-vrrpv3](#) on page 325
[brocade-vxlan-visibility](#) on page 326
[brocade-xstp-ext](#) on page 328
[extreme-config-mgmt](#) on page 334
[extreme-gNMI](#) on page 335
[extreme-remote-attestation](#) on page 336
[extreme-ssl](#) on page 337
[extreme-tpvm-config](#) on page 338

[extreme-bmc](#) on page 340

brocade-aaa

Top-level container

```

module: brocade-aaa
  +-rw aaa-config
    |  +-rw aaa
    |    +-rw authentication
    |      |  +-rw login
    |      |    +-rw first?    enumeration
    |      |    +-rw second?   enumeration
    |    +-rw accounting
    |      |  +-rw exec
    |      |    +-rw defaultacc
    |      |      +-rw start-stop
    |      |        +-rw server-type? acc_srv_type
    |    +-rw commands
    |      |  +-rw defaultacc
    |      |      +-rw start-stop
    |      |        +-rw server-type? acc_srv_type
    +-rw authorization
      +-rw command
        +-rw firstauthor?   enumeration
        +-rw secondauthor?  enumeration
    +-rw username* [name]
      +-rw name           string
      +-rw user-password  user-passwd
      +-rw encryption-level? enumeration
      +-rw role            string
      +-rw desc?          string
      +-rw enable?         username-enable
      +-rw expire?         date
      +-rw access-time?   string
      +-rw end-time?       string
      +-rw acct-inactivity-expiry-period? uint32
      +-rw acct-inactivity-warning-period? uint32
    +-rw service
      +-rw password-encryption? empty
    +-rw user
      +---x unlock
      +---w input
        |  +---w username   string
      +---ro output
        +---ro Result?    string
    +-rw role
      +-rw name* [name]
        +-rw name     string
        +-rw desc?   string
    +-rw radius-server
      +-rw host* [hostname use-vrf]
        +-rw hostname      string
        +-rw use-vrf       common-def:use-vrf
        +-rw radius-server-options
          +-rw auth-port?  rad-auth-port
          +-rw protocol?   rad-auth-protocols
          +-rw key?        string
          +-rw encryption-level? enumeration
          +-rw retries?    uint32
          +-rw timeout?    uint32
          +-rw radsec?     empty
          +-rw source-interface
            +-rw source-interface-name? track-iftype

```

```

|           +---rw ethernet
|           |   +---rw source-interface-value?    interface:interface-type
|           +---rw loopback
|           |   +---rw source-interface-value?    loopback-iftype
|           +---rw ve
|           |   +---rw source-interface-value?    ve-iftype
|           +---rw management
|               +---rw source-interface-value?    mm-iftype
+---rw tacacs-server
|   +---rw host* [hostname use-vrf]
|       +---rw hostname          string
|       +---rw use-vrf           common-def:use-vrf
|       +---rw tacacs-server-options
|           +---rw port?          tac-auth-port
|           +---rw protocol?      tac-auth-protocols
|           +---rw key?           string
|           +---rw encryption-level? enumeration
|           +---rw retries?       uint8
|           +---rw timeout?       uint8
|           +---rw tacacs-source-ip
|               +---rw tacacs-source-int-type?  srcip_type
|               +---rw tacacs-source-int-value? string-type
+---rw ldap-server
|   +---rw host* [hostname use-vrf]
|       +---rw hostname          string
|       +---rw use-vrf           common-def:use-vrf
|       +---rw ldap-server-options
|           +---rw ldaps?          empty
|           +---rw port?           ldap-auth-port
|           +---rw retries?        uint8
|           +---rw timeout?        uint8
|           +---rw baseddn?        string
|           +---rw source-interface
|               +---rw source-intf-type?  source-interface-type
|               +---rw ethernet
|                   +---rw source-intf-name?  ethernet-iftype
|               +---rw loopback
|                   +---rw source-intf-name?  loopback-iftype
|               +---rw ve
|                   +---rw source-intf-name?  ve-iftype
|               +---rw management
|                   +---rw source-intf-name?  mm-iftype
+---rw maprole
|   +---rw group* [ad-group]
|       +---rw ad-group         string
|       +---rw switch-role      string
+---rw password-attributes
|   +---rw min-length?        uint32
|   +---rw max-logins?        uint32
|   +---rw max-retry?         uint32
|   +---rw max-lockout-duration?  uint32
|   +---rw history?          uint32
|   +---rw repeat?            uint32
|   +---rw sequence?          uint32
|   +---rw force-default-password-change? empty
|   +---rw max-password-age?  uint32
|   +---rw character-restriction
|       +---rw upper?          uint32
|       +---rw lower?          uint32
|       +---rw numeric?         uint32
|       +---rw special-char?    uint32
|   +---rw admin-lockout-enable?  empty
|   +---rw login-notify-duration? uint32
+---rw banner

```

```

|   +--rw login?      string
|   +--rw motd?       string
|   +--rw incoming?   string
+--rw rule* [index]
|   +--rw index        uint32
|   +--rw action?     rule-action
|   +--rw operation?  rule-operation
|   +--rw role?       string
|   +--rw command
|       +--rw (cmdlist)?
|           +---:(container-cmds)
|               |   +--rw enumList?          enumeration
|               +---:(interface-a)
|                   |   +--rw interface-int
|                   |   +--rw interface-cont!
|               +---:(interface-c)
|                   |   +--rw interface-eth
|                   |   +--rw interface
|                   |   +--rw ethernet-cont!
|               +---:(interface-e)
|                   |   +--rw interface-eth-leaf
|                   |   +--rw interface
|                   |   +--rw ethernet-leaf?    interface:interface-type
|               +---:(interface-f)
|                   |   +--rw interface-mgmt
|                   |   +--rw interface
|                   |   +--rw management-cont!
|               +---:(interface-i)
|                   |   +--rw interface-pc
|                   |   +--rw interface
|                   |   +--rw port-channel-cont!
|               +---:(interface-j)
|                   |   +--rw interface-pc-leaf
|                   |   +--rw interface
|                   |   +--rw port-channel-leaf?  interface:portchannel-type
|               +---:(interface-m)
|                   |   +--rw interface-management-leaf
|                   |   +--rw interface
|                   |   +--rw management-leaf?  interface:man-interface-type
|               +---:(interface-n)
|                   |   +--rw interface-loopback
|                   |   +--rw interface
|                   |   +--rw loopback-cont!
|               +---:(interface-o)
|                   |   +--rw interface-loopback-leaf
|                   |   +--rw interface
|                   |   +--rw loopback-leaf?   loopback-intf:intf-loopback-port-type
|               +---:(interface-p)
|                   |   +--rw interface-ve
|                   |   +--rw interface
|                   |   +--rw ve-cont!
|               +---:(interface-q)
|                   |   +--rw interface-ve-leaf
|                   |   +--rw interface
|                   |   +--rw ve-leaf?    interface:ve-type
|               +---:(copy-a)
|                   |   +--rw copy-cp
|                   |   +--rw copy-cont!
|               +---:(copy-b)
|                   |   +--rw copy-running
|                   |   +--rw copy
|                   |   +--rw running-config-cont!
|               +---:(copy-c)
|                   |   +--rw copy-support

```

```
|           |     +-rw copy
|           |     +-rw support-cp!
+--:(clear-a)
|   +-rw clear-cl
|   +-rw clear-cont!
+--:(clear-b)
|   +-rw clearLogging
|   +-rw clear
|   +-rw logging-cont!
+--:(clear-c)
|   +-rw clear-support
|   +-rw clear
|   +-rw support-cl!
+--:(protocol-a)
|   +-rw protocol-pr
|   +-rw protocol-cont!
+--:(protocol-b)
|   +-rw protocol-spanning
|   +-rw protocol
|   +-rw spanning-tree-cont!
+--:(protocol-c)
    +-rw protocol-lldp
    +-rw protocol
    +-rw lldp-cont!
+-rw root-sa
|   +-rw root
|   +-rw enable?    empty
|   +-rw access?    root_access_type
+-rw alias-config
    +-rw alias* [name]
    |   +-rw name        string
    |   +-rw expansion   string
    +-rw user* [name]
        +-rw name        string
        +-rw alias* [name]
            +-rw name        string
            +-rw expansion   string
```

brocade-aaa-ext

RPCs

```
rpcs:  
  +---x user-session-info  
  +--ro output  
    +--ro user-role?  string
```

brocade-acl-policy

Top-level container

```
module: brocade-acl-policy
  +-rw acl-policy
    +-rw global-acl-policy-conf-cmds
      +-rw allow-conflicting-rules?    empty
      +-rw allow-duplicate-rules?    empty
      +-rw enable-acl-cam-sharing?    empty
      +-rw enable-acl-log-raslog
        |  +-rw acl-log-raslog?    empty
        |  +-rw log-interval?    common-def:time-interval-sec
      +-rw enable-implicit-deny-log
        +-rw implicit-deny-log?    empty
        +-rw acl-type    enumeration
```

brocade-arp

Top-level container

```
module: brocade-arp
  +-rw arp-entry* [arp-ip-address]
  | +-rw arp-ip-address      inet:ipv4-address
  | +-rw mac-address-value?  mac-access-list:mac-address-type
  | +-rw interfacename?     enumeration
  | +-rw (interfacetype)?
  |   +---:(Port-channel)
  |     | +-rw Port-channel?    interface:portchannel-type
  |   +---:(Ethernet)
  |     | +-rw Ethernet?      interface:interface-type
  |   +---:(Ve)
  |     +-rw Ve?              interface:ve-type
  +-rw host-table
    +-rw aging-mode
    | +-rw conversational?   empty
  +-rw aging-time
    +-rw conversational-timeout?  uint32
```

RPCs

Return ARP entries of the managed entity:

```
rpcs:
  +---x get-arp
    +---w input
    | +---w (input-type)?
    |   +---:(interface)
    |     | +---w interface-type?  enumeration
    |     | +---w interface-name? union
    |   +---:(dynamic)
    |     | +---w dynamic?       empty
    |   +---:(static)
    |     | +---w static?        empty
    |   +---:(ip)
    |     +---w ip-address?     inet:ipv4-address
  +-ro output
    +---ro arp-entry* [ip-address]
      +---ro ip-address      inet:ipv4-address
      +---ro mac-address?    mac-access-list:mac-address-type
      +---ro interface-type? enumeration
      +---ro interface-name? union
      +---ro is-resolved?    boolean
      +---ro age?            string
      +---ro entry-type?    enumeration
```

brocade-app-telemetry

Top-level container

```
module: brocade-app-telemetry
  +-rw app-telemetry
    +-rw app-telemetry-basic
      |  +-rw enable?  empty
    +-rw access-list-container
      +-rw access-list?  string
      +-rw ingress?  empty
```

brocade-beacon

Top-level container

```
module: brocade-beacon
  +-rw beacon
    +-rw enable
      |  +-rw interface
      |  |  +---x ethernet
      |  |  |  +---w input
      |  |  |  +---w eth_option
      |  |  |  +---w ethernet    string
      |  |  |  +---w start?     ietfyang:date-and-time
      |  |  |  +---w length?    uint32
      |  |  +---x port-channel
      |  |  |  +---w input
      |  |  |  +---w lag_option
      |  |  |  +---w port-channel  uint32
      |  |  |  +---w start?     ietfyang:date-and-time
      |  |  |  +---w length?    uint32
      |  +---x chassis
      |  |  +---w input
      |  |  |  +---w start?     ietfyang:date-and-time
      |  |  |  +---w length?    uint32
    +-rw disable
      +-rw interface
        |  +---x ethernet
        |  |  +---w input
        |  |  |  +---w ethernet    string
        |  +---x port-channel
        |  |  +---w input
        |  |  |  +---w port-channel  uint32
      +---x chassis
```

brocade-bridge-domain

Top-level container

```

module: brocade-bridge-domain
  +-rw bridge-domain* [bridge-domain-id bridge-domain-type]
    +-rw bridge-domain-id          bridge-domain-id-type
    +-rw bridge-domain-type       enumeration
    +-rw vc-id-num?              uint32
    +-rw description?            string
    +-rw mac-learning
      | +-rw mac-learning-disable?   empty
    +-rw peer* [peer-ip]
      | +-rw peer-ip             inet:ipv4-address
      | +-rw load-balance?        empty
      | +-rw cos?                uint32
      | +-rw lsp*                 string
      | +-rw flow-label?         empty
      | +-rw control-word?       empty
    +-rw statistics?
    +-rw statistics-sync?       empty
    +-rw pw-profile-name?      common-def:name-string64
    +-rw router-interface* [router-ve]
      | +-rw router-ve           interface:ve-type
      | +-rw disallow-oar-ac?    empty
    +-rw logical-interface
      | +-rw ethernet* [lif-bind-id]
        | | +-rw lif-bind-id     import-lif:lif-interface-type
      | +-rw port-channel* [pc-lif-bind-id]
        | | +-rw pc-lif-bind-id  import-lif:lif-port-channel-type
    +-rw bpdu-drop-enable?      empty
    +-rw local-switching?      empty
    +-rw ip
      | +-rw dai:arp-node-config
        | | +-rw dai:arp
          | | | +-rw dai:inspection
          | | | | +-rw dai:trust?   empty
          | | | +-rw dai:filter
          | | | | +-rw dai:acl-name? dai-acl-policy-name
      | +-rw igmp-snooping:bd-pim
        | | +-rw igmp-snooping:snooping
        | | | +-rw igmp-snooping:bd-pimv4-enable?   empty
      | +-rw igmp-snooping:bd-ip-igmp
        | | +-rw igmp-snooping:snooping
          | | | +-rw igmps-version?          igmps-version-type
          | | | +-rw igmp-snooping:igmps-last-member-query-interval?  lmqt-type
          | | | +-rw igmp-snooping:igmps-query-max-response-time?    qmrt-type
          | | | +-rw igmp-snooping:igmps-query-interval?            qi-type
          | | | +-rw igmp-snooping:igmps-enable?          empty
          | | | +-rw igmp-snooping:igmps-fast-leave?        empty
          | | | +-rw igmp-snooping:restrict-unknown-multicast?   empty
          | | | +-rw igmp-snooping:igmps-querier
          | | | | +-rw igmp-snooping:igmps-qenable?   empty
          | | | +-rw igmp-snooping:igmps_mrouter
            | | | | +-rw igmp-snooping:igmps-interface* [igmps-if-type igmps-value]
              | | | | | +-rw igmp-snooping:igmps-if-type   enumeration
              | | | | | +-rw igmp-snooping:igmps-value     bridge-domain:bridge-domain-lif-
                type
                | | | +-rw igmp-snooping:igmps_static-group* [igmps-mcast-address igmps-
                  interface igmps-if-type igmps-value]
                  | | | | +-rw igmp-snooping:igmps-mcast-address   inet:ipv4-address
                  | | | | +-rw igmp-snooping:igmps-interface      enumeration

```

```
|           +-rw igmp-snooping:igmps-if-type      enumeration
|           +-rw igmp-snooping:igmps-value       bridge-domain:bridge-domain-
lif-type
+-rw ipv6
|   +-rw mld-snooping:bd-pim
|   |   +-rw mld-snooping:snooping
|   |   |   +-rw mld-snooping:bd-pimv6-enable?  empty
|   +-rw mld-snooping:bd-ipv6-mld
|   |   +-rw mld-snooping:mld-snooping
|   |   |   +-rw mld-snooping:last-member-query-interval? lmqt-type
|   |   +-rw mld-snooping:query-max-response-time? qmrt-type
|   |   +-rw mld-snooping:query-interval?         qi-type
|   |   +-rw mld-snooping:mldVersion?            version-type
|   |   +-rw mld-snooping:enable?                empty
|   |   +-rw mld-snooping:fast-leave?           empty
|   |   +-rw mld-snooping:querier
|   |   |   +-rw mld-snooping:qenable?          empty
|   +-rw mld-snooping:mrouter
|   |   +-rw mld-snooping:interface* [if-type value]
|   |   |   +-rw mld-snooping:if-type          enumeration
|   |   |   +-rw mld-snooping:value           bridge-domain:bridge-domain-lif-type
+-rw mld-snooping:static-group* [mcast-address interface if-type value]
    +-rw mld-snooping:mcast-address      inet:ipv6-address
    +-rw mld-snooping:interface        enumeration
    +-rw mld-snooping:if-type          enumeration
    +-rw mld-snooping:value           bridge-domain:bridge-domain-lif-type
---rw mac-address
|   +-rw withdrawal?               empty
---rw arp:suppress-arp
|   +-rw arp:suppress-arp-enable?  empty
---rw ipv6-nd-ra:suppress-nd
    +-rw ipv6-nd-ra:suppress-nd-enable? empty
```

brocade-certutil

This data model provides tail-f actions to perform functions such as importing an LDAP CA certificate, removing an LDAP CA certificate, or displaying the LDAP certificate.

Top-level container

```
module: brocade-certutil
  +-rw certutil
    +---x sshkey
      |  +---w input
      |    +---w user      string
      |    +---w pubkey     string
    +---x aaa-cacpiv
      |  +---w input
      |    +---w user      string
      |    +---w DN        string
    +---x sshx509v3
      |  +---w input
      |    +---w user      string
      |    +---w DN        string
  +-rw import
    +---x sshkey
      +---w input
        +---w protocol    enumeration
        +---w source-ip?  inet:ip-address
        +---w user        string
        +---w host        string
        +---w directory   string
        +---w file         string
        +---w login        string
        +---w password?   string
        +---w use-vrf?    common-def:use-vrf
```

External augmentations

```
module: brocade-common-def
  +-rw no
  |  +-rw certutil:certutil
  +-rw show
  |  +-rw certutil:cert-util
```

brocade-chassis

Top-level container

```
module: brocade-chassis
  +-rw hide-virtual-ip-holder
  | +-rw chassis
  |   +-rw virtual-ip?      common-def:ipv4-prefix-mask
  |   +-rw virtual-ipv6?    common-def:ipv6-address-prefix
  |   +-rw oper-address
  |     +-ro virtual-oper-Vip-address?    common-def:ipv4-address-prefix-type
  |     +-ro virtual-oper-VipV6-address*  string
  +-rw chassis
    +---x enable
    +---x disable
    +-rw beacon
      +---x enable
      +---x disable
    +-rw fan
      +-rw airflow-direction
        +---x port-side-intake
        +---x port-side-exhaust
```

Actions

Enable the chassis:

```
module: brocade-chassis
  +-rw chassis
    +-ro enable
```

Disable the chassis:

```
module: brocade-chassis
  +-rw chassis
    +-ro disable
```

Enable the chassis beacon:

```
module: brocade-chassis
  +-rw chassis
    +-rw beacon
      +---ro enable
```

Disable the chassis beacon:

```
module: brocade-chassis
  +-rw chassis
    +-rw beacon
      +---ro disable
```

Set the airflow direction to port-side-intake:

```
module: brocade-chassis
  +-rw chassis
    +-rw fan
      +-rw airflow-direction
        +---ro port-side-intake
```

Set the airflow direction to port-side-exhaust:

```
module: brocade-chassis
  +-rw chassis
    +-rw fan
      +-rw airflow-direction
        +-ro port-side-exhaust
```

brocade-clock

Top-level container

```
module: brocade-clock
  +-rw clock-set-datetime
  |  +---x clock
  |  +---w input
  |  +---w set    ietfyang:date-and-time
  +-rw clock-sa
    +-rw clock
      +-rw timezone?  common-def:timezone
```

External augmentations

```
module: brocade-common-def
  |  +-/-rw clock-server:clock
```

RPCs

```
rpcs:
  +---x show-clock
    +-ro output
    +---ro clock-time*
      +-ro current-time?  ietfyang:date-and-time
      +-ro timezone?      string
```

brocade-common-def

Top-level container

```

module: brocade-common-def
  +-rw show
    | +-rw defaults
    | | +-rw threshold-monitor-extensions:threshold
    | | | +---x threshold-monitor-extensions:sfp
    | | | +---w threshold-monitor-extensions:input
    | | | +---w threshold-monitor-extensions:type      sfp-type
    | +-rw aaa-extensions:aaa-users
    | | +---x aaa-extensions:users
    +-rw certutil:cert-util
    | | +---x certutil:sshkey
    | | +---w certutil:input
    | | | +---w certutil:user      string
    +-rw brcd-crypto-ext:crypto
    | | +---rw brcd-crypto-ext:key
    | | | +---x brcd-crypto-ext:mypubkey
    | | +---rw brcd-crypto-ext:ca
    | | | +---x brcd-crypto-ext:trustpoint
    | | | +---x brcd-crypto-ext:certificates
    +-rw event-handler:event-handler
    | | +---x event-handler:activations
    +-rw firmware-extensions:firmware
    | | +---x firmware-extensions:firmwaredownloadstatus
    | | | +---w firmware-extensions:input
    | | | | +---w firmware-extensions:brief?      empty
    | | | | +---w firmware-extensions:summary?    empty
    | | | +---ro firmware-extensions:output
    | | | | +---ro firmware-extensions:result?    string
    | | +---x firmware-extensions:firmwaredownloadhistory
    | | | +---ro firmware-extensions:output
    | | | | +---ro firmware-extensions:result?    string
    | | +---x firmware-extensions:firmware
    | | | +---w firmware-extensions:input
    | | | | +---w firmware-extensions:auto-sync?  enumeration
    | | | +---ro firmware-extensions:output
    | | | | +---ro firmware-extensions:result?    string
    | | +---x firmware-extensions:version
    | | | +---w firmware-extensions:input
    | | | | +---w firmware-extensions:brief?      empty
    | | | | +---w firmware-extensions:all-partitions? empty
    | | | +---ro firmware-extensions:output
    | | | | +---ro firmware-extensions:result?    string
    | | +---x firmware-extensions:firmware-features
    | | | +---ro firmware-extensions:output
    | | | | +---ro firmware-extensions:result?    string
    +-rw firmware:ztp
    | | +---x firmware:ztpstatus
    | | | +---ro firmware:output
    | | | | +---ro firmware:result?    string
    +-rw firmware:show-firmware-dummy
    | | +---rw firmware:show-firmware-option
    | | | +---rw firmware:peripheral-show-option
    | | | | +---x firmware:peripheral-show-cpld
    | | | | +---x firmware:peripheral-show-fpga
    | | | +---rw firmware:peripheral-show-bmc-option
    | | | | +---x firmware:peripheral-show-bmc-all
    | | | | +---x firmware:peripheral-show-bmc-boot
    | | | | +---x firmware:peripheral-show-bmc-application
  
```

```

|   +-rw firmware:update
|   |   +---x firmware:onieversion
|   |   |   +-ro firmware:output
|   |   |   +-ro firmware:onie-ver?    string
|   |   +---x firmware:grubversion
|   |   |   +-ro firmware:output
|   |   |   +-ro firmware:grub-ver?   string
|   +-rw hardware:hardware
|   |   +---x hardware:port-group
|   |   +---x hardware:smt
|   |   +---x hardware:media-database
|   |   |   +---w hardware:input
|   |   |   |   +-w (opt)?
|   |   |   |   +-:(all)
|   |   |   |   |   +---w hardware:all      empty
|   |   |   |   +-:(sfp)
|   |   |   |   |   +---w hardware:sfp     empty
|   |   |   |   +-:(qsfp)
|   |   |   |   |   +---w hardware:qsfp    empty
|   |   |   |   +-:(qsfp28)
|   |   |   |   |   +---w hardware:qsfp28   empty
|   |   +---x hardware:profile
|   |   |   +---w hardware:input
|   |   |   |   +-w (profile-type)?
|   |   |   |   +-:(tcam)
|   |   |   |   |   +---w hardware:tcam?      tcam-profile-subtype
|   |   |   |   +-:(cam-share)
|   |   |   |   |   +---w hardware:cam-share-show?   empty
|   |   |   |   +-:(route)
|   |   |   |   |   +---w hardware:routing
|   |   |   |   |   |   +---w hardware:route      route-profile-subtype
|   |   |   |   |   |   +---w hardware:routing-feature-flag
|   |   |   |   |   |   |   +---w hardware:hw_opt?      empty
|   |   |   |   |   |   |   +-w hardware:multi_vrf?    empty
|   |   |   |   |   |   |   +-w hardware:v4_fib_comp?   empty
|   |   |   |   |   |   |   +-w hardware:v6_fib_comp?   empty
|   |   |   |   |   |   |   +-w hardware:ipv6-prefix-max64? empty
|   |   |   |   |   |   |   +-w hardware:urpf_flag?     empty
|   |   |   |   +-:(qos)
|   |   |   |   |   +---w hardware:qos?      qos-profile-subtype
|   |   |   |   +-:(lag)
|   |   |   |   |   +---w hardware:lag?      lag-profile-subtype
|   |   |   |   +-:(counters)
|   |   |   |   |   +---w hardware:counters?   counters-profile-subtype
|   |   |   |   +-:(etcam)
|   |   |   |   |   +---w hardware:etcam?      etcam-profile-subtype
|   |   |   |   +-:(current)
|   |   |   |   |   +---w hardware:current-container
|   |   |   |   |   |   +---w hardware:current?   empty
|   |   |   |   |   |   +-w hardware:usage?     empty
|   |   |   |   |   |   +-w hardware:slot?      uint32
|   |   |   |   |   |   +-w hardware:chip?      uint32
|   +-rw ha:ha
|   |   +---x ha:ha
|   |   |   +---w ha:input
|   |   |   |   +-w ha:all-partitions?   empty
|   +-rw ha:redundancy
|   |   +---x ha:redundancy
|   +-rw http-config:http
|   |   +---rw http-config:server
|   |   |   +---x http-config:status
|   +-rw brocade-license:license
|   |   +---x brocade-license:id
|   |   |   +-ro brocade-license:output

```

```

| |         +--ro brocade-license:licenseid-list*
| |             +--ro brocade-license:license-id?    string
| +-rw brocade-license:enh-show-license-keys
| |     +---x brocade-license:license
| |         +---w brocade-license:input
| |             +---w (single-or-all)?
| |                 +---:(eula)
| |                     +---w brocade-license:eula?    empty
| |     +---ro brocade-license:output
| |         +---ro brocade-license:license-list*
| |             +---ro brocade-license:license-details*
| |                 +---ro brocade-license:license-data?      string
| |                 +---ro brocade-license:license-expiry-date?  string
| |                 +---ro brocade-license:license-feature-name? string
| |                 +---ro brocade-license:license-capacity?   string
| |                 +---ro brocade-license:license-consumed?   string
| |                 +---ro brocade-license:license-valid-state? string
| |                 +---ro brocade-license:license-vendor-info? string
| |                 +---ro brocade-license:license-eula-date?   string
| |     +---x brocade-license:dpod
| |         +---ro brocade-license:output
| |             +---ro brocade-license:showdpod-list*
| |                 +---ro brocade-license:dpod-details*
| |                     +---ro brocade-license:dpod-ports?        uint32
| |                     +---ro brocade-license:dpod-licenses-installed? uint32
| |                     +---ro brocade-license:num-ports-provisioned? uint32
| |                     +---ro brocade-license:num-ports-reserved?   uint32
| |                     +---ro brocade-license:num-ports-license-available? uint32
| +-rw linecard-management:linecardinfo
| |     +---x linecard-management:linecard
| +-rw linecard-management:sfminfo
| |     +---x linecard-management:switch_fabric_module
| +-rw linecard-management:mminfor
| |     +---x linecard-management:mm
| +-rw linecard-management:slotsinfor
| |     +---x linecard-management:slots
| +-rw linecard-management:latch-detection-info
| |     +---x linecard-management:show-latch-detection
| |         +---w linecard-management:input
| |             +---w linecard-management:linecard?    fusion_slotnum
| +-rw ras-extensions:support
| |     +---x ras-extensions:support
| +-rw ras-extensions:tech-support
| |     +---x ras-extensions:tech-support
| +-rw ras-extensions:copy-support
| |     +---x ras-extensions:status
| |     +---x ras-extensions:group-list
| +-rw ras-extensions:infra-inventory
| |     +---x ras-extensions:inventory
| |         +---w ras-extensions:input
| |             +---w (opt)?
| |                 +---:(chassis)
| |                     | +---w ras-extensions:chassis?    empty
| |                         +---:(fan)
| |                             | +---w ras-extensions:fan?    empty
| |                         +---:(module)
| |                             | +---w ras-extensions:module?    empty
| |                                 +---:(powerSupply)
| |                                     +---w ras-extensions:powerSupply?  empty
| +-rw ras-extensions:infra
| |     +---x ras-extensions:chassis
| |         +---ro ras-extensions:output
| |             +---ro ras-extensions:chassis-info*
| |                 +---ro ras-extensions:switch-type          uint32

```

```

| | |
| | |    +-+ro ras-extensions:vendor           string
| | |    +-+ro ras-extensions:vendor-version   string
| | |    +-+ro ras-extensions:supplier-serial-number? string
| | |    +-+ro ras-extensions:chassis-service-tag? string
| | |    +-+ro ras-extensions:bay-id?           string
| | |    +-+ro ras-extensions:vendor-part-number? string
| | |    +-+ro ras-extensions:brocade-part-number? string
| | |    +-+ro ras-extensions:max-port?         int32
| | |    +-+ro ras-extensions:is-ha-enabled?     boolean
| | |    +-+ro ras-extensions:is-ha-redundant?   boolean
| | |    +-+ro ras-extensions:is-ha-heartbeat-up? boolean
| | |    +-+ro ras-extensions:is-ha-synchronized? boolean
| | |    +-+ro ras-extensions:ha-recovery?       ha-recovery-type
| | |    +-+ro ras-extensions:fru*
| | |      +-+ro ras-extensions:tag             uint32
| | |      +-+ro ras-extensions:part-number     string
| | |      +-+ro ras-extensions:serial-number   string
| | |      +-+ro ras-extensions:field-replacable boolean
| | |      +-+ro ras-extensions:slot-number     uint32
| | |      +-+ro ras-extensions:logical-slot-number? uint32
| | |      +-+ro ras-extensions:blade-type-id?   uint32
| | |      +-+ro ras-extensions:slot-eth-port-cnt? uint32
| | |      +-+ro ras-extensions:manufacturer-date xs:date
| | |      +-+ro ras-extensions:update-date     xs:date
| | |      +-+ro ras-extensions:version          string
| | |      +-+ro ras-extensions:vendor-equipment-type fru-type
| | |      +-+ro ras-extensions:operational-status fru-operational-status
| | |      +-+ro ras-extensions:manufacturer     string
| | |      +-+ro ras-extensions:vendor?          string
| | |      +-+ro ras-extensions:vendor-part-number? string
| | |      +-+ro ras-extensions:vendor-serial-number? string
| | |
| | +-+rw ras-extensions:process
| | | +-+--x ras-extensions:info
| | +-+rw ras-extensions:environment
| | | +-+--x ras-extensions:fan
| | | +-+--x ras-extensions:power
| | | +-+--x ras-extensions:led
| | | +-+--x ras-extensions:temp
| | | | +-+--w ras-extensions:input
| | | | | +-+--w ras-extensions:detail?   empty
| | | | +-+--x ras-extensions:sensor
| | | | | +-+--ro ras-extensions:output
| | | | | | +-+ro ras-extensions:sensor-info*
| | | | | | | +-+ro ras-extensions:sensor*
| | | | | | | | +-+ro ras-extensions:id           uint32
| | | | | | | | +-+ro ras-extensions:type        sensor-type
| | | | | | | | +-+ro ras-extensions:sub-type    uint32
| | | | | | | | +-+ro ras-extensions:status      sensor-status
| | | | | | | | | +-+ro ras-extensions:current-reading int32
| | | | +-+--x ras-extensions:history
| | +-+rw ras-extensions:logging
| | | +-+--x ras-extensions:raslog
| | | | +-+--w ras-extensions:input
| | | | | +-+--w ras-extensions:reverse?   empty
| | | | | +-+--w ras-extensions:message-type? enumeration
| | | | | +-+--w ras-extensions:attribute?   enumeration
| | | | | +-+--w ras-extensions:blade?       string
| | | | | +-+--w ras-extensions:count?      uint16
| | | | | +-+--w ras-extensions:severity?   enumeration
| | | +-+--x ras-extensions:auditlog
| | | | +-+--w ras-extensions:input
| | | | | +-+--w ras-extensions:reverse?   empty
| | | | | +-+--w ras-extensions:count?      uint16
| | +-+rw brcd-sec-services:telnet

```

```

|   |   +--rw brcd-sec-services:server
|   |       +---x brcd-sec-services:status
|   +-rw brcd-sec-services:ssh
|   |   +--rw brcd-sec-services:server
|   |       +---x brcd-sec-services:status
|   |   +--rw brcd-sec-services:client
|   |       +---x brcd-sec-services:status
|   +-rw brcd-sec-services:selinux
|   |   +---x brcd-sec-services:status
|   |       +---ro brcd-sec-services:output
|   |           +---ro brcd-sec-services:sestatus-output?    string
|   +-rw snmp-server:snmp-server
|   |   +---x snmp-server:status
|   |       +---ro snmp-server:output
|   |           +---ro snmp-server:server* [vrf]
|   |               +---ro snmp-server:vrf      string
|   |               +---ro snmp-server:status?  server-status
|   +-rw sysmgr:bpswitch
|   |   +---rw sysmgr:show-stats
|   |       +---x sysmgr:stats
|   |           +---w sysmgr:input
|   |               +---w (show-bpswitch-type)?
|   |                   +---:(stats1)
|   |                       +---w sysmgr:port?      uint32
|   |                   +---:(stats2)
|   |                       +---w sysmgr:global?    empty
|   +-rw system-monitor-extensions:system
|   |   +---x system-monitor-extensions:monitor
|   |       +---ro system-monitor-extensions:output
|   |           +---ro system-monitor-extensions:switch-status*
|   |               +---ro system-monitor-extensions:switch-name?      string
|   |               +---ro system-monitor-extensions:switch-ip?        inet:ip-address
|   |               +---ro system-monitor-extensions:report-time?     ietfyang:date-and-
time
|   |       +---ro system-monitor-extensions:switch-state?        system-monitor-
health-state-enum
|   |           +---ro system-monitor-extensions:component-status*
|   |               +---ro system-monitor-extensions:component-name?  string
|   |               +---ro system-monitor-extensions:component-state? system-monitor-
health-state-enum
|   |           +---ro system-monitor-extensions:faulty-port*
|   |               +---ro system-monitor-extensions:port-name?      string
|   +-rw tpvm:tpvm
|   |   +---x tpvm:status
|   |       +---w tpvm:input
|   |           +---w tpvm:tpvmid?      string
|   |           +---w tpvm:debug?      boolean
|   |           +---w tpvm:clear-tag?  string
|   |           +---w tpvm:blade?     bladeType
|   |       +---ro tpvm:output
|   |           +---ro tpvm:tpvm-status-msg?      string
|   |           +---ro tpvm:additional-status?    string
|   |           +---ro tpvm:tpvm-state?          tpvmStateType
|   |           +---ro tpvm:version?            string
|   |           +---ro tpvm:auto-boot-enabled?  empty
|   |           +---ro tpvm:allow-pwless-enabled? empty
|   |           +---ro tpvm:upgrade-fail-reason? string
|   |           +---ro tpvm:reboot-required?    empty
|   |       +---x tpvm:status-history
|   |           +---w tpvm:input
|   |               +---w tpvm:tpvmid?      string
|   |               +---w tpvm:blade?     bladeType
|   |           +---ro tpvm:output
|   |               +---ro tpvm:tpvm-status-history-msg?  string

```

```

| |   +---x tpvm:service-port
| |   |   +---w tpvm:input
| |   |   |   +---w tpvm:blade?    bladeType
| |   |   |   +---w tpvm:debug?   boolean
| |   |   +---ro tpvm:output
| |   |   |   +---ro tpvm:tpvm-service-port-msg?   string
| |   +---x tpvm:ip-address
| |   |   +---w tpvm:input
| |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---w tpvm:blade?   bladeType
| |   |   |   +---w tpvm:debug?   boolean
| |   |   +---ro tpvm:output
| |   |   |   +---ro tpvm:tpvm-ipaddr-msg?   string
| |   +---x tpvm:disk
| |   |   +---w tpvm:input
| |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---w tpvm:name     union
| |   |   |   +---w tpvm:blade?   bladeType
| |   |   |   +---w tpvm:debug?   boolean
| |   |   +---ro tpvm:output
| |   |   |   +---ro tpvm:tpvm-show-disk-msg?   string
| |   +---rw tpvm:config
| |   |   +---x tpvm:ldap
| |   |   |   +---w tpvm:input
| |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---ro tpvm:output
| |   |   |   |   +---ro tpvm:tpvm-ldap-config-msg?   string
| |   |   +---x tpvm:ntp
| |   |   |   +---w tpvm:input
| |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---ro tpvm:output
| |   |   |   |   +---ro tpvm:tpvm-ntp-config-msg?   string
| |   |   +---x tpvm:dns
| |   |   |   +---w tpvm:input
| |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---ro tpvm:output
| |   |   |   |   +---ro tpvm:tpvm-dns-config-msg?   string
| |   |   +---rw tpvm:system-attributes
| |   |   |   +---x tpvm:hostname
| |   |   |   |   +---w tpvm:input
| |   |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   |   +---ro tpvm:output
| |   |   |   |   |   +---ro tpvm:tpvm-sys-config-msg?   string
| |   |   +---x tpvm:timezone
| |   |   |   +---w tpvm:input
| |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---ro tpvm:output
| |   |   |   |   +---ro tpvm:tpvm-sys-config-msg?   string
| |   |   +---x tpvm:trusted-peer
| |   |   |   +---w tpvm:input
| |   |   |   |   +---w tpvm:tpvmid?   string
| |   |   |   +---ro tpvm:output
| |   |   |   |   +---ro tpvm:tpvm-trusted-peer-config-msg?   string
| |   +---x tpvm:snapshot
| |   |   +---w tpvm:input
| |   |   |   +---w tpvm:tpvmid?   string
| |   |   +---ro tpvm:output
| |   |   |   +---ro tpvm:domain-name?   string
| |   |   |   +---ro tpvm:domain-version?   string
| |   |   |   +---ro tpvm:snapshot-time?   string
| |   |   |   +---ro tpvm:snapshot-size?   string
| +---rw bmc:bmc
| |   +---x bmc:status
| +---rw cfg-mgmt:config-drift-track

```

```

| |   +---x cfg-mgmt:values
| |   |   +--ro cfg-mgmt:output
| |   |   |   +--ro cfg-mgmt:drift-ts?      uint64
| |   |   |   +--ro cfg-mgmt:drift-counter?  uint64
| |   +---x cfg-mgmt:status
| |   |   +--ro cfg-mgmt:output
| |   |   |   +--ro cfg-mgmt:status?    driftTrackStatus
| +-rw remote_att:remote-attestation
| | +---x remote_att:status
| | | +--ro remote_att:output
| | | | +--ro remote_att:show-remote-att-status*
| | | | | +--ro remote_att:status?      string
| | | | | +--ro remote_att:registrar-ip?  string
| | | | | +--ro remote_att:registrar-port? string
| | | | | +--ro remote_att:agent-port?    string
| | | | | +--ro remote_att:uuid?        string
| | | | | +--ro remote_att:ima-status?  string
| | +---x remote_att:boot-aggregate
| | | +--ro remote_att:output
| | | | +--ro remote_att:boot-aggregate? string
| +-rw tpm:tpm
| | +---x tpm:ekcert
| | +---x tpm:iakcert
| | +---x tpm:idevidcert
+-rw clear
| +-rw brcd-aaa:login
| | +---x brcd-aaa:sessions
| +-rw ras-extensions:support
| | +---x ras-extensions:support
| +-rw ras-extensions:logging
| | +---x ras-extensions:raslog
| | | +---w ras-extensions:input
| | | | +---w ras-extensions:message-type? enumeration
| | +---x ras-extensions:auditlog
| +-rw sysmgr:bpswitch
| | +---x sysmgr:clear-stats
+-rw no
| +-rw certutil:certutil
| | +---x certutil:sshkey
| | | +---w certutil:input
| | | | +---w certutil:user    string
| | +---x certutil:aaa-cacpiv
| | | +---w certutil:input
| | | | +---w certutil:user    string
| | +---x certutil:sshx509v3
| | | +---w certutil:input
| | | | +---w certutil:user    string
| +-rw clock-server:clock
| | +---x clock-server:timezone
| +-rw brcd-crypto-ext:nocrypto
| | +-rw brcd-crypto-ext:ca
| | | +---x brcd-crypto-ext:authenticate
| | | | +---w brcd-crypto-ext:input
| | | | | +---w brcd-crypto-ext:authenticate_params
| | | | | | +---w brcd-crypto-ext:trustpoint  string
| | | | | | +---w brcd-crypto-ext:cert-type   cert-type-enum
| | | +---x brcd-crypto-ext:import
| | | | +---w brcd-crypto-ext:input
| | | | | +---w brcd-crypto-ext:authenticate_params
| | | | | | +---w brcd-crypto-ext:trustpoint  string
| | | | | | +---w brcd-crypto-ext:certificate empty
| | | | | | +---w brcd-crypto-ext:cert-type   cert-type-enum
| | | +---x brcd-crypto-ext:import-pkcs
| | | | +---w brcd-crypto-ext:input

```

```

| | |
| | |     +---w brcd-crypto-ext:authenticate_params
| | |         +---w brcd-crypto-ext:type          enumeration
| | |         +---w brcd-crypto-ext:cert-type    cert-type-enum-pkcs
| | +---rw brcd-crypto-ext:import
| |     +---x brcd-crypto-ext:ldapca
| |     +---x brcd-crypto-ext:syslogca
| |     +---x brcd-crypto-ext:radiusca
| |     +---x brcd-crypto-ext:sshx509v3ca
| |     +---x brcd-crypto-ext:gnmiclientca
| |     +---x brcd-crypto-ext:oauth2pkicert
| |     +---x brcd-crypto-ext:httpsclientca
| +---rw tpvm:tpvm
|     +---rw tpvm:service-port
|     +---x tpvm:enable
|     +---w tpvm:input
|     | +---w tpvm:blade?   bladeType
|     +---ro tpvm:output
|     | +---ro tpvm:sp-disable-msg?   string
+---rw ip
| +---rw ip-administration:dns
| | +---rw ip-administration:dom-name
| | | +---rw ip-administration:domain-name?   string
| | +---rw ip-administration:name-server* [name-server-ip use-vrf]
| |     +---rw ip-administration:name-server-ip      inet:ip-address
| |     +---rw ip-administration:use-vrf           common-def:use-vrf
| | +---rw ip-administration:source-interface
| |     +---rw ip-administration:source-intf-type?   source-interface-type
| |     +---rw ip-administration:ethernet
| |     | +---rw ip-administration:source-intf-name?   ethernet-iftype
| |     +---rw ip-administration:loopback
| |     | +---rw ip-administration:source-intf-name?   loopback-iftype
| |     +---rw ip-administration:ve
| |     | +---rw ip-administration:source-intf-name?   ve-iftype
| |     +---rw ip-administration:management
| |     | +---rw ip-administration:source-intf-name?   mm-iftype
| +---rw ip-policy:hide-prefix-holder
| | +---rw ip-policy:prefix-list* [name seq-keyword instance]
| |     +---rw ip-policy:name                  ip-prefix-name-t
| |     +---rw ip-policy:seq-keyword        enumeration
| |     +---rw ip-policy:instance            instance-id-t
| |     +---rw ip-policy:ip-description-ipp? common-def:name-string63
| |     +---rw ip-policy:action-ipp?       action-t
| |     +---rw ip-policy:prefix-ipp?       inet:ipv4-prefix
| |     +---rw ip-policy:ge-ipp?           prefix-len-t
| |     +---rw ip-policy:le-ipp?           prefix-len-t
| +---rw ip-policy:flowspec
| | +---rw ip-policy:rules
| |     +---rw ip-policy:statistics?      empty
| |     +---rw ip-policy:statistics-vrf
| |         +---rw ip-policy:statistics* [vrf]
| |             +---rw ip-policy:vrf      common-def:vrf-name
| +---rw ip-policy:hide-as-path-holder
| | +---rw ip-policy:as-path
| |     +---rw ip-policy:access-list* [name seq-keyword instance]
| |         +---rw ip-policy:name          ip-as-path-name-t
| |         +---rw ip-policy:seq-keyword  enumeration
| |         +---rw ip-policy:instance    instance-id-t
| |         +---rw ip-policy:ip-action?  action-t
| |         +---rw ip-policy:ip-reg-expr? ip-as-path-reg-expr-t
| +---rw ip-policy:hide-community-list-holder
| | +---rw ip-policy:community-list
| |     +---rw ip-policy:standard* [name seq-keyword instance]
| |     | +---rw ip-policy:name          ip-community-list-name-t
| |     | +---rw ip-policy:seq-keyword  enumeration

```

```

| | | | +--rw ip-policy:instance           instance-id-t
| | | | +--rw ip-policy:ip-action?      action-t
| | | | +--rw ip-policy:std-community-expr?  ip-std-community-expr-t
| | | +--rw ip-policy:extended* [name seq-keyword instance]
| | | | +--rw ip-policy:name          ip-community-list-name-t
| | | | +--rw ip-policy:seq-keyword    enumeration
| | | | +--rw ip-policy:instance       instance-id-t
| | | | +--rw ip-policy:ip-action?     action-t
| | | | +--rw ip-policy:ip-community-reg-expr? ip-community-reg-expr-t
| | +--rw ip-policy:hide-ext-community-list-holder
| | +--rw ip-policy:extcommunity-list
| | | +--rw ip-policy:standard* [extcommunity-list-name]
| | | | +--rw ip-policy:extcommunity-list-name  ip-extcommunity-list-name-t
| | | | +--rw ip-policy:seq* [seq-id]
| | | | | +--rw ip-policy:seq-id        uint32
| | | | | +--rw ip-policy:ext-community-action?  action-t
| | | | | +--rw ip-policy:ext-community-expr?   extcommunity-list-expr-t
| | | +--rw ip-policy:extended* [extended-extcommunity-list-name]
| | | | +--rw ip-policy:extended-extcommunity-list-name ip-extcommunity-list-
name-t
| | | | +--rw ip-policy:seq* [extended-seq-id]
| | | | | +--rw ip-policy:extended-seq-id      uint32
| | | | | +--rw ip-policy:exp-ext-community-action?  action-t
| | | | | +--rw ip-policy:ext-community-regex?    extcommunity-list-reg-expr-t
+--rw rtm:rtm-config
| +--rw rtm:router-id?      inet:ipv4-address
| +--rw rtm:load-sharing?    uint32
| +--rw rtm:route
| | +--rw rtm:static-route-nh* [static-route-dest static-route-next-hop]
| | | +--rw rtm:static-route-dest      inet:ipv4-prefix
| | | +--rw rtm:static-route-next-hop  inet:ipv4-address
| | | +--rw rtm:route-attributes
| | | | +--rw rtm:metric?            uint32
| | | | +--rw rtm:distance?          uint32
| | | | +--rw rtm:tag?              uint32
| | | | +--rw rtm:route_name?       ip-static-route-name
| | +--rw rtm:static-route-nh-vrf* [static-route-next-vrf-dest next-hop-vrf
static-route-next-hop]
| | | +--rw rtm:static-route-next-vrf-dest  inet:ipv4-prefix
| | | +--rw rtm:next-hop-vrf          common-def:vrf-name
| | | +--rw rtm:static-route-next-hop   inet:ipv4-address
| | | +--rw rtm:static-route-oif-vrf* [static-route-next-vrf-dest next-hop-vrf
static-route-oif-type static-route-oif-name]
| | | | +--rw rtm:static-route-next-vrf-dest  inet:ipv4-prefix
| | | | +--rw rtm:next-hop-vrf          common-def:vrf-name
| | | | +--rw rtm:static-route-oif-type    enumeration
| | | | +--rw rtm:static-route-oif-name   string
| | | +--rw rtm:static-route-oif* [static-route-dest static-route-oif-type static-
route-oif-name]
| | | | +--rw rtm:static-route-dest      inet:ipv4-prefix
| | | | +--rw rtm:static-route-oif-type    enumeration
| | | | +--rw rtm:static-route-oif-name   string
| | | +--rw rtm:route-attributes
| | | | +--rw rtm:metric?            uint32
| | | | +--rw rtm:distance?          uint32
| | | | +--rw rtm:tag?              uint32
| | | | +--rw rtm:route_name?       ip-static-route-name
| +--rw rtm:static
| | +--rw rtm:bfd
| | | +--rw rtm:bfd-static-route* [bfd-static-route-dest bfd-static-route-src]
| | | | +--rw rtm:bfd-static-route-dest  inet:ipv4-address
| | | | +--rw rtm:bfd-static-route-src   inet:ipv4-address
| | | | +--rw rtm:bfd-interval-attributes
| | | | | +--rw rtm:interval?         uint16

```

```

|   |   |   |   +-rw rtm:min-rx?      uint16
|   |   |   |   +-rw rtm:multiplier?  uint8
|   |   |   +-rw rtm:holdover-interval?  uint8
|   |   +-rw rtm:next-hop-recursion?  empty
|   +-rw rtm:import
|       +-rw rtm:routes* [src-vrf route-map]
|           +-rw rtm:src-vrf      common-def:vrf-name
|           +-rw rtm:route-map    common-def:name-string63
+--rw ipv6
|   +-rw router
|   +-rw control-plane:ipv6-global-cmd
|   |   +-rw control-plane:option
|   |       +-rw control-plane:option-disable?  empty
|   +-rw ip-policy:prefix-list* [name seq-keyword instance]
|   |   +-rw ip-policy:name          ipv6-prefix-name-t
|   |   +-rw ip-policy:seq-keyword  enumeration
|   |   +-rw ip-policy:instance     instance-id-t
|   |   +-rw ip-policy:ipv6-description-ipp?  common-def:name-string63
|   |   +-rw ip-policy:action-ipp?    action-t
|   |   +-rw ip-policy:ipv6-prefix-ipp?  inet:ipv6-prefix
|   |   +-rw ip-policy:ge-ipp?        ipv6-prefix-len-t
|   |   +-rw ip-policy:le-ipp?        ipv6-prefix-len-t
|   +-rw ip-policy:flowspec
|   |   +-rw ip-policy:rules
|   |       +-rw ip-policy:statistics?  empty
|   |       +-rw ip-policy:statistics-vrf
|   |           +-rw ip-policy:statistics* [vrf]
|   |               +-rw ip-policy:vrf    common-def:vrf-name
|   +-rw ipv6-nd-ra:ipv6-global-cmnds
|   |   +-rw ipv6-nd-ra:nd-global
|   |       +-rw ipv6-nd-ra:cache
|   |           +-rw ipv6-nd-ra:global-cache-limit?  uint32
|   |           +-rw ipv6-nd-ra:global-suppress-ra?  empty
|   |           +-rw ipv6-nd-ra:dns-server-global* [dns-server-prefix-global]
|   |               +-rw ipv6-nd-ra:dns-server-prefix-global  inet:ipv6-address
|   |               +-rw ipv6-nd-ra:dns-server-lifetime-global?  uint32
|   |               +-rw ipv6-nd-ra:domain-name-global* [domain-name-string-global]
|   |                   +-rw ipv6-nd-ra:domain-name-string-global  string
|   |                   +-rw ipv6-nd-ra:domain-name-lifetime-global?  uint32
|   +-rw ipv6-route:route
|   |   +-rw ipv6-route:static-route-nh* [static-route-dest static-route-next-hop]
|   |       +-rw ipv6-route:static-route-dest      inet:ipv6-prefix
|   |       +-rw ipv6-route:static-route-next-hop  inet:ipv6-address
|   |       +-rw ipv6-route:route-attributes
|   |           +-rw ipv6-route:metric?      uint32
|   |           +-rw ipv6-route:distance?    uint32
|   |           +-rw ipv6-route:tag?        uint32
|   |           +-rw ipv6-route:route_name?  rtm:ip-static-route-name
|   |   +-rw ipv6-route:static-route-oif* [static-route-dest static-route-oif-type
static-route-oif-name]
|   |       +-rw ipv6-route:static-route-dest      inet:ipv6-prefix
|   |       +-rw ipv6-route:static-route-oif-type  enumeration
|   |       +-rw ipv6-route:static-route-oif-name  string
|   |       +-rw ipv6-route:route-attributes
|   |           +-rw ipv6-route:metric?      uint32
|   |           +-rw ipv6-route:distance?    uint32
|   |           +-rw ipv6-route:tag?        uint32
|   |           +-rw ipv6-route:route_name?  rtm:ip-static-route-name
|   |   +-rw ipv6-route:link-local-static-route-nh* [link-local-static-route-dest link-
local-nexthop link-local-route-oif-type link-local-route-oif-name]
|   |       +-rw ipv6-route:link-local-static-route-dest  inet:ipv6-prefix
|   |       +-rw ipv6-route:link-local-nexthop            inet:ipv6-address
|   |       +-rw ipv6-route:link-local-route-oif-type    enumeration
|   |       +-rw ipv6-route:link-local-route-oif-name    string

```

```

    |   |   |   +-rw ipv6-route:route-attributes
    |   |   |       +-rw ipv6-route:metric?          uint32
    |   |   |       +-rw ipv6-route:distance?        uint32
    |   |   |       +-rw ipv6-route:tag?            uint32
    |   |   |       +-rw ipv6-route:route_name?      rtm:ip-static-route-name
    |   |   +-rw ipv6-route:static-route-nh-vrf* [static-route-next-vrf-dest next-hop-vrf
static-route-next-hop]
    |   |   |   +-rw ipv6-route:static-route-next-vrf-dest      inet:ipv6-prefix
    |   |   |   +-rw ipv6-route:next-hop-vrf                common-def:vrf-name
    |   |   |   +-rw ipv6-route:static-route-next-hop        inet:ipv6-address
    |   |   +-rw ipv6-route:link-local-static-route-nh-vrf* [static-route-next-vrf-dest
next-hop-vrf link-local-next-hop link-local-route-oif-type link-local-route-oif-name]
    |   |   |   +-rw ipv6-route:static-route-next-vrf-dest      inet:ipv6-prefix
    |   |   |   +-rw ipv6-route:next-hop-vrf                common-def:vrf-name
    |   |   |   +-rw ipv6-route:link-local-next-hop        inet:ipv6-address
    |   |   |   +-rw ipv6-route:link-local-route-oif-type enumeration
    |   |   |   +-rw ipv6-route:link-local-route-oif-name    string
    |   |   +-rw ipv6-route:ipv6-static-route-oif-vrf* [static-route-next-vrf-dest next-hop-
vrf static-route-oif-type static-route-oif-name]
    |   |   |   +-rw ipv6-route:static-route-next-vrf-dest      inet:ipv6-prefix
    |   |   |   +-rw ipv6-route:next-hop-vrf                common-def:vrf-name
    |   |   |   +-rw ipv6-route:static-route-oif-type        enumeration
    |   |   |   +-rw ipv6-route:static-route-oif-name        string
    |   |   +-rw ipv6-route:static
    |   |   |   +-rw ipv6-route:bfd
    |   |   |       +-rw ipv6-route:bfd-ipv6-static-route* [bfd-ipv6-static-route-dest bfd-
ipv6-static-route-src]
    |   |   |       |   +-rw ipv6-route:bfd-ipv6-static-route-dest      inet:ipv6-address
    |   |   |       |   +-rw ipv6-route:bfd-ipv6-static-route-src        inet:ipv6-address
    |   |   |       |   +-rw ipv6-route:bfd-ipv6-interval-attributes
    |   |   |       |       +-rw ipv6-route:interval?        uint16
    |   |   |       |       +-rw ipv6-route:min-rx?        uint16
    |   |   |       |       +-rw ipv6-route:multiplier?     uint8
    |   |   |       |       +-rw ipv6-route:bfd-ipv6-link-local-static-route* [bfd-ipv6-link-local-
dest bfd-ipv6-link-local-src bfd-interface-type bfd-interface-name]
    |   |   |       |       +-rw ipv6-route:bfd-ipv6-link-local-dest      inet:ipv6-address
    |   |   |       |       +-rw ipv6-route:bfd-ipv6-link-local-src        inet:ipv6-address
    |   |   |       |       +-rw ipv6-route:bfd-interface-type        enumeration
    |   |   |       |       +-rw ipv6-route:bfd-interface-name    string
    |   |   |       |       +-rw ipv6-route:bfd-ipv6-interval-attributes
    |   |   |       |           +-rw ipv6-route:interval?        uint16
    |   |   |       |           +-rw ipv6-route:min-rx?        uint16
    |   |   |       |           +-rw ipv6-route:multiplier?     uint8
    |   |   |       |           +-rw ipv6-route:ipv6-holdover-interval?      uint8
    |   |   +-rw ipv6-route:next-hop-recursion?             empty
    |   +-rw ipv6-route:import
    |   |   +-rw ipv6-route:routes* [src-vrf route-map]
    |   |       +-rw ipv6-route:src-vrf        common-def:vrf-name
    |   |       +-rw ipv6-route:route-map      common-def:name-string63
    +-rw ipv6-route:subnet-zero
    |   +-rw ipv6-route:drop?      empty
    +-rw vrrpv3:proto-vrrpv3
    |   +-rw vrrpv3:vrrp?        empty
    |   +-rw vrrpv3:vrrp-extended? empty
    +-rw router
    +-rw routing-system
        +-rw router
            +-rw bgp:router-bgp!
            |   +-rw bgp:router-bgp-attributes
            |   |   +-rw bgp:local-as?            local-as-type
            |   |   +-rw bgp:always-compare-med? empty
            |   |   +-rw bgp:compare-med-empty-aspath? empty
            |   |   +-rw bgp:med-missing-as-worst? empty
            |   |   +-rw bgp:as-path-ignore?      empty

```

```

    | | | +---rw bgp:compare-routerid?           empty
    | | | +---rw bgp:install-igp-cost?         empty
    | | | +---rw bgp:cluster-id
    | | | | +---rw (ch-cluster-id)?
    | | | | | +---:(ca-cluster-id)
    | | | | | +---rw bgp:cluster-id-value?     decimal-number
    | | | | | +---:(ca-cluster-id-ipv4-address)
    | | | | | +---rw bgp:cluster-id-ipv4-address?   inet:ipv4-address
    | | | +---rw bgp:default-local-preference?   local-preference-number
    | | | +---rw bgp:distance
    | | | | +---rw bgp:ext-route-distance?     ext-route-distance
    | | | | +---rw bgp:int-route-distance?     int-route-distance
    | | | | +---rw bgp:lcl-route-distance?     lcl-route-distance
    | | | +---rw bgp:capability
    | | | | +---rw bgp:as4-enable?   empty
    | | | +---rw bgp:maxas-limit
    | | | | +---rw bgp:in
    | | | | | +---rw bgp:num-as-in-path?   num-as-in-path
    | | | +---rw bgp:enforce-first-as?        empty
    | | | +---rw bgp:fast-external-fallover?   empty
    | | | +---rw bgp:timers
    | | | | +---rw bgp:keep-alive?   nei-keep-alive
    | | | | +---rw bgp:hold-time?    nei-hold-time
    | | | +---rw bgp:peer-dampening
    | | | | +---rw (peer-dampening-source)?
    | | | | | +---:(ca-peer-dampening-flag)
    | | | | | +---rw bgp:peer-dampening-flag?   empty
    | | | | +---:(ca-peer-dampening-specify-values)
    | | | | +---rw bgp:values
    | | | | | +---rw bgp:delay-hold?       nei-delay-hold
    | | | | | +---rw bgp:penalty?        nei-penalty
    | | | | | +---rw bgp:max-penalty?     nei-max-penalty
    | | | | | +---rw bgp:stability-interval?   nei-stability-interval
    | | | +---rw bgp:log-dampening-debug?   empty
    | | | +---rw bgp:confederation
    | | | | +---rw bgp:identifier?   cidentifier
    | | | | +---rw bgp:peers*        cidentifier
    | | | +---rw bgp:bfd
    | | | | +---rw bgp:holdover-interval?   bfd:bfd-holdover-interval
    | | | | +---rw bgp:interval
    | | | | | +---rw bgp:min-tx?       bfd-tx-interval-type
    | | | | | +---rw bgp:min-rx?       bfd-rx-interval-type
    | | | | | +---rw bgp:multiplier?    bfd-multiplier-type
    | | | +---rw bgp:auto-shutdown-new-neighbors?   empty
    | | | +---rw bgp:listen-limit?
    | | | | +---rw bgp:neighbor
    | | | | | +---rw bgp:peer-grps
    | | | | | | +---rw bgp:neighbor-peer-grp* [router-bgp-neighbor-peer-grp]
    | | | | | | | +---rw bgp:router-bgp-neighbor-peer-grp   bgp-peergroup
    | | | | | | | +---rw bgp:peer-group-name?   empty
    | | | | | | | +---rw bgp:remote-as?        bgp-remote-as
    | | | | | | +---rw bgp:alternate-as
    | | | | | | | +---rw bgp:add?          bgp-alternate-as
    | | | | | | | +---rw bgp:remove?        bgp-alternate-as
    | | | | | +---rw bgp:update-source
    | | | | | | +---rw (ch-update-source)?
    | | | | | | | +---:(ca-ipv4)
    | | | | | | | | +---rw bgp:sip-ipv4-address?   sip-ipv4-address
    | | | | | | | | +---:(ca-eth)
    | | | | | | | | +---rw bgp:ethernet-interface
    | | | | | | | | | +---rw bgp:interface-type?   enumeration
    | | | | | | | | | +---rw bgp:interface-name?   update-source-ethernet-
    type | | | | | | | +---:(ca-port-channel)

```

```

type          |   |   |   |   |   |   |   +--rw bgp:port-channel?           interface:portchannel-
               |   |   |   |   |   |   |   +-:(ca-loopback)
               |   |   |   |   |   |   |   |   +-rw bgp:loopback?             loopback-interface
               |   |   |   |   |   |   |   +-:(ca-ve)
               |   |   |   |   |   |   |   |   +-rw bgp:ve-interface?       interface:ve-type
               |   |   |   |   |   |   |   +-rw bgp:description?        neighbor-description
               |   |   |   |   |   |   |   +-rw bgp:local-as
               |   |   |   |   |   |   |   |   +-rw bgp:local-as-value?    local-as-num
               |   |   |   |   |   |   |   |   +-rw bgp:no-prepend?        empty
               |   |   |   |   |   |   |   +-rw bgp:next-hop-self
               |   |   |   |   |   |   |   |   +-rw (ch-next-hop-self-type)?
               |   |   |   |   |   |   |   |   |   +-:(ca-next-hop-self-always)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:next-hop-self-always?  empty
               |   |   |   |   |   |   |   |   |   +-:(ca-next-hop-self-status)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:next-hop-self-status? empty
               |   |   |   |   |   |   |   +-rw bgp:advertisement-interval
               |   |   |   |   |   |   |   |   +-rw bgp:value?            adv-value
               |   |   |   |   |   |   |   +-rw bgp:ebgp-btsh?          empty
               |   |   |   |   |   |   |   +-rw bgp:ebgp-multiphop
               |   |   |   |   |   |   |   |   +-rw (ch-ebgp-multiphop-type)?
               |   |   |   |   |   |   |   |   |   +-:(ca-ebgp-multiphop-flag)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:ebgp-multiphop-flag? empty
               |   |   |   |   |   |   |   |   |   +-:(ca-ebgp-multiphop-count)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:ebgp-multiphop-count? uint32
               |   |   |   |   |   |   |   +-rw bgp:password?          bgp-password
               |   |   |   |   |   |   |   +-rw bgp:enforce-first-as
               |   |   |   |   |   |   |   |   +-rw bgp:nei-enforce-first-as? empty
               |   |   |   |   |   |   |   |   +-rw bgp:nei-enforce-first-as-disable? empty
               |   |   |   |   |   |   |   +-rw bgp:timers
               |   |   |   |   |   |   |   |   +-rw bgp:nei-keep-alive?  nei-keep-alive
               |   |   |   |   |   |   |   |   +-rw bgp:nei-hold-time?   nei-hold-time
               |   |   |   |   |   |   |   +-rw bgp:peer-dampening
               |   |   |   |   |   |   |   |   +-rw (nei-peer-dampening-source)?
               |   |   |   |   |   |   |   |   |   +-:(nei-ca-peer-dampening-flag)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:nei-peer-dampening-flag? empty
               |   |   |   |   |   |   |   |   |   +-:(nei-ca-peer-dampening-specify-values)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:values
               |   |   |   |   |   |   |   |   |   |   |   +-rw bgp:nei-delay-hold?   nei-delay-hold
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:nei-penalty?      nei-penalty
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:nei-max-penalty?  nei-max-penalty
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:nei-stability-interval? nei-stability-
interval      |   |   |   |   |   |   |   +-rw bgp:remove-private-as? empty
               |   |   |   |   |   |   |   +-rw bgp:as-override?        empty
               |   |   |   |   |   |   |   +-rw bgp:soft-reconfiguration
               |   |   |   |   |   |   |   |   +-rw bgp:inbound?         empty
               |   |   |   |   |   |   |   +-rw bgp:static-network-edge? empty
               |   |   |   |   |   |   |   +-rw bgp:bfd
               |   |   |   |   |   |   |   |   +-rw bgp:bfd-enable?       empty
               |   |   |   |   |   |   |   |   +-rw bgp:holdover-interval? bfd:bfd-holdover-interval
               |   |   |   |   |   |   |   |   +-rw bgp:interval
               |   |   |   |   |   |   |   |   |   +-rw bgp:min-tx?        bfd-tx-interval-type
               |   |   |   |   |   |   |   |   |   +-rw bgp:min-rx?        bfd-rx-interval-type
               |   |   |   |   |   |   |   |   |   +-rw bgp:multiplier?     bfd-multiplier-type
               |   |   |   |   |   |   |   +-rw bgp:graceful-restart
               |   |   |   |   |   |   |   |   +-rw (ch-graceful-restart-type)?
               |   |   |   |   |   |   |   |   |   +-:(ca-graceful-restart-disable)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:graceful-restart-disable? empty
               |   |   |   |   |   |   |   |   |   +-:(ca-graceful-restart-status)
               |   |   |   |   |   |   |   |   |   |   +-rw bgp:graceful-restart-status? empty
               |   |   |   |   |   |   |   +-rw bgp:maxas-limit
               |   |   |   |   |   |   |   |   +-rw bgp:in
               |   |   |   |   |   |   |   |   |   +-rw (ch-maxas-limit)?
```

```

    | | | | | | | +---:(ca-maxas-limit-enable)
    | | | | | | | | +---rw bgp:num-as-in-as-path?      num-as-in-as-path
    | | | | | | | +---:(ca-maxas-limit-disable)
    | | | | | | | | +---rw bgp:maxas-limit-disable?   empty
    | | | | | | +---rw bgp:graceful-shutdown
    | | | | | | | +---rw bgp:gshut-timer-value?      bgp-gshut-timer
    | | | | | | | +---rw (ch-gshut-options)?
    | | | | | | | | +---:(ca-gshut-timer-route-map)
    | | | | | | | | | +---rw bgp:gshut-route-map?    rmap-type
    | | | | | | | +---:(ca-gshut-timer-attributes)
    | | | | | | | | +---rw bgp:gshut-timer-attributes
    | | | | | | | | | +---rw bgp:gshut-local-pref?  bgp-gshut-local-pref
    | | | | | | | | | +---rw bgp:gshut-community?   bgp-gshut-community
    | | | | | | +---rw bgp:af-neighbor-capability
    | | | | | | | +---rw bgp:as4
    | | | | | | | | +---rw bgp:neighbor-as4-enable?  empty
    | | | | | | | | +---rw bgp:neighbor-as4-disable? empty
    | | | | | | +---rw bgp:shutdown
    | | | | | | | +---rw bgp:shutdown-status?   empty
    | | | | | | | +---rw bgp:generate-rib-out?  empty
    | | | | | +---rw bgp:neighbor-ipv6s
    | | | | | | +---rw bgp:neighbor-ipv6-addr* [router-bgp-neighbor-ipv6-address]
    | | | | | | | +---rw bgp:router-bgp-neighbor-ipv6-address  inet:ipv6-address
    | | | | | | | +---rw bgp:remote-as?           bgp-remote-as
    | | | | | | | +---rw bgp:associate-peer-group?  bgp-peergroup
    | | | | | | +---rw bgp:update-source
    | | | | | | | +---rw (ch-update-source)?
    | | | | | | | | +---:(ca-ipv6)
    | | | | | | | | | +---rw bgp:sip-ipv6-address?  sip-ipv6-address
    | | | | | | | | +---:(ca-eth)
    | | | | | | | | | +---rw bgp:ethernet-interface
    | | | | | | | | | | +---rw bgp:interface-type? enumeration
    | | | | | | | | | | +---rw bgp:interface-name?  update-source-ethernet-
type
    | | | | | | | +---:(ca-port-channel)
    | | | | | | | | +---rw bgp:port-channel?     interface:portchannel-
type
    | | | | | | | +---:(ca-loopback)
    | | | | | | | | +---rw bgp:loopback?       loopback-interface
    | | | | | | | +---:(ca-ve)
    | | | | | | | | +---rw bgp:ve-interface?  interface:ve-type
    | | | | | | +---rw bgp:description?      neighbor-description
    | | | | | +---rw bgp:local-as
    | | | | | | +---rw bgp:local-as-value?  local-as-num
    | | | | | | +---rw bgp:no-prepend?      empty
    | | | | | +---rw bgp:next-hop-self
    | | | | | | +---rw (ch-next-hop-self-type)?
    | | | | | | | +---:(ca-next-hop-self-always)
    | | | | | | | | +---rw bgp:next-hop-self-always? empty
    | | | | | | | +---:(ca-next-hop-self-status)
    | | | | | | | | +---rw bgp:next-hop-self-status? empty
    | | | | | +---rw bgp:advertisement-interval
    | | | | | | +---rw bgp:value?        adv-value
    | | | | | +---rw bgp:ebgp-btsh?      empty
    | | | | | +---rw bgp:ebgp-multiphop
    | | | | | | +---rw (ch-ebgp-multiphop-type)?
    | | | | | | | +---:(ca-ebgp-multiphop-flag)
    | | | | | | | | +---rw bgp:ebgp-multiphop-flag? empty
    | | | | | | | +---:(ca-ebgp-multiphop-count)
    | | | | | | | | +---rw bgp:ebgp-multiphop-count? uint32
    | | | | | | +---rw bgp:password?      bgp-password
    | | | | | | +---rw bgp:enforce-first-as
    | | | | | | | +---rw bgp:nei-enforce-first-as? empty
    | | | | | | | +---rw bgp:nei-enforce-first-as-disable? empty

```

```

    | | | | |   +--rw bgp:timers
    | | | | |   |   +--rw bgp:nei-keep-alive?      nei-keep-alive
    | | | | |   |   +--rw bgp:nei-hold-time?      nei-hold-time
    | | | | |   +--rw bgp:peer-dampening
    | | | | |   |   +--rw (nei-peer-dampening-source)?
    | | | | |   |   +---:(nei-ca-peer-dampening-flag)
    | | | | |   |   |   +--rw bgp:nei-peer-dampening-flag?      empty
    | | | | |   |   +---:(nei-ca-peer-dampening-specify-values)
    | | | | |   |   +--rw bgp:values
    | | | | |   |   |   +--rw bgp:nei-delay-hold?      nei-delay-hold
    | | | | |   |   +--rw bgp:nei-penalty?      nei-penalty
    | | | | |   |   +--rw bgp:nei-max-penalty?      nei-max-penalty
    | | | | |   |   +--rw bgp:nei-stability-interval?      nei-stability-
interval
    | | | | |   +--rw bgp:remove-private-as?      empty
    | | | | |   +--rw bgp:as-override?      empty
    | | | | |   +--rw bgp:soft-reconfiguration
    | | | | |   |   +--rw bgp:inbound?      empty
    | | | | |   +--rw bgp:static-network-edge?      empty
    | | | | |   +--rw bgp:bfd
    | | | | |   |   +--rw bgp:bfd-enable?      empty
    | | | | |   |   +--rw bgp:holdover-interval?      bfd:bfd-holdover-interval
    | | | | |   |   +--rw bgp:interval
    | | | | |   |   |   +--rw bgp:min-tx?      bfd-tx-interval-type
    | | | | |   |   |   +--rw bgp:min-rx?      bfd-rx-interval-type
    | | | | |   |   |   +--rw bgp:multiplier?      bfd-multiplier-type
    | | | | |   +--rw bgp:graceful-restart
    | | | | |   |   +--rw (ch-graceful-restart-type)?
    | | | | |   |   +---:(ca-graceful-restart-disable)
    | | | | |   |   |   +--rw bgp:graceful-restart-disable?      empty
    | | | | |   |   +---:(ca-graceful-restart-status)
    | | | | |   |   |   +--rw bgp:graceful-restart-status?      empty
    | | | | |   +--rw bgp:maxas-limit
    | | | | |   |   +--rw bgp:in
    | | | | |   |   |   +--rw (ch-maxas-limit)?
    | | | | |   |   |   +---:(ca-maxas-limit-enable)
    | | | | |   |   |   |   +--rw bgp:num-as-in-as-path?      num-as-in-as-path
    | | | | |   |   |   +---:(ca-maxas-limit-disable)
    | | | | |   |   |   |   +--rw bgp:maxas-limit-disable?      empty
    | | | | |   +--rw bgp:graceful-shutdown
    | | | | |   |   +--rw bgp:gshut-timer-value?      bgp-gshut-timer
    | | | | |   |   +--rw (ch-gshut-options)?
    | | | | |   |   |   +---:(ca-gshut-timer-route-map)
    | | | | |   |   |   |   +--rw bgp:gshut-route-map?      rmap-type
    | | | | |   |   |   +---:(ca-gshut-timer-attributes)
    | | | | |   |   |   |   +--rw bgp:gshut-timer-attributes
    | | | | |   |   |   |   |   +--rw bgp:gshut-local-pref?      bgp-gshut-local-pref
    | | | | |   |   |   |   +--rw bgp:gshut-community?      bgp-gshut-community
    | | | | |   +--rw bgp:af-neighbor-capability
    | | | | |   |   +--rw bgp:as4
    | | | | |   |   |   +--rw bgp:neighbor-as4-enable?      empty
    | | | | |   |   |   +--rw bgp:neighbor-as4-disable?      empty
    | | | | |   +--rw bgp:shutdown
    | | | | |   |   +--rw bgp:shutdown-status?      empty
    | | | | |   |   +--rw bgp:generate-rib-out?      empty
    | | | | +--rw bgp:neighbor-ips
    | | | | |   +--rw bgp:neighbor-addr* [router-bgp-neighbor-address]
    | | | | |   |   +--rw bgp:router-bgp-neighbor-address      inet:ipv4-address
    | | | | |   |   +--rw bgp:remote-as?      bgp-remote-as
    | | | | |   |   +--rw bgp:associate-peer-group?      bgp-peergroup
    | | | | |   |   +--rw bgp:update-source
    | | | | |   |   |   +--rw (ch-update-source)?
    | | | | |   |   |   |   +---:(ca-ipv4)
    | | | | |   |   |   |   |   +--rw bgp:sip-ipv4-address?      sip-ipv4-address

```

```

    | | | | |   +--:(ca-eth)
    | | | | |   |   +-rw bgp:ethernet-interface
    | | | | |   |   +-rw bgp:interface-type?      enumeration
    | | | | |   |   +-rw bgp:interface-name?     update-source-ethernet-
type
    | | | | |   +--:(ca-port-channel)
    | | | | |   |   +-rw bgp:port-channel?       interface:portchannel-
type
    | | | | |   +--:(ca-loopback)
    | | | | |   |   +-rw bgp:loopback?
    | | | | |   |   +-:(ca-ve)
    | | | | |   |   +-rw bgp:ve-interface?      interface:ve-type
    | | | | |   +-rw bgp:description?          neighbor-description
    | | | | |   +-rw bgp:local-as
    | | | | |   |   +-rw bgp:local-as-value?   local-as-num
    | | | | |   |   +-rw bgp:no-prepend?      empty
    | | | | |   +-rw bgp:next-hop-self
    | | | | |   |   +-rw (ch-next-hop-self-type)?
    | | | | |   |   +-:(ca-next-hop-self-always)
    | | | | |   |   |   +-rw bgp:next-hop-self-always?   empty
    | | | | |   |   +-:(ca-next-hop-self-status)
    | | | | |   |   |   +-rw bgp:next-hop-self-status?   empty
    | | | | |   +-rw bgp:advertisement-interval
    | | | | |   |   +-rw bgp:value?        adv-value
    | | | | |   +-rw bgp:ebgp-btsh?         empty
    | | | | |   +-rw bgp:ebgp-multipath
    | | | | |   |   +-rw (ch-ebgp-multipath-type)?
    | | | | |   |   +-:(ca-ebgp-multipath-flag)
    | | | | |   |   |   +-rw bgp:ebgp-multipath-flag?   empty
    | | | | |   |   +-:(ca-ebgp-multipath-count)
    | | | | |   |   |   +-rw bgp:ebgp-multipath-count?   uint32
    | | | | |   +-rw bgp:password?        bgp-password
    | | | | |   +-rw bgp:enforce-first-as
    | | | | |   |   +-rw bgp:nei-enforce-first-as?   empty
    | | | | |   |   +-rw bgp:nei-enforce-first-as-disable?   empty
    | | | | |   +-rw bgp:timers
    | | | | |   |   +-rw bgp:nei-keep-alive?   nei-keep-alive
    | | | | |   |   +-rw bgp:nei-hold-time?    nei-hold-time
    | | | | |   +-rw bgp:peer-dampening
    | | | | |   |   +-rw (nei-peer-dampening-source)?
    | | | | |   |   +-:(nei-ca-peer-dampening-flag)
    | | | | |   |   |   +-rw bgp:nei-peer-dampening-flag?   empty
    | | | | |   |   +-:(nei-ca-peer-dampening-specify-values)
    | | | | |   |   |   +-rw bgp:values
    | | | | |   |   |   +-rw bgp:nei-delay-hold?   nei-delay-hold
    | | | | |   |   |   +-rw bgp:nei-penalty?      nei-penalty
    | | | | |   |   |   +-rw bgp:nei-max-penalty?   nei-max-penalty
    | | | | |   |   |   +-rw bgp:nei-stability-interval?   nei-stability-
interval
    | | | | |   +-rw bgp:remove-private-as?   empty
    | | | | |   +-rw bgp:as-override?        empty
    | | | | |   +-rw bgp:soft-reconfiguration
    | | | | |   |   +-rw bgp:inbound?      empty
    | | | | |   +-rw bgp:static-network-edge?   empty
    | | | | |   +-rw bgp:bfd
    | | | | |   |   +-rw bgp:bfd-enable?   empty
    | | | | |   |   +-rw bgp:holdover-interval?   bfd:bfd-holdover-interval
    | | | | |   |   +-rw bgp:interval
    | | | | |   |   |   +-rw bgp:min-tx?      bfd-tx-interval-type
    | | | | |   |   |   +-rw bgp:min-rx?      bfd-rx-interval-type
    | | | | |   |   |   +-rw bgp:multiplier?   bfd-multiplier-type
    | | | | |   +-rw bgp:graceful-restart
    | | | | |   |   +-rw (ch-graceful-restart-type)?
    | | | | |   |   |   +-:(ca-graceful-restart-disable)

```

```

| | | | | | +--rw bgp:graceful-restart-disable?    empty
| | | | | | +-+: (ca-graceful-restart-status)
| | | | | | +-+rw bgp:graceful-restart-status?    empty
| | | | | +-+rw bgp:maxas-limit
| | | | | | +-+rw bgp:in
| | | | | | | +--+rw (ch-maxas-limit)?
| | | | | | | | +-+: (ca-maxas-limit-enable)
| | | | | | | | | +--+rw bgp:num-as-in-as-path?      num-as-in-as-path
| | | | | | | | | +-+: (ca-maxas-limit-disable)
| | | | | | | | | | +--+rw bgp:maxas-limit-disable?  empty
| | | | | | +-+rw bgp:graceful-shutdown
| | | | | | | +-+rw bgp:gshut-timer-value?        bgp-gshut-timer
| | | | | | | | +-+rw (ch-gshut-options)?
| | | | | | | | | +-+: (ca-gshut-timer-route-map)
| | | | | | | | | | +--+rw bgp:gshut-route-map?     rmap-type
| | | | | | | | | | +-+: (ca-gshut-timer-attributes)
| | | | | | | | | | | +--+rw bgp:gshut-timer-attributes
| | | | | | | | | | | | +-+rw bgp:gshut-local-pref?  bgp-gshut-local-pref
| | | | | | | | | | | | +-+rw bgp:gshut-community?   bgp-gshut-community
| | | | | | +-+rw bgp:af-neighbor-capability
| | | | | | | +-+rw bgp:as4
| | | | | | | | | +--+rw bgp:neighbor-as4-enable?  empty
| | | | | | | | | | +--+rw bgp:neighbor-as4-disable? empty
| | | | | | +-+rw bgp:shutdown
| | | | | | | | +--+rw bgp:shutdown-status?    empty
| | | | | | | | | +--+rw bgp:generate-rib-out?  empty
| | | | | | +-+rw bgp:listen-range* [listen-range-prefix peer-group]
| | | | | | | +-+rw bgp:listen-range-prefix      inet:ipv4-prefix
| | | | | | | | +-+rw bgp:peer-group          bgp-peergroup
| | | | | | | | | +-+rw bgp:limit?            listen-limit-type
| | | | | | +-+rw bgp:ipv6
| | | | | | | +-+rw bgp:ipv6-listen-range* [listen-range-prefix peer-group]
| | | | | | | | +-+rw bgp:listen-range-prefix  inet:ipv6-prefix
| | | | | | | | | +-+rw bgp:peer-group        bgp-peergroup
| | | | | | | | | | +-+rw bgp:limit?          listen-limit-type
| | | | | | +-+rw bgp:graceful-shutdown
| | | | | | | | +--+rw bgp:gshut-timer-value?  bgp-gshut-timer
| | | | | | | | | +-+rw (ch-gshut-options)?
| | | | | | | | | | +-+: (ca-gshut-timer-route-map)
| | | | | | | | | | | +--+rw bgp:gshut-route-map?     rmap-type
| | | | | | | | | | | +-+: (ca-gshut-timer-attributes)
| | | | | | | | | | | | +--+rw bgp:gshut-timer-attributes
| | | | | | | | | | | | | +-+rw bgp:gshut-local-pref?  bgp-gshut-local-pref
| | | | | | | | | | | | | +-+rw bgp:gshut-community?   bgp-gshut-community
| | | | | | +-+rw bgp:init-route-calc-delay
| | | | | | | | +--+rw bgp:init-route-calc-delay-status? empty
| | | | | | | | | +--+rw bgp:min-delay?           route-calc-delay-time-min
| | | | | | | | | | +--+rw bgp:max-delay?           route-calc-delay-time-max
| | | | | | | | | | | +--+rw bgp:msg-idle-time?   route-calc-delay-time-msg-idle
| | | | | | +-+rw bgp:address-family
| | | | | | | +-+rw bgp:ipv4
| | | | | | | | +-+rw bgp:ipv4-unicast
| | | | | | | | | +-+rw bgp:default-vrf
| | | | | | | | | | +--+rw bgp:default-vrf-selected?      empty
| | | | | | | | | | | +-+rw bgp:af-ipv4-uc-and-vrf-cmds-call-point-holder
| | | | | | | | | | | | +--+rw bgp:bgp-redistribute-internal? empty
| | | | | | | | | | | | | +-+rw bgp:redistribute
| | | | | | | | | | | | | | +--+rw bgp:bgp
| | | | | | | | | | | | | | | +--+rw bgp:redistribute-bgp? empty
| | | | | | | | | | | | | | | +--+rw bgp:bgp-metric?       conn-metric
| | | | | | | | | | | | | | | | +--+rw bgp:bgp-route-map?    rmap-type
| | | | | | | | | | | | | | | | +--+rw bgp:connected
| | | | | | | | | | | | | | | | | +--+rw bgp:redistribute-connected? empty
| | | | | | | | | | | | | | | | | +--+rw bgp:unicast-metric? conn-metric

```

```

    | | | | | | | | | | +--rw bgp:redistribute-route-map?      rmap-type
    | | | | | | | | | | +--rw bgp:ospf
    | | | | | | | | | | +--rw bgp:redistribute-ospf?      empty
    | | | | | | | | | | +--rw bgp:match
    | | | | | | | | | | | +--rw bgp:ospf-internal?      empty
    | | | | | | | | | | | +--rw bgp:ospf-external1?      empty
    | | | | | | | | | | | +--rw bgp:ospf-external2?      empty
    | | | | | | | | | | +--rw bgp:ospf-metric?      conn-metric
    | | | | | | | | | | +--rw bgp:ospf-route-map?      rmap-type
    | | | | | | | | | | +--rw bgp:redistribute-isis!
    | | | | | | | | | | | +--rw bgp:redistribute-isis-route-map?      common-def:name-
string63
    | | | | | | | | | | | | +--rw (ch-isis-level)?
    | | | | | | | | | | | | | +--:(ca-level-1)
    | | | | | | | | | | | | | | +--rw bgp:level-1?      empty
    | | | | | | | | | | | | | | +--:(ca-level-2)
    | | | | | | | | | | | | | | +--rw bgp:level-2?      empty
    | | | | | | | | | | | | | | +--:(ca-level-1-2)
    | | | | | | | | | | | | | | | +--rw bgp:level-1-2?      empty
    | | | | | | | | | | | | | | | +--rw bgp:redistribute-isis-metric?      conn-metric
    | | | | | | | | | | | | | | +--rw bgp:static
    | | | | | | | | | | | | | | | | +--rw bgp:redistribute-static?      empty
    | | | | | | | | | | | | | | | | +--rw bgp:unicast-static-metric?      conn-metric
    | | | | | | | | | | | | | | | | +--rw bgp:static-route-map?      rmap-type
    | | | | | | | | | | | | | | | | +--rw bgp:af-additional-paths
    | | | | | | | | | | | | | | | | | +--rw bgp:addpath-txrx
    | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-send?      empty
    | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-receive?      empty
    | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-select
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-best?      uint8
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-groupbest?      empty
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-all?      empty
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:advertise-best-external?      empty
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network* [static-network-address]
    | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network-address      inet:ipv4-prefix
    | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network-distance?      sdistance
    | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:aggregate-address* [aggregate-ip-prefix]
    | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:aggregate-ip-prefix      inet:ipv4-prefix
    | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:advertise-map?      advertise-map
    | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:as-set?      empty
    | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:attribute-map?      attribute-map
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:summary-only?      empty
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:suppress-map?      suppress-map
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network* [network-ipv4-address]
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-ipv4-address      inet:ipv4-prefix
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-weight?      absolute-decimal-number
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:backdoor?      empty
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-route-map?      rmap-type
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup-holder
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup* [af-ipv4-neighbor-
peergroup-name]
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup-name      bgp-
peergroup
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:send-community
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:send-community-status?      empty
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:all?
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:both?
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:extended?
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:standard?
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:large?
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:af-neighbor-capability
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:orf
    | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:prefixlist

```



```

    | | | | | | | | +-rw bgp:addpath-advertise
    | | | | | | | |   +-rw bgp:addpath-adv-best?      uint8
    | | | | | | | |   +-rw bgp:addpath-adv-groupbest?  empty
    | | | | | | | |   +-rw bgp:addpath-adv-all?       empty
    | | | | | | | +-rw bgp:af-common-cmnds-holder
    | | | | | | |   +-rw bgp:maximum-paths
    | | | | | | |     +-rw bgp:load-sharing-value?  uint32
    | | | | | | |     +-rw bgp:ebgp?                 ebgp-paths
    | | | | | | |     +-rw bgp:ibgp?                 ibgp-paths
    | | | | | | |     +-rw bgp:use-load-sharing?   empty
    | | | | | | +-rw bgp:multipath
    | | | | | |   | +-rw bgp:multipath_ebgp?   empty
    | | | | | |   | +-rw bgp:multipath_ibgp?  empty
    | | | | | |   | +-rw bgp:multi-as?      empty
    | | | | | | +-rw bgp:always-propagate? empty
    | | | | | | +-rw bgp:default-information-originate? empty
    | | | | | | +-rw bgp:rib-route-limit?   rib-route-number
    | | | | | | +-rw bgp:client-to-client-reflection? empty
    | | | | | +-rw bgp:dampening
    | | | | |   | +-rw (ch-dampening-source)?
    | | | | |   |   +-:(ca-dampening-flag)
    | | | | |   |     +-rw bgp:dampening-flag? empty
    | | | | |   |   +-:(ca-dampening-specify-values)
    | | | | |   |     +-rw bgp:values
    | | | | |   |       +-rw bgp:half-time?      htime
    | | | | |   |       +-rw bgp:reuse-value?   damp-reuse-value
    | | | | |   |     +-rw bgp:start-suppress-time? damp-start-
  suppress-value
  | | | | | | | +-rw bgp:max-suppress-time?   damp-max-suppress-
value
  | | | | | | |   +-:(ca-dampening-route-map)
  | | | | | | |     +-rw bgp:dampening-route-map? rmap-type
  | | | | | | |     +-rw bgp:default-metric?  default-metric-
number
  | | | | | | | +-rw bgp:next-hop-enable-default? empty
  | | | | | | +-rw bgp:table-map
  | | | | | |   | +-rw bgp:table-map-route-map? rmap-type
  | | | | | |   | +-rw bgp:update-time?      update-time-type
  | | | | | |   | +-rw bgp:graceful-restart
  | | | | | |   |     +-rw bgp:graceful-restart-status? empty
  | | | | | |   |     +-rw bgp:restart-time?      rtime-type
  | | | | | |   |     +-rw bgp:purge-time?      ptime-type
  | | | | | |   |     +-rw bgp:stale-routes-time? st-time-type
  | | | | | |   | +-rw bgp:next-hop-recursion? empty
  | | | | | | +-rw bgp:bestpath
  | | | | | |   | +-rw bgp:prefix-validation
  | | | | | |   |     +-rw bgp:prefix-validation-disable? empty
  | | | | | |   |     +-rw bgp:disallow-invalid? empty
  | | | | | +-rw bgp:next-hop-mpls!
  | | | | |   | +-rw (ch-compare-lsp-follow-igp)?
  | | | | |   |   +-:(ca-compare-lsp-metric)
  | | | | |   |     | +-rw bgp:compare-lsp-metric? empty
  | | | | |   |     +-:(ca-follow-igp)
  | | | | |   |       +-rw bgp:follow-igp? empty
  | | | | |   | +-rw bgp:af-vrf* [af-vrf-name]
  | | | | |   |     +-rw bgp:af-vrf-name           string
  | | | | |   |     +-rw bgp:local-as?          local-as-
type
  | | | | | | +-rw bgp:maxas-limit
  | | | | | |   | +-rw bgp:in
  | | | | | |   |     +-rw bgp:num-as-in-path? num-as-in-path
  | | | | | |   |     +-rw bgp:next-hop-recursion? empty
  | | | | | |   |     +-rw bgp:bestpath
  | | | | | |   |     +-rw bgp:prefix-validation

```

```

        | | | | | | | | +--rw bgp:prefix-validation-disable?    empty
        | | | | | | | | +--rw bgp:disallow-invalid?          empty
        | | | | | | | | +--rw bgp:graceful-restart-status?      empty
        | | | | | | | | +--rw bgp:af-ipv4-uc-and-vrf-cmds-call-point-holder
        | | | | | | | | +--rw bgp:bgp-redistribute-internal?   empty
        | | | | | | | | +--rw bgp:redistribute
        | | | | | | | | | +--rw bgp:bgp
        | | | | | | | | | | +--rw bgp:redistribute-bgp?     empty
        | | | | | | | | | | +--rw bgp:bgp-metric?           conn-metric
        | | | | | | | | | | +--rw bgp:bgp-route-map?        rmap-type
        | | | | | | | | | | +--rw bgp:connected
        | | | | | | | | | | | +--rw bgp:redistribute-connected? empty
        | | | | | | | | | | | +--rw bgp:unicast-metric?       conn-metric
        | | | | | | | | | | | +--rw bgp:redistribute-route-map? rmap-type
        | | | | | | | | | | +--rw bgp:ospf
        | | | | | | | | | | | +--rw bgp:redistribute-ospf?   empty
        | | | | | | | | | | | +--rw bgp:match
        | | | | | | | | | | | | +--rw bgp:ospf-internal?   empty
        | | | | | | | | | | | | +--rw bgp:ospf-external1? empty
        | | | | | | | | | | | | +--rw bgp:ospf-external2? empty
        | | | | | | | | | | | | +--rw bgp:ospf-metric?         conn-metric
        | | | | | | | | | | | | +--rw bgp:ospf-route-map?      rmap-type
        | | | | | | | | | | | | +--rw bgp:redistribute-isis!
        | | | | | | | | | | | | | +--rw bgp:redistribute-isis-route-map? common-def:name-
string63
        | | | | | | | | | | | | | | +--rw (ch-isis-level)?
        | | | | | | | | | | | | | | +--:(ca-level-1)
        | | | | | | | | | | | | | | | +--rw bgp:level-1?          empty
        | | | | | | | | | | | | | | | +--:(ca-level-2)
        | | | | | | | | | | | | | | | | +--rw bgp:level-2?          empty
        | | | | | | | | | | | | | | | | +--:(ca-level-1-2)
        | | | | | | | | | | | | | | | | | +--rw bgp:level-1-2?    empty
        | | | | | | | | | | | | | | | | | | +--rw bgp:redistribute-isis-metric? conn-metric
        | | | | | | | | | | | | | | | | | | +--rw bgp:static
        | | | | | | | | | | | | | | | | | | | +--rw bgp:redistribute-static? empty
        | | | | | | | | | | | | | | | | | | | +--rw bgp:unicast-static-metric? conn-metric
        | | | | | | | | | | | | | | | | | | | +--rw bgp:static-route-map? rmap-type
        | | | | | | | | | | | | | | | | | | | +--rw bgp:af-additional-paths
        | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-txrx
        | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-send?    empty
        | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-receive? empty
        | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-select
        | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-best? uint8
        | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-groupbest? empty
        | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:addpath-sel-all? empty
        | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:advertise-best-external? empty
        | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network* [static-network-address]
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network-address   inet:ipv4-prefix
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:static-network-distance? sdistance
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:aggregate-address* [aggregate-ip-prefix]
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:aggregate-ip-prefix   inet:ipv4-prefix
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:advertise-map?      advertise-map
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:as-set?          empty
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:attribute-map?    attribute-map
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:summary-only?   empty
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:suppress-map?    suppress-map
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network* [network-ipv4-address]
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-ipv4-address   inet:ipv4-prefix
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-weight?      absolute-decimal-number
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:backdoor?          empty
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:network-route-map? rmap-type
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:listen-range* [listen-range-prefix peer-group]
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:listen-range-prefix   inet:ipv4-prefix
        | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:peer-group        bgp-peergroup

```

```

| | | | | | +--rw bgp:limit?           listen-limit-type
| | | | | +---rw bgp:neighbor
| | | | | | +---rw bgp:af-ipv4-vrf-neighbor-address-holder
| | | | | | | +---rw bgp:af-ipv4-neighbor-addr* [af-ipv4-neighbor-address]
| | | | | | | | +---rw bgp:af-ipv4-neighbor-address      inet:ipv4-address
| | | | | | | | +---rw bgp:remote-as?                  bgp-remote-as
| | | | | | +---rw bgp:shutdown
| | | | | | | +---rw bgp:shutdown-status?    empty
| | | | | | | +---rw bgp:generate-rib-out?   empty
| | | | | | +---rw bgp:af-vrf-neighbor-capability
| | | | | | | +---rw bgp:as4
| | | | | | | | +---rw bgp:neighbor-as4-enable?  empty
| | | | | | | | +---rw bgp:neighbor-as4-disable? empty
| | | | | | +---rw bgp:orf
| | | | | | | +---rw bgp:prefixlist
| | | | | | | | +---rw bgp:prefixlist-status?  empty
| | | | | | | | +---rw bgp:prefixlist-send?   empty
| | | | | | | | +---rw bgp:prefixlist-receive? empty
| | | | | | +---rw bgp:allowas-in?        uint32
| | | | | +---rw bgp:filter-list
| | | | | | +---rw bgp:direction-in
| | | | | | | +---rw bgp:filter-list-direction-in-acl-name? ip-
filter-name
| | | | | | | | +---rw bgp:filter-list-name-direction-in?
empty
| | | | | | | | +---rw bgp:direction-out
| | | | | | | | +---rw bgp:filter-list-direction-out-acl-name? ip-
filter-name
| | | | | | | | +---rw bgp:filter-list-name-direction-out?
empty
| | | | | | +---rw bgp:maximum-prefix
| | | | | | | +---rw bgp:max-prefix-limit?  max-prefix-limit
| | | | | | +---rw bgp:threshold-holder
| | | | | | | +---rw bgp:threshold?        max-prefix-threshold
| | | | | | | +---rw bgp:teardown?       empty
| | | | | | | +---rw bgp:restart-interval? restart-interval-
range
| | | | | | | +---rw bgp:default-originate
| | | | | | | | +---rw bgp:default-originate-status?  empty
| | | | | | | | +---rw bgp:default-originate-route-map? rmap-type
+---rw bgp:prefix-list
| | | | | | | +---rw bgp:direction-in
| | | | | | | | +---rw bgp:prefix-list-direction-in-prefix-name?
nei-prefix-list-filter
| | | | | | | | +---rw bgp:prefix-list-direction-in?
empty
| | | | | | | | +---rw bgp:direction-out
| | | | | | | | +---rw bgp:prefix-list-direction-out-prefix-name?
nei-prefix-list-filter
| | | | | | | | +---rw bgp:prefix-list-direction-out?
empty
| | | | | | +---rw bgp:neighbor-route-map
| | | | | | | +---rw bgp:neighbor-route-map-direction-in
| | | | | | | | +---rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64
| | | | | | | +---rw bgp:neighbor-route-map-direction-out
| | | | | | | | +---rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
| | | | | | | +---rw bgp:route-reflector-client?  empty
| | | | | | | +---rw bgp:unsuppress-map
| | | | | | | | +---rw bgp:map-name?    rmap-type
| | | | | | | | +---rw bgp:af-nei-weight?      nei-weight
| | | | | | | | +---rw bgp:enable-peer-as-check? empty
| | | | | | | | +---rw bgp:announce-rpki-state? empty

```

```

    | | | | | | | +--rw bgp:additional-paths
    | | | | | | | | +--rw bgp:addpath-disable? empty
    | | | | | | | | +--rw bgp:addpath-txrx
    | | | | | | | | | +--rw bgp:addpath-send? empty
    | | | | | | | | | +--rw bgp:addpath-receive? empty
    | | | | | | | | +--rw bgp:addpath-advertise
    | | | | | | | | | +--rw bgp:addpath-adv-best? uint8
    | | | | | | | | | +--rw bgp:addpath-adv-groupbest? empty
    | | | | | | | | | +--rw bgp:addpath-adv-all? empty
    | | | | | | | +--rw bgp:associate-peer-group? bgp-peergroup
    | | | | | | | +--rw bgp:description? neighbor-
description
    | | | | | | +--rw bgp:local-as
    | | | | | | | +--rw bgp:local-as-value? local-as-num
    | | | | | | | +--rw bgp:no-prepend? empty
    +--rw bgp:next-hop-self
    | | | | | | | +--rw (ch-next-hop-self-type)?
    | | | | | | | | +--:(ca-next-hop-self-always)
    | | | | | | | | | +--rw bgp:next-hop-self-always? empty
    | | | | | | | | | +--:(ca-next-hop-self-status)
    | | | | | | | | | | +--rw bgp:next-hop-self-status? empty
    +--rw bgp:advertisement-interval
    | | | | | | | +--rw bgp:value? adv-value
    +--rw bgp:ebgp-btsh? empty
    +--rw bgp:ebgp-multipihop
    | | +--rw (ch-ebgp-multipihop-type)?
    | | | +--:(ca-ebgp-multipihop-flag)
    | | | | +--rw bgp:ebgp-multipihop-flag? empty
    | | | | +--:(ca-ebgp-multipihop-count)
    | | | | | +--rw bgp:ebgp-multipihop-count? uint32
    +--rw bgp:password? bgp-password
    +--rw bgp:enforce-first-as
    | | +--rw bgp:nei-enforce-first-as? empty
    | | +--rw bgp:nei-enforce-first-as-disable? empty
    +--rw bgp:timers
    | | +--rw bgp:nei-keep-alive? nei-keep-alive
    | | +--rw bgp:nei-hold-time? nei-hold-time
    +--rw bgp:peer-dampening
    | | +--rw (nei-peer-dampening-source)?
    | | | +--:(nei-ca-peer-dampening-flag)
    | | | | +--rw bgp:nei-peer-dampening-flag? empty
    | | | +--:(nei-ca-peer-dampening-specify-values)
    | | | | +--rw bgp:values
    | | | | | +--rw bgp:nei-delay-hold? nei-
delay-hold
    | | | | | | +--rw bgp:nei-penalty? nei-
penalty
    | | | | | | | +--rw bgp:nei-max-penalty? nei-max-
penalty
    | | | | | | | +--rw bgp:nei-stability-interval? nei-
stability-interval
    | | | | | | | +--rw bgp:remove-private-as? empty
    +--rw bgp:as-override? empty
    +--rw bgp:soft-reconfiguration
    | | +--rw bgp:inbound? empty
    +--rw bgp:static-network-edge? empty
    +--rw bgp:bfd
    | | +--rw bgp:bfd-enable? empty
    | | +--rw bgp:holdover-interval? bfd:bfd-holdover-
interval
    | | | +--rw bgp:interval
    | | | | +--rw bgp:min-tx? bfd-tx-interval-type
    | | | | +--rw bgp:min-rx? bfd-rx-interval-type
    | | | | +--rw bgp:multiplier? bfd-multiplier-type

```

```

          | | | | | | | +--rw bgp:graceful-restart
          | | | | | | | | +--rw (ch-graceful-restart-type)?
          | | | | | | | | +--:(ca-graceful-restart-disable)
          | | | | | | | | | +--rw bgp:graceful-restart-disable? empty
          | | | | | | | | +--:(ca-graceful-restart-status)
          | | | | | | | | | +--rw bgp:graceful-restart-status? empty
          | | | | | | +--rw bgp:maxas-limit
          | | | | | | | +--rw bgp:in
          | | | | | | | | +--rw (ch-maxas-limit)?
          | | | | | | | | +--:(ca-maxas-limit-enable)
          | | | | | | | | | +--rw bgp:num-as-in-as-path? num-as-in-
as-path
          | | | | | | | | | | +--:(ca-maxas-limit-disable)
          | | | | | | | | | | +--rw bgp:maxas-limit-disable? empty
          | | | | | | +--rw bgp:update-source
          | | | | | | | +--rw (ch-update-source)?
          | | | | | | | | +--:(ca-ipv4)
          | | | | | | | | | +--rw bgp:sip-ipv4-address? sip-ipv4-address
          | | | | | | | | | +--:(ca-eth)
          | | | | | | | | | | +--rw bgp:ethernet-interface
          | | | | | | | | | | | +--rw bgp:interface-type? enumeration
          | | | | | | | | | | | +--rw bgp:interface-name? update-source-
ethernet-type
          | | | | | | | | | | | +--:(ca-port-channel)
          | | | | | | | | | | | | +--rw bgp:port-channel?
interface:portchannel-type
          | | | | | | | | | | | +--:(ca-loopback)
          | | | | | | | | | | | | +--rw bgp:loopback? loopback-
interface
          | | | | | | | | | | | | | +--:(ca-ve)
          | | | | | | | | | | | | | +--rw bgp:ve-interface? interface:ve-
type
          | | | | | | | | | | | | +--rw bgp:send-community
          | | | | | | | | | | | | | +--rw bgp:send-community-status? empty
          | | | | | | | | | | | | | +--rw bgp:all? empty
          | | | | | | | | | | | | | +--rw bgp:both? empty
          | | | | | | | | | | | | | +--rw bgp:extended? empty
          | | | | | | | | | | | | | +--rw bgp:standard? empty
          | | | | | | | | | | | | | +--rw bgp:large? empty
          | | | | | | | | | | | | | | +--rw bgp:activate? empty
          | | | | | | | | | | | | +--rw bgp:maximum-paths
          | | | | | | | | | | | | | | +--rw bgp:load-sharing-value? uint32
          | | | | | | | | | | | | | | +--rw bgp:ebgp? ebgp-paths
          | | | | | | | | | | | | | | +--rw bgp:ibgp? ibgp-paths
          | | | | | | | | | | | | | | +--rw bgp:use-load-sharing? empty
          | | | | | | | | | | | | +--rw bgp:multipath
          | | | | | | | | | | | | | | +--rw bgp:multipath_ebgp? empty
          | | | | | | | | | | | | | | +--rw bgp:multipath_ibgp? empty
          | | | | | | | | | | | | | | +--rw bgp:multi-as? empty
          | | | | | | | | | | | | | | +--rw bgp:always-propagate? empty
          | | | | | | | | | | | | | | +--rw bgp:default-information-originate? empty
          | | | | | | | | | | | | | | +--rw bgp:rib-route-limit? rib-route-
number
          | | | | | | | | | | | | | | | +--rw bgp:client-to-client-reflection? empty
          | | | | | | | | | | | | | | +--rw bgp:dampening
          | | | | | | | | | | | | | | | +--rw (ch-dampening-source)?
          | | | | | | | | | | | | | | | | +--:(ca-dampening-flag)
          | | | | | | | | | | | | | | | | | +--rw bgp:dampening-flag? empty
          | | | | | | | | | | | | | | | | | +--:(ca-dampening-specify-values)
          | | | | | | | | | | | | | | | | | | +--rw bgp:values
          | | | | | | | | | | | | | | | | | | | +--rw bgp:half-time? htime
          | | | | | | | | | | | | | | | | | | | | +--rw bgp:reuse-value? damp-reuse-value
          | | | | | | | | | | | | | | | | | | | | +--rw bgp:start-suppress-time? damp-start-suppress-
value

```

```

    | | | | | | | | +--rw bgp:max-suppress-time?      damp-max-suppress-
value   | | | | | | | | +--:(ca-dampening-route-map)
    | | | | | | | |     +--rw bgp:dampening-route-map?  rmap-type
    | | | | | | | | +--rw bgp:default-metric?          default-
metric-number | | | | | | | | +--rw bgp:next-hop-enable-default?      empty
    | | | | | | | | +--rw bgp:table-map
    | | | | | | | | | +--rw bgp:table-map-route-map?  rmap-type
    | | | | | | | | +--rw bgp:update-time?           update-
time-type   | | | | | | | | +--rw bgp:flowspec
    | | | | | | | | | +--rw bgp:ipv4-flowspec-default-vrf!
    | | | | | | | | | +--rw bgp:default-vrf-selected?      empty
    | | | | | | | | | +--rw bgp:client-to-client-reflection?      empty
    | | | | | | | | | +--rw bgp:distribute?           common-def:name-string64
    | | | | | | | | | +--rw bgp:rib-route-limit?        rib-route-number
    | | | | | | | | | +--rw bgp:flowspec
    | | | | | | | | | | +--rw bgp:validation
    | | | | | | | | | | | +--rw bgp:validation-flag?      empty
    | | | | | | | | | | | +--rw bgp:redirect?           empty
    | | | | | | | | +--rw bgp:neighbor
    | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup-holder
    | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup* [af-ipv4-neighbor-
peergroup-name]
    | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-peergroup-name      bgp-
peergroup   | | | | | | | | | | +--rw bgp:activate?           empty
    | | | | | | | | | | +--rw bgp:allowas-in?         uint32
    | | | | | | | | | | +--rw bgp:maximum-prefix
    | | | | | | | | | | | +--rw bgp:max-prefix-limit?      max-prefix-limit
    | | | | | | | | | | | +--rw bgp:threshold-holder
    | | | | | | | | | | | | +--rw bgp:threshold?         max-prefix-threshold
    | | | | | | | | | | | +--rw bgp:teardown?           empty
    | | | | | | | | | | | +--rw bgp:restart-interval?      restart-interval-
range   | | | | | | | | | | | +--rw bgp:neighbor-route-map
    | | | | | | | | | | | | +--rw bgp:neighbor-route-map-direction-in
    | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64 | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-direction-out
    | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64 | | | | | | | | | | | | | +--rw bgp:route-reflector-client?      empty
    | | | | | | | | | | | | | | +--rw bgp:af-nei-weight?         nei-weight
    | | | | | | | | | | | | | +--rw bgp:flowspec
    | | | | | | | | | | | | | | +--rw bgp:validation
    | | | | | | | | | | | | | | | +--rw bgp:validation-flag?      empty
    | | | | | | | | | | | | | | | +--rw bgp:redirect?           empty
    | | | | | | | | | | | | | | +--rw bgp:redirect
    | | | | | | | | | | | | | | | +--rw bgp:next-hop
    | | | | | | | | | | | | | | | | +--rw bgp:next-hop-type?      enumeration
    | | | | | | | | | | | | | | | | +--rw bgp:next-hop-holder?      enumeration
    | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-address-holder
    | | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-address* [af-ipv4-neighbor-
address]   | | | | | | | | | | | | | | | +--rw bgp:af-ipv4-neighbor-address      inet:ipv4-address
    | | | | | | | | | | | | | | | +--rw bgp:activate?           empty
    | | | | | | | | | | | | | | | +--rw bgp:allowas-in?         uint32
    | | | | | | | | | | | | | | | +--rw bgp:maximum-prefix
    | | | | | | | | | | | | | | | | +--rw bgp:max-prefix-limit?      max-prefix-limit
    | | | | | | | | | | | | | | | | +--rw bgp:threshold-holder
    | | | | | | | | | | | | | | | | | +--rw bgp:threshold?         max-prefix-threshold
    | | | | | | | | | | | | | | | | +--rw bgp:teardown?           empty

```

```

range                                     |      +-rw bgp:restart-interval?    restart-interval-
                                         |      +-rw bgp:neighbor-route-map
                                         |      +-rw bgp:neighbor-route-map-direction-in
                                         |      |      +-rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64                  |      +-rw bgp:neighbor-route-map-direction-out
                                         |      |      +-rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64                  |      +-rw bgp:route-reflector-client?    empty
                                         |      +-rw bgp:af-nei-weight?          nei-weight
                                         |      +-rw bgp:flowspec
                                         |      |      +-rw bgp:validation
                                         |      |      |      +-rw bgp:validation-flag?    empty
                                         |      |      |      +-rw bgp:redirect?          empty
                                         |      |      +-rw bgp:redirect
                                         |      |      |      +-rw bgp:next-hop
                                         |      |      |      |      +-rw bgp:next-hop-type?    enumeration
                                         |      |      |      |      +-rw bgp:next-hop-holder?   enumeration
                                         |      |      +-rw bgp:flowspec-vrf
                                         |      |      |      +-rw bgp:flowspec
                                         |      |      |      |      +-rw bgp:af-ipv4-flowspec-vrf* [af-ipv4-flowspec-vrf-name]
                                         |      |      |      |      +-rw bgp:af-ipv4-flowspec-vrf-name    string
                                         |      |      |      |      +-rw bgp:client-to-client-reflection? empty
                                         |      |      |      |      +-rw bgp:distribute?        common-def:name-
string64                                 |      +-rw bgp:rib-route-limit?        rib-route-number
                                         |      +-rw bgp:flowspec
                                         |      |      +-rw bgp:validation
                                         |      |      |      +-rw bgp:validation-flag?    empty
                                         |      |      |      +-rw bgp:redirect?          empty
                                         |      +-rw bgp:neighbor
                                         |      |      +-rw bgp:af-ipv4-neighbor-address-holder
                                         |      |      |      +-rw bgp:af-ipv4-neighbor-address* [af-ipv4-neighbor-
address]                               |      +-rw bgp:af-ipv4-neighbor-address    inet:ipv4-
                                         |      address
                                         |      |      |      |      +-rw bgp:activate?          empty
                                         |      |      |      |      +-rw bgp:allowas-in?       uint32
                                         |      |      |      |      +-rw bgp:maximum-prefix
                                         |      |      |      |      |      +-rw bgp:max-prefix-limit? max-prefix-limit
                                         |      |      |      |      |      +-rw bgp:threshold-holder
                                         |      |      |      |      |      |      +-rw bgp:threshold?        max-prefix-
threshold                                |      |      |      |      |      |      |      |      |      +-rw bgp:teardown?          empty
                                         |      |      |      |      |      |      |      |      +-rw bgp:restart-interval? restart-interval-
range                                    |      |      |      |      |      |      |      |      |      |      +-rw bgp:neighbor-route-map
                                         |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:neighbor-route-map-direction-in
                                         |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:neighbor-route-map-name-direction-
in?   common-def:name-string64           |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:neighbor-route-map-direction-out
                                         |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:neighbor-route-map-name-direction-
out?  common-def:name-string64           |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:route-reflector-client?    empty
                                         |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:af-nei-weight?          nei-weight
                                         |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:flowspec
                                         |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:validation
                                         |      |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:validation-flag?    empty
                                         |      |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:redirect?          empty
                                         |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:redirect
                                         |      |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:next-hop
                                         |      |      |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:next-hop-type?    enumeration
                                         |      |      |      |      |      |      |      |      |      |      |      |      |      +-rw bgp:next-hop-holder?   enumeration

```

```

    | | | |
    | | | |     +-rw bgp:listen-range* [listen-range-prefix peer-group]
    | | | |         +-rw bgp:listen-range-prefix      inet:ipv4-prefix
    | | | |         +-rw bgp:peer-group            bgp-peergroup
    | | | |         +-rw bgp:limit?              listen-limit-type
    | | | +-rw bgp:ipv6
    | | |     +-rw bgp:ipv6-unicast
    | | |         +-rw bgp:default-vrf
    | | |             +-rw bgp:default-vrf-selected?          empty
    | | |             +-rw bgp:af-ipv6-uc-and-vrf-cmds-call-point-holder
    | | |                 +-rw bgp:bgp-redistribute-internal?  empty
    | | |                 +-rw bgp:redistribute
    | | |                     +-rw bgp:bgp
    | | |                         +-rw bgp:redistribute-bgp?   empty
    | | |                         +-rw bgp:metric?           conn-metric
    | | |                         +-rw bgp:route-map?        rmap-type
    | | |                         +-rw bgp:connected
    | | |                             +-rw bgp:redistribute-connected? empty
    | | |                             +-rw bgp:unicast-metric?   conn-metric
    | | |                             +-rw bgp:redistribute-route-map? rmap-type
    | | |                         +-rw bgp:ospf
    | | |                             +-rw bgp:redistribute-ospf?   empty
    | | |                             +-rw bgp:match
    | | |                                 +-rw bgp:internal?       empty
    | | |                                 +-rw bgp:external1?      empty
    | | |                                 +-rw bgp:external2?      empty
    | | |                             +-rw bgp:metric?           conn-metric
    | | |                             +-rw bgp:route-map?        rmap-type
    | | |                         +-rw bgp:redistribute-isis!
    | | |                             +-rw bgp:redistribute-isis-route-map? common-def:name-
string63
    | | | | |     +-rw (ch-isis-level)?
    | | | | |         +-:(ca-level-1)
    | | | | |             | +-rw bgp:level-1?          empty
    | | | | |         +-:(ca-level-2)
    | | | | |             | +-rw bgp:level-2?          empty
    | | | | |         +-:(ca-level-1-2)
    | | | | |             | +-rw bgp:level-1-2?        empty
    | | | | |         +-rw bgp:redistribute-isis-metric? conn-metric
    | | | | |         +-rw bgp:static
    | | | | |             +-rw bgp:redistribute-static? empty
    | | | | |             +-rw bgp:unicast-static-metric? conn-metric
    | | | | |             +-rw bgp:static-route-map?   rmap-type
    | | | | +-rw bgp:af-additional-paths
    | | | |     +-rw bgp:addpath-txrx
    | | | |         +-rw bgp:addpath-send?      empty
    | | | |         +-rw bgp:addpath-receive?  empty
    | | | |         +-rw bgp:addpath-select
    | | | |             +-rw bgp:addpath-sel-best?  uint8
    | | | |             +-rw bgp:addpath-sel-groupbest? empty
    | | | |             +-rw bgp:addpath-sel-all?    empty
    | | | |         +-rw bgp:advertise-best-external? empty
    | | | +-rw bgp:aggregate-ipv6-address* [aggregate-ip-prefix]
    | | |         +-rw bgp:aggregate-ip-prefix  inet:ipv6-prefix
    | | |         +-rw bgp:advertise-map?       advertise-map
    | | |         +-rw bgp:as-set?            empty
    | | |         +-rw bgp:attribute-map?     attribute-map
    | | |         +-rw bgp:summary-only?      empty
    | | |         +-rw bgp:suppress-map?     suppress-map
    | | |         +-rw bgp:network* [network-ipv6-address]
    | | |             +-rw bgp:network-ipv6-address  inet:ipv6-prefix
    | | |             +-rw bgp:network-weight?    absolute-decimal-number
    | | |             +-rw bgp:backdoor?        empty
    | | |             +-rw bgp:network-route-map? rmap-type
    | | |         +-rw bgp:neighbor

```

```

    | | | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup-holder
    | | | | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup* [af-ipv6-neighbor-
peergroup-name]
    | | | | | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup-name      bgp-
peergroup
    | | | | | | | | | | | +--rw bgp:send-community
    | | | | | | | | | | | | +--rw bgp:send-community-status?   empty
    | | | | | | | | | | | | +--rw bgp:all?
    | | | | | | | | | | | | +--rw bgp:both?
    | | | | | | | | | | | | +--rw bgp:extended?
    | | | | | | | | | | | | +--rw bgp:standard?
    | | | | | | | | | | | | +--rw bgp:large?
    | | | | | | | | | | | | +--rw bgp:af-neighbor-capability
    | | | | | | | | | | | | | +--rw bgp:orff
    | | | | | | | | | | | | | | +--rw bgp:prefixlist
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-status?   empty
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-send?   empty
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-receive?   empty
    | | | | | | | | | | | | | | +--rw bgp:activate?           empty
    | | | | | | | | | | | | | | +--rw bgp:allowas-in?        uint32
    | | | | | | | | | | | | | | +--rw bgp:filter-list
    | | | | | | | | | | | | | | | +--rw bgp:direction-in
    | | | | | | | | | | | | | | | | +--rw bgp:filter-list-direction-in-acl-name? ip-
filter-name
    | | | | | | | | | | | | | | | | | +--rw bgp:filter-list-name-direction-in?
empty
    | | | | | | | | | | | | | | | | | +--rw bgp:direction-out
    | | | | | | | | | | | | | | | | | +--rw bgp:filter-list-direction-out-acl-name? ip-
filter-name
    | | | | | | | | | | | | | | | | | +--rw bgp:filter-list-name-direction-out?
empty
    | | | | | | | | | | | | | | | | | +--rw bgp:maximum-prefix
    | | | | | | | | | | | | | | | | | | +--rw bgp:max-prefix-limit?   max-prefix-limit
    | | | | | | | | | | | | | | | | | | +--rw bgp:threshold-holder
    | | | | | | | | | | | | | | | | | | +--rw bgp:threshold?       max-prefix-threshold
    | | | | | | | | | | | | | | | | | | +--rw bgp:teardown?        empty
    | | | | | | | | | | | | | | | | | | +--rw bgp:restart-interval? restart-interval-
range
    | | | | | | | | | | | | | | | | | | +--rw bgp:default-originate
    | | | | | | | | | | | | | | | | | | | +--rw bgp:default-originate-status?   empty
    | | | | | | | | | | | | | | | | | | | +--rw bgp:default-originate-route-map? rmap-type
    | | | | | | | | | | | | | | | | | | | +--rw bgp:prefix-list
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:direction-in
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-in-prefix-name?
nei-prefix-list-filter
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-in?
empty
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:direction-out
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-out-prefix-name?
nei-prefix-list-filter
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-out?
empty
    | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map
    | | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-direction-in
    | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64
    | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-direction-out
    | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
    | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:route-reflector-client?   empty
    | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:unsuppress-map
    | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:map-name?   rmap-type
    | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:af-nei-weight?           nei-weight
    | | | | | | | | | | | | | | | | | | | | | | | | +--rw bgp:enable-peer-as-check?   empty

```

```

    | | | | | | | | | | +--rw bgp:announce-rpki-state?           empty
    | | | | | | | | | | +--rw bgp:additional-paths
    | | | | | | | | | | | +--rw bgp:addpath-disable?       empty
    | | | | | | | | | | | +--rw bgp:addpath-txrx
    | | | | | | | | | | | | +--rw bgp:addpath-send?       empty
    | | | | | | | | | | | | +--rw bgp:addpath-receive?     empty
    | | | | | | | | | | | +--rw bgp:addpath-advertise
    | | | | | | | | | | | | +--rw bgp:addpath-adv-best?     uint8
    | | | | | | | | | | | | +--rw bgp:addpath-adv-groupbest? empty
    | | | | | | | | | | | | +--rw bgp:addpath-adv-all?      empty
    | | | | | | | | | | | +--rw bgp:af-ipv6-neighbor-address-holder
    | | | | | | | | | | | | +--rw bgp:af-ipv6-neighbor-address* [af-ipv6-neighbor-
address]
    | | | | | | | | | | | | | +--rw bgp:af-ipv6-neighbor-address   inet:ipv6-address
    | | | | | | | | | | | | +--rw bgp:send-community
    | | | | | | | | | | | | | +--rw bgp:send-community-status? empty
    | | | | | | | | | | | | | +--rw bgp:all?
    | | | | | | | | | | | | | +--rw bgp:both?
    | | | | | | | | | | | | | +--rw bgp:extended?
    | | | | | | | | | | | | | +--rw bgp:standard?
    | | | | | | | | | | | | | +--rw bgp:large?
    | | | | | | | | | | | | +--rw bgp:af-neighbor-capability
    | | | | | | | | | | | | | +--rw bgp:orff
    | | | | | | | | | | | | | | +--rw bgp:prefixlist
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-status? empty
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-send?   empty
    | | | | | | | | | | | | | | | +--rw bgp:prefixlist-receive? empty
    | | | | | | | | | | | | +--rw bgp:activate?             empty
    | | | | | | | | | | | | +--rw bgp:allowas-in?          uint32
    | | | | | | | | | | | | +--rw bgp:filter-list
    | | | | | | | | | | | | | +--rw bgp:direction-in
    | | | | | | | | | | | | | | +--rw bgp:filter-list-direction-in-acl-name? ip-
filter-name
    | | | | | | | | | | | | | | +--rw bgp:filter-list-name-direction-in?
empty
    | | | | | | | | | | | | | | +--rw bgp:direction-out
    | | | | | | | | | | | | | | +--rw bgp:filter-list-direction-out-acl-name? ip-
filter-name
    | | | | | | | | | | | | | | +--rw bgp:filter-list-name-direction-out?
empty
    | | | | | | | | | | | | | +--rw bgp:maximum-prefix
    | | | | | | | | | | | | | | +--rw bgp:max-prefix-limit? max-prefix-limit
    | | | | | | | | | | | | | +--rw bgp:threshold-holder
    | | | | | | | | | | | | | | +--rw bgp:threshold?        max-prefix-threshold
    | | | | | | | | | | | | | | +--rw bgp:teardown?         empty
    | | | | | | | | | | | | | | +--rw bgp:restart-interval? restart-interval-
range
    | | | | | | | | | | | | | +--rw bgp:default-originate
    | | | | | | | | | | | | | | +--rw bgp:default-originate-status? empty
    | | | | | | | | | | | | | | +--rw bgp:default-originate-route-map? rmap-type
    | | | | | | | | | | | | +--rw bgp:prefix-list
    | | | | | | | | | | | | | +--rw bgp:direction-in
    | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-in-prefix-name?
nei-prefix-list-filter
    | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-in?
empty
    | | | | | | | | | | | | | | +--rw bgp:direction-out
    | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-out-prefix-name?
nei-prefix-list-filter
    | | | | | | | | | | | | | | +--rw bgp:prefix-list-direction-out?
empty
    | | | | | | | | | | | | | +--rw bgp:neighbor-route-map
    | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-direction-in
    | | | | | | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in?

```

```

common-def:name-string64
    | | | | | |
    | | | | | | +--rw bgp:neighbor-route-map-direction-out
    | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
    | | | | | |
    | | | | | | +--rw bgp:route-reflector-client?      empty
    | | | | | | +--rw bgp:unsuppress-map
    | | | | | | | +--rw bgp:map-name?      rmap-type
    | | | | | | | +--rw bgp:af-nei-weight?      nei-weight
    | | | | | | | +--rw bgp:enable-peer-as-check?      empty
    | | | | | | | +--rw bgp:announce-rpki-state?      empty
    | | | | | | | +--rw bgp:additional-paths
    | | | | | | | | +--rw bgp:addpath-disable?      empty
    | | | | | | | | +--rw bgp:addpath-txrx
    | | | | | | | | | +--rw bgp:addpath-send?      empty
    | | | | | | | | | +--rw bgp:addpath-receive?      empty
    | | | | | | | | +--rw bgp:addpath-advertise
    | | | | | | | | | +--rw bgp:addpath-adv-best?      uint8
    | | | | | | | | | +--rw bgp:addpath-adv-groupbest?      empty
    | | | | | | | | | +--rw bgp:addpath-adv-all?      empty
    | | | | | | | +--rw bgp:af-common-cmnds-holder
    | | | | | | | | +--rw bgp:maximum-paths
    | | | | | | | | | +--rw bgp:load-sharing-value?      uint32
    | | | | | | | | | +--rw bgp:ebgp?      ebgp-paths
    | | | | | | | | | +--rw bgp:ibgp?      ibgp-paths
    | | | | | | | | | +--rw bgp:use-load-sharing?      empty
    | | | | | | | | +--rw bgp:multipath
    | | | | | | | | | +--rw bgp:multipath_ebgp?      empty
    | | | | | | | | | +--rw bgp:multipath_ibgp?      empty
    | | | | | | | | | +--rw bgp:multi-as?      empty
    | | | | | | | | +--rw bgp:always-propagate?      empty
    | | | | | | | | +--rw bgp:default-information-originate?      empty
    | | | | | | | | +--rw bgp:rib-route-limit?      rib-route-number
    | | | | | | | | +--rw bgp:client-to-client-reflection?      empty
    | | | | | | | | +--rw bgp:dampening
    | | | | | | | | | +--rw (ch-dampening-source)?
    | | | | | | | | | | +---(ca-dampening-flag)
    | | | | | | | | | | | +--rw bgp:dampening-flag?      empty
    | | | | | | | | | | | +---(ca-dampening-specify-values)
    | | | | | | | | | | | +--rw bgp:values
    | | | | | | | | | | | | +--rw bgp:half-time?      htime
    | | | | | | | | | | | | +--rw bgp:reuse-value?      damp-reuse-value
    | | | | | | | | | | | | +--rw bgp:start-suppress-time?      damp-start-
suppress-value
    | | | | | | | | | | | | | +--rw bgp:max-suppress-time?      damp-max-suppress-
value
    | | | | | | | | | | | | | | +---(ca-dampening-route-map)
    | | | | | | | | | | | | | | +--rw bgp:dampening-route-map?      rmap-type
    | | | | | | | | | | | | | +--rw bgp:default-metric?      default-metric-
number
    | | | | | | | | | | | | | | +--rw bgp:next-hop-enable-default?      empty
    | | | | | | | | | | | | | | +--rw bgp:table-map
    | | | | | | | | | | | | | | | +--rw bgp:table-map-route-map?      rmap-type
    | | | | | | | | | | | | | | | +--rw bgp:update-time?      update-time-type
    | | | | | | | | | | | | | | +--rw bgp:graceful-restart
    | | | | | | | | | | | | | | | +--rw bgp:graceful-restart-status?      empty
    | | | | | | | | | | | | | | | +--rw bgp:restart-time?      rtime-type
    | | | | | | | | | | | | | | | +--rw bgp:purge-time?      ptime-type
    | | | | | | | | | | | | | | | +--rw bgp:stale-routes-time?      st-time-type
    | | | | | | | | | | | | | | | +--rw bgp:ipv6-ucast-next-hop-recursion?      empty
    | | | | | | | | | | | | | | | +--rw bgp:bestpath
    | | | | | | | | | | | | | | | | +--rw bgp:prefix-validation
    | | | | | | | | | | | | | | | | | +--rw bgp:prefix-validation-disable?      empty
    | | | | | | | | | | | | | | | | | +--rw bgp:disallow-invalid?      empty
    | | | | | | | | | | | | | | | +--rw bgp:af-ipv6-vrf* [af-ipv6-vrf-name]

```

```

    | | | | |   +--rw bgp:af-ipv6-vrf-name                      string
    | | | | |   +--rw bgp:next-hop-recursion?                  empty
    | | | | |   +--rw bgp:bestpath
    | | | | |     +--rw bgp:prefix-validation
    | | | | |       +--rw bgp:prefix-validation-disable?  empty
    | | | | |       +--rw bgp:disallow-invalid?        empty
    | | | | +--rw bgp:graceful-restart-status?           empty
    | | | | +--rw bgp:af-ipv6-uc-and-vrf-cmds-call-point-holder
    | | | |   +--rw bgp:bgp-redistribute-internal?   empty
    | | | |   +--rw bgp:redistribute
    | | | |     +--rw bgp:bgp
    | | | |       +--rw bgp:redistribute-bgp?      empty
    | | | |       +--rw bgp:bgp-metric?        conn-metric
    | | | |       +--rw bgp:bgp-route-map?      rmap-type
    | | | |     +--rw bgp:connected
    | | | |       +--rw bgp:redistribute-connected? empty
    | | | |       +--rw bgp:unicast-metric?      conn-metric
    | | | |       +--rw bgp:redistribute-route-map? rmap-type
    | | | |     +--rw bgp:ospf
    | | | |       +--rw bgp:redistribute-ospf?      empty
    | | | |     +--rw bgp:match
    | | | |       +--rw bgp:ospf-internal?      empty
    | | | |       +--rw bgp:ospf-external1?     empty
    | | | |       +--rw bgp:ospf-external2?     empty
    | | | |       +--rw bgp:ospf-metric?        conn-metric
    | | | |       +--rw bgp:ospf-route-map?      rmap-type
    | | | |     +--rw bgp:redistribute-isis!
    | | | |       +--rw bgp:redistribute-isis-route-map? common-def:name-
string63
    | | | |     +--rw (ch-isis-level)?
    | | | |       +--:(ca-level-1)
    | | | |         +--rw bgp:level-1?          empty
    | | | |       +--:(ca-level-2)
    | | | |         +--rw bgp:level-2?          empty
    | | | |       +--:(ca-level-1-2)
    | | | |         +--rw bgp:level-1-2?        empty
    | | | |       +--rw bgp:redistribute-isis-metric? conn-metric
    | | | |     +--rw bgp:static
    | | | |       +--rw bgp:redistribute-static? empty
    | | | |       +--rw bgp:unicast-static-metric? conn-metric
    | | | |       +--rw bgp:static-route-map?    rmap-type
    | | | |     +--rw bgp:af-additional-paths
    | | | |       +--rw bgp:addpath-txrx
    | | | |         +--rw bgp:addpath-send?    empty
    | | | |         +--rw bgp:addpath-receive? empty
    | | | |       +--rw bgp:addpath-select
    | | | |         +--rw bgp:addpath-sel-best?  uint8
    | | | |         +--rw bgp:addpath-sel-groupbest? empty
    | | | |         +--rw bgp:addpath-sel-all?    empty
    | | | |       +--rw bgp:advertise-best-external? empty
    | | | |     +--rw bgp:aggregate-ipv6-address* [aggregate-ip-prefix]
    | | | |       +--rw bgp:aggregate-ip-prefix  inet:ipv6-prefix
    | | | |       +--rw bgp:advertise-map?       advertise-map
    | | | |       +--rw bgp:as-set?            empty
    | | | |       +--rw bgp:attribute-map?     attribute-map
    | | | |       +--rw bgp:summary-only?      empty
    | | | |       +--rw bgp:suppress-map?      suppress-map
    | | | |     +--rw bgp:network* [network-ipv6-address]
    | | | |       +--rw bgp:network-ipv6-address  inet:ipv6-prefix
    | | | |       +--rw bgp:network-weight?      absolute-decimal-number
    | | | |       +--rw bgp:backdoor?          empty
    | | | |       +--rw bgp:network-route-map?  rmap-type
    | | | |     +--rw bgp:ipv6-listen-range* [listen-range-prefix peer-group]
    | | | |       +--rw bgp:listen-range-prefix  inet:ipv6-prefix

```

```

    | | | | | | | +--rw bgp:peer-group          bgp-peergroup
    | | | | | | | +--rw bgp:limit?           listen-limit-type
    | | | | | | +--rw bgp:neighbor
    | | | | | | | +--rw bgp:af-ipv6-vrf-neighbor-address-holder
    | | | | | | |   +--rw bgp:af-ipv6-neighbor-addr* [af-ipv6-neighbor-address]
    | | | | | | |     +--rw bgp:af-ipv6-neighbor-address      inet:ipv6-address
    | | | | | | |     +--rw bgp:remote-as?                bgp-remote-as
    | | | | | | | +--rw bgp:shutdown
    | | | | | | |   +--rw bgp:shutdown-status?    empty
    | | | | | | |   +--rw bgp:generate-rib-out?  empty
    | | | | | | +--rw bgp:af-vrf-neighbor-capability
    | | | | | | | +--rw bgp:as4
    | | | | | | |   +--rw bgp:neighbor-as4-enable?  empty
    | | | | | | |   +--rw bgp:neighbor-as4-disable? empty
    | | | | | | +--rw bgp:orf
    | | | | | | |   +--rw bgp:prefixlist
    | | | | | | |     +--rw bgp:prefixlist-status?  empty
    | | | | | | |     +--rw bgp:prefixlist-send?    empty
    | | | | | | |     +--rw bgp:prefixlist-receive? empty
    | | | | | | +--rw bgp:allowas-in?
    | | | | | | |   uint32
    | | | | | | +--rw bgp:filter-list
    | | | | | | |   +--rw bgp:direction-in
    | | | | | | |     +--rw bgp:filter-list-direction-in-acl-name? ip-
filter-name
    | | | | | | |   | | +--rw bgp:filter-list-name-direction-in?
empty
    | | | | | | |   +--rw bgp:direction-out
    | | | | | | |     +--rw bgp:filter-list-direction-out-acl-name? ip-
filter-name
    | | | | | | |   +--rw bgp:filter-list-name-direction-out?
empty
    | | | | | | +--rw bgp:maximum-prefix
    | | | | | | | +--rw bgp:max-prefix-limit?  max-prefix-limit
    | | | | | | | +--rw bgp:threshold-holder
    | | | | | | |   +--rw bgp:threshold?        max-prefix-threshold
    | | | | | | |   +--rw bgp:teardown?       empty
    | | | | | | |   +--rw bgp:restart-interval? restart-interval-
range
    | | | | | | +--rw bgp:default-originate
    | | | | | | | +--rw bgp:default-originate-status?  empty
    | | | | | | | +--rw bgp:default-originate-route-map? rmap-type
    | | | | | | +--rw bgp:prefix-list
    | | | | | | | +--rw bgp:direction-in
    | | | | | | |   +--rw bgp:prefix-list-direction-in-prefix-name?
nei-prefix-list-filter
    | | | | | | | +--rw bgp:prefix-list-direction-in?
empty
    | | | | | | | +--rw bgp:direction-out
    | | | | | | |     +--rw bgp:prefix-list-direction-out-prefix-name?
nei-prefix-list-filter
    | | | | | | | +--rw bgp:prefix-list-direction-out?
empty
    | | | | | | +--rw bgp:neighbor-route-map
    | | | | | | | +--rw bgp:neighbor-route-map-direction-in
    | | | | | | |   +--rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64
    | | | | | | | +--rw bgp:neighbor-route-map-direction-out
    | | | | | | |     +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
    | | | | | | | +--rw bgp:route-reflector-client?    empty
    | | | | | | | +--rw bgp:unsuppress-map
    | | | | | | |   +--rw bgp:map-name?    rmap-type
    | | | | | | | +--rw bgp:af-nei-weight?            nei-weight
    | | | | | | | +--rw bgp:enable-peer-as-check? empty

```

```

    | | | | | | | +--rw bgp:announce-rpki-state?           empty
    | | | | | | | +--rw bgp:additional-paths
    | | | | | | | | +--rw bgp:addpath-disable?       empty
    | | | | | | | | +--rw bgp:addpath-txrx
    | | | | | | | | | +--rw bgp:addpath-send?       empty
    | | | | | | | | | +--rw bgp:addpath-receive?     empty
    | | | | | | | | +--rw bgp:addpath-advertise
    | | | | | | | | | +--rw bgp:addpath-adv-best?     uint8
    | | | | | | | | | +--rw bgp:addpath-adv-groupbest? empty
    | | | | | | | | | +--rw bgp:addpath-adv-all?      empty
    | | | | | | | +--rw bgp:associate-peer-group?      bgp-peergroup
    | | | | | | +--rw bgp:maxas-limit
    | | | | | | | +--rw bgp:in
    | | | | | | | | +--rw (ch-maxas-limit)?
    | | | | | | | | | +---:(ca-maxas-limit-enable)
    | | | | | | | | | | +--rw bgp:num-as-in-as-path?   num-as-in-
as-path
    | | | | | | | | | +---:(ca-maxas-limit-disable)
    | | | | | | | | | | +--rw bgp:maxas-limit-disable? empty
    | | | | | | +--rw bgp:description?                 neighbor-
description
    | | | | | | | +--rw bgp:local-as
    | | | | | | | | +--rw bgp:local-as-value?   local-as-num
    | | | | | | | | +--rw bgp:no-prepend?        empty
    | | | | | | +--rw bgp:next-hop-self
    | | | | | | | +--rw (ch-next-hop-self-type)?
    | | | | | | | | +---:(ca-next-hop-self-always)
    | | | | | | | | | +--rw bgp:next-hop-self-always? empty
    | | | | | | | | +---:(ca-next-hop-self-status)
    | | | | | | | | | +--rw bgp:next-hop-self-status? empty
    | | | | | | +--rw bgp:advertisement-interval
    | | | | | | | +--rw bgp:value?          adv-value
    | | | | | | +--rw bgp:ebgp-btsh?           empty
    | | | | | | +--rw bgp:ebgp-multipath
    | | | | | | | +--rw (ch-ebgp-multipath-type)?
    | | | | | | | | +---:(ca-ebgp-multipath-flag)
    | | | | | | | | | +--rw bgp:ebgp-multipath-flag? empty
    | | | | | | | | +---:(ca-ebgp-multipath-count)
    | | | | | | | | | +--rw bgp:ebgp-multipath-count? uint32
    | | | | | | +--rw bgp:password?            bgp-password
    | | | | | | +--rw bgp:enforce-first-as
    | | | | | | | +--rw bgp:nei-enforce-first-as? empty
    | | | | | | | +--rw bgp:nei-enforce-first-as-disable? empty
    | | | | | | +--rw bgp:timers
    | | | | | | | +--rw bgp:nei-keepalive?    nei-keepalive
    | | | | | | | +--rw bgp:nei-hold-time?   nei-hold-time
    | | | | | | +--rw bgp:peer-dampening
    | | | | | | | +--rw (nei-peer-dampening-source)?
    | | | | | | | | +---:(nei-ca-peer-dampening-flag)
    | | | | | | | | | +--rw bgp:nei-peer-dampening-flag? empty
    | | | | | | | | +---:(nei-ca-peer-dampening-specify-values)
    | | | | | | | | | +--rw bgp:values
    | | | | | | | | | +--rw bgp:nei-delay-hold?   nei-
delay-hold
    | | | | | | | | +--rw bgp:nei-penalty?       nei-
penalty
    | | | | | | | | +--rw bgp:nei-max-penalty?   nei-max-
penalty
    | | | | | | | | +--rw bgp:nei-stability-interval? nei-
stability-interval
    | | | | | | | | +--rw bgp:remove-private-as? empty
    | | | | | | | | +--rw bgp:as-override?        empty
    | | | | | | | | +--rw bgp:soft-reconfiguration
    | | | | | | | | | +--rw bgp:inbound?         empty

```

```

          | | | | | | |       +---rw bgp:static-network-edge?           empty
          | | | | | | |       +---rw bgp:bfd
          | | | | | | |       |   +---rw bgp:bfd-enable?           empty
          | | | | | | |       |   +---rw bgp:holdover-interval?   bfd:bfd-holdover-
interval
          | | | | | | |       |   +---rw bgp:interval
          | | | | | | |       |   +---rw bgp:min-tx?            bfd-tx-interval-type
          | | | | | | |       |   +---rw bgp:min-rx?            bfd-rx-interval-type
          | | | | | | |       |   +---rw bgp:multiplier?        bfd-multiplier-type
          | | | | | | |       +---rw bgp:graceful-restart
          | | | | | | |       |   +---rw (ch-graceful-restart-type)?
          | | | | | | |       |   +---:(ca-graceful-restart-disable)
          | | | | | | |       |   |   +---rw bgp:graceful-restart-disable? empty
          | | | | | | |       |   +---:(ca-graceful-restart-status)
          | | | | | | |       |   |   +---rw bgp:graceful-restart-status? empty
          | | | | | | |       +---rw bgp:update-source
          | | | | | | |       |   +---rw (ch-update-source)?
          | | | | | | |       |   |   +---:(ca-ipv6)
          | | | | | | |       |   |   +---rw bgp:sip-ipv6-address?    sip-ipv6-address
          | | | | | | |       |   +---:(ca-eth)
          | | | | | | |       |   |   +---rw bgp:ethernet-interface
          | | | | | | |       |   |   |   +---rw bgp:interface-type?  enumeration
          | | | | | | |       |   |   |   +---rw bgp:interface-name? update-source-
ethernet-type
          | | | | | | |       |   +---:(ca-port-channel)
          | | | | | | |       |   |   +---rw bgp:port-channel?
interface:portchannel-type
          | | | | | | |       |   +---:(ca-loopback)
          | | | | | | |       |   |   +---rw bgp:loopback?          loopback-
interface
          | | | | | | |       |   +---:(ca-ve)
          | | | | | | |       |   |   +---rw bgp:ve-interface?    interface:ve-
type
          | | | | | | |       +---rw bgp:send-community
          | | | | | | |       |   +---rw bgp:send-community-status? empty
          | | | | | | |       |   +---rw bgp:all?
          | | | | | | |       |   +---rw bgp:both?
          | | | | | | |       |   +---rw bgp:extended?
          | | | | | | |       |   +---rw bgp:standard?
          | | | | | | |       |   |   +---rw bgp:large?
          | | | | | | |       |   |   +---rw bgp:activate?        empty
          | | | | | | |       +---rw bgp:maximum-paths
          | | | | | | |       |   +---rw bgp:load-sharing-value?  uint32
          | | | | | | |       |   +---rw bgp:ebgp?             ebgp-paths
          | | | | | | |       |   +---rw bgp:ibgp?             ibgp-paths
          | | | | | | |       |   +---rw bgp:use-load-sharing? empty
          | | | | | | |       +---rw bgp:multipath
          | | | | | | |       |   +---rw bgp:multipath_ebgp? empty
          | | | | | | |       |   +---rw bgp:multipath_ibgp? empty
          | | | | | | |       |   +---rw bgp:multi-as?        empty
          | | | | | | |       +---rw bgp:always-propagate?      empty
          | | | | | | |       +---rw bgp:default-information-originate? empty
          | | | | | | |       +---rw bgp:rib-route-limit?       rib-route-
number
          | | | | | | |       +---rw bgp:client-to-client-reflection? empty
          | | | | | | |       +---rw bgp:dampening
          | | | | | | |       |   +---rw (ch-dampening-source)?
          | | | | | | |       |   |   +---:(ca-dampening-flag)
          | | | | | | |       |   |   |   +---rw bgp:dampening-flag? empty
          | | | | | | |       |   |   +---:(ca-dampening-specify-values)
          | | | | | | |       |   |   |   +---rw bgp:values
          | | | | | | |       |   |   |   |   +---rw bgp:half-time?      htime
          | | | | | | |       |   |   |   |   +---rw bgp:reuse-value?    damp-reuse-value
          | | | | | | |       |   |   |   |   +---rw bgp:start-suppress-time? damp-start-suppress-

```

```

value
| | | | | | | +--rw bgp:max-suppress-time?      damp-max-suppress-
value
| | | | | | +--:(ca-dampening-route-map)
| | | | | | | +--rw bgp:dampening-route-map?   rmap-type
| | | | | | +--rw bgp:default-metric?           default-
metric-number
| | | | | | +--rw bgp:next-hop-enable-default?    empty
| | | | | | +--rw bgp:table-map
| | | | | | | +--rw bgp:table-map-route-map?   rmap-type
| | | | | | +--rw bgp:update-time?             update-
time-type
| | | | | | +--rw bgp:flowspec
| | | | | | | +--rw bgp:ipv6-flowspec-default-vrf!
| | | | | | | +--rw bgp:default-vrf-selected?   empty
| | | | | | | +--rw bgp:client-to-client-reflection? empty
| | | | | | | +--rw bgp:distribute?            common-def:name-string64
| | | | | | | +--rw bgp:rib-route-limit?        rib-route-number
| | | | | | +--rw bgp:flowspec
| | | | | | | +--rw bgp:validation
| | | | | | | | +--rw bgp:validation-flag?   empty
| | | | | | | | +--rw bgp:redirect?           empty
| | | | | | +--rw bgp:neighbor
| | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup-holder
| | | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup* [af-ipv6-neighbor-
peergroup-name]
| | | | | | | | +--rw bgp:af-ipv6-neighbor-peergroup-name   bgp-
peergroup
| | | | | | | | +--rw bgp:activate?           empty
| | | | | | | | +--rw bgp:allowas-in?         uint32
| | | | | | | | +--rw bgp:maximum-prefix
| | | | | | | | | +--rw bgp:max-prefix-limit?   max-prefix-limit
| | | | | | | | +--rw bgp:threshold-holder
| | | | | | | | | +--rw bgp:threshold?         max-prefix-threshold
| | | | | | | | | +--rw bgp:teardown?          empty
| | | | | | | | | +--rw bgp:restart-interval?   restart-interval-
range
| | | | | | | | +--rw bgp:neighbor-route-map
| | | | | | | | | +--rw bgp:neighbor-route-map-direction-in
| | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64
| | | | | | | | | +--rw bgp:neighbor-route-map-direction-out
| | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
| | | | | | | | | +--rw bgp:route-reflector-client?   empty
| | | | | | | | | +--rw bgp:af-nei-weight?          nei-weight
| | | | | | | | +--rw bgp:flowspec
| | | | | | | | | +--rw bgp:validation
| | | | | | | | | | +--rw bgp:validation-flag?   empty
| | | | | | | | | | +--rw bgp:redirect?           empty
| | | | | | | | +--rw bgp:redirect
| | | | | | | | | +--rw bgp:next-hop
| | | | | | | | | | +--rw bgp:next-hop-type?   enumeration
| | | | | | | | | | +--rw bgp:next-hop-holder?  enumeration
| | | | | | | | +--rw bgp:af-ipv6-neighbor-address-holder
| | | | | | | | | +--rw bgp:af-ipv6-neighbor-address* [af-ipv6-neighbor-
address]
| | | | | | | | | | +--rw bgp:af-ipv6-neighbor-address   inet:ipv6-address
| | | | | | | | | | +--rw bgp:activate?           empty
| | | | | | | | | | +--rw bgp:allowas-in?         uint32
| | | | | | | | | | +--rw bgp:maximum-prefix
| | | | | | | | | | | +--rw bgp:max-prefix-limit?   max-prefix-limit
| | | | | | | | | | +--rw bgp:threshold-holder
| | | | | | | | | | | +--rw bgp:threshold?         max-prefix-threshold

```

```

    | | | | |
    | | | | |     +--rw bgp:teardown?      empty
    | | | | |     +--rw bgp:restart-interval?  restart-interval-
range
    | | | | |
    | | | | |     +--rw bgp:neighbor-route-map
    | | | | |     | +--rw bgp:neighbor-route-map-direction-in
    | | | | |     | | +--rw bgp:neighbor-route-map-name-direction-in?
common-def:name-string64
    | | | | |
    | | | | |     +--rw bgp:neighbor-route-map-direction-out
    | | | | |     +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
    | | | | |
    | | | | |     +--rw bgp:route-reflector-client?      empty
    | | | | |     +--rw bgp:af-nei-weight?          nei-weight
    | | | | |
    | | | | |     +--rw bgp:flowspec
    | | | | |     +--rw bgp:validation
    | | | | |     | +--rw bgp:validation-flag?  empty
    | | | | |     | +--rw bgp:redirect?        empty
    | | | | |
    | | | | |     +--rw bgp:redirect
    | | | | |     +--rw bgp:next-hop
    | | | | |     +--rw bgp:next-hop-type?   enumeration
    | | | | |     +--rw bgp:next-hop-holder?  enumeration
    | | | | |
    | | | | |     +--rw bgp:flowspec-vrf
    | | | | |     +--rw bgp:flowspec
    | | | | |     +--rw bgp:af-ipv6-flowspec-vrf* [af-ipv6-flowspec-vrf-name]
    | | | | |     +--rw bgp:af-ipv6-flowspec-vrf-name  string
    | | | | |
    | | | | |     +--rw bgp:client-to-client-reflection? empty
    | | | | |     +--rw bgp:distribute?       common-def:name-
string64
    | | | | |
    | | | | |     +--rw bgp:rib-route-limit?      rib-route-number
    | | | | |
    | | | | |     +--rw bgp:validation
    | | | | |     | +--rw bgp:validation-flag?  empty
    | | | | |     | +--rw bgp:redirect?        empty
    | | | | |
    | | | | |     +--rw bgp:neighbor
    | | | | |     | +--rw bgp:af-ipv6-neighbor-address-holder
    | | | | |     | +--rw bgp:af-ipv6-neighbor-address* [af-ipv6-neighbor-
address]
    | | | | |
    | | | | |     +--rw bgp:af-ipv6-neighbor-address  inet:ipv6-
address
    | | | | |
    | | | | |     +--rw bgp:activate?      empty
    | | | | |     +--rw bgp:allow-as-in?  uint32
    | | | | |
    | | | | |     +--rw bgp:maximum-prefix
    | | | | |     | +--rw bgp:max-prefix-limit? max-prefix-limit
    | | | | |     | +--rw bgp:threshold-holder
    | | | | |     | | +--rw bgp:threshold?      max-prefix-
threshold
    | | | | |
    | | | | |     | +--rw bgp:teardown?      empty
    | | | | |     | +--rw bgp:restart-interval?  restart-interval-
range
    | | | | |
    | | | | |     +--rw bgp:neighbor-route-map
    | | | | |     | +--rw bgp:neighbor-route-map-direction-in
    | | | | |     | | +--rw bgp:neighbor-route-map-name-direction-
in?
    | | | | |     common-def:name-string64
    | | | | |
    | | | | |     | +--rw bgp:neighbor-route-map-direction-out
    | | | | |     | +--rw bgp:neighbor-route-map-name-direction-
out?
    | | | | |     common-def:name-string64
    | | | | |
    | | | | |     +--rw bgp:route-reflector-client?      empty
    | | | | |     +--rw bgp:af-nei-weight?          nei-weight
    | | | | |
    | | | | |     +--rw bgp:flowspec
    | | | | |     +--rw bgp:validation
    | | | | |     | +--rw bgp:validation-flag?  empty
    | | | | |     | +--rw bgp:redirect?        empty
    | | | | |
    | | | | |     +--rw bgp:redirect
    | | | | |     +--rw bgp:next-hop
    | | | | |     +--rw bgp:next-hop-type?   enumeration

```

```

| | | | |           |           +-rw bgp:next-hop-holder?   enumeration
| | | | |           +-rw bgp:ipv6-listen-range* [listen-range-prefix peer-group]
| | | | |             +-rw bgp:listen-range-prefix     inet:ipv6-prefix
| | | | |             +-rw bgp:peer-group          bgp-peergroup
| | | | |             +-rw bgp:limit?            listen-limit-type
| | | | +-rw bgp:l2vpn
| | | | +-rw bgp:evpn!
| | | |   +-rw bgp:suppress
| | | |   | +-rw bgp:ipv4
| | | |   |   +-rw bgp:host-route?   empty
| | | | +-rw bgp:client-to-client-reflection?   empty
| | | | +-rw bgp:graceful-restart
| | | |   | +-rw bgp:graceful-restart-status?   empty
| | | |   | +-rw bgp:restart-time?        rtime-type
| | | |   | +-rw bgp:purge-time?         ptime-type
| | | |   | +-rw bgp:stale-routes-time?   st-time-type
| | | | +-rw bgp:retain
| | | |   | +-rw bgp:route-target
| | | |   |   +-rw bgp:all?      empty
| | | | +-rw bgp:vtep-discovery?       empty
| | | | +-rw bgp:import
| | | |   | +-rw bgp:vpnv4
| | | |   |   +-rw bgp:vpnv4-unicast
| | | |   |   | +-rw bgp:vpnv4-reoriginate?   empty
| | | | +-rw bgp:vpnv6
| | | |   +-rw bgp:vpnv6-unicast
| | | |   | +-rw bgp:vpnv6-reoriginate?   empty
| | | | +-rw bgp:neighbor
| | | |   +-rw bgp:evpn-peer-group* [evpn-neighbor-peergroup-name]
| | | |   | +-rw bgp:evpn-neighbor-peergroup-name    bgp-peergroup
| | | |   | +-rw bgp:encapsulation?      encapsulation-t
| | | |   | +-rw bgp:maximum-prefix?    max-prefix-limit
| | | |   | +-rw bgp:route-reflector-client?   empty
| | | |   | +-rw bgp:allowas-in?        uint32
| | | |   | +-rw bgp:next-hop-unchanged?   empty
| | | |   | +-rw bgp:enable-peer-as-check?   empty
| | | |   | +-rw bgp:route-map
| | | |   |   | +-rw bgp:direction-in
| | | |   |   |   | +-rw bgp:route-map-name-direction-in?   common-def:name-
string64
| | | |   |   |   +-rw bgp:direction-out
| | | |   |   |   | +-rw bgp:route-map-name-direction-out?   common-
def:name-string64
| | | |   |   |   +-rw bgp:activate?           empty
| | | |   |   |   +-rw bgp:send-community
| | | |   |   |     +-rw bgp:send-community-status?   empty
| | | |   |   |     +-rw bgp:both?           empty
| | | |   |   |     +-rw bgp:extended?        empty
| | | |   |   |     +-rw bgp:standard?        empty
| | | |   +-rw bgp:evpn-neighbor-ipv4* [evpn-neighbor-ipv4-address]
| | | |   | +-rw bgp:evpn-neighbor-ipv4-address   inet:ipv4-address
| | | |   | +-rw bgp:encapsulation?      encapsulation-t
| | | |   | +-rw bgp:maximum-prefix?    max-prefix-limit
| | | |   | +-rw bgp:route-reflector-client?   empty
| | | |   | +-rw bgp:allowas-in?        uint32
| | | |   | +-rw bgp:next-hop-unchanged?   empty
| | | |   | +-rw bgp:enable-peer-as-check?   empty
| | | |   | +-rw bgp:route-map
| | | |   |   | +-rw bgp:direction-in
| | | |   |   |   | +-rw bgp:route-map-name-direction-in?   common-def:name-
string64
| | | |   |   |   +-rw bgp:direction-out
| | | |   |   |   | +-rw bgp:route-map-name-direction-out?   common-
def:name-string64

```

```

| | | | | | +--rw bgp:activate? empty
| | | | | | +--rw bgp:send-community
| | | | | | | +--rw bgp:send-community-status? empty
| | | | | | | +--rw bgp:both? empty
| | | | | | | +--rw bgp:extended? empty
| | | | | | | +--rw bgp:standard? empty
| | | | | | +--rw bgp:evpn-neighbor-ipv6* [evpn-neighbor-ipv6-address]
| | | | | | | +--rw bgp:evpn-neighbor-ipv6-address inet:ipv6-address
| | | | | | | +--rw bgp:encapsulation? encapsulation-t
| | | | | | | +--rw bgp:maximum-prefix? max-prefix-limit
| | | | | | | +--rw bgp:route-reflector-client? empty
| | | | | | | +--rw bgp:allow-as-in? uint32
| | | | | | | +--rw bgp:next-hop-unchanged? empty
| | | | | | | +--rw bgp:enable-peer-as-check? empty
| | | | | | +--rw bgp:route-map
| | | | | | | +--rw bgp:direction-in
| | | | | | | | +--rw bgp:route-map-name-direction-in? common-def:name-
string64
| | | | | | | +--rw bgp:direction-out
| | | | | | | | +--rw bgp:route-map-name-direction-out? common-
def:name-string64
| | | | | | | +--rw bgp:activate? empty
| | | | | | | +--rw bgp:send-community
| | | | | | | | +--rw bgp:send-community-status? empty
| | | | | | | | +--rw bgp:both? empty
| | | | | | | | +--rw bgp:extended? empty
| | | | | | | | +--rw bgp:standard? empty
| | | | | | +--rw bgp:vpnv4
| | | | | | | +--rw bgp:vpnv4-unicast!
| | | | | | | | +--rw bgp:rr-group? rr-group-type
| | | | | | | | +--rw bgp:export-vrf-leaked-routes? empty
| | | | | | | +--rw bgp:af-vpn-neighbor-peergroup-holder
| | | | | | | | +--rw bgp:af-vpn-neighbor-peergroup* [af-vpn-neighbor-peergroup-
address]
| | | | | | | | +--rw bgp:af-vpn-neighbor-peergroup-address bgp-peergroup
| | | | | | | +--rw bgp:af-neighbor-capability
| | | | | | | | +--rw bgp:orff
| | | | | | | | | +--rw bgp:prefix-list
| | | | | | | | | | +--rw bgp:prefixlist-status? empty
| | | | | | | | | | +--rw bgp:prefixlist-send? empty
| | | | | | | | | | +--rw bgp:prefixlist-receive? empty
| | | | | | | | | +--rw bgp:extended-community
| | | | | | | | | | +--rw bgp:ext-community-receive? empty
| | | | | | | | | | +--rw bgp:ext-community-send-vrf? empty
| | | | | | | +--rw bgp:send-community
| | | | | | | | +--rw bgp:send-community-status? empty
| | | | | | | | +--rw bgp:all? empty
| | | | | | | | +--rw bgp:both? empty
| | | | | | | | +--rw bgp:extended? empty
| | | | | | | | +--rw bgp:standard? empty
| | | | | | | | +--rw bgp:large? empty
| | | | | | | +--rw bgp:activate? empty
| | | | | | | +--rw bgp:weight? nei-weight
| | | | | | | | +--rw bgp:route-reflector-client? empty
| | | | | | | | +--rw bgp:neighbor-route-map
| | | | | | | | | +--rw bgp:neighbor-route-map-direction-in
| | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in? common-
def:name-string64
| | | | | | | | | +--rw bgp:neighbor-route-map-direction-out
| | | | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
| | | | | | | | +--rw bgp:prefix-list
| | | | | | | | | +--rw bgp:direction-in
| | | | | | | | | | +--rw bgp:prefix-list-direction-in-prefix-name? nei-

```



```

| | | |      +-rw bgp:evpn
| | | |          +-rw bgp:vpnv4-evpn-reoriginate?    empty
| | | +-rw bgp:vpnv6
| | |     +-rw bgp:vpn6-unicast!
| | |         +-rw bgp:rr-group?                      rr-group-type
| | |         +-rw bgp:export-vrf-leaked-routes?    empty
| | |         +-rw bgp:af-vpn-neighbor-peergroup-holder
| | |             +-rw bgp:af-vpn-neighbor-peergroup*
| | |                 [af-vpn-neighbor-peergroup-
address]
| | |             +-rw bgp:af-vpn-neighbor-peergroup-address    bgp-peergroup
| | |             +-rw bgp:af-neighbor-capability
| | |                 +-rw bgp:orf
| | |                     +-rw bgp:prefix-list
| | |                         +-rw bgp:prefixlist-status?    empty
| | |                         +-rw bgp:prefixlist-send?    empty
| | |                         +-rw bgp:prefixlist-receive?   empty
| | |                     +-rw bgp:extended-community
| | |                         +-rw bgp:ext-community-receive?   empty
| | |                         +-rw bgp:ext-community-send-vrf?  empty
| | |             +-rw bgp:send-community
| | |                 +-rw bgp:send-community-status?    empty
| | |                 +-rw bgp:all?                      empty
| | |                 +-rw bgp:both?                     empty
| | |                 +-rw bgp:extended?                  empty
| | |                 +-rw bgp:standard?                  empty
| | |                 +-rw bgp:large?                     empty
| | |             +-rw bgp:activate?                   empty
| | |             +-rw bgp:weight?                     nei-weight
| | |             +-rw bgp:route-reflector-client?   empty
| | |             +-rw bgp:neighbor-route-map
| | |                 +-rw bgp:neighbor-route-map-direction-in
| | |                     +-rw bgp:neighbor-route-map-name-direction-in?  common-
def:name-string64
| | |                 +-rw bgp:neighbor-route-map-direction-out
| | |                     +-rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
| | |             +-rw bgp:prefix-list
| | |                 +-rw bgp:direction-in
| | |                     +-rw bgp:prefix-list-direction-in-prefix-name?  nei-
prefix-list-filter
| | |                 +-rw bgp:prefix-list-direction-in?           empty
| | |                 +-rw bgp:direction-out
| | |                     +-rw bgp:prefix-list-direction-out-prefix-name?  nei-
prefix-list-filter
| | |                 +-rw bgp:prefix-list-direction-out?           empty
| | |             +-rw bgp:filter-list
| | |                 +-rw bgp:direction-in
| | |                     +-rw bgp:filter-list-direction-in-acl-name?  ip-filter-
name
| | |                 +-rw bgp:filter-list-name-direction-in?    empty
| | |             +-rw bgp:direction-out
| | |                 +-rw bgp:filter-list-direction-out-acl-name?  ip-
filter-name
| | |                     +-rw bgp:filter-list-name-direction-out?    empty
| | |             +-rw bgp:af-vpnv6-neighbor-address-holder
| | |                 +-rw bgp:af-vpnv6-neighbor* [af-vpnv6-neighbor-address]
| | |                     +-rw bgp:af-vpnv6-neighbor-address    inet:ipv4-address
| | |                     +-rw bgp:af-neighbor-capability
| | |                         +-rw bgp:orf
| | |                             +-rw bgp:prefix-list
| | |                                 +-rw bgp:prefixlist-status?    empty
| | |                                 +-rw bgp:prefixlist-send?    empty
| | |                                 +-rw bgp:prefixlist-receive?   empty
| | |                         +-rw bgp:extended-community

```

```

| | | | | | +--rw bgp:ext-community-receive?    empty
| | | | | | +--rw bgp:ext-community-send-vrf?   empty
| | | | +---rw bgp:send-community
| | | | | | +--rw bgp:send-community-status?  empty
| | | | | | +--rw bgp:all?                   empty
| | | | | | +--rw bgp:both?                  empty
| | | | | | +--rw bgp:extended?              empty
| | | | | | +--rw bgp:standard?              empty
| | | | | | +--rw bgp:large?                 empty
| | | | | | +--rw bgp:activate?               empty
| | | | | | +--rw bgp:weight?                nei-weight
| | | | | | +--rw bgp:route-reflector-client? empty
| | | | | | +--rw bgp:neighbor-route-map
| | | | | | | +--rw bgp:neighbor-route-map-direction-in
| | | | | | | | +--rw bgp:neighbor-route-map-name-direction-in?  common-
def:name-string64
| | | | | | | +--rw bgp:neighbor-route-map-direction-out
| | | | | | | | +--rw bgp:neighbor-route-map-name-direction-out?
common-def:name-string64
| | | | | | +--rw bgp:prefix-list
| | | | | | | +--rw bgp:direction-in
| | | | | | | | +--rw bgp:prefix-list-direction-in-prefix-name?  nei-
prefix-list-filter
| | | | | | | | +--rw bgp:prefix-list-direction-in?           empty
| | | | | | | | +--rw bgp:direction-out
| | | | | | | | | +--rw bgp:prefix-list-direction-out-prefix-name?  nei-
prefix-list-filter
| | | | | | | | +--rw bgp:prefix-list-direction-out?           empty
| | | | | | +---rw bgp:filter-list
| | | | | | | +--rw bgp:direction-in
| | | | | | | | +--rw bgp:filter-list-direction-in-acl-name?  ip-filter-
name
| | | | | | | | +--rw bgp:filter-list-name-direction-in?       empty
| | | | | | | +--rw bgp:direction-out
| | | | | | | | +--rw bgp:filter-list-direction-out-acl-name?  ip-
filter-name
| | | | | | | | +--rw bgp:filter-list-name-direction-out?       empty
| | | | | +---rw bgp:import
| | | | | | +--rw bgp:l2vpn
| | | | | | | +--rw bgp:evpn
| | | | | | | | +--rw bgp:vpnv6-evpn-reoriginate?   empty
| | | +---rw bgp:rpk
| | | | +--rw bgp:rpk-priority* [priority-num]
| | | | | +--rw bgp:priority-num      rpki-priority-num
| | | | +---rw bgp:server
| | | | | | +--rw bgp:rpk-ssh-server
| | | | | | | +--rw bgp:rpk-cache-ssh-server-name
| | | | | | | | +--rw bgp:ssh-server-name* [rpki-ssh-server-name]
| | | | | | | | | +--rw bgp:rpk-ssh-server-name      bgp-peergroup
| | | | | | | | +--rw bgp:rpk-ssh-server-port
| | | | | | | | | +--rw bgp:rpk-ssh-server-port?        uint32
| | | | | | | | | +--rw bgp:rpk-ssh-server-username?      string
| | | | | | | | | +--rw bgp:rpk-ssh-server-password-file?  string
| | | | | | +--rw bgp:rpk-cache-ssh-server-ip
| | | | | | | +--rw bgp:ssh-server-ip* [rpki-ssh-server-ip]
| | | | | | | | +--rw bgp:rpk-ssh-server-ip      inet:ipv4-address
| | | | | | | +--rw bgp:rpk-ssh-server-port
| | | | | | | | +--rw bgp:rpk-ssh-server-port?        uint32
| | | | | | | | +--rw bgp:rpk-ssh-server-username?      string
| | | | | | | | +--rw bgp:rpk-ssh-server-password-file?  string
| | | | | +---rw bgp:rpk-cache-ssh-server-ipv6
| | | | | | +--rw bgp:ssh-server-ipv6* [rpki-ssh-server-ipv6]
| | | | | | | +--rw bgp:rpk-ssh-server-ipv6      inet:ipv6-address
| | | | | | | +--rw bgp:rpk-ssh-server-port

```

```

| | | | | +--rw bgp:rpkissh-server-port?          uint32
| | | | | +--rw bgp:rpkissh-server-username?      string
| | | | | +--rw bgp:rpkissh-server-password-file? string
| | | | +--rw bgp:rpkitcp-server
| | | | | +--rw bgp:rpkicachetcpservername
| | | | | +--rw bgp:tcpservername* [rpkitcpservername]
| | | | | +--rw bgp:rpkitcpservername      bgp-peergroup
| | | | | +--rw bgp:rpkitcpserverport?        uint32
| | | | +--rw bgp:rpkicachetcpserverip
| | | | | +--rw bgp:tcpserverip* [rpkitcpserverip]
| | | | | +--rw bgp:rpkitcpserverip      inet:ipv4-address
| | | | | +--rw bgp:rpkitcpserverport?        uint32
| | | | +--rw bgp:rpkicachetcpserveripv6
| | | | | +--rw bgp:tcpserveripv6* [rpkitcpserveripv6]
| | | | | +--rw bgp:rpkitcpserveripv6      inet:ipv6-address
| | | | | +--rw bgp:rpkitcpserverport?        uint32
| | | +---rw isis:isis!
| | | | +--rw isis:routerisiscmdsholder
| | | | | +--rw isis:net* [net-cmd]
| | | | | | +--rw isis:netcmd      net-type
| | | | +--rw isis:routerisisattributes
| | | | | +--rw isis:authcheck
| | | | | | +--rw isis:authchecklevel1
| | | | | | | +--rw isis:authchecklevel1disable? empty
| | | | | | +--rw isis:authchecklevel2
| | | | | | | +--rw isis:authchecklevel2disable? empty
| | | | +--rw isis:authmode
| | | | | +--rw isis:md5
| | | | | | +--rw isis:authmode-md5-level1? empty
| | | | | | +--rw isis:authmode-md5-level2? empty
| | | | +--rw isis:authkey
| | | | | +--rw isis:authkey-level1-str?   string
| | | | | +--rw isis:authkey-level2-str?   string
| | | | +--rw isis:bfd
| | | | | +--rw isis:bfdglobalenable?    empty
| | | | | +--rw isis:bfdholdoverinterval? uint16
| | | | +--rw isis:cspninterval?          uint32
| | | | +--rw isis:disableincstctspfopt? empty
| | | | +--rw isis:disableincrementalspfopt? empty
| | | | +--rw isis:disablepartialspfopt? empty
| | | | +--rw isis:fastflood!
| | | | | +--rw isis:fastfloodvalue?   uint32
| | | | +--rw isis:gracefulrestart
| | | | | +--rw isis:grhelperdisable? empty
| | | +--rw isis:hello
| | | | +--rw isis:padding
| | | | | +--rw isis:hellopaddingpointtopoint
| | | | | | +--rw isis:hellopaddingptpdisable? empty
| | | | | +--rw isis:hellopaddingdisable? empty
| | | +--rw isis:hostname
| | | | +--rw isis:hostnameenable?    empty
| | | +--rw isis:istype?                enumeration
| | | +--rw isis:log
| | | | +--rw isis:adjacency?         empty
| | | | +--rw isis:invalidlsppackets? empty
| | | | +--rw isis:lspgeninterval?     uint32
| | | | +--rw isis:lspinterval?       uint32
| | | | +--rw isis:lsprefreshinterval? uint32
| | | | +--rw isis:maxlsplifetime?   uint32
| | | | +--rw isis:nonstoprouting?    empty
| | | | +--rw isis:partialspfinterval
| | | | | +--rw isis:pspfmaxholdtime? uint32
| | | | | +--rw isis:pspfinitdelay?   uint32
| | | | | +--rw isis:pspholdtime?     uint32

```

```

    |   |   |   +-rw isis:retransmit-interval?          uint32
    |   |   |   +-rw isis:set-debug
    |   |   |   |   +-rw isis:nsr?      empty
    |   |   |   +-rw isis:set-overload-bit!
    |   |   |   |   +-rw isis:on-startup
    |   |   |   |   |   +-rw (ch-on-startup)?
    |   |   |   |   |   |   +-:(ca-on-startup)
    |   |   |   |   |   |   |   +-rw isis:on-startup-overloadtime?  uint32
    |   |   |   |   |   |   |   +-:(ca-on-startup-wfbgp)
    |   |   |   |   |   |   |   +-rw isis:wait-for-bgp!
    |   |   |   |   |   |   |   |   +-rw isis:wait-for-bgp-value?  uint32
    |   |   |   +-rw isis:spf-interval* [spf-interval-level]
    |   |   |   |   +-rw isis:spf-interval-level      enumeration
    |   |   |   |   +-rw isis:spf-interval-max-hold-time?  uint32
    |   |   |   |   +-rw isis:spf-interval-initial-delay?  uint32
    |   |   |   |   +-rw isis:spf-interval-hold-time?      uint32
    |   |   |   +-rw isis:reverse-metric!
    |   |   |   |   +-rw isis:reverse_metric_tlv
    |   |   |   |   |   +-rw isis:rev-metric-tlv-type?  uint16
    |   |   |   +-rw isis:rev-metric-common-attributes
    |   |   |   |   +-rw isis:rev-metric-val?          uint32
    |   |   |   |   +-rw isis:rev-metric-whole-lan?      empty
    |   |   |   |   +-rw isis:rev-metric-te-def-metric?  empty
    +-rw isis:address-family
    |   +-rw isis:ipv4
    |   |   +-rw isis:af-ipv4-unicast!
    |   |   |   +-rw isis:af-ipv4-attributes
    |   |   |   |   +-rw isis:metric-style
    |   |   |   |   |   +-rw isis:wide
    |   |   |   |   |   |   +-rw isis:metric-style-wide-level1?  empty
    |   |   |   |   |   |   +-rw isis:metric-style-wide-level2?  empty
    |   |   |   +-rw isis:summary-address* [summary-ip summary-ip-mask]
    |   |   |   |   +-rw isis:summary-ip          inet:ipv4-address
    |   |   |   |   +-rw isis:summary-ip-mask      inet:ipv4-address
    |   |   |   |   +-rw isis:summary-ip-level1?  empty
    |   |   |   |   +-rw isis:summary-ip-level2?  empty
    |   |   |   +-rw isis:ldp-sync!
    |   |   |   |   +-rw isis:ldp-sync-hold-down?  uint32
    +-rw isis:default-link-metric
    |   |   +-rw isis:default-link-metric-level1?  uint32
    |   |   +-rw isis:default-link-metric-level2?  uint32
    +-rw isis:segment-routing
    |   |   +-rw isis:segment-routing-level1!
    |   |   |   +-rw isis:srgb
    |   |   |   |   +-rw isis:level1-srgb-lower-bound?  uint32
    |   |   |   |   +-rw isis:level1-srgb-upper-bound?  uint32
    |   |   |   +-rw isis:segment-routing-level2!
    |   |   |   |   +-rw isis:srgb
    |   |   |   |   |   +-rw isis:level2-srgb-lower-bound?  uint32
    |   |   |   |   |   +-rw isis:level2-srgb-upper-bound?  uint32
    +-rw isis:af-common-attributes
    |   |   |   +-rw isis:default-information-originate!
    |   |   |   |   +-rw isis:default-information-originate-route-map?
    string
    |   |   |   |   +-rw isis:default-metric?          uint32
    |   |   |   |   +-rw isis:distance?            uint32
    |   |   |   |   +-rw isis:maximum-paths?        uint32
    |   |   |   |   +-rw isis:redistribute
    |   |   |   |   |   +-rw isis:connected!
    |   |   |   |   |   |   +-rw isis:connected-metric?      conn-metric
    |   |   |   |   |   |   +-rw isis:connected-route-map?  rmap-type
    |   |   |   |   |   |   +-rw (ch-connected-levels)?
    |   |   |   |   |   |   |   +-:(ca-connected-level1)
    |   |   |   |   |   |   |   |   +-rw isis:connected-level1?  empty

```

```

    | |   +---(ca-connected-level2)
    | |   |   +--rw isis:connected-level2?           empty
    | |   +---(ca-connected-level12)
    | |       +--rw isis:connected-level12?         empty
    | +--rw isis:connected-metric-type?      is-metric-type-t
+--rw isis:ospf!
    |   +--rw isis:match
    |   |   +--rw isis:ospf-internal?     empty
    |   |   +--rw isis:ospf-external1?    empty
    |   |   +--rw isis:ospf-external2?    empty
    |   +--rw isis:ospf-metric?          conn-metric
    |   +--rw isis:ospf-route-map?      rmap-type
    |   +--rw (ch-ospf-levels)?
    |   |   +---(ca-ospf-level1)
    |   |   |   +--rw isis:ospf-level1?         empty
    |   |   +---(ca-ospf-level2)
    |   |   |   +--rw isis:ospf-level2?         empty
    |   |   +---(ca-ospf-level12)
    |   |       +--rw isis:ospf-level12?        empty
    |   +--rw isis:ospf-metric-type?      is-metric-type-t
+--rw isis:static!
    |   +--rw isis:static-metric?          conn-metric
    |   +--rw isis:static-route-map?      rmap-type
    |   +--rw (ch-static-levels)?
    |   |   +---(ca-static-level1)
    |   |   |   +--rw isis:static-level1?        empty
    |   |   +---(ca-static-level2)
    |   |   |   +--rw isis:static-level2?        empty
    |   |   +---(ca-static-level12)
    |   |       +--rw isis:static-level12?       empty
    |   +--rw isis:static-metric-type?      is-metric-type-t
+--rw isis:bgp!
    |   +--rw isis:bgp-metric?          conn-metric
    |   +--rw isis:bgp-route-map?      common-def:name-string63
    |   +--rw (ch-bgp-levels)?
    |   |   +---(ca-bgp-level1)
    |   |   |   +--rw isis:bgp-level1?         empty
    |   |   +---(ca-bgp-level2)
    |   |   |   +--rw isis:bgp-level2?         empty
    |   |   +---(ca-bgp-level12)
    |   |       +--rw isis:bgp-level12?       empty
    |   +--rw isis:bgp-metric-type?      is-metric-type-t
+--rw isis:isis
    |   +--rw isis:level-1
    |   |   +--rw isis:into
    |   |   |   +--rw isis:level1-into-level2
    |   |   |       +--rw (ch-prefix-list-level1-disable)?
    |   |   |       +---(ca-prefix-list-level1)
    |   |   |       |   +--rw isis:prefix-list-
level1?      string
    |   |   |           +---(ca-level1-into-level2-disable)
    |   |   |           +--rw isis:level1-into-level2-
disable?      empty
    |   |   |           +--rw isis:level-2
    |   |   |           +--rw isis:into
    |   |   |               +--rw isis:level2-into-level1!
    |   |   |                   +--rw isis:prefix-list-level2?   string
+--rw isis:ipv6
    |   +--rw isis:af-ipv6-unicast!
    |   +--rw isis:af-ipv6-attributes
    |       +--rw isis:disable-adjacency-check?   empty
    |       +--rw isis:summary-prefix* [summary-prefix-ipv6]
    |           |   +--rw isis:summary-prefix-ipv6      common-def:ipv6-address-
prefix

```

```

|   |           |   +-+rw isis:summary-prefix-level1?    empty
|   |           |   +-+rw isis:summary-prefix-level2?    empty
|   +-rw isis:ipv6-default-link-metric
|       |   +-+rw isis:ipv6-default-link-metric-level1?    uint32
|       |   +-+rw isis:ipv6-default-link-metric-level2?    uint32
|   +-+rw isis:multi-topology!
|       |   +-+rw isis:multi-topology-transition?    empty
|   +-+rw isis:spf6-interval* [spf6-interval-level]
|       |   +-+rw isis:spf6-interval-level      enumeration
|       |   +-+rw isis:spf6-interval-max-hold-time?    uint32
|       |   +-+rw isis:spf6-interval-initial-delay?    uint32
|       |   +-+rw isis:spf6-interval-hold-time?    uint32
|   +-+rw isis:partial6-spf-interval
|       |   +-+rw isis:pspf6-max-hold-time?    uint32
|       |   +-+rw isis:pspf6-init-delay?    uint32
|       |   +-+rw isis:pspf6-hold-time?    uint32
|   +-+rw isis:af-common-attributes
|       |   +-+rw isis:default-information-originate!
|           |   +-+rw isis:default-information-originate-route-map?
string
|   |           |   +-+rw isis:default-metric?          uint32
|   |           |   +-+rw isis:distance?            uint32
|   |           |   +-+rw isis:maximum-paths?        uint32
|   |           |   +-+rw isis:redistribute
|       |           |   +-+rw isis:connected!
|           |           |   +-+rw isis:connected-metric?      conn-metric
|           |           |   +-+rw isis:connected-route-map?    rmap-type
|           |           |   +-+rw (ch-connected-levels)?
|               |           |   +-+:(ca-connected-level1)
|                   |           |   +-+rw isis:connected-level1?    empty
|               |           |   +-+:(ca-connected-level2)
|                   |           |   +-+rw isis:connected-level2?    empty
|               |           |   +-+:(ca-connected-level12)
|                   |           |   +-+rw isis:connected-level12?    empty
|           |           |   +-+rw isis:connected-metric-type?  is-metric-type-t
|   +-+rw isis:ospf!
|       |   +-+rw isis:match
|           |       |   +-+rw isis:ospf-internal?    empty
|           |       |   +-+rw isis:ospf-external1?    empty
|           |       |   +-+rw isis:ospf-external2?    empty
|           |       |   +-+rw isis:ospf-metric?          conn-metric
|           |       |   +-+rw isis:ospf-route-map?    rmap-type
|           |       |   +-+rw (ch-ospf-levels)?
|               |           |   +-+:(ca-ospf-level1)
|                   |           |   +-+rw isis:ospf-level1?    empty
|               |           |   +-+:(ca-ospf-level2)
|                   |           |   +-+rw isis:ospf-level2?    empty
|               |           |   +-+:(ca-ospf-level12)
|                   |           |   +-+rw isis:ospf-level12?    empty
|           |       |   +-+rw isis:ospf-metric-type?  is-metric-type-t
|   +-+rw isis:static!
|       |   +-+rw isis:static-metric?          conn-metric
|       |   +-+rw isis:static-route-map?    rmap-type
|       |   +-+rw (ch-static-levels)?
|           |           |   +-+:(ca-static-level1)
|               |           |   +-+rw isis:static-level1?    empty
|           |           |   +-+:(ca-static-level2)
|               |           |   +-+rw isis:static-level2?    empty
|           |           |   +-+:(ca-static-level12)
|               |           |   +-+rw isis:static-level12?    empty
|       |   +-+rw isis:static-metric-type?  is-metric-type-t
|   +-+rw isis:bgp!
|       |   +-+rw isis:bgp-metric?          conn-metric
|       |   +-+rw isis:bgp-route-map?    common-def:name-string63

```

```

    |   +-+rw (ch-bgp-levels)?
    |   |   +-+:(ca-bgp-level1)
    |   |   |   +-+rw isis:bgp-level1?           empty
    |   |   |   +-+:(ca-bgp-level2)
    |   |   |   +-+rw isis:bgp-level2?           empty
    |   |   |   +-+:(ca-bgp-level12)
    |   |   |   +-+rw isis:bgp-level12?         empty
    |   +-+rw isis:bgp-metric-type?      is-metric-type-t
    +-+rw isis:isis
        +-+rw isis:level-1
        |   +-+rw isis:into
        |   |   +-+rw isis:level1-into-level2
        |   |   |   +-+rw (ch-prefix-list-level1-disable)?
        |   |   |   |   +-+:(ca-prefix-list-level1)
        |   |   |   |   +-+rw isis:prefix-list-
level1?      string
        |   |   |   +-+:(ca-level1-into-level2-disable)
        |   |   |   +-+rw isis:level1-into-level2-
disable?    empty
        |   |   |   +-+rw isis:level-2
        |   |   |   +-+rw isis:into
        |   |   |   |   +-+rw isis:level2-into-level1!
        |   |   |   |   +-+rw isis:prefix-list-level2?   string
+-+rw ospf:ospf* [vrf]
|   +-+rw ospf:vrf                  common-def:vrf-name
|   +-+rw ospf:database-overflow-interval?  common-def:time-interval-sec
|   +-+rw ospf:default-information-originate!
|   |   +-+rw ospf:always?             empty
|   |   +-+rw ospf:def-orig-metric?   uint32
|   |   +-+rw ospf:def-orig-metric-type? metric-type
|   |   +-+rw ospf:def-orig-route-map? string
|   +-+rw ospf:default-passive-interface?   empty
|   +-+rw ospf:default-metric?            uint32
|   +-+rw ospf:ldp-sync!
|   |   +-+rw ospf:ldp-sync-hold-down?  uint32
|   +-+rw ospf:external-lsdb-limit?     uint32
|   +-+rw ospf:log
|   |   +-+rw ospf:adjacency!
|   |   |   +-+rw ospf:dr-only?       empty
|   |   +-+rw ospf:log-all?          empty
|   |   +-+rw ospf:bad-packet!
|   |   |   +-+rw ospf:log-checksum? empty
|   |   +-+rw ospf:log-database?     empty
|   |   +-+rw ospf:log-retransmit?   empty
|   +-+rw ospf:ospf-metric-type?      metric-type
|   +-+rw ospf:neighbor* [neighbor-addr]
|   |   +-+rw ospf:neighbor-addr    ospf-ipv4-address
|   +-+rw ospf:redistribute
|   |   +-+rw ospf:connected!
|   |   |   +-+rw ospf:connected-route-map? common-def:name-string63
|   |   +-+rw ospf:static!
|   |   |   +-+rw ospf:static-route-map?  common-def:name-string63
|   |   +-+rw ospf:bgp!
|   |   |   +-+rw ospf:bgp-route-map?   common-def:name-string63
|   |   +-+rw ospf:redistribute-ospf!
|   |   |   +-+rw ospf:ospf-route-map?  common-def:name-string63
|   +-+rw ospf:isis
        +-+rw (ch-isis-level)?
        |   +-+:(ca-level-1)
        |   |   +-+rw ospf:isis-level-one?       empty
        |   |   +-+:(ca-level-2)
        |   |   |   +-+rw ospf:isis-level-two?   empty
        |   |   |   +-+:(ca-level-1-2)
        |   |   |   |   +-+rw ospf:isis-level-one-and-two? empty

```

```

    | | |     +-rw ospf:isis-route-map?           common-def:name-string63
    | | +-rw ospf:rfc1583-compatibility!
    | | | +-rw ospf:rfc1583-compatibility-flag?   empty
    | | +-rw ospf:area* [area-id]
    | | | +-rw ospf:area-id          ospf-area-id
    | | | +-rw ospf:normal?         empty
    | | | +-rw ospf:nssa
    | | | | +-rw ospf:metric
    | | | | | +-rw ospf:nssa-value?   big-metric
    | | | | | +-rw ospf:no-summary?  empty
    | | | | +-rw ospf:default-information-originate? empty
    | | +-rw ospf:stub
    | | | +-rw ospf:metric
    | | | | +-rw ospf:stub-value?   big-metric
    | | | | +-rw ospf:no-summary?  empty
    | | | +-rw ospf:range* [range-address range-mask]
    | | | | +-rw ospf:range-address  inet:ipv4-address
    | | | | +-rw ospf:range-mask    inet:ipv4-address
    | | | | +-rw ospf:range-effect? enumeration
    | | | | +-rw ospf:range-cost?   range-metric
    | | | +-rw ospf:prefix-list
    | | | | +-rw ospf:direction-in
    | | | | | +-rw ospf:prefix-list-direction-in-prefix-name?  ipv4-prefix-name-t
    | | | | | +-rw ospf:prefix-list-direction-in?                empty
    | | | | +-rw ospf:direction-out
    | | | | | +-rw ospf:prefix-list-direction-out-prefix-name?  ipv4-prefix-name-
    t
    | | | | | +-rw ospf:prefix-list-direction-out?             empty
    | | +-rw ospf:virtual-link* [virt-link-neighbor]
    | | | +-rw ospf:virt-link-neighbor  inet:ipv4-address
    | | | +-rw ospf:authentication-key
    | | | | +-rw ospf:no-encrypt-auth-key-table
    | | | | | +-rw ospf:no-encrypt-auth-key?  ospf-auth-psswd-string
    | | | | +-rw ospf:auth-key-table
    | | | | | +-rw ospf:encrypt-type?   key-type
    | | | | | +-rw ospf:auth-key?      ospf-auth-psswd-string
    | | | +-rw ospf:authentication
    | | | | +-rw ospf:key-chain?    ospf-keychain-string
    | | | | +-rw ospf:hello-interval? common-def:time-interval-sec
    | | | | +-rw ospf:dead-interval? common-def:time-interval-sec
    | | | | +-rw ospf:retransmit-interval? common-def:time-interval-sec
    | | | | +-rw ospf:transmit-delay?  common-def:time-interval-sec
    | | | +-rw ospf:md5-authentication
    | | | | +-rw ospf:key-activation-wait-time?  common-def:time-interval-sec
    | | | | +-rw ospf:no-encrypt-key-table
    | | | | | +-rw ospf:no-encrypt-key-id?  uint32
    | | | | | +-rw ospf:no-encrypt-key?    ospf-auth-psswd-string
    | | | | +-rw ospf:key-table
    | | | | | +-rw ospf:key-id?        uint32
    | | | | | +-rw ospf:key?          key-type
    | | | | | +-rw ospf:md5-authentication-key?  ospf-auth-psswd-string
    | | +-rw ospf:auto-cost
    | | | +-rw ospf:reference-bandwidth
    | | | | +-rw ospf:ref-bandwidth?   band-width
    | | | | +-rw ospf:use-active-ports? empty
    | | +-rw ospf:distance* [route-type]
    | | | +-rw ospf:route-type    route-type-enum
    | | | +-rw ospf:dist-value    uint32
    | | +-rw ospf:distribute-list
    | | | +-rw ospf:route-map?
    | | | | +-rw ospf:route-map?  common-def:name-string63
    | | | | +-rw ospf:input?       empty
    | | +-rw ospf:max-metric
    | | | +-rw ospf:router-lsa!
```

```

| | |     +-rw ospf:all-vrfs?      empty
| | |     +-rw ospf:all-lsas?      empty
| | |     +-rw ospf:external-lsa!
| | |     | +-rw ospf:external-lsa-val?  uint32
| | |     +-rw ospf:summary-lsa!
| | |     | +-rw ospf:summary-lsa-val?  uint32
| | |     +-rw ospf:link
| | |     | +-rw ospf:all?      empty
| | |     | +-rw ospf:ptp?      empty
| | |     | +-rw ospf:stub?      empty
| | |     | +-rw ospf:transit?    empty
| | |     +-rw ospf:on-startup
| | |     | +-rw ospf:time?        uint32
| | |     | +-rw ospf:wait-for-bgp? empty
| | |     +-rw ospf:all-lsas-onstartup?   empty
| | |     +-rw ospf:external-lsa-onstartup!
| | |     | +-rw ospf:external-lsa-val-onstartup?  uint32
| | |     +-rw ospf:summary-lsa-onstartup!
| | |     | +-rw ospf:summary-lsa-val-onstartup?  uint32
| | |     +-rw ospf:link-onstartup
| | |     | +-rw ospf:all-link-onstartup?    empty
| | |     | +-rw ospf:ptp-link-onstartup?    empty
| | |     | +-rw ospf:stub-link-onstartup?    empty
| | |     | +-rw ospf:transit-link-onstartup? empty
| | |     +-rw ospf:summary-address* [sum-address sum-address-mask]
| | |     | +-rw ospf:sum-address      ospf:ipv4-address
| | |     | +-rw ospf:sum-address-mask  inet:ipv4-address
| | |     +-rw ospf:timers
| | |     | +-rw ospf:lsa-group-pacing?  common-def:time-interval-sec
| | |     | +-rw ospf:throttle
| | |     |     +-rw ospf:spf
| | |     |     | +-rw ospf:init-delay?   common-def:time-interval-msec
| | |     |     | +-rw ospf:hold-time?    common-def:time-interval-msec
| | |     |     | +-rw ospf:max-hold-time? common-def:time-interval-msec
| | |     +-rw ospf:permit
| | |     | +-rw ospf:redistribute* [redist-value route-option]
| | |     |     +-rw ospf:redist-value  uint32
| | |     |     +-rw ospf:route-option route-option-type
| | |     |     +-rw ospf:address?      inet:ipv4-address
| | |     |     +-rw ospf:mask?        inet:ipv4-address
| | |     |     +-rw ospf:set-metric-val? uint32
| | |     |     +-rw ospf:match-metric-val? uint32
| | |     +-rw ospf:deny
| | |     | +-rw ospf:redistribute* [redist-value route-option]
| | |     |     +-rw ospf:redist-value  uint32
| | |     |     +-rw ospf:route-option route-option-type
| | |     |     +-rw ospf:address?      inet:ipv4-address
| | |     |     +-rw ospf:mask?        inet:ipv4-address
| | |     |     +-rw ospf:set-metric-val? uint32
| | |     |     +-rw ospf:match-metric-val? uint32
| | |     +-rw ospf:vrf-lite-capability?   empty
| | |     +-rw ospf:graceful-restart
| | |     | +-rw ospf:graceful-restart-enable? empty
| | |     | +-rw ospf:helper-disable?      empty
| | |     | +-rw ospf:restart-time?       common-def:time-interval-sec
| | |     +-rw ospf:nonstop-routing?     empty
| | |     +-rw ospf:maximum-paths?      uint8
| | |     +-rw ospf:global-bfd
| | |     | +-rw ospf:bfd-enable?      empty
| | |     | +-rw ospf:holdover-interval? uint8
| | |     +-rw ospf:auth-transition?    empty
| +-rw pim:pim* [vrf]
|     +-rw pim:vrfl      common-def:vrf-name
|     +-rw pim:hello-interval?  uint32

```

```

|   +-rw pim:prune-wait?          uint32
|   +-rw pim:nbr-timeout?        uint16
|   +-rw pim:inactivity-timer?   uint16
|   +-rw pim:message-interval?  uint32
|   +-rw pim:spt-threshold?     spt-thr-type
|   +-rw pim:rpf
|   |   +-rw pim:ecmp!
|   |   |   +-rw pim:rebalance?   empty
|   +-rw pim:ssm-enable!
|   |   +-rw pim:range?         ip-prefix-name-t
|   +-rw pim:bsr-candidate
|   |   +-rw pim:bsr-cand-interface* [bsr-cand-intf-type bsr-cand-intf-id]
|   |   |   +-rw pim:bsr-cand-intf-type    pim-intf-types
|   |   |   +-rw pim:bsr-cand-intf-id      pim-intf-name_t
|   |   |   +-rw pim:hash-mask-length?   uint16
|   |   |   +-rw pim:bsr-cand-priority?  uint32
|   +-rw pim:rp-candidate
|   |   +-rw pim:rp-cand-interface* [rp-cand-intf-type rp-cand-intf-id]
|   |   |   +-rw pim:rp-cand-intf-type    pim-intf-types
|   |   |   +-rw pim:rp-cand-intf-id      pim-intf-name_t
|   |   |   +-rw pim:rp-cand-grp-prefix* [rp-cand-prefix-name]
|   |   |   |   +-rw pim:rp-cand-prefix-name  ip-prefix-name-t
|   +-rw pim:route-precedence
|   |   +-rw pim:uc-default?        route-precedence-type
|   |   +-rw pim:uc-non-default?   route-precedence-type
|   |   +-rw pim:none?            route-precedence-type
|   +-rw pim:anycast-rp* [anycast-ip-addr]
|   |   +-rw pim:anycast-ip-addr    inet:ipv4-address
|   |   +-rw pim:anycast-prefix-list? ip-prefix-name-t
|   +-rw pim:rp-address* [rp-ip-addr]
|   |   +-rw pim:rp-ip-addr        inet:ipv4-address
|   |   +-rw pim:rp-addr-prefix-list? common-def:name-string63
|   +-rw pim:max-mcache?        uint32
+-rw ip
|   +-rw arp:neighbor-optimization
|   |   +-rw arp:nbr-optimization-disable? empty
|   +-rw dhcp:dhcp
|   |   +-rw dhcp:relay
|   |   |   +-rw dhcp:information
|   |   |   |   +-rw dhcp:option?   empty
|   |   +-rw dhcp:snooping
|   |   |   +-rw dhcp:snoop-enable? empty
|   |   |   +-rw dhcp:information
|   |   |   |   +-rw dhcp:option
|   |   |   |   |   +-rw dhcp:snoop-option?   empty
|   |   |   |   +-rw dhcp:allow-untrusted? empty
|   |   +-rw dhcp:binding* [mac-address ip-address vlan interface-type interface-
name]
|   |   |   +-rw dhcp:mac-address      string
|   |   |   +-rw dhcp:ip-address       dhcp-ipv4-address
|   |   |   +-rw dhcp:vlan            interface:vlan-type
|   |   |   +-rw dhcp:interface-type  dhcp-snooping-interface-type
|   |   |   +-rw dhcp:interface-name  dhcp-snooping-interface-name
|   +-rw ip-access-list:receive
|   |   +-rw ip-access-list:access-group* [acl-name]
|   |   |   +-rw ip-access-list:acl-name    13-acl-policy-name
|   |   |   +-rw ip-access-list:sequence?  racl-seq-id
|   +-rw ip-access-list:global-subnet-broadcast-acl
|   |   +-rw ip-access-list:ip-access-list? 13-acl-policy-name
|   +-rw ip-policy:hide-large-community-list-holder
|   |   +-rw ip-policy:large-community-list
|   |   |   +-rw ip-policy:standard* [name seq-keyword instance]
|   |   |   |   +-rw ip-policy:name      ip-large-community-list-name-t
|   |   |   |   +-rw ip-policy:seq-keyword enumeration

```

```

| | | | +--rw ip-policy:instance      instance-id-t
| | | | +--rw ip-policy:action?    action-t
| | | | +--rw ip-policy:expr?     large-community-expr-t
| | | +--rw ip-policy:extended* [name seq-keyword instance]
| | | | +--rw ip-policy:name      ip-large-community-list-name-t
| | | | +--rw ip-policy:seq-keyword enumeration
| | | | +--rw ip-policy:instance   instance-id-t
| | | | +--rw ip-policy:action?   action-t
| | | | +--rw ip-policy:regex-expr? ip-community-reg-expr-t
| | +--rw vrrp:static-ag-ip-config
| | | +--rw vrrp:anycast-gateway-mac
| | | | +--rw vrrp:ip-anycast-gateway-mac? mac-access-list:mac-address-type
| | | | +--rw vrrp:ip-anycast-default-mac? empty
+--rw ipv6
| | +--rw router
| | | +--rw ospfv3:ospf* [vrf]                                     common-def:vrf-name
| | | | +--rw ospfv3:vrf
| | | | +--rw ospfv3:area* [area-id]
| | | | | +--rw ospfv3:area-id      ospf:ospf-area-id
| | | | | +--rw ospfv3:normal?    empty
| | | | | +--rw ospfv3:nssa!
| | | | | | +--rw ospfv3:metric
| | | | | | | +--rw ospfv3:nssa-area-metric? uint32
| | | | | | | +--rw ospfv3:area-default-information-originate!
| | | | | | | +--rw ospfv3:area-default-information-originate-metric?
uint32
| | | | | | +--rw ospfv3:area-default-information-originate-metric-type?
ospfv3:metric-type
| | | | | | +--rw ospfv3:no-redistribution?   empty
| | | | | | +--rw ospfv3:nssa-area-no-summary? empty
| | | | | | +--rw ospfv3:translator-always?   empty
| | | | | | +--rw ospfv3:translator-interval? common-def:time-
interval-sec
| | | | | | +--rw ospfv3:stub
| | | | | | | +--rw ospfv3:stub-area-no-summary? empty
| | | | | | | +--rw ospfv3:stub-area-metric?   uint32
| | | | | | +--rw ospfv3:authentication
| | | | | | | +--rw ospfv3:ipsec-auth-key-config
| | | | | | | | +--rw ospfv3:spi?           spi-value-type
| | | | | | | | +--rw (ch-algorithm)?
| | | | | | | | | +--:(ca-ah-algorithm)
| | | | | | | | | | +--rw ospfv3:ah?       algorithm-type-ah
| | | | | | | | | | +--rw ospfv3:ah-key?  ipsec-authentication-hexkey-
string
| | | | | | | | +--:(ca-esp-algorithm)
| | | | | | | | | +--rw ospfv3:esp?       algorithm-type-esp
| | | | | | | | | +--rw ospfv3:esp-auth?  algorithm-type-ah
| | | | | | | | | +--rw ospfv3:esp-auth-key? ipsec-authentication-hexkey-
string
| | | | | | | +--rw ospfv3:virtual-link* [virtual-link-neighbor]
| | | | | | | | +--rw ospfv3:virtual-link-neighbor   inet:ipv4-address
| | | | | | | +--rw ospfv3:link-properties
| | | | | | | | +--rw ospfv3:link-interval-properties
| | | | | | | | | +--rw ospfv3:hello-interval?   common-def:time-interval-
sec
| | | | | | | | +--rw ospfv3:dead-interval?   common-def:time-interval-
sec
| | | | | | | | +--rw ospfv3:hello-jitter?   uint32
| | | | | | | | +--rw ospfv3:retransmit-interval? common-def:time-interval-
sec
| | | | | | | | +--rw ospfv3:transmit-delay?   common-def:time-interval-
sec
| | | | | | | | +--rw ospfv3:authentication
| | | | | | | | | +--rw ospfv3:key-chain?   string

```

```

    | | | | |     +-rw ospfv3:ipsec-auth-key-config
    | | | | |     +-rw ospfv3:spi?           spi-value-type
    | | | | |     +-rw (ch-algorithm)?
    | | | | |     +---(ca-ah-algorithm)
    | | | | |     | +-rw ospfv3:ah?         algorithm-type-ah
    | | | | |     | +-rw ospfv3:ah-key?      ipsec-authentication-
hexkey-string
    | | | | |     +---(ca-esp-algorithm)
    | | | | |     +-rw ospfv3:esp?         algorithm-type-esp
    | | | | |     +-rw ospfv3:esp-auth?    algorithm-type-ah
    | | | | |     +-rw ospfv3:esp-auth-key? ipsec-authentication-
hexkey-string
    | | | | |     +-rw ospfv3:area-range* [range-address]
    | | | | |     +-rw ospfv3:range-address   common-def:ipv6-address-prefix
    | | | | |     +-rw ospfv3:range-effect?  enumeration
    | | | | |     +-rw ospfv3:range-cost?    ospf:range-metric
    | | | | |     +-rw ospfv3:auto-cost
    | | | | |     +-rw ospfv3:reference-bandwidth? ospf:band-width
    | | | | |     +-rw ospfv3:database-overflow-interval? common-def:time-
interval-sec
    | | | | |     +-rw ospfv3:global-default-information-originate!
    | | | | |     +-rw ospfv3:global-default-information-originate-always? empty
    | | | | |     +-rw ospfv3:global-default-information-originate-metric? uint32
    | | | | |     +-rw ospfv3:global-default-information-originate-metric-type?
ospf:metric-type
    | | | | |     +-rw ospfv3:default-metric?          uint32
    | | | | |     +-rw ospfv3:default-passive-interface? empty
    | | | | |     +-rw ospfv3:distance* [route-type]
    | | | | |     +-rw ospfv3:route-type      ospf:route-type-enum
    | | | | |     +-rw ospfv3:distance-value?   uint32
    | | | | |     +-rw ospfv3:distribute-list
    | | | | |     +-rw ospfv3:route-map
    | | | | |     | +-rw ospfv3:distribute-list-route-map-name? common-def:name-
string63
    | | | | |     | +-rw ospfv3:distribute-list-route-map-in? empty
    | | | | |     +-rw ospfv3:prefix-list
    | | | | |     +-rw ospfv3:distribute-list-prefix-list-name? common-def:name-
string63
    | | | | |     +-rw ospfv3:distribute-list-prefix-list-in? empty
    | | | | |     +-rw ospfv3:external-lsdb-limit?      uint32
    | | | | |     +-rw ospfv3:graceful-restart
    | | | | |     +-rw ospfv3:helper
    | | | | |     | +-rw ospfv3:graceful-restart-helper-disable? empty
    | | | | |     | +-rw ospfv3:graceful-restart-helper-strict-lsa-checking? empty
    | | | | |     +-rw ospfv3:restart-time?   common-def:time-interval-sec
    | | | | |     +-rw ospfv3:key-add-remove-interval? common-def:time-
interval-sec
    | | | | |     +-rw ospfv3:key-rollover-interval? common-def:time-
interval-sec
    | | | | |     +-rw ospfv3:log
    | | | | |     +-rw ospfv3:log-adjacency!
    | | | | |     | +-rw ospfv3:log-adjacency-dr-only? empty
    | | | | |     +-rw ospfv3:log-all?           empty
    | | | | |     +-rw ospfv3:log-bad-packet!
    | | | | |     | +-rw ospfv3:log-bad-packet-checksum? empty
    | | | | |     +-rw ospfv3:log-database?      empty
    | | | | |     +-rw ospfv3:log-retransmit?    empty
    | | | | |     +-rw ospfv3:global-metric-type?      ospf:metric-type
    | | | | |     +-rw ospfv3:redistribute
    | | | | |     +-rw ospfv3:redistribute-connected!
    | | | | |     | +-rw ospfv3:connected-route-map? common-def:name-
string63
    | | | | |     | +-rw ospfv3:redistribute-connected-metric? uint32
    | | | | |     | +-rw ospfv3:redistribute-connected-metric-type? ospf:metric-type

```

```

    |   |   |   |   +-rw ospfv3:redistribute-static!
    |   |   |   |   +-rw ospfv3:static-route-map?           common-def:name-
string63
    |   |   |   |   +-rw ospfv3:redistribute-static-metric?      uint32
    |   |   |   |   +-rw ospfv3:redistribute-static-metric-type? ospf:metric-type
    |   |   |   |   +-rw ospfv3:redistribute-isis!
    |   |   |   |   +-rw ospfv3:redistribute-isis-route-map?   common-def:name-
string63
    |   |   |   |   +-rw (ch-isis-level)?
    |   |   |   |   |   +-:(ca-level-1)
    |   |   |   |   |   +-rw ospfv3:level-1?                 empty
    |   |   |   |   |   +-:(ca-level-2)
    |   |   |   |   |   +-rw ospfv3:level-2?                 empty
    |   |   |   |   |   +-:(ca-level-1-2)
    |   |   |   |   |   +-rw ospfv3:level-1-2?               empty
    |   |   |   |   |   +-rw ospfv3:redistribute-isis-metric?  uint32
    |   |   |   |   |   +-rw ospfv3:redistribute-isis-metric-type? ospf:metric-type
    |   |   |   |   +-rw ospfv3:redistribute-bgp!
    |   |   |   |   |   +-rw ospfv3:bgp-route-map?          common-def:name-string63
    |   |   |   |   |   +-rw ospfv3:redistribute-bgp-metric?  uint32
    |   |   |   |   |   +-rw ospfv3:redistribute-bgp-metric-type? ospf:metric-type
    |   |   |   |   +-rw ospfv3:redistribute-ospf!
    |   |   |   |   |   +-rw ospfv3:ospf-route-map?         common-def:name-
string63
    |   |   |   |   |   +-rw ospfv3:redistribute-ospf-metric?  uint32
    |   |   |   |   |   +-rw ospfv3:redistribute-ospf-metric-type? ospf:metric-type
    |   |   |   |   +-rw ospfv3:summary-address* [summary-address-value]
    |   |   |   |   |   +-rw ospfv3:summary-address-value   common-def:ipv6-address-prefix
    |   |   |   |   +-rw ospfv3:timers
    |   |   |   |   |   +-rw ospfv3:lsa-group-pacing?   common-def:time-interval-sec
    |   |   |   |   |   +-rw ospfv3:spf
    |   |   |   |   |   |   +-rw ospfv3:spf-delay?       common-def:time-interval-sec
    |   |   |   |   |   |   +-rw ospfv3:spf-hold-time?   common-def:time-interval-sec
    |   |   |   |   |   +-rw ospfv3:nonstop-routing?      empty
    |   |   |   |   |   +-rw ospfv3:maximum-paths?        uint32
    |   |   |   |   |   +-rw ospfv3:max-metric
    |   |   |   |   |   |   +-rw ospfv3:router-lsa!
    |   |   |   |   |   |   |   +-rw ospfv3:all-lsas?     empty
    |   |   |   |   |   |   |   +-rw ospfv3:external-lsa!
    |   |   |   |   |   |   |   |   +-rw ospfv3:external-lsa-value?  uint32
    |   |   |   |   |   |   |   +-rw ospfv3:summary-lsa!
    |   |   |   |   |   |   |   |   +-rw ospfv3:summary-lsa-value?  uint32
    |   |   |   |   |   |   |   +-rw ospfv3:include-stub?   empty
    |   |   |   |   |   |   |   +-rw ospfv3:on-startup
    |   |   |   |   |   |   |   |   +-rw ospfv3:on-startup-time?  uint32
    |   |   |   |   |   |   |   |   +-rw ospfv3:wait-for-bgp?   empty
    |   |   |   |   |   |   |   +-rw ospfv3:bfd
    |   |   |   |   |   |   |   |   +-rw ospfv3:bfd-enable?   empty
    |   |   |   |   |   |   |   |   +-rw ospfv3:bfd-holdover-interval? common-def:time-interval-sec
    |   |   |   |   |   |   |   +-rw ospfv3:vrf-lite-capability?      empty
    |   |   |   |   |   |   |   +-rw ospfv3:auth-transition?      empty
    |   |   |   |   +-rw pim:pim* [vrf]
    |   |   |   |   |   +-rw pim:vrf                    common-def:vrf-name
    |   |   |   |   |   +-rw pim:hello-interval?      uint32
    |   |   |   |   |   +-rw pim:prune-wait?        uint32
    |   |   |   |   |   +-rw pim:nbr-timeout?       uint16
    |   |   |   |   |   +-rw pim:inactivity-timer?   uint16
    |   |   |   |   |   +-rw pim:message-interval?  uint32
    |   |   |   |   |   +-rw pim:spt-threshold?     spt-thr-type
    |   |   |   |   |   +-rw pim:rpf
    |   |   |   |   |   |   +-rw pim:ecmp!
    |   |   |   |   |   |   |   +-rw pim:rebalance?   empty
    |   |   |   |   |   |   +-rw pim:ssm-enable!
    |   |   |   |   |   |   |   +-rw pim:range?      ip-prefix-name-

```

```

| |     +--rw pim:bsr-candidate
| |     |   +--rw pim:bsr-cand-interface* [bsr-cand-intf-type bsr-cand-intf-id]
| |     |     +--rw pim:bsr-cand-intf-type    pim-intf-types
| |     |     +--rw pim:bsr-cand-intf-id      pim-intf-name_t
| |     |     +--rw pim:hash-mask-length?    uint16
| |     |     +--rw pim:bsr-cand-priority?    uint32
| |     +--rw pim:rp-candidate
| |     |   +--rw pim:rp-cand-interface* [rp-cand-intf-type rp-cand-intf-id]
| |     |     +--rw pim:rp-cand-intf-type    pim-intf-types
| |     |     +--rw pim:rp-cand-intf-id      pim-intf-name_t
| |     |     +--rw pim:rp-cand-grp-prefix* [rp-cand-prefix-name]
| |     |       +--rw pim:rp-cand-prefix-name  ip-prefix-name-t
| |     +--rw pim:route-precedence
| |     |   +--rw pim:uc-default?          route-precedence-type
| |     |   +--rw pim:uc-non-default?      route-precedence-type
| |     |   +--rw pim:none?              route-precedence-type
| |     +--rw pim:anycast-rp* [anycast-ip-addr]
| |     |   +--rw pim:anycast-ip-addr      inet:ipv6-address
| |     |   +--rw pim:anycast-prefix-list?  ipv6-prefix-name-t
| |     +--rw pim:rp-address* [rp-ip-addr]
| |     |   +--rw pim:rp-ip-addr          inet:ipv6-address
| |     |   +--rw pim:rp-addr-prefix-list? common-def:name-string63
| |     +--rw pim:max-mcache?          uint32
| +--rw ipv6-access-list:receive
| |   +--rw ipv6-access-list:access-group* [acl-name]
| |   +--rw ipv6-access-list:acl-name      ipv6-13-acl-policy-name
| |   +--rw ipv6-access-list:sequence?    ip-access-list:racl-seq-id
| +--rw vrrp:static-ag-ipv6-config
|   +--rw vrrp:anycast-gateway-mac
|     +--rw vrrp:ipv6-anycast-gateway-mac?  mac-access-list:mac-address-type
|     +--rw vrrp:ipv6-anycast-default-mac?  empty
| +--rw brocade-interface:protocol
|   +--rw vrrp:vrrp-holder
|     +--rw vrrp:vrrp?                  empty
|     +--rw vrrp:vrrp-extended?        empty
| +--rw brocade-interface:interface
|   +--rw brocade-interface:ve* [name]
|   |   +--rw brocade-interface:name           config-ve-type
|   |   +--rw brocade-interface:description?  string
|   |   +--rw brocade-interface:bfd
|   |     +--rw brocade-interface:interval
|   |     |   +--rw brocade-interface:min-tx?  bfd-tx-interval-type
|   |     |   +--rw brocade-interface:min-rx?  bfd-rx-interval-type
|   |     |   +--rw brocade-interface:multiplier?  bfd-multiplier-type
|   |     +--rw brocade-interface:bfd-shutdown?  empty
|   |   +--rw brocade-interface:snmp
|   |     +--rw brocade-interface:trap
|   |       +--rw brocade-interface:link-status
|   |         +--rw brocade-interface:snmp-link-disable?  empty
|   +--rw qos-mls:gos
|   |   +--rw qos-mls:dscp-cos?            map-name-type
|   |   +--rw qos-mls:dscp-cos-builtin
|   |     +--rw qos-mls:map-name?          builtin-map-name-type
|   |     +--rw qos-mls:dscp-mutation?    map-name-type
|   |     +--rw qos-mls:dscp-mutation-builtin
|   |       +--rw qos-mls:map-name?      builtin-map-name-type
|   |       +--rw qos-mls:dscp-traffic-class?  map-name-type
|   |       +--rw qos-mls:dscp-traffic-class-builtin
|   |         +--rw qos-mls:map-name?      builtin-map-name-type
|   |         +--rw qos-mls:traffic-class-dscp?  map-name-type
|   |         +--rw qos-mls:traffic-class-dscp-builtin
|   |           +--rw qos-mls:map-name?      builtin-map-name-type
|   |           +--rw qos-mls:service-policy
|   |             +--rw qos-mqc:in?        map-name-type

```

```

    | | | +--rw qos-mqc:out? map-name-type
    | | +-rw ip-config:vrf
    | | | +--rw ip-config:forwarding? common-def:vrf-name
    | | +-rw ip-config:ip
    | | | +--rw ip-config:ip-config
    | | | | +--rw ip-config:mtu? ip-mtu
    | | | | +--rw ip-config:directed-broadcast? empty
    | | | | +--rw ip-config:arp
    | | | | | +--rw ip-config:learn-any? empty
    | | | | +--rw ip-config:proxy-arp? empty
    | | | | +--rw ip-config:arp-aging-timeout? uint32
    | | | | +--rw ip-config:irdp? empty
    | | | | +--rw ip-config:address* [address]
    | | | | | +--rw ip-config:address union
    | | | | | +--rw ip-config:secondary? empty
    | | | | | +--rw ip-config:ospf-passive? empty
    | | | | | +--rw ip-config:ospf-ignore? empty
    | | | | +--rw dhcp:interface-ve-dhcp-conf
    | | | | | +--rw dhcp:dhcp
    | | | | | | +--rw dhcp:relay
    | | | | | | | +--rw dhcp:servers* [relay-ip-addr server-vrf-name]
    | | | | | | | | +--rw dhcp:relay-ip-addr dhcp-ipv4-address
    | | | | | | | | +--rw dhcp:server-vrf-name common-def:vrf-name
    | | | | | | +--rw dhcp:gateway
    | | | | | | | +--rw dhcp:gateway-address? dhcp-ipv4-address
    | | | | | | | +--rw dhcp:gw-intf-type? dhcp-gateway-interface-type
    | | | | | | | +--rw dhcp:gw-intf-name? dhcp-gateway-interface-name
    | | | | +--rw icmp:icmp
    | | | | | +--rw icmp:rate-limiting? uint32
    | | | | | +--rw icmp:echo-reply? empty
    | | | | | +--rw icmp:redirect? empty
    | | | | | +--rw icmp:unreachable? empty
    | | | +--rw igmp:igmp
    | | | | +--rw igmp:igmp13-last-member-query-interval? igmp-snooping:lmqt-type
    | | | | +--rw igmp:igmp13-query-interval? igmp-snooping:qi-type
    | | | | +--rw igmp:igmp13-query-max-response-time? igmp-snooping:qmrt-type
    | | | | +--rw igmp:igmp13-immediate-leave? empty
    | | | | +--rw igmp:igmp13-version? uint32
    | | | | +--rw igmp:igmp13-static-group* [igmp13-sg-addr]
    | | | | | +--rw igmp:igmp13-sg-addr inet:ipv4-address
    | | | | +--rw isis:intf-router-isis
    | | | | | +--rw isis:int-router-isis
    | | | | | | +--rw isis:interface-ip-router-isis? empty
    | | | | +--rw vrrp:ip-anycast-address* [ip-address]
    | | | | | +--rw vrrp:ip-address union
    | | | | +--rw vrrp:ip-vrrp-extended
    | | | | | +--rw vrrp:auth-type
    | | | | | | +--rw vrrp:md5-auth
    | | | | | | | +--rw vrrp:auth-data? string
    | | | | +--rw ospf:interface-vlan-ospf-conf
    | | | | | +--rw ospf:ospf1
    | | | | | | +--rw ospf:area? ospf-area-id
    | | | | | | +--rw ospf:auth-change-wait-time? common-def:time-interval-sec
    | | | | | | +--rw ospf:authentication-key
    | | | | | | | +--rw ospf:no-encrypt-auth-key-table
    | | | | | | | | +--rw ospf:no-encrypt-auth-key? ospf-auth-psswd-string
    | | | | | | +--rw ospf:auth-key-table
    | | | | | | | | +--rw ospf:encrypt-type? key-type
    | | | | | | | | +--rw ospf:auth-key? ospf-auth-psswd-string
    | | | | +--rw ospf:authentication
    | | | | | +--rw ospf:key-chain? ospf-keychain-string
    | | | | +--rw ospf:hello-interval? common-def:time-interval-sec
    | | | | +--rw ospf:dead-interval? common-def:time-interval-sec
    | | | | +--rw ospf:retransmit-interval? common-def:time-interval-sec

```

```

    | | | |    +-rw ospf:transmit-delay?           common-def:time-interval-sec
    | | | |    +-rw ospf:md5-authentication
    | | | |    |    +-rw ospf:key-activation-wait-time?   common-def:time-interval-
sec
    | | | |    |    +-rw ospf:no-encrypt-key-table
    | | | |    |    |    +-rw ospf:no-encrypt-key-id?   uint32
    | | | |    |    |    +-rw ospf:no-encrypt-key?       ospf-auth-psswd-string
    | | | |    |    +-rw ospf:key-table
    | | | |    |    |    +-rw ospf:key-id?           uint32
    | | | |    |    |    +-rw ospf:key?             key-type
    | | | |    |    |    +-rw ospf:md5-authentication-key? ospf-auth-psswd-string
    | | | |    +-rw ospf:cost?                 uint32
    | | | |    +-rw ospf:network?            enumeration
    | | | |    +-rw ospf:intf-ldp-sync?      enumeration
    | | | |    +-rw ospf:database-filter
    | | | |    |    +-rw ospf:all-out?        empty
    | | | |    |    +-rw ospf:all-external?     database-filter-options
    | | | |    |    +-rw ospf:all-summary-external? database-filter-options
    | | | |    +-rw ospf:mtu-ignore?        empty
    | | | |    +-rw ospf:active?          empty
    | | | |    +-rw ospf:passive?         empty
    | | | |    +-rw ospf:priority?        uint32
    | | | |    +-rw ospf:bfd
    | | | |    |    +-rw ospf:intf-bfd-enable? empty
    | | | |    +-rw pim:pim-intf-vlan-cont
    | | | |    +-rw pim:pim-int-cmd
    | | | |    |    +-rw pim:pim-sparse?      empty
    | | | |    |    +-rw pim:pim
    | | | |    |    |    +-rw pim:neighbor-filter? ip-prefix-name-t
    | | | |    |    |    +-rw pim:dr-priority?   uint32
    | | | |    |    |    +-rw pim:ttl-threshold? uint32
    | | | |    |    |    +-rw pim:mcast-bdry-prefix-list? ip-prefix-name-t
    | | | |    +-rw ip-config:ip-forward
    | | | |    |    +-rw ip-config:ip
    | | | |    |    |    +-rw ip-config:forward? empty
    | | | |    +-rw ip-config:shutdown?        empty
    | | | |    +-rw ipv6-config:ipv6
    | | | |    |    +-rw ipv6-config:ipv6-config
    | | | |    |    |    +-rw ipv6-config:address
    | | | |    |    |    |    +-rw ipv6-config:use-link-local-only? empty
    | | | |    |    |    |    +-rw ipv6-config:link-local-config
    | | | |    |    |    |    |    +-rw ipv6-config:link-local-address? inet:ipv6-address
    | | | |    |    |    |    |    +-rw ipv6-config:link-local? empty
    | | | |    |    |    |    +-rw ipv6-config:ipv6-address* [address]
    | | | |    |    |    |    |    +-rw ipv6-config:address      union
    | | | |    |    |    |    |    +-rw ipv6-config:secondary? empty
    | | | |    |    |    |    +-rw ipv6-config:eui-config
    | | | |    |    |    |    |    +-rw ipv6-config:eui64?      empty
    | | | |    |    |    |    |    +-rw ipv6-config:eui-secondary? empty
    | | | |    |    |    |    +-rw ipv6-config:anycast?      empty
    | | | |    +-rw ipv6-config:mtu?           ip-mtu
    | | | |    +-rw dhcpcv6:interface-ve-dhcp-conf
    | | | |    +-rw dhcpcv6:dhcp
    | | | |    |    +-rw dhcpcv6:relay
    | | | |    |    |    +-rw dhcpcv6:servers* [relay-ip-addr]
    | | | |    |    |    |    +-rw dhcpcv6:relay-ip-addr      dhcp-ipv6-address
    | | | |    |    |    |    +-rw dhcpcv6:server-vrf-name? common-def:vrf-name
    | | | |    |    |    |    +-rw dhcpcv6:interface
    | | | |    |    |    |    +-rw dhcpcv6:interface-type?   dhcpcv6-iftype
    | | | |    |    |    |    +-rw dhcpcv6:interface-name?   dhcpcv6-ifname
    | | | |    |    |    +-rw dhcpcv6:source-interface
    | | | |    |    |    +-rw dhcpcv6:source-intf-type?   dhcpcv6-relay-src-interface-
type
    | | | |    |    |    +-rw dhcpcv6:source-intf-name?   dhcpcv6-src-ifname

```

```

| | | | |     +--rw dhcipv6:source-ip?           dhcp-ipv6-address
| | | | +---rw icmp:icmpv6
| | | | |     +--rw icmp:rate-limiting?   uint32
| | | | |     +--rw icmp:echo-reply?      empty
| | | | |     +--rw icmp:redirect?       empty
| | | | |     +--rw icmp:unreachable?    empty
| | | | +---rw ipv6-access-list:access-group* [ipv6-access-list ip-direction]
| | | | |     +--rw ipv6-access-list:ipv6-access-list   ipv6-13-acl-policy-name
| | | | |     +--rw ipv6-access-list:ip-direction      enumeration
| | | | |     +--rw ipv6-access-list:traffic-type?    enumeration
| | | | +---rw ip-policy:policy
| | | | |     +--rw ip-policy:route-map
| | | | | |     +--rw ip-policy:ipv6-route-map-name?  common-def:name-string63
| | | | +---rw ipv6-nd-ra:ipv6-nd-ra
| | | | |     +--rw ipv6-nd-ra:ipv6-intf-cmds
| | | | | |     +--rw ipv6-nd-ra:vrrp-suppress-interface-ra? empty
| | | | |     +--rw ipv6-nd-ra:nd
| | | | | |     +--rw ipv6-nd-ra:managed-config-flag? empty
| | | | | |     +--rw ipv6-nd-ra:other-config-flag? empty
| | | | | |     +--rw ipv6-nd-ra:broadcast-mac-trap? empty
| | | | | |     +--rw ipv6-nd-ra:ra-lifetime?        common-def:time-interval-
sec
| | | | |     +--rw ipv6-nd-ra:reachable-time?      common-def:time-interval-
msec
| | | | | |     +--rw ipv6-nd-ra:mtu?                uint32
| | | | | |     +--rw ipv6-nd-ra:retrans-timer?      common-def:time-interval-
msec
| | | | | |     +--rw ipv6-nd-ra:hoplimit?          uint32
| | | | | |     +--rw ipv6-nd-ra:ns-interval?        common-def:time-interval-
sec
| | | | | |     +--rw ipv6-nd-ra:suppress-ra
| | | | | | |     +--rw ipv6-nd-ra:suppress-ra-flag? empty
| | | | | | |     +--rw ipv6-nd-ra:suppress-ra-mtu? empty
| | | | | | |     +--rw ipv6-nd-ra:suppress-ra-all? empty
| | | | | |     +--rw ipv6-nd-ra:ra-interval
| | | | | | |     +--rw ipv6-nd-ra:max-interval?   common-def:time-interval-sec
| | | | | | |     +--rw ipv6-nd-ra:min?            common-def:time-interval-sec
| | | | | |     +--rw ipv6-nd-ra:send-ra?          empty
| | | | | |     +--rw ipv6-nd-ra:router-preference
| | | | | | |     +--rw ipv6-nd-ra:router-pref-high? empty
| | | | | | |     +--rw ipv6-nd-ra:router-pref-low? empty
| | | | | | |     +--rw ipv6-nd-ra:router-pref-medium? empty
| | | | | |     +--rw ipv6-nd-ra:ra-dns-server* [dns-server-prefix]
| | | | | | |     +--rw ipv6-nd-ra:dns-server-prefix      inet:ipv6-
address
| | | | | | |     +--rw ipv6-nd-ra:dns-server-lifetime-multiplier? uint32
| | | | | | +---rw ipv6-nd-ra:ra-domain-name* [domain-name-string]
| | | | | | |     +--rw ipv6-nd-ra:domain-name-string      string
| | | | | | |     +--rw ipv6-nd-ra:domain-name-lifetime-multiplier? uint32
| | | | | | +---rw ipv6-nd-ra:address
| | | | | | |     +--rw ipv6-nd-ra:suppressing-address* [suppress-ipv6-address]
| | | | | | | |     +--rw ipv6-nd-ra:suppress-ipv6-address      nd-suppress-ipv6-
address
| | | | | | | |     +--rw ipv6-nd-ra:suppress-per-address? empty
| | | | | | | |     +--rw ipv6-nd-ra:address-suppress-all? empty
| | | | | | +---rw ipv6-nd-ra:dad
| | | | | | |     +--rw ipv6-nd-ra:attempts?   uint32
| | | | | | |     +--rw ipv6-nd-ra:time?        common-def:time-interval-sec
| | | | | | +---rw ipv6-nd-ra:cache
| | | | | | |     +--rw ipv6-nd-ra:expire?      common-def:time-interval-sec
| | | | | | |     +--rw ipv6-nd-ra:cache-limit?   uint32
| | | | | | +---rw ipv6-nd-ra:prefix* [prefix-ipv6-address]
| | | | | | |     +--rw ipv6-nd-ra:prefix-ipv6-address      inet:ipv6-prefix
| | | | | | |     +--rw ipv6-nd-ra:lifetime

```

```

    | | | | |     +-rw (ch-valid-type)?
    | | | | |     | +-:(ca-no-advertise)
    | | | | |     | | +-rw ipv6-nd-ra:no-advertise?      empty
    | | | | |     | +-:(ca-valid-lifetime)
    | | | | |     | | +-rw ipv6-nd-ra:valid-lifetime?   common-def:time-
interval-sec
    | | | | |     | +-:(ca-valid-infinite)
    | | | | |     | | +-rw ipv6-nd-ra:valid-infinite?   empty
    | | | | |     +-rw ipv6-nd-ra:preferred
    | | | | |     | +-rw (ch-preferred-type)?
    | | | | |     | | +-:(ca-preferred-lifetime)
    | | | | |     | | | +-rw ipv6-nd-ra:preferred-lifetime? common-
def:time-interval-sec
    | | | | |     | +-:(ca-preferred-infinite)
    | | | | |     | | +-rw ipv6-nd-ra:preferred-infinite? empty
    | | | | |     +-rw ipv6-nd-ra:prefix-flags
    | | | | |     | +-rw ipv6-nd-ra:no-autoconfig?   empty
    | | | | |     | +-rw ipv6-nd-ra:no-onlink?       empty
    | | | | |     | +-rw ipv6-nd-ra:off-link?        empty
    | | | | |     +-rw ipv6-nd-ra:neighbor* [ipv6-address]
    | | | | |     | +-rw ipv6-nd-ra:ipv6-address      neighbor-ipv6-address
    | | | | |     | +-rw ipv6-nd-ra:hardware-address? macAddr
    | | | | |     +-rw isis:intf-ipv6-router-isis
    | | | | |     | +-rw isis:int-ipv6-router-isis
    | | | | |     | | +-rw isis:interface-ipv6-router-isis? empty
    | | | | |     +-rw vrrp:ipv6-anycast-address* [ipv6-address]
    | | | | |     | +-rw vrrp:ipv6-address      union
    | | | | |     +-rw vrrp:ipv6-vrrp-extended
    | | | | |     | +-rw vrrp:auth-type
    | | | | |     | | +-rw vrrp:md5-auth
    | | | | |     | | | +-rw vrrp:auth-data?   string
    | | | | |     +-rw ospfv3:interface-ospfv3-conf
    | | | | |     | +-rw ospfv3:interface-area?      ospf:ospf-area-id
    | | | | |     | +-rw ospfv3:active?           empty
    | | | | |     | +-rw ospfv3:passive?          empty
    | | | | |     +-rw ospfv3:bfd
    | | | | |     | +-rw ospfv3:bfd-enable?   empty
    | | | | |     | +-rw ospfv3:cost?            uint32
    | | | | |     | +-rw ospfv3:instance?        uint32
    | | | | |     | +-rw ospfv3:mtu-ignore?      empty
    | | | | |     | +-rw ospfv3:network?         enumeration
    | | | | |     | +-rw ospfv3:priority?        uint32
    | | | | |     | +-rw ospfv3:suppress-linklsa? empty
    | | | | |     | +-rw ospfv3:authentication
    | | | | |     | | +-rw ospfv3:key-chain?   string
    | | | | |     | | | +-rw ospfv3:ipsec-auth-key-config
    | | | | |     | | | | +-rw ospfv3:spi?      spi-value-type
    | | | | |     | | | | | +-rw (ch-algorithm)?
    | | | | |     | | | | | | +-:(ca-ah-algorithm)
    | | | | |     | | | | | | | +-rw ospfv3:ah?      algorithm-type-ah
    | | | | |     | | | | | | | +-rw ospfv3:ah-key? ipsec-authentication-hexkey-
string
    | | | | |     | +-:(ca-esp-algorithm)
    | | | | |     | | +-rw ospfv3:esp?      algorithm-type-esp
    | | | | |     | | | +-rw ospfv3:esp-auth? algorithm-type-ah
    | | | | |     | | | | +-rw ospfv3:esp-auth-key? ipsec-authentication-hexkey-
string
    | | | | |     +-rw ospfv3:ipsec
    | | | | |     | +-rw ospfv3:ipsec-authentication-disable? empty
    | | | | |     | +-rw ospfv3:ifc-key-add-remove-interval? common-def:time-
interval-sec
    | | | | |     +-rw ospfv3:link-interval-properties
    | | | | |     | +-rw ospfv3:hello-interval?   common-def:time-interval-sec
    | | | | |     | +-rw ospfv3:dead-interval?   common-def:time-interval-sec

```

```

| | | |    +-rw ospfv3:hello-jitter?      uint32
| | | |    +-rw ospfv3:retransmit-interval?   common-def:time-interval-sec
| | | |    +-rw ospfv3:transmit-delay?      common-def:time-interval-sec
| | | +-rw pim:pim-intf-vlan-cont
| | | | +-rw pim:ipv6-pim-int-cmd
| | | | +-rw pim:pim-sparse?          empty
| | | | +-rw pim:pim
| | | | | +-rw pim:neighbor-filter?    ip-prefix-name-t
| | | | | +-rw pim:dr-priority?      uint32
| | | | | +-rw pim:ttl-threshold?    uint32
| | | | | +-rw pim:mcast-bdry-prefix-list?  ip-prefix-name-t
| | | +-rw vrrpv3:vrrpv3* [vrid]
| | | | +-rw vrrpv3:vrid                  vrid-type
| | | | +-rw vrrpv3:use-v2-checksum?    empty
| | | | +-rw vrrpv3:virtual-ip* [virtual-ipaddr]
| | | | | +-rw vrrpv3:virtual-ipaddr    inet:ipv6-address
| | | | +-rw vrrpv3:track
| | | | | +-rw vrrpv3:interface* [interface-type interface-name]
| | | | | | +-rw vrrpv3:interface-type  track-iftype
| | | | | | +-rw vrrpv3:interface-name  track-ifname
| | | | | | +-rw vrrpv3:track-priority?  uint8
| | | | | +-rw vrrpv3:advertisement-interval?  uint32
| | | | | +-rw vrrpv3:enable?          empty
| | | | | +-rw vrrpv3:hold-time?      uint32
| | | | | +-rw vrrpv3:preempt-mode?    empty
| | | | | +-rw vrrpv3:priority?       uint8
| | | | | +-rw vrrpv3:description?    string
| | | | +-rw vrrpv3:vrrpv3e* [vrid]
| | | | | +-rw vrrpv3:vrid           vrrpe-vrid-type
| | | | | +-rw vrrpv3:virtual-mac?    enumeration
| | | | | +-rw vrrpv3:virtual-ip* [virtual-ipaddr]
| | | | | | +-rw vrrpv3:virtual-ipaddr  inet:ipv6-address
| | | | | +-rw vrrpv3:track
| | | | | | +-rw vrrpv3:network* [network-address]
| | | | | | | +-rw vrrpv3:network-address  track-network-address
| | | | | | | +-rw vrrpv3:network-priority?  uint8
| | | | | | | +-rw vrrpv3:interface* [interface-type interface-name]
| | | | | | | | +-rw vrrpv3:interface-type  track-iftype
| | | | | | | | +-rw vrrpv3:interface-name  track-ifname
| | | | | | | | +-rw vrrpv3:track-priority?  uint8
| | | | | | +-rw vrrpv3:enable?          empty
| | | | | | +-rw vrrpv3:hold-time?      uint32
| | | | | | +-rw vrrpv3:preempt-mode?    empty
| | | | | | +-rw vrrpv3:priority?       uint8
| | | | | | +-rw vrrpv3:description?    string
| | | | | | +-rw vrrpv3:advertise-backup?  empty
| | | | | | +-rw vrrpv3:nd-advertisement-timer?  uint32
| | | | | | +-rw vrrpv3:advertisement-interval-scale?  uint32
| | | | | | +-rw vrrpv3:backup-advertisement-interval?  uint32
| | | | | | +-rw vrrpv3:vrrpe-advertisement-interval?  uint32
| | | | | | +-rw vrrpv3:short-path-forwarding
| | | | | | | +-rw vrrpv3:basic?        empty
| | | | | | | +-rw vrrpv3:revert-priority?  uint8
| | | | +-rw ip-access-list:ip-acl-interface
| | | | | +-rw ip-access-list:ip
| | | | | | +-rw ip-access-list:access-group* [ip-access-list ip-direction]
| | | | | | | +-rw ip-access-list:ip-access-list  13-acl-policy-name
| | | | | | | +-rw ip-access-list:ip-direction    enumeration
| | | | | | | +-rw ip-access-list:traffic-type?  enumeration
| | | | | +-rw ip-access-list:ip-subnet-broadcast-acl-interface
| | | | | | +-rw ip-access-list:ip
| | | | | | | +-rw ip-access-list:subnet-broadcast-acl* [ip-access-list]
| | | | | | | | +-rw ip-access-list:ip-access-list  13-acl-policy-name
| | | | +-rw ip-policy:ip-pbr-interface

```

```

    | | | +--rw ip-policy:ip
    | | |   +--rw ip-policy:policy
    | | |     +--rw ip-policy:route-map
    | | |       +--rw ip-policy:route-map-name?  common-def:name-string63
    | | +--rw isis:intf-isis!
    | |   +--rw isis:interface-isis
    | |     +--rw isis:auth-check
    | |       +--rw isis:auth-check-level1
    | |         +--rw isis:interface-auth-check-level1-disable?  empty
    | |       +--rw isis:auth-check-level2
    | |         +--rw isis:interface-auth-check-level2-disable?  empty
    | | +--rw isis:interface-reverse-metric!
    | |   +--rw isis:rev-metric-common-attributes
    | |     +--rw isis:rev-metric-val?          uint32
    | |     +--rw isis:rev-metric-whole-lan?    empty
    | |     +--rw isis:rev-metric-te-def-metric? empty
    | | +--rw isis:interface-auth-mode
    | |   +--rw isis:interface-md5
    | |     +--rw isis:interface-auth-mode-md5-level1?  empty
    | |     +--rw isis:interface-auth-mode-md5-level2?  empty
    | | +--rw isis:interface-auth-key* [interface-auth-key-level]
    | |   +--rw isis:interface-auth-key-level  enumeration
    | |   +--rw isis:interface-auth-key-str?    string
    | | +--rw isis:interface-hello
    | |   +--rw isis:interface-hello-padding
    | |     +--rw isis:interface-hello-padding-disable?  empty
    | | +--rw isis:interface-hello-interval* [interface-hello-interval-level]
    | |   +--rw isis:interface-hello-interval-level  enumeration
    | |   +--rw isis:interface-hello-interval-val?    uint32
    | | +--rw isis:interface-hello-multiplier* [interface-hello-multiplier-
level]
    | |   +--rw isis:interface-hello-multiplier-level  enumeration
    | |   +--rw isis:interface-hello-multiplier-val?    uint32
    | | +--rw isis:circuit-type?                  enumeration
    | | +--rw isis:interface-ipv6
    | |   +--rw isis:interface-ipv6-metric* [interface-ipv6-metric-level]
    | |     +--rw isis:interface-ipv6-metric-level  enumeration
    | |     +--rw isis:interface-ipv6-metric-val?    uint32
    | | +--rw isis:interface-metric* [interface-metric-level]
    | |   +--rw isis:interface-metric-level  enumeration
    | |   +--rw isis:interface-metric-val?    uint32
    | | +--rw isis:interface-point-to-point?  empty
    | | +--rw isis:interface-passive?        empty
    | | +--rw isis:interface-priority
    | |   +--rw isis:interface-priority-level1?  uint32
    | |   +--rw isis:interface-priority-level2?  uint32
    | | +--rw isis:interface-bfd
    | |   +--rw isis:interface-bfd-enable?  empty
    | | +--rw isis:interface-ldp-sync?      enumeration
    | | +--rw isis:segment-routing
    | |   +--rw isis:interface-segment-routing-disable?  empty
    | | +--rw isis:segment-routing-prefix-sid
    | |   +--rw isis:sr-prefix-sid-value?  uint32
    | | +--rw vrrp:vrrp* [vrid version]
    | |   +--rw vrrp:vrid                  vrid-type
    | |   +--rw vrrp:version              uint8
    | |   +--rw vrrp:use-v2-checksum?    empty
    | |   +--rw vrrp:virtual-ip* [virtual-ipaddr]
    | |     +--rw vrrp:virtual-ipaddr   inet:ipv4-address
    | | +--rw vrrp:track
    | |   +--rw vrrp:interface* [interface-type interface-name]
    | |     +--rw vrrp:interface-type  track-iftype
    | |     +--rw vrrp:interface-name  track-ifname
    | |     +--rw vrrp:track-priority?  uint8

```

```

    | | | +--rw vrrp:advertisement-interval?      uint32
    | | | +--rw vrrp:enable?                      empty
    | | | +--rw vrrp:hold-time?                  uint32
    | | | +--rw vrrp:preempt-mode?                empty
    | | | +--rw vrrp:arp
    | | | | +--rw vrrp:unicast-request
    | | | | +--rw vrrp:receive?                 empty
    | | | +--rw vrrp:priority?                  uint8
    | | | +--rw vrrp:description?               string
    | | +--rw vrrp:vrrpe* [vrid]
    | | | +--rw vrrp:vrid                         vrrpe-vrid-type
    | | | +--rw vrrp:virtual-mac?                enumeration
    | | | +--rw vrrp:virtual-ip* [virtual-ipaddr]
    | | | | +--rw vrrp:virtual-ipaddr      inet:ipv4-address
    | | | +--rw vrrp:track
    | | | | +--rw vrrp:network* [network-address]
    | | | | | +--rw vrrp:network-address   union
    | | | | +--rw vrrp:network-priority?   uint8
    | | | | +--rw vrrp:interface* [interface-type interface-name]
    | | | | | +--rw vrrp:interface-type   track-iftype
    | | | | +--rw vrrp:interface-name     track-ifname
    | | | | +--rw vrrp:track-priority?   uint8
    | | | +--rw vrrp:advertisement-interval?      uint32
    | | | +--rw vrrp:enable?                      empty
    | | | +--rw vrrp:hold-time?                  uint32
    | | | +--rw vrrp:preempt-mode?                empty
    | | | +--rw vrrp:arp
    | | | | +--rw vrrp:unicast-request
    | | | | +--rw vrrp:receive?                 empty
    | | | +--rw vrrp:priority?                  uint8
    | | | +--rw vrrp:description?               string
    | | | +--rw vrrp:advertise-backup?          empty
    | | | +--rw vrrp:vrrpe-garp-timer?        uint32
    | | | +--rw vrrp:backup-advertisement-interval?  uint32
    | | | +--rw vrrp:short-path-forwarding
    | | | | +--rw vrrp:basic?                   empty
    | | | | +--rw vrrp:revert-priority?   uint8
    | | | +--rw vrrp:advertisement-interval-scale?  uint32
    | | +--rw rpf:rpf
    | | | +--rw rpf:mode?                     enumeration
    | +--rw intf-loopback:loopback* [id]
    | | +--rw intf-loopback:id                intf-loopback-port-type
    | | +--rw intf-loopback:vrf
    | | +--rw intf-loopback:forwarding?      common-def:vrf-name
    | | +--rw intf-loopback:description?    string
    | | +--rw intf-loopback:reload-delay
    | | | +--rw intf-loopback:reload-delay-enable?  empty
    | | | +--rw intf-loopback:reload-delay-time?   reload-delay-type
    | | +--rw intf-loopback:snmp
    | | | +--rw intf-loopback:trap
    | | | | +--rw intf-loopback:link-status
    | | | | +--rw intf-loopback:snmp-link-disable?  empty
    | | +--rw intf-loopback:shutdown?        empty
    | | +--rw ip-config:ip
    | | | +--rw ip-config:ip-config
    | | | | +--rw ip-config:address* [address]
    | | | | | +--rw ip-config:address   union
    | | | +--rw isis:intf-isis
    | | | | +--rw isis:int-router-isis
    | | | | | +--rw isis:interface-ip-router-isis?  empty
    | | +--rw ospf:interface-loopback-ospf-conf
    | | | +--rw ospf:ospf1
    | | | | +--rw ospf:area?                  ospf-area-id
    | | | | +--rw ospf:auth-change-wait-time?  common-def:time-interval-sec

```

```

| | | | +--rw ospf:authentication-key
| | | | | +--rw ospf:no-encrypt-auth-key-table
| | | | | | +--rw ospf:no-encrypt-auth-key?    ospf-auth-psswd-string
| | | | +--rw ospf:auth-key-table
| | | | | +--rw ospf:encryptype?    key-type
| | | | | +--rw ospf:auth-key?      ospf-auth-psswd-string
| | | +---rw ospf:authentication
| | | | +--rw ospf:key-chain?    ospf-keychain-string
| | | +---rw ospf:hello-interval?    common-def:time-interval-sec
| | | +---rw ospf:dead-interval?    common-def:time-interval-sec
| | | +---rw ospf:retransmit-interval?    common-def:time-interval-sec
| | | +---rw ospf:transmit-delay?    common-def:time-interval-sec
| | | +---rw ospf:md5-authentication
| | | | +--rw ospf:key-activation-wait-time?    common-def:time-interval-
sec
| | | | | +--rw ospf:no-encrypt-key-table
| | | | | | +--rw ospf:no-encrypt-key-id?    uint32
| | | | | | +--rw ospf:no-encrypt-key?      ospf-auth-psswd-string
| | | | +--rw ospf:key-table
| | | | | +--rw ospf:key-id?          uint32
| | | | | +--rw ospf:key?            key-type
| | | | | +--rw ospf:md5-authentication-key?    ospf-auth-psswd-string
| | | +---rw ospf:cost?          uint32
| | | +---rw ospf:network?        enumeration
| | | +---rw ospf:intf-ldp-sync?    enumeration
| | | +---rw ospf:database-filter
| | | | +--rw ospf:all-out?        empty
| | | | +--rw ospf:all-external?    database-filter-options
| | | | +--rw ospf:all-summary-external?    database-filter-options
| | | +---rw ospf:mtu-ignore?      empty
| | | +---rw ospf:active?         empty
| | | +---rw ospf:passive?        empty
| | | +---rw ospf:priority?       uint32
| | | +---rw ospf:bfd
| | | | +--rw ospf:intf-bfd-enable?    empty
| | +---rw pim:pim-intf-loopback-cont
| | | +---rw pim:pim-int-cmd
| | | | +--rw pim:pim-sparse?      empty
| | | | +--rw pim:pim
| | | | | +--rw pim:neighbor-filter?    ip-prefix-name-t
| | | | | +--rw pim:dr-priority?     uint32
| | | | | +--rw pim:ttl-threshold?    uint32
| | | | +--rw pim:mcast-bdry-prefix-list?    ip-prefix-name-t
+---rw ipv6-config:ipv6
| | +---rw ipv6-config:ipv6-config
| | | +---rw ipv6-config:address
| | | | +--rw ipv6-config:use-link-local-only?    empty
| | | | +--rw ipv6-config:link-local-config
| | | | | +--rw ipv6-config:link-local-address?    inet:ipv6-address
| | | | | +--rw ipv6-config:link-local?      empty
| | | +---rw ipv6-config:ipv6-address* [address]
| | | | +--rw ipv6-config:address      union
| | | | +--rw ipv6-config:eui64?      empty
| | | | +--rw ipv6-config:anycast?    empty
| | +---rw isis:intf-ipv6-router-isis
| | | +---rw isis:int-ipv6-router-isis
| | | | +--rw isis:interface-ipv6-router-isis?    empty
| | +---rw ospfv3:interface-ospfv3-conf
| | | +--rw ospfv3:interface-area?      ospf:ospf-area-id
| | | +--rw ospfv3:active?            empty
| | | +--rw ospfv3:passive?          empty
| | | +---rw ospfv3:bfd
| | | | +--rw ospfv3:bfd-enable?    empty
| | | +---rw ospfv3:cost?          uint32

```

```

    |   |   |   +-rw ospfv3:instance?           uint32
    |   |   |   +-rw ospfv3:mtu-ignore?       empty
    |   |   |   +-rw ospfv3:network?         enumeration
    |   |   |   +-rw ospfv3:priority?        uint32
    |   |   |   +-rw ospfv3:suppress-linklsa? empty
    |   |   |   +-rw ospfv3:authentication
    |   |   |   |   +-rw ospfv3:key-chain?     string
    |   |   |   |   +-rw ospfv3:ipsec-auth-key-config
    |   |   |   |   |   +-rw ospfv3:spi?          spi-value-type
    |   |   |   |   |   +-rw (ch-algorithm)?
    |   |   |   |   |   |   +-rw ospfv3:ah?          algorithm-type-ah
    |   |   |   |   |   |   +-rw ospfv3:ah-key?      ipsec-authentication-hexkey-
string
    |   |   |   |   +-:(ca-esp-algorithm)
    |   |   |   |   |   +-rw ospfv3:esp?          algorithm-type-esp
    |   |   |   |   |   +-rw ospfv3:esp-auth?      algorithm-type-ah
    |   |   |   |   |   +-rw ospfv3:esp-auth-key?  ipsec-authentication-hexkey-
string
    |   |   |   |   +-rw ospfv3:ipsec
    |   |   |   |   |   +-rw ospfv3:ipsec-authentication-disable? empty
    |   |   |   |   |   +-rw ospfv3:ifc-key-add-remove-interval? common-def:time-
interval-sec
    |   |   |   |   +-rw ospfv3:link-interval-properties
    |   |   |   |   |   +-rw ospfv3:hello-interval?  common-def:time-interval-sec
    |   |   |   |   |   +-rw ospfv3:dead-interval?  common-def:time-interval-sec
    |   |   |   |   |   +-rw ospfv3:hello-jitter?   uint32
    |   |   |   |   |   +-rw ospfv3:retransmit-interval? common-def:time-interval-sec
    |   |   |   |   |   +-rw ospfv3:transmit-delay?  common-def:time-interval-sec
    |   |   |   +-rw pim:pim-intf-loopback-cont
    |   |   |   |   +-rw pim:pim-ipv6-pim-int-cmd
    |   |   |   |   |   +-rw pim:pim-sparse?      empty
    |   |   |   |   |   +-rw pim:pim
    |   |   |   |   |   |   +-rw pim:neighbor-filter? ip-prefix-name-t
    |   |   |   |   |   |   +-rw pim:dr-priority?   uint32
    |   |   |   |   |   |   +-rw pim:ttl-threshold? uint32
    |   |   |   |   |   +-rw pim:mcast-bdry-prefix-list? ip-prefix-name-t
    |   |   +-rw isis:intf-isis!
    |   |   |   +-rw isis:interface-isis
    |   |   |   |   +-rw isis:auth-check
    |   |   |   |   |   +-rw isis:auth-check-level1
    |   |   |   |   |   |   +-rw isis:interface-auth-check-level1-disable? empty
    |   |   |   |   |   +-rw isis:auth-check-level2
    |   |   |   |   |   |   +-rw isis:interface-auth-check-level2-disable? empty
    |   |   |   +-rw isis:interface-reverse-metric!
    |   |   |   |   +-rw isis:rev-metric-common-attributes
    |   |   |   |   |   +-rw isis:rev-metric-val?   uint32
    |   |   |   |   |   +-rw isis:rev-metric-whole-lan? empty
    |   |   |   |   |   +-rw isis:rev-metric-te-def-metric? empty
    |   |   |   +-rw isis:interface-auth-mode
    |   |   |   |   +-rw isis:interface-md5
    |   |   |   |   |   +-rw isis:interface-auth-mode-md5-level1? empty
    |   |   |   |   |   +-rw isis:interface-auth-mode-md5-level2? empty
    |   |   +-rw isis:interface-auth-key* [interface-auth-key-level]
    |   |   |   +-rw isis:interface-auth-key-level  enumeration
    |   |   |   +-rw isis:interface-auth-key-str?   string
    |   |   |   +-rw isis:interface-hello
    |   |   |   |   +-rw isis:interface-hello-padding
    |   |   |   |   |   +-rw isis:interface-hello-padding-disable? empty
    |   |   |   +-rw isis:interface-hello-interval* [interface-hello-interval-level]
    |   |   |   |   +-rw isis:interface-hello-interval-level  enumeration
    |   |   |   |   +-rw isis:interface-hello-interval-val?   uint32
    |   |   |   +-rw isis:interface-hello-multiplier* [interface-hello-multiplier-
level]

```

```

|           |   +-+rw isis:interface-hello-multiplier-level    enumeration
|           |   +-+rw isis:interface-hello-multiplier-val?      uint32
+-rw isis:circuit-type?                      enumeration
+-rw isis:interface-ipv6
|   +-+rw isis:interface-ipv6-metric* [interface-ipv6-metric-level]
|       +-+rw isis:interface-ipv6-metric-level    enumeration
|       +-+rw isis:interface-ipv6-metric-val?      uint32
+-rw isis:interface-metric* [interface-metric-level]
|   +-+rw isis:interface-metric-level    enumeration
|   +-+rw isis:interface-metric-val?      uint32
+-rw isis:interface-point-to-point?        empty
+-rw isis:interface-passive?            empty
+-rw isis:interface-priority
|   +-+rw isis:interface-priority-level1?    uint32
|   +-+rw isis:interface-priority-level2?    uint32
+-rw isis:interface-bfd
|   +-+rw isis:interface-bfd-enable?    empty
+-rw isis:interface-ldp-sync?            enumeration
+-rw isis:segment-routing
|   +-+rw isis:interface-segment-routing-disable?  empty
+-rw isis:segment-routing-prefix-sid
|   +-+rw isis:sr-prefix-sid-value?    uint32
+-rw bgp:evpn-config
|   +-+rw bgp:evpn
|       +-+rw bgp:evpn-instance* [instance-name]
|           +-+rw bgp:instance-name          evpn-type
|           +-+rw bgp:route-target
|               +-+rw bgp:both* [target-community]
|                   +-+rw bgp:target-community    rt-type
|                   +-+rw bgp:ignore-as?      empty
|               +-+rw bgp:export* [target-community]
|                   +-+rw bgp:target-community    rt-type
|               +-+rw bgp:import* [target-community]
|                   +-+rw bgp:target-community    rt-type
|                   +-+rw bgp:ignore-as?      empty
|               +-+rw bgp:route-distinguisher
|                   +-+rw (ch-rd-type)?
|                       +-+:(ca-rd-auto)
|                           +-+rw bgp:auto?      empty
|               +-+rw bgp:duplicate-mac-timer
|                   +-+rw bgp:duplicate-mac-timer-value?  dup-mac-timer
|                   +-+rw bgp:max-count?        max-count
|               +-+rw bgp:bridge-domain
|                   +-+rw bgp:bd-add
|                       +-+rw bgp:bd-range-add?    bridge-domain:ui32-bridge-domain-20k-
range
|                           +-+rw bgp:bd-range-remove?    bridge-domain:ui32-bridge-domain-20k-
range
|                               +-+rw bgp:evpn-bd* [bd-number]
|                                   +-+rw bgp:bd-number        bridge-domain:bridge-domain-id-type
|                                   +-+rw bgp:rd?            rd-type
|                                   +-+rw bgp:route-target
|                                       +-+rw bgp:import* [target-community]
|                                           +-+rw bgp:target-community    rd-rt-type
|                                       +-+rw bgp:export* [target-community]
|                                           +-+rw bgp:target-community    rd-rt-type
|                                       +-+rw bgp:both* [target-community]
|                                           +-+rw bgp:target-community    rd-rt-type
|               +-+rw bgp:vlan
|                   +-+rw bgp:vlan-add
|                       +-+rw bgp:add?      interface:ui32-vlan-20k-range
|                       +-+rw bgp:remove?    interface:ui32-vlan-20k-range
|               +-+rw bgp:evpn-vlan* [vlan-number]
|                   +-+rw bgp:vlan-number    interface:vlan-type

```

```

| | | | +--rw bgp:rd? rd-type
| | | | +--rw bgp:route-target
| | | | | +--rw bgp:import* [target-community]
| | | | | | +--rw bgp:target-community rd-rt-type
| | | | | +--rw bgp:export* [target-community]
| | | | | | +--rw bgp:target-community rd-rt-type
| | | | | +--rw bgp:both* [target-community]
| | | | | | +--rw bgp:target-community rd-rt-type
| | | | +--rw bgp:core-isolation-disable? empty
+--rw bgp:prefix-independent-convergence!
+--rw ip-policy:route-map* [name action-rm instance]
    +--rw ip-policy:name route-map-name-type-t
    +--rw ip-policy:action-rm action-t
    +--rw ip-policy:instance instance-id-t
    +--rw ip-policy:content
        +--rw ip-policy:match
            | +--rw ip-policy:uda? common-def:name-string63
            | +--rw ip-policy:vrf? common-def:vrf-name
            | +--rw ip-policy:rplki
                | | +--rw ip-policy:rplki-state-type? enumeration
                | +--rw ip-policy:additional-paths
                    | | +--rw ip-policy:advertise-set
                        | | | +--rw ip-policy:all? empty
                        | | | +--rw ip-policy:best? uint32
                        | | | +--rw ip-policy:best-range
                            | | | | +--rw ip-policy:range-start? uint32
                            | | | | +--rw ip-policy:range-end? uint32
                            | | | | +--rw ip-policy:group-best? empty
                        | +--rw ip-policy:interface
                            | | +--rw ip-policy:ethernet-rmm* interface:interface-type
                            | | +--rw ip-policy:port-channel-rmm* interface:portchannel-type
                            | | +--rw ip-policy:loopback* loopback-intf:intf-loopback-port-
type
    | | +--rw ip-policy:ve* interface:ve-type
+--rw ip-policy:ipv6
    +--rw ip-policy:address
        | | +--rw ip-policy:ipv6-prefix-list-rmm? match-prefix-list-name-t
        | | +--rw ip-policy:ipv6-acl-rmm? ipv6-access-list:ipv6-13-acl-
policy-name
        | | +--rw ip-policy:source-address? inet:ipv6-prefix
        | | +--rw ip-policy:destination-address? inet:ipv6-prefix
        | | +--rw ip-policy:icmp-type* [compare-op value]
            | | | +--rw ip-policy:compare-op comparison-type-t
            | | | +--rw ip-policy:value union
            | | | +--rw ip-policy:max-value? union
            | | | +--rw ip-policy:neq-values-flag? empty
            | | | +--rw ip-policy:neq-extra-values? string
            | | | +--rw ip-policy:empty-leaf? empty
            | | +--rw ip-policy:icmp-code* [compare-op value]
                | | | +--rw ip-policy:compare-op comparison-type-t
                | | | +--rw ip-policy:value icmp-code-t
                | | | +--rw ip-policy:max-value? icmp-code-t
                | | | +--rw ip-policy:neq-values-flag? empty
                | | | +--rw ip-policy:neq-extra-values? string
                | | | +--rw ip-policy:empty-leaf? empty
            | | +--rw ip-policy:flow-label* [compare-op value]
                | | | +--rw ip-policy:compare-op comparison-type-t
                | | | +--rw ip-policy:value flow-label-t
                | | | +--rw ip-policy:max-value? flow-label-t
                | | | +--rw ip-policy:neq-values-flag? empty
                | | | +--rw ip-policy:neq-extra-values? string
                | | | +--rw ip-policy:empty-leaf? empty
            | | +--rw ip-policy:next-hop
                | | | +--rw ip-policy:ipv6-prefix-list-rmm-n? match-prefix-list-name-t

```

```

    |   |   +-rw ip-policy:route-source
    |   |   |   +-rw ip-policy:ipv6-prefix-list-rmrs? string
    |   +-rw ip-policy:ip
    |   |   +-rw ip-policy:address
    |   |   |   +-rw ip-policy:prefix-list-rmm? match-prefix-list-name-t
    |   |   |   +-rw ip-policy:acl-rmm? ip-access-list:l3-acl-policy-name
    |   +-rw ip-policy:source-address? inet:ipv4-prefix
    |   +-rw ip-policy:destination-address? inet:ipv4-prefix
    |   +-rw ip-policy:icmp-type* [compare-op value]
    |   |   +-rw ip-policy:compare-op comparison-type-t
    |   |   +-rw ip-policy:value union
    |   |   +-rw ip-policy:max-value? union
    |   |   +-rw ip-policy:neq-values-flag? empty
    |   |   +-rw ip-policy:neq-extra-values? string
    |   |   +-rw ip-policy:empty-leaf? empty
    |   +-rw ip-policy:icmp-code* [compare-op value]
    |   |   +-rw ip-policy:compare-op comparison-type-t
    |   |   +-rw ip-policy:value icmp-code-t
    |   |   +-rw ip-policy:max-value? icmp-code-t
    |   |   +-rw ip-policy:neq-values-flag? empty
    |   |   +-rw ip-policy:neq-extra-values? string
    |   |   +-rw ip-policy:empty-leaf? empty
    +-rw ip-policy:next-hop
    |   |   +-rw ip-policy:prefix-list-rmm-n? match-prefix-list-name-t
    +-rw ip-policy:route-source
    |   +-rw ip-policy:prefix-list-rmrs? string
    +-rw ip-policy:extcommunity
    |   +-rw ip-policy:extcommunity-name? match-extcommunity-list-name-t
    +-rw ip-policy:metric
    |   +-rw ip-policy:metric-rmm? metric-t
    +-rw ip-policy:route-type
    |   +-rw ip-policy:route-type-rmm? match-route-type-t
    +-rw ip-policy:tag
    |   +-rw ip-policy:tag-rmm* tag-t
    +-rw ip-policy:as-path
    |   +-rw ip-policy:as-path-access-list-name? ip-match-as-path-name-t
    +-rw ip-policy:community
    |   +-rw ip-policy:community-access-list-name? match-community-list-name-t
    |   +-rw ip-policy:large-community
    |   |   +-rw ip-policy:large-community-access-list-name? match-large-community-list-name-t
    |   |   +-rw ip-policy:protocol
    |   |   |   +-rw ip-policy:protocol-match-list* [compare-op value]
    |   |   |   |   +-rw ip-policy:compare-op comparison-type-t
    |   |   |   |   +-rw ip-policy:value union
    |   |   |   |   +-rw ip-policy:max-value? union
    |   |   |   |   +-rw ip-policy:neq-values-flag? empty
    |   |   |   |   +-rw ip-policy:neq-extra-values? string
    |   |   |   |   +-rw ip-policy:empty-leaf? empty
    |   |   +-rw ip-policy:protocol-static-container
    |   |   |   +-rw ip-policy:static? empty
    |   |   +-rw ip-policy:bgp-protocol-container
    |   |   |   +-rw ip-policy:protocol-bgp? empty
    |   |   |   +-rw ip-policy:bgp-route-type? enumeration
    |   |   +-rw ip-policy:isis-protocol-container
    |   |   |   +-rw ip-policy:protocol-isis? empty
    |   |   |   +-rw ip-policy:match-isis-level? enumeration
    |   |   +-rw ip-policy:ospf-protocol-container
    |   |   |   +-rw ip-policy:protocol-ospf? empty
    |   |   |   +-rw ip-policy:ospf-route-type? enumeration
    |   +-rw ip-policy:port* [compare-op value]
    |   |   +-rw ip-policy:compare-op comparison-type-t
    |   |   +-rw ip-policy:value union

```

```

| |   +--rw ip-policy:max-value?      union
| |   +--rw ip-policy:neq-values-flag?  empty
| |   +--rw ip-policy:neq-extra-values? string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:source-port* [compare-op value]
| |   +--rw ip-policy:compare-op      comparison-type-t
| |   +--rw ip-policy:value          union
| |   +--rw ip-policy:max-value?      union
| |   +--rw ip-policy:neq-values-flag?  empty
| |   +--rw ip-policy:neq-extra-values? string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:destination-port* [compare-op value]
| |   +--rw ip-policy:compare-op      comparison-type-t
| |   +--rw ip-policy:value          union
| |   +--rw ip-policy:max-value?      union
| |   +--rw ip-policy:neq-values-flag?  empty
| |   +--rw ip-policy:neq-extra-values? string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:packet-length* [compare-op value]
| |   +--rw ip-policy:compare-op      comparison-type-t
| |   +--rw ip-policy:value          packet-length-t
| |   +--rw ip-policy:max-value?      packet-length-t
| |   +--rw ip-policy:neq-values-flag?  empty
| |   +--rw ip-policy:neq-extra-values? string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:dscp* [compare-op value]
| |   +--rw ip-policy:compare-op      comparison-type-t
| |   +--rw ip-policy:value          union
| |   +--rw ip-policy:max-value?      union
| |   +--rw ip-policy:neq-values-flag?  empty
| |   +--rw ip-policy:neq-extra-values? string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:tcp-flags* [flags-op flags-string]
| |   +--rw ip-policy:flags-op        bits-match-op-type-t
| |   +--rw ip-policy:flags-string    string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:fragment-type* [fragment-type-op fragment-type-string]
| |   +--rw ip-policy:fragment-type-op  bits-match-op-type-t
| |   +--rw ip-policy:fragment-type-string string
| |   +--rw ip-policy:empty-leaf?      empty
| +--rw ip-policy:rule-name?          rmap-rule-name
| +--rw ip-policy:next-hop-recursion? empty
| +--rw ip-policy:set
| |   +--rw ip-policy:police
| |   | +--rw ip-policy:cir?    uint64
| |   +--rw ip-policy:sflow
| |   | +--rw ip-policy:default-profile? empty
| |   +--rw ip-policy:traffic-action
| |   | +--rw ip-policy:traffic-action-continue? empty
| +--rw ip-policy:level
| |   +--rw ip-policy:set-isis-level? enumeration
| +--rw ip-policy:ip
| |   +--rw ip-policy:mirror* [destination]
| |   | +--rw ip-policy:destination    inet:ipv4-address
| |   +--rw ip-policy:dscp
| |   | +--rw ip-policy:dscp-rms?    dscp-precedence
| |   +--rw ip-policy:interface
| |   | +--rw ip-policy:null0?      empty
| |   +--rw ip-policy:next-hop
| |   | +--rw ip-policy:peer-address? empty
| |   | +--rw ip-policy:next-hop-list* [next-hop-addr]
| |   |   +--rw ip-policy:next-hop-addr    inet:ipv4-address
| |   +--rw ip-policy:global
| |   | +--rw ip-policy:next-global-hop* [next-hop]

```

```

    | | |     +--rw ip-policy:next-hop      inet:ipv4-address
    | | +-rw ip-policy:next-vrf
    | |   +-rw ip-policy:next-vrf-list* [vrf next-hop]
    | |     +-rw ip-policy:vrf          string
    | |     +-rw ip-policy:next-hop      inet:ipv4-address
    | +-rw ip-policy:ipv6
    |   +-rw ip-policy:mirror* [destination]
    |   | +-rw ip-policy:destination    inet:ipv6-address
    |   +-rw ip-policy:dscp
    |     | +-rw ip-policy:dscp-rms-ipv6?  dscp-precedence
    |     +-rw ip-policy:interface
    |       +-rw ip-policy:ipv6-null0?  empty
    |     +-rw ip-policy:global
    |       +-rw ip-policy:next-global-hop* [next-hop]
    |         +-rw ip-policy:next-hop    inet:ipv6-address
    |     +-rw ip-policy:next-ip
    |       +-rw ip-policy:ipv6-peer-address?  empty
    |       +-rw ip-policy:next-hop* [next-hop]
    |         +-rw ip-policy:next-hop    inet:ipv6-address
    |     +-rw ip-policy:next-vrf
    |       +-rw ip-policy:next-vrf-list* [vrf next-hop]
    |         +-rw ip-policy:vrf          string
    |         +-rw ip-policy:next-hop    inet:ipv6-address
    | +-rw ip-policy:extcommunity
    |   +-rw ip-policy:rt
    |     | +-rw ip-policy:ASN-NN-rt?  ext-community-rt-expr-t
    |   +-rw ip-policy:soo
    |     +-rw ip-policy:ASN-NN-soo?  ext-community-soo-expr-t
    +-rw ip-policy:community
    | +-rw ip-policy:set-community-expr?  set-community-expr-t
    +-rw ip-policy:large-community
    | +-rw ip-policy:set-large-community-expr?  set-large-community-expr-t
    +-rw ip-policy:metric
    | +-rw ip-policy:delta-rms?  enumeration
    | +-rw ip-policy:metric-rms?  metric-t
    +-rw ip-policy:distance
    | +-rw ip-policy:dist-rms?  distance-t
    +-rw ip-policy:tag
    | +-rw ip-policy:tag-rms?  tag-t
    +-rw ip-policy:weight
    | +-rw ip-policy:weight-value?  uint32
    +-rw ip-policy:interface* [rmap-set-interface-type rmap-set-interface-
name]
    | +-rw ip-policy:rmap-set-interface-type    rmap-set-intf-type
    | +-rw ip-policy:rmap-set-interface-name    rmap-set-intf-name
    +-rw ip-policy:uda-interface-policy
    | +-rw ip-policy:interface
    |   +-rw ip-policy:uda-null0?  empty
    +-rw ip-policy:as-path
    | +-rw ip-policy:aspath-tag?  empty
    | +-rw ip-policy:prepend?    string
    +-rw ip-policy:automatic-tag
    | +-rw ip-policy:tag-empty?  empty
    +-rw ip-policy:comm-list
    | +-rw ip-policy:comm-list-name?    ip-community-list-name-t
    | +-rw ip-policy:match-comm-delete?  empty
    +-rw ip-policy:large-community-list
    | +-rw ip-policy:large-comm-list-name?    ip-large-community-list-name-
t
    |   +-rw ip-policy:match-large-comm-delete?  empty
    +-rw ip-policy:dampening
    | +-rw ip-policy:half-life?        uint32
    | +-rw ip-policy:reuse?          uint32
    | +-rw ip-policy:suppress?       uint32

```

```
|   |   +-rw ip-policy:max-suppress-time?    uint32
|   +-rw ip-policy:local-preference
|   |   +-rw ip-policy:local-preference-value?    uint32
|   +-rw ip-policy:origin
|   |   +-rw ip-policy:origin-igp?        empty
|   |   +-rw ip-policy:origin-incomplete?    empty
|   +-rw ip-policy:metric-type
|       +-rw ip-policy:internal?    empty
|       +-rw ip-policy:type-1?      empty
|       +-rw ip-policy:type-2?      empty
+-rw ip-policy:continue-holder
    +-rw ip-policy:continue?    empty
    +-rw ip-policy:continue-val?    uint32
```

brocade-control-plane

Top-level container

```
module: brocade-control-plane
  +-rw control-plane
    +-rw ip
      |  +-rw subnet-rate-limit
      |  |  +-rw cir?    rate-limit-cir
      |  |  +-rw cbs?    rate-limit-cbs
      |  +-rw linklocal
      |    +-rw trap?   enumeration
    +-rw service-policy* [direction policy-map-name]
      +-rw direction        enumeration
      +-rw policy-map-name  qos-mqc:map-name-type
```

brocade-crypto

Top-level container

```
module: brocade-crypto
  +-rw crypto-sa
  |  +-rw crypto
  |    +-rw key* [label]
  |      |  +-rw label      string
  |      |  +-rw type?     key-type
  |      |  +-rw modulus?   uint32
  |      +-rw cert
  |        |  +-rw expiry-level* [level period]
  |          |    +-rw level      severity-level
  |          |    +-rw period    uint32
  |        +-rw ca* [trustpoint]
  |          +-rw trustpoint  string
  |          +-rw keypair?   string
  +-rw management-security
    +-rw ssl-profile
      +-rw server
      |  +-rw tls
      |    +-rw min-version?  versionType
      +-rw client
        +-rw tls
          +-rw min-version?  versionType
```

brocade-crypto-ext

Top-level container

```

module: brocade-crypto-ext
  +-rw crypto
    +-rw ca
      |  +---x authenticate
      |  |  +---w input
      |  |  |  +---w authenticate_params
      |  |  |  |  +---w trustpoint      string
      |  |  |  |  +---w cert-type     cert-type-enum
      |  |  |  |  +---w protocol       enumeration
      |  |  |  |  +---w source-ip?   inet:ip-address
      |  |  |  |  +---w user          string
      |  |  |  |  +---w password?    string
      |  |  |  |  +---w host          inet:host
      |  |  |  |  +---w directory     string
      |  |  |  |  +---w use-vrf?    common-def:use-vrf
      |  |  |  |  +---w file          string
      |  +---x enroll
      |  |  +---w input
      |  |  |  +---w authenticate_params
      |  |  |  |  +---w trustpoint      string
      |  |  |  |  +---w cert-type     cert-type-enum
      |  |  |  |  +---w country        string
      |  |  |  |  +---w state          string
      |  |  |  |  +---w locality       string
      |  |  |  |  +---w organization    string
      |  |  |  |  +---w orgunit        string
      |  |  |  |  +---w common          inet:host
      |  |  |  |  +---w protocol       enumeration
      |  |  |  |  +---w source-ip?   inet:ip-address
      |  |  |  |  +---w user          string
      |  |  |  |  +---w password?    string
      |  |  |  |  +---w host          inet:host
      |  |  |  |  +---w directory     string
      |  |  |  |  +---w use-vrf?    common-def:use-vrf
      |  +---x import
      |  |  +---w input
      |  |  |  +---w authenticate_params
      |  |  |  |  +---w trustpoint      string
      |  |  |  |  +---w certificate    empty
      |  |  |  |  +---w cert-type     cert-type-enum
      |  |  |  |  +---w protocol       enumeration
      |  |  |  |  +---w source-ip?   inet:ip-address
      |  |  |  |  +---w user          string
      |  |  |  |  +---w password?    string
      |  |  |  |  +---w host          inet:host
      |  |  |  |  +---w directory     string
      |  |  |  |  +---w use-vrf?    common-def:use-vrf
      |  |  |  |  +---w file          string
      |  +---x import-pkcs
      |  |  +---w input
      |  |  |  +---w authenticate_params
      |  |  |  |  +---w type          enumeration
      |  |  |  |  +---w cert-type     cert-type-enum-pkcs
      |  |  |  |  +---w protocol       enumeration
      |  |  |  |  +---w source-ip?   inet:ip-address
      |  |  |  |  +---w user          string
      |  |  |  |  +---w password?    string
      |  |  |  |  +---w host          inet:host
  
```

```
|           +---w directory      string
|           +---w use-vrf?    common-def:use-vrf
|           +---w file        string
|           +---w pkcs-passphrase? string
+--rw import
  +---x ldapca
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
    |   +---w file        string
  +---x syslogca
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
    |   +---w file        string
  +---x radiusca
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
    |   +---w file        string
  +---x sshx509v3ca
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
    |   +---w file        string
  +---x oauth2pkicert
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
    |   +---w file        string
  +---x httpsclientca
    |   +---w input
    |   +---w protocol    enumeration
    |   +---w source-ip?  inet:ip-address
    |   +---w user         string
    |   +---w password?   string
    |   +---w host         inet:host
    |   +---w directory    string
    |   +---w use-vrf?    common-def:use-vrf
```

```
|   +---w file          string
+---x gnmiclientca
    +---w input
        +---w protocol      enumeration
        +---w source-ip?    inet:ip-address
        +---w user           string
        +---w password?     string
        +---w host            inet:host
        +---w directory       string
        +---w use-vrf?       common-def:use-vrf
        +---w file           string
```

brocade-dai

Top-level container

```
module: brocade-dai
  +-rw dai-config
    +-rw arp
      +-rw access-list* [acl-name]
        +-rw acl-name      dai-acl-policy-name
      +-rw permit
        +-rw permit-list* [ip-type host-ip mac-type host-mac]
          +-rw ip-type      enumeration
          +-rw host-ip      inet:ipv4-address
          +-rw mac-type     enumeration
          +-rw host-mac     string
```

brocade-diagnostics

This data model enables or disables power-on self-test (POST) and actions to initiate the tests listed in [Table 5](#).

Table 5: Diagnostic actions

Action	Purpose
burninerrclear	Clears the errors that are stored in the nonvolatile storage on the slot during the burn-in process.
clearerror	Clears the diagnostics failure status.
portledtest	Runs various action modes on the port LEDs and validates the functionality.
portloopbacktest	Sends frames between various ASICs on the switch and validates the ASIC functionality.
post	Performs power-on self-test.
prbstest	Performs pseudo-random binary-sequence tests.
setcycle	Configures all the parameters required for the system verification test.
setdbg	Changes the debug level.
systemverification	Runs a combination of various hardware diagnostic tests.
turboramtest	Performs a turbo static RAM (SRAM) test of the ASIC chips.

Top-level container

```
module: brocade-diagnostics
  +-rw diag
    +--x diag-install
      +--ro output
      +--ro diag-install-msg? string
```

brocade-dotlag

Top-level container

```

module: brocade-dotlag
  +-rw cfm-config
  +-rw protocol
    +-rw cfm!
      +-rw y1731!
        |  +-rw test-profile* [test-profile]
        |  |  +-rw test-profile          string
        |  |  +-rw profile-type?       y1731-profile-type
        |  |  +-rw test-profile-params
        |  |    +-rw tx-interval?      y1731-profile-tx-interval
        |  |    +-rw measurement-interval? uint32
        |  |    +-rw cos?             uint8
        |  |    +-rw tx-frame-count?   uint32
        |  |    +-rw timeout?         uint8
        |  |    +-rw start
        |  |      |  +-rw start-type?    schedule-type
        |  |      |  +-rw start-time?   time-in-hhmmss
        |  |      |  +-rw start-periodic? y1731-start-periodic
        |  |    +-rw stop
        |  |      |  +-rw stop-type?    schedule-type
        |  |      |  +-rw stop-time?   time-in-hhmmss
        |  |    +-rw slm-threshold
        |  |      |  +-rw forward
        |  |        |  |  +-rw thr-fwd-avg-value?  uint32
        |  |        |  |  +-rw thr-fwd-max-value?  uint32
        |  |      |  +-rw backward
        |  |        |  |  +-rw thr-bwd-avg-value?  uint32
        |  |        |  |  +-rw thr-bwd-max-value?  uint32
        |  |    +-rw dmm-threshold
        |  |      |  +-rw thr-avg-value?  uint32
        |  |      |  +-rw thr-max-value?  uint32
        |  +-rw action-profile-name* [action-profile-name]
          +-rw action-profile-name  string
          +-rw event
            +-rw ccm-up
            |  +-rw ccm-up-actions?  action-profile-bitmap
            +-rw ccm-down
            |  +-rw ccm-down-actions?  action-profile-bitmap
            +-rw avg-threshold
            |  +-rw avg-threshold-actions?  action-profile-bitmap
            +-rw max-threshold
            |  +-rw max-threshold-actions?  action-profile-bitmap
        +-rw domain-name* [domain-name]
          +-rw domain-name      string
          +-rw domain-id        uint32
          +-rw domain-level     uint32
        +-rw ma-name* [ma-name]
          +-rw ma-name          string
          +-rw ma-id            uint32
          +-rw (vid-type)?
            |  +-:(vlan)
            |    |  +-rw ma-vlan-vid?      uint32
            |  +-:(bridgeDomain)
            |    |  +-rw ma-bd-vid?        uint32
          +-rw ma-priority?
          +-rw cfm-ma-sub-commands
            +-rw ccm-interval?      ccm-interval-type
            +-rw mip-policy?        mip-policy-type

```

```
+--rw maid-icc-format
|   +---rw icc-name?    string
|   +---rw umc-name?    string
+---rw maid-format?          maid-format-type
+---rw mep* [mep-id]
|   +---rw mep-id           uint32
|   +---rw mep-down-up       mep-down-up-type
|   +---rw vlan?            uint32
|   +---rw inner-vlan?      uint32
|   +---rw mep-intf-type?   dot1ag-interface-type
|   +---rw mep-intf-name?   dot1ag-interface-name
+---rw cfm-mep-sub-commands
|   +---rw tlv-type?        ccm-tlv-type
|   +---rw client-interface
|     +---rw client-intf-type?  dot1ag-interface-type
|     +---rw client-intf-name? dot1ag-interface-name
|     +---rw csf-type?        eth-csf-type
|     +---rw tx-period?       csf-tx-period
+---rw remote-mep* [remote-mep]
|   +---rw remote-mep         uint32
|   +---rw rmeep-test-profile* [rmeep-test-profile mode]
|     +---rw rmeep-test-profile   string
|     +---rw mode                y1731-profile-mode
+---rw action-profile-association?  string
```

brocade-dot1x

IEEE 802.1X is an IEEE standard for port-based Network Access Control (PNAC). It is a networking protocol that provides an authentication mechanism to devices attempting to attach to a LAN or WLAN. IEEE 802.1X defines the encapsulation of the Extensible Authentication Protocol (EAP) over IEEE 802, which is known as EAP over LAN or EAPoL.

802.1X involves three parties:

- Supplicant—A device that connects to a network
- Authenticator—A network device such as an Ethernet switch
- Authentication server—A host running software that supports RADIUS and EAP

This module defines the parameters used for the PNAC.

Top-level container

```
module: brocade-dot1x
  +-rw dot1x
    +-rw enable?    empty
    +-rw test
      +-rw timeout?  dot1x-readiness-test-timeout-interval
```

External augmentations

```
module: brocade-interface
  +-rw dot1x:dot1x
    |  |  |  +-rw dot1x:authentication?          empty
    |  |  |  +-rw dot1x:port-control?           enumeration
    |  |  |  +-rw dot1x:protocol-version?        uint32
    |  |  |  +-rw dot1x:quiet-period?            uint32
    |  |  |  +-rw dot1x:reauthMax?              uint32
    |  |  |  +-rw dot1x:max-req?                uint32
    |  |  |  +-rw dot1x:reauthentication?         empty
    |  |  |  +-rw dot1x:filter-strict-security? empty
    |  |  |  +-rw dot1x:timeout
      |  |  |    +-rw dot1x:re-authperiod?       dot1x-reauth-timeout-interval
      |  |  |    +-rw dot1x:server-timeout?       dot1x-server-timeout-interval
      |  |  |    +-rw dot1x:supp-timeout?         dot1x-supp-timeout-interval
      |  |  |    +-rw dot1x:tx-period?           dot1x-tx-timeout-interval
```

brocade-entity

RPCs

```
module: brocade-entity
rpcs:
  +---x get-contained-in-ID
    +--ro output
      +--ro contained-in-ID?  common-def:name-string64
```

brocade-event-handler

Top-level container

```
module: brocade-event-handler
  +-rw event-handler
    +-rw event-handler-list* [name]
      |  +-rw name          common-def:name-string32
      |  +-rw description?   string
      |  +-rw trigger* [trigger-id]
      |  |  +-rw trigger-id   uint32
      |  |  +-rw (trigger-choice)?
      |  |  |  +---:(raslog)
      |  |  |  +-rw raslog
      |  |  |  +-rw raslog?   common-def:name-string32
      |  |  |  +-rw pattern?   string
      |  +-rw action
      |  |  +-rw (action-choice)?
      |  |  |  +---:(python-script)
      |  |  |  +-rw python-script? common-def:name-string32
    +---x abort
      |  +---w input
      |  |  +-w action   common-def:name-string32
    +-rw activate
      +-rw name* [name]
        +-rw name          common-def:name-string32
        +-rw delay?        uint32
        +-rw iterations?   uint32
        +-rw interval?     uint32
        +-rw trigger-mode? enumeration
        +-rw trigger-function
          |  +-rw trigger-function? enumeration
          |  +-rw time-window      uint32
        +-rw action-timeout?  uint32
```

brocade-erp

Top-level container

```

module: brocade-erp
  +-rw erp* [erp-id]
    +-rw erp-id                      uint16
    +-rw left-interface
      |  +-rw left-interface-vlan?   uint32
      |  +-rw left-intf-type?      erp-interface-type
      |  +-rw left-intf-name?      erp-interface-name
    +-rw right-interface
      |  +-rw right-interface-vlan?   uint32
      |  +-rw right-intf-type?      erp-interface-type
      |  +-rw right-intf-name?      erp-interface-name
    +-rw dot1lag-compliance
      |  +-rw dot1lag-left-interface
        |    |  +-rw dot1lag-left-domain-name?   string
        |    |  +-rw dot1lag-left-ma-name?      string
        |    |  +-rw dot1lag-left-mep?          uint32
        |    |  +-rw dot1lag-left-rmep-id?     uint32
      |  +-rw dot1lag-right-interface
        |    |  +-rw dot1lag-right-domain-name?   string
        |    |  +-rw dot1lag-right-ma-name?      string
        |    |  +-rw dot1lag-right-mep?          uint32
        |    |  +-rw dot1lag-right-rmep-id?     uint32
    +-rw rpl-owner?                  empty
    +-rw version?                   uint32
    +-rw raps-mel?                 uint8
    +-rw raps-default-mac?         empty
    +-rw sub-ring!
      |  +-rw parent-ring-id?       uint32
    +-rw raps-propagate-tc?        empty
    +-rw non-revertive-mode?      empty
    +-rw fast-wtr-time?           empty
    +-rw rpl
      |  +-rw rpl-vlan?            uint32
      |  +-rw rpl-intf-type?      erp-interface-type
      |  +-rw rpl-intf-name?      erp-interface-name
    +-rw force-switch
      |  +-rw fs-vlan?            uint32
      |  +-rw fs-intf-type?      erp-interface-type
      |  +-rw fs-intf-name?      erp-interface-name
    +-rw guard-time?               uint32
    +-rw wtr-time?                 uint32
    +-rw wtb-time?                 uint32
    +-rw holdoff-time?             uint32
    +-rw message-interval?        uint32
    +-rw enable?                  empty
    +-rw manual-switch
      |  +-rw ms-vlan?            uint32
      |  +-rw ms-intf-type?      erp-interface-type
      |  +-rw ms-intf-name?      erp-interface-name
    +-rw name?                     string
    +-rw fast-convergence?        empty

```

brocade-firmware

This module supports the custom actions listed in the table below.

Table 6: Custom actions for firmware version management

Action	Purpose
<ftp>	Download firmware with FTP.
<scp>	Download firmware with SCP.
<usb>	Download firmware from a USB device.
<interactive>	Download firmware interactively.
<commit>	Commits a firmware upgrade after evaluation.
<restore>	Restores a firmware version.
<sync>	Synchronizes the firmware with its peer.
<fastboot>	Reboots the control processor (CP), bypassing the power-on self-test (POST).

Top-level container

```
module: brocade-firmware
  +-rw firmware
    |  +-rw download
    |  |  +---x ftp
    |  |  |  +---w input
    |  |  |  |  +---w user          string
    |  |  |  |  +---w password?    string
    |  |  |  |  +---w host          string
    |  |  |  |  +---w directory    string
    |  |  |  |  +---w file?        string
    |  |  |  |  +---w (options) ?
    |  |  |  |  |  +---:(manual)
    |  |  |  |  |  |  +---w manual?      empty
    |  |  |  |  |  |  +---w noreboot?    empty
    |  |  |  |  |  |  +---w nocommitt?   empty
    |  |  |  |  |  +---:(noactivate)
    |  |  |  |  |  |  +---w noactivate?  empty
    |  |  |  |  |  +---:(coldboot)
    |  |  |  |  |  |  +---w coldboot?    empty
    |  |  |  |  +---w use-vrf?       common-def:use-vrf
    |  |  |  +---ro output
    |  |  |  |  +---ro fwdl-tid?     int32
    |  |  |  |  +---ro fwdl-status?   int32
    |  |  |  |  +---ro fwdl-msg?     string
    |  |  +---x scp
    |  |  |  +---w input
    |  |  |  |  +---w user          string
    |  |  |  |  +---w password?    string
    |  |  |  |  +---w host          string
    |  |  |  |  +---w directory    string
    |  |  |  |  +---w file?        string
    |  |  |  |  +---w (options) ?
    |  |  |  |  |  +---:(manual)
    |  |  |  |  |  |  +---w manual?      empty
    |  |  |  |  |  |  +---w noreboot?    empty
    |  |  |  |  |  |  +---w nocommitt?   empty
```

```

| | | | | +--:(noactivate)
| | | | | | +---w noactivate?    empty
| | | | | +--:(coldboot)
| | | | | | +---w coldboot?    empty
| | | | | +---w use-vrf?      common-def:use-vrf
| | | +--ro output
| | | | +---ro fwdl-tid?     int32
| | | | +---ro fwdl-status?   int32
| | | | +---ro fwdl-msg?      string
| | | +---x http
| | | | +---w input
| | | | | +---w host         string
| | | | | +---w directory    string
| | | | | +---w file?        string
| | | | | +---w (options)?
| | | | | | +--:(manual)
| | | | | | | +---w manual?   empty
| | | | | | | +---w noreboot?  empty
| | | | | | | +---w nocommitt? empty
| | | | | +--:(noactivate)
| | | | | | +---w noactivate? empty
| | | | | +--:(coldboot)
| | | | | | +---w coldboot?   empty
| | | | +--ro output
| | | | | +---ro fwdl-tid?   int32
| | | | | +---ro fwdl-status? int32
| | | | | +---ro fwdl-msg?    string
| | | +---x tftp
| | | | +---w input
| | | | | +---w host         string
| | | | | +---w directory    string
| | | | | +---w file?        string
| | | | | +---w (options)?
| | | | | | +--:(manual)
| | | | | | | +---w manual?   empty
| | | | | | | +---w noreboot?  empty
| | | | | | | +---w nocommitt? empty
| | | | | +--:(noactivate)
| | | | | | +---w noactivate? empty
| | | | | +--:(coldboot)
| | | | | | +---w coldboot?   empty
| | | | | +---w use-vrf?     common-def:use-vrf
| | | | +--ro output
| | | | | +---ro fwdl-tid?   int32
| | | | | +---ro fwdl-status? int32
| | | | | +---ro fwdl-msg?    string
| | | +---x sftp
| | | | +---w input
| | | | | +---w user         string
| | | | | +---w password?    string
| | | | | +---w host         string
| | | | | +---w directory    string
| | | | | +---w file?        string
| | | | | +---w (options)?
| | | | | | +--:(manual)
| | | | | | | +---w manual?   empty
| | | | | | | +---w noreboot?  empty
| | | | | | | +---w nocommitt? empty
| | | | | +--:(noactivate)
| | | | | | +---w noactivate? empty
| | | | | +--:(coldboot)
| | | | | | +---w coldboot?   empty
| | | | | +---w port?        int32
| | | | | +---w host-key-check? empty

```

```

| | | | +---w use-vrf?           common-def:use-vrf
| | | +--ro output
| | | | +--ro fwdl-tid?      int32
| | | | +--ro fwdl-status?   int32
| | | | +--ro fwdl-msg?      string
| | +---x usb
| | | +---w input
| | | | +---w directory     string
| | | | +---w (options)?
| | | | | +---:(manual)
| | | | | | +---w manual?    empty
| | | | | | +---w noreboot?  empty
| | | | | | +---w nocommitt? empty
| | | | | +---:(noactivate)
| | | | | | +---w noactivate? empty
| | | | | +---:(coldboot)
| | | | | | +---w coldboot?  empty
| | | +--ro output
| | | | +--ro fwdl-tid?      int32
| | | | +--ro fwdl-status?   int32
| | | | +--ro fwdl-msg?      string
| | +---x interactive
| | | +--ro output
| | | | +--ro result?      string
| | +---rw default-config
| | | +---x ftp
| | | | +---w input
| | | | | +---w user        string
| | | | | | +---w password? string
| | | | | | +---w host       string
| | | | | | +---w directory  string
| | | | | | +---w file?     string
| | | | | | +---w manual?   empty
| | | | | | +---w noreboot? empty
| | | | | | +---w use-vrf?  common-def:use-vrf
| | | | +--ro output
| | | | | +--ro fwdl-tid?    int32
| | | | | +--ro fwdl-status? int32
| | | | | +--ro fwdl-msg?    string
| | | +---x scp
| | | | +---w input
| | | | | +---w user        string
| | | | | | +---w password? string
| | | | | | +---w host       string
| | | | | | +---w directory  string
| | | | | | +---w file?     string
| | | | | | +---w manual?   empty
| | | | | | +---w noreboot? empty
| | | | | | +---w use-vrf?  common-def:use-vrf
| | | | +--ro output
| | | | | +--ro fwdl-tid?    int32
| | | | | +--ro fwdl-status? int32
| | | | | +--ro fwdl-msg?    string
| | | +---x sftp
| | | | +---w input
| | | | | +---w user        string
| | | | | | +---w password? string
| | | | | | +---w host       string
| | | | | | +---w directory  string
| | | | | | +---w file?     string
| | | | | | +---w manual?   empty
| | | | | | +---w noreboot? empty
| | | | | | +---w use-vrf?  common-def:use-vrf
| | | | +--ro output

```

```

| | | |   +--ro fwdl-tid?      int32
| | | |   +--ro fwdl-status?  int32
| | | |   +--ro fwdl-msg?    string
| | | +---x http
| | | |   +---w input
| | | |   | +---w host       string
| | | |   | +---w directory  string
| | | |   | +---w file?     string
| | | |   | +---w manual?   empty
| | | |   | +---w noreboot? empty
| | | |   +---ro output
| | | |     +--ro fwdl-tid?  int32
| | | |     +--ro fwdl-status? int32
| | | |     +--ro fwdl-msg?  string
| | | +---x tftp
| | | |   +---w input
| | | |   | +---w host       string
| | | |   | +---w directory  string
| | | |   | +---w file?     string
| | | |   | +---w manual?   empty
| | | |   | +---w noreboot? empty
| | | |   | +---w use-vrf?  common-def:use-vrf
| | | |   +---ro output
| | | |     +--ro fwdl-tid?  int32
| | | |     +--ro fwdl-status? int32
| | | |     +--ro fwdl-msg?  string
| | | +---x usb
| | | |   +---w input
| | | |   | +---w directory  string
| | | |   | +---w manual?   empty
| | | |   | +---w noreboot? empty
| | | |   +---ro output
| | | |     +--ro fwdl-tid?  int32
| | | |     +--ro fwdl-status? int32
| | | |     +--ro fwdl-msg?  string
| | +---rw fullinstall
| |   +---x ftp
| |   | +---w input
| |   |   +---w user       string
| |   |   +---w password?  string
| |   |   +---w host       string
| |   |   +---w directory  string
| |   |   +---w file?     string
| |   |   +---w manual?   empty
| |   |   +---w noreboot? empty
| |   |   +---w use-vrf?  common-def:use-vrf
| |   |   +---ro output
| |   |     +--ro fwdl-tid?  int32
| |   |     +--ro fwdl-status? int32
| |   |     +--ro fwdl-msg?  string
| | +---x scp
| |   +---w input
| |   | +---w user       string
| |   | +---w password?  string
| |   | +---w host       string
| |   | +---w directory  string
| |   | +---w file?     string
| |   | +---w manual?   empty
| |   | +---w noreboot? empty
| |   | +---w use-vrf?  common-def:use-vrf
| |   | +---ro output
| |   |     +--ro fwdl-tid?  int32
| |   |     +--ro fwdl-status? int32
| |   |     +--ro fwdl-msg?  string

```

```

| | | +---x sftp
| | | | +---w input
| | | | | +---w user          string
| | | | | +---w password?    string
| | | | | +---w host          string
| | | | | +---w directory    string
| | | | | +---w file?        string
| | | | | +---w manual?      empty
| | | | | +---w noreboot?    empty
| | | | | +---w use-vrf?     common-def:use-vrf
| | | | +---ro output
| | | | | +---ro fwdl-tid?    int32
| | | | | +---ro fwdl-status? int32
| | | | | +---ro fwdl-msg?    string
| | | +---x tftp
| | | | +---w input
| | | | | +---w host          string
| | | | | +---w directory    string
| | | | | +---w file?        string
| | | | | +---w manual?      empty
| | | | | +---w noreboot?    empty
| | | | | +---w use-vrf?     common-def:use-vrf
| | | | +---ro output
| | | | | +---ro fwdl-tid?    int32
| | | | | +---ro fwdl-status? int32
| | | | | +---ro fwdl-msg?    string
| | | +---x usb
| | | | +---w input
| | | | | +---w directory    string
| | | | | +---w manual?      empty
| | | | | +---w noreboot?    empty
| | | | +---ro output
| | | | | +---ro fwdl-tid?    int32
| | | | | +---ro fwdl-status? int32
| | | | | +---ro fwdl-msg?    string
| | +---x commit
| | | +---ro output
| | | | +---ro result?      string
| | +---x restore
| | | +---ro output
| | | | +---ro result?      string
| | +---x sync
| | | +---ro output
| | | | +---ro result?      string
| | +---x activate
| | | +---ro output
| | | | +---ro overall-status? int32
| | | | +---ro overall-error-msg? string
| | | | +---ro status?       int32
| | +---rw auto-sync
| | | +---x enable
| | | | +---ro output
| | | | | +---ro result?      string
| | | +---x disable
| | | | +---ro output
| | | | | +---ro result?      string
| | +---rw peripheral-update-option
| | | +---x peripheral-update-cpld
| | | +---x peripheral-update-fpga
| | +---rw peripheral-update-bmc-option
| | | +---x peripheral-update-bmc-all
| | | +---x peripheral-update-bmc-boot
| | | +---x peripheral-update-bmc-application
| | +---rw update

```

```

|   +-rw onie
|     +---x scp
|       |   +---w input
|       |     |   +---w user          string
|       |     |   +---w password?    string
|       |     |   +---w host         string
|       |     |   +---w directory    string
|       |     |   +---w file?        string
|       |     |   +---w use-vrf?    common-def:use-vrf
|       |   +---ro output
|       |         +---ro upgrade-msg?  string
|     +---x ftp
|       |   +---w input
|       |     |   +---w user          string
|       |     |   +---w password?    string
|       |     |   +---w host         string
|       |     |   +---w directory    string
|       |     |   +---w file?        string
|       |     |   +---w use-vrf?    common-def:use-vrf
|       |   +---ro output
|       |         +---ro upgrade-msg?  string
|     +---x sftp
|       |   +---w input
|       |     |   +---w user          string
|       |     |   +---w password?    string
|       |     |   +---w host         string
|       |     |   +---w directory    string
|       |     |   +---w file?        string
|       |     |   +---w use-vrf?    common-def:use-vrf
|       |   +---ro output
|       |         +---ro upgrade-msg?  string
|   +-rw write
|     +---x erase
|       +---w input
|         |   +---w (write_erase_options)?
|         |         +---:(erase_all)
|         |           |   +---w erase_all?            empty
|         |           +---:(erase_all_skip_license)
|             |               +---w erase_all_skip_license?  empty
|       +---ro output
|         +---ro fwdl-tid?      int32
|         +---ro fwdl-status?   int32
|         +---ro fwdl-msg?     string
|   +-rw reboot
|     +---x fastboot
|   +-rw dhcp
|     +---rw ztp
|       +---x log
|         |   +---ro output
|         |         +---ro dad-cmd-msg?  string
|       +---x cancel
|         +---ro output
|           +---ro dad-cmd-msg?  string
|   +-rw onie
|     +---x onie-install
|       +---ro output
|         +---ro onie-install-msg?  string
|   +-rw bootmenu
|     +---x menu-enable
|       +---ro output
|         +---ro menu-enable-msg?  string
|     +---x menu-disable
|       +---ro output
|         +---ro menu-disable-msg?  string

```

RPCs

```

rpcs:
  +---x fwdl-status
  | +---w input
  | | +---w fwdl-tid?    int32
  | +--ro output
  |   +---ro number-of-entries?  uint32
  |   +---ro fwdl-state?      enumeration
  |   +---ro fwdl-entries*
  |     +---ro index?          uint32
  |     +---ro message-id?     int32
  |     +---ro date-and-time-info? string
  |     +---ro message?        string
  |     +---ro blade-slot?     int32
  |     +---ro blade-swbd?    int32
  |     +---ro blade-name?    string
  |     +---ro blade-state?   enumeration
  |     +---ro blade-app?     string
  +---x activate-status
  | +---ro output
  |   +---ro overall-status?  int32
  |   +---ro overall-error-msg? string
  |   +---ro status?         int32
  +---x firmware-download
  | +---w input
  | | +---w fullinstall?    empty
  | | +---w (protocol-type)?
  | | | +---:(scp-protocol)
  | | | | +---w scp
  | | | |   +---w user       string
  | | | |   +---w password?  string
  | | | |   +---w host       string
  | | | |   +---w directory  string
  | | | |   +---w file?      string
  | | | +---:(ftp-protocol)
  | | | | +---w ftp
  | | | |   +---w user       string
  | | | |   +---w password?  string
  | | | |   +---w host       string
  | | | |   +---w directory  string
  | | | |   +---w file?      string
  | | | +---:(sftp-protocol)
  | | | | +---w sftp
  | | | |   +---w user       string
  | | | |   +---w password?  string
  | | | |   +---w host       string
  | | | |   +---w directory  string
  | | | |   +---w file?      string
  | | | |   +---w port?      int32
  | | | |   +---w host-key-check? empty
  | | | +---:(usb-protocol)
  | | | | +---w usb
  | | | |   +---w directory  string
  | | +---w coldboot?      empty
  | +---ro output
  |   +---ro fwdl-tid?    int32
  |   +---ro fwdl-status?  int32
  |   +---ro fwdl-msg?     string
  +---x firmware-commit
  | +---ro output
  |   +---ro result?      string
  +---x firmware-restore
  | +---ro output

```

```
|     +--ro result?    string
+---x firmware-download-sanity
    +---w input
    |   +---w (protocol-type)?
    |   |   +---:(scp-protocol)
    |   |   |   +---w scp
    |   |   |       +---w user        string
    |   |   |       +---w password?  string
    |   |   |       +---w host        string
    |   |   |       +---w directory   string
    |   |   |       +---w file?      string
    |   |   +---:(ftp-protocol)
    |   |   |   +---w ftp
    |   |   |       +---w user        string
    |   |   |       +---w password?  string
    |   |   |       +---w host        string
    |   |   |       +---w directory   string
    |   |   |       +---w file?      string
    |   |   +---:(sftp-protocol)
    |   |   |   +---w sftp
    |   |   |       +---w user        string
    |   |   |       +---w password?  string
    |   |   |       +---w host        string
    |   |   |       +---w directory   string
    |   |   |       +---w file?      string
    |   |   |       +---w port?      int32
    |   |   |       +---w host-key-check? empty
    |   |   +---:(usb-protocol)
    |   |       +---w usb
    |   |           +---w directory   string
+--ro output
    +---ro fwdl-tid?      int32
    +---ro fwdl-status?    int32
    +---ro fwdl-msg?       string
    +---ro fwdl-version?   string
```

brocade-firmware-ext

RPCs

Displays firmware version information:

```
rpcs:  
  +--x show-firmware-version  
    +-ro output  
      +--ro show-firmware-version*  
        +-ro os-name?          string  
        +-ro os-version?       string  
        +-ro copy-right-info?  string  
        +-ro build-time?       string  
        +-ro install-time?     string  
        +-ro kernel-version?   string  
        +-ro firmware-full-version?  string  
        +-ro control-processor-vendor? string  
        +-ro control-processor-chipset? string  
        +-ro control-processor-cpucores? string  
        +-ro control-processor-microcode? string  
        +-ro control-processor-memory?  string  
        +-ro system-upptime?      string  
        +-ro node-info*  
          +-ro slot-no?          uint32  
          +-ro node-instance-no?  uint32  
          +-ro node-type?         node-type-enum  
          +-ro is-active-cp?      boolean  
          +-ro firmware-version-info*  
            +-ro application-name? string  
            +-ro primary-version?   string  
            +-ro secondary-version? string
```

brocade-ha

Top-level container

```

module: brocade-ha
  +-rw ha
    |  +-rw process-restart
    |    +-rw mpls?      empty
    |    +-rw bgp?       empty
    |    +-rw isis?      empty
    |    +-rw ospfv2?    empty
    |    +-rw ospfv3?    empty
  +-rw ha-action
    |  +-rw ha
      |    +---x enable
      |      +---w input
      |      |    +---w force?  empty
      |    +---x disable
      |      +---w input
      |      |    +---w force?  empty
      |    +---x dump
      |    +---x chassisreboot
      |    +---x failover
      |      +---w input
      |      |    +---w force?  empty
    |  +-rw sync
      +---x start
      |    +---ro output
      |    |    +---ro result?  string
      +---x stop
        +---ro output
        |    +---ro result?  string
  +-rw system-reload
    +---x reload
      +---w input
      |    +---w system?      empty
      |    +---w powercycle?   empty
      |    +---w diag-mode?    empty
      |    +---w standby?      empty
      +---ro output
        +---ro status-string?  string

```

RPCs

```

rpcs:
  +---x reload
    +---w input
      +---w system?      empty
      +---w diag-mode?    empty
      +---w standby?      empty

```

brocade-hardware

Top-level container

```

module: brocade-hardware
  +-rw hardware
    | +-rw connector* [name]
    | | +-rw name          connector-type
    | | +-rw breakout!
    | | | +-rw cage-mode?   connector-mode-type
    | | +-rw insight
    | | | +-rw insmode?    empty
    | +-rw port-group* [name]
    | | +-rw name           interface:port-group-type
    | | +-rw portgroup-speed?  portgroup-speed-type
    +-rw profile
      +-rw tcam
        | +-rw predefined
        | | +-rw tcam_profiletype?  tcam-profile-subtype
        | +-rw cam-share
        | | | +-rw 12-ingress-acl?   empty
        | | | +-rw 13-v4-ingress-acl? empty
        | | | +-rw 13-v6-ingress-acl? empty
        | | | +-rw 13-v4-pbr?       empty
        | | | +-rw 13-v6-pbr?       empty
        | +-rw limit
        | | +-rw l2l3v4-app     uint32
        | | +-rw v6-app         uint32
        | | +-rw flex-acl       uint32
        | +-rw vxlan-vpls-enable? empty
      +-rw route
        | +-rw predefined
        | | +-rw route_profiletype?  route-profile-subtype
        | | +-rw enhance_parameter
        | | | +-rw hwopt_enable?    feature-state-subtype
        | | | +-rw multi_vrf?      feature-state-subtype
        | | | +-rw v4fibcomp_enable? feature-state-subtype
        | | | +-rw v6fibcomp_enable? feature-state-subtype
        | +-rw routing_parameter
          +-rw maximum-paths?  ecmp-subtype
          +-rw route-feature
            +-rw ipv6-max-prefix-64? empty
            +-rw urpf?           empty
      +-rw qos
        | +-rw predefined
        | | +-rw qos_profiletype?  qos-profile-subtype
      +-rw lag
        | +-rw predefined
        | | +-rw lag_profiletype?  lag-profile-subtype
      +-rw counters
        | +-rw predefined
        | | +-rw counters_profiletype?  counters-profile-subtype
      +-rw etcam
        | +-rw predefined
        | | +-rw etcam_profiletype?  etcam-profile-subtype
  +-rw hardware-action
    +-rw hardware
      +---x media-database
        | +---w input
        | | +---w activate    empty
      +---x smt
        | +---w input

```

```
+---w (opt)?
+--: (enable)
|   +---w enable      empty
+--: (disable)
    +---w disable    empty
```

brocade-http-config

Top-level container

```
module: brocade-http-config
  +-rw http-sa
    +-rw http
      +-rw server
        +-rw http-vrf-cont
          +-rw use-vrf* [use-vrf-name]
            +-rw use-vrf-name      string
            +-rw http-vrf-shutdown? empty
```

External augmentations

```
module: brocade-common-def
  +-rw show
    |  +-rw http-config:http
    |  |  +-rw http-config:server
```

brocade-http-redirect

RPCs

```
rpcs:  
  +---x set-http-application-url  
    +---w input  
      |  +---w config-http-app-url  
      |  +---w url          string  
      |  +---w op-type     uint32  
    +--ro output  
      +--ro status-code   int32  
      +--ro status-string? string
```

brocade-igmp-snooping

Top-level container

```
module: brocade-igmp-snooping
  +-rw igmp-snooping
    +-rw ip
      +-rw igmp
        +-rw router-alert-check-disable?    empty
        +-rw ssm-map
          +-rw igmps-ssmmap?           empty
          +-rw igmps-prefix-list* [igmps-prefix-list-name igmps-prefix-src-addr]
            +-rw igmps-prefix-list-name   ipv4-prefix-name-t
            +-rw igmps-prefix-src-addr   inet:ipv4-address
```

External augmentations

```
module: brocade-interface
  +-rw igmp:igmp-phy-intf-cfg
    | | | | +-rw igmp:igmp
    | | | |   +-rw igmp:igmp13-last-member-query-interval?    igmp-snooping:lmqt-type
    | | | |   +-rw igmp:igmp13-query-interval?                igmp-snooping:qi-type
    | | | |   +-rw igmp:igmp13-query-max-response-time?    igmp-snooping:qmrt-type
    | | | |   +-rw igmp:igmp13-immediate-leave?           empty
    | | | |   +-rw igmp:igmp13-version?                  uint32
    | | | |   +-rw igmp:igmp13-static-group [igmp13-sg-addr]
    | | | |     +-rw igmp:igmp13-sg-addr   inet:ipv4-address
```

brocade-interface

The following table lists the Ethernet interfaces and other entities modeled by high-level nodes in this management module.

Table 7: Entities managed through brocade-interface module

High-level node name	Description
interface/ethernet	Physical Ethernet interfaces
interface/management	Models the management port or management interfaces
interface/port-channel	Models port-channel or LAG interfaces
interface-vlan	Models Layer 2 VLAN interfaces

This module provides the mechanism to support the following actions:

- Discover and characterize the interface sublayers.
- Configure various attributes of these interfaces.
- Structure the interfaces so that various Layer 2 or Layer 3 access and security policies, network discovery policies, QoS policies, and link aggregation policies can be applied using other modules supported by the managed entity.

Top-level container

```
module: brocade-interface
  +-rw interface
    |  +-rw ethernet* [name]
    |  |  +-rw name                                     config-interface-type
    |  |  +-rw long-distance-isl?                      enumeration
    |  |  +-rw cee?                                     cee-map-name-type
    |  |  +-rw loopback?                                enumeration
    |  |  +-rw speed?                                   enumeration
    |  |  +-rw fec
    |  |    |  +-rw fec-mode?   fec-mode-type
    |  |    +-ro ifindex?                             uint64
    |  |    +-rw description?                        string
    |  |    +-rw shutdown?                           empty
    |  |    +-rw channel-group
    |  |      |  +-rw port-int?   portchannel-type
    |  |      |  +-rw mode?       po-mode
    |  |      |  +-rw type?       po-type
    |  |      +-rw mtu?                                 mtu-type
    |  |      +-rw route-only?                         empty
    |  |      +-rw tag-type?                           tpid-type
    |  |      +-rw maintenance-mode!
    |  |        |  +-rw rate-monitoring!
    |  |          |  +-rw threshold?   maint-mode-threshold
    |  |      +-rw switchport-basic
    |  |        |  +-rw basic?     empty
    |  |      +-rw switchport
    |  |        |  +-rw mode
    |  |          |  |  +-rw vlan-mode?   12-mode-type
    |  |          |  +-rw port-security!
    |  |            |  |  +-rw port-sec-max?   uint32
```

```

    | | | | +--rw port-sec-violation?          port-sec-violation
    | | | | +--rw port-security-mac-address* [mac-address port-sec-vlan]
    | | | |   | +--rw mac-address      mac-address-type
    | | | |   | +--rw port-sec-vlan    vlan-type
    | | | | +--rw sticky
    | | | |   | +--rw sticky-flag?      empty
    | | | |   | +--rw port-security-mac-address* [mac-address port-sec-vlan]
    | | | |     | +--rw mac-address      mac-address-type
    | | | |     | +--rw port-sec-vlan    vlan-type
    | | | | +--rw shutdown-time?        uint32
    | | | +--rw access
    | | |   | +--rw accessvlan?      vlan-type
    | | |   | +--rw rspan-access
    | | |     | +--rw rspan-access-vlan?  vlan-type
    | | | x--rw access-mac-vlan-classification
    | | |   | +--rw access
    | | |     | +--rw vlan* [access-vlan-id access-mac-address]
    | | |       | +--rw access-vlan-id    vlan-type
    | | |       | +--rw access-mac-address  mac-address-type
    | | | x--rw access-mac-group-vlan-classification
    | | |   | +--rw access
    | | |     | +--rw vlan* [access-vlan-id access-mac-group]
    | | |       | +--rw access-vlan-id    vlan-type
    | | |       | +--rw access-mac-group  mac-group-id-type
    | | +--rw trunk
    | |   | +--rw allowed
    | |   | +--rw vlan
    | |     | | +--rw all?      empty
    | |     | | +--rw none?     empty
    | |     | | +--rw add?      ui32-vlan-20k-range
    | |     | | +--rw except?   ui32-1k-vlan-range
    | |     | | +--rw remove?   ui32-1k-vlan-range
    | |     | x--rw vlanoper
    | |     |   | +--rw vlan
    | |     |     | +--rw add?      ui32-vlan-range
    | |     |     | +--rw remove?   ui32-vlan-range
    | |     | +--rw rspan-vlan
    | |     |   | +--rw add-rspan-trunk-vlan?   ui32-1k-vlan-range
    | |     |   | +--rw remove-rspan-trunk-vlan?  ui32-1k-vlan-range
    | |     | x--rw trunk-rspan-vlan-classification
    | |     |   | +--rw rspan-vlan
    | |     |     | +--rw add* [trunk-vlan-id trunk-ctag-id]
    | |     |       | +--rw trunk-vlan-id  non-dot1q-vlan-type
    | |     |       | +--rw trunk-ctag-id   dot1q-vlan-type
    | |     |     | +--rw remove* [trunk-vlan-id trunk-ctag-id]
    | |     |       | +--rw trunk-vlan-id  non-dot1q-vlan-type
    | |     |       | +--rw trunk-ctag-id   dot1q-vlan-type
    | |     | x--rw trunk-vlan-classification
    | |     |   | +--rw allowed
    | |     |     | +--rw vlan
    | |     |       | +--rw add* [trunk-vlan-id]
    | |     |         | +--rw trunk-vlan-id  non-dot1q-vlan-type
    | |     |         | +--rw trunk-ctag-range? ui32-ctag-range
    | |     |       | +--rw remove* [trunk-vlan-id]
    | |     |         | +--rw trunk-vlan-id  non-dot1q-vlan-type
    | |     |         | +--rw trunk-ctag-range? ui32-ctag-range
    | |     | x--rw default-vlan-config
    | |     |   | +--rw default-transparent-vlan?  non-dot1q-vlan-type
    | |     | +--rw tag!
    | |     |   | +--rw native-vlan?  empty
    | |     | +--rw native-vlan-classification
    | |     |   | +--rw native-vlan-id?   native-vlan-type
    | |     |   | x--rw native-vlan-ctag-id?  dot1q-vlan-type
    | |     | x--rw native-vlan-xtagged-config

```

```

    | | | | |   +-rw native-vlan-id-xtagged?          vlan-type
    | | | | |   +-rw native-vlan-ctag-id-xtagged?      dot1q-vlan-type
    | | | | |   +-rw native-vlan-egress-type-xtagged?  enumeration
    | | | | |   x--rw native-vlan-untagged-config
    | | | | |   +-rw native-vlan-id-untagged?        vlan-type
    | | | | x--rw access-mac-rspan-vlan-classification
    | | | | |   +-rw access
    | | | | |   +-rw vlan* [access-vlan-id access-mac-address]
    | | | | |     +-rw access-vlan-id      vlan-type
    | | | | |     +-rw access-mac-address  mac-address-type
    | | | | x--rw access-mac-group-rspan-vlan-classification
    | | | | |   +-rw access
    | | | | |   +-rw vlan* [access-vlan-id access-mac-group]
    | | | | |     +-rw access-vlan-id      vlan-type
    | | | | |     +-rw access-mac-group  mac-group-id-type
    | | | | +-rw bfd-software-session?           empty
    | | | +-rw ip
    | | | | +-rw source-guard
    | | | | | +-rw source-guard-enable?   empty
    | | | | +-rw ip-config:ip-config
    | | | | | +-rw ip-config:mtu?          ip-mtu
    | | | | | +-rw ip-config:directed-broadcast? empty
    | | | | | +-rw ip-config:proxy-arp?    empty
    | | | | | +-rw ip-config:irdp?        empty
    | | | | | +-rw ip-config:arp
    | | | | | | +-rw ip-config:learn-any? empty
    | | | | | +-rw ip-config:arp-aging-timeout? uint32
    | | | | | +-rw ip-config:address* [address]
    | | | | | | +-rw ip-config:address      union
    | | | | | | +-rw ip-config:secondary?  empty
    | | | | | | +-rw ip-config:ospf-passive? empty
    | | | | | | +-rw ip-config:ospf-ignore? empty
    | | | | | +-rw ip-config:unnumbered
    | | | | | | +-rw ip-config:ip-donor-interface-type? ip-unnumbered-donor-
interface-type_t
    | | | | | | +-rw ip-config:ip-donor-interface-name? ip-unnumbered-donor-
interface-name_t
    | | | | | | +-rw dai:arp-node-config
    | | | | | | +-rw dai:arp
    | | | | | |   +-rw dai:inspection
    | | | | | | | +-rw dai:trust?   empty
    | | | | | | | +-rw dai:filter
    | | | | | | | | +-rw dai:acl-name? dai-acl-policy-name
    | | | | | +-rw dhcp:interface-eth-dhcp-conf
    | | | | | | +-rw dhcp:dhcp
    | | | | | | | +-rw dhcp:relay
    | | | | | | | | +-rw dhcp:servers* [relay-ip-addr server-vrf-name]
    | | | | | | | | +-rw dhcp:relay-ip-addr      dhcp-ipv4-address
    | | | | | | | | +-rw dhcp:server-vrf-name  common-def:vrf-name
    | | | | | | +-rw dhcp:gateway
    | | | | | | | +-rw dhcp:gateway-address?  dhcp-ipv4-address
    | | | | | | | +-rw dhcp:gw-intf-type?    dhcp-gateway-interface-type
    | | | | | | | +-rw dhcp:gw-intf-name?    dhcp-gateway-interface-name
    | | | | | +-rw dhcp:dhcp
    | | | | | | +-rw dhcp:snooping
    | | | | | | | +-rw dhcp:dhcp-snooping-trust? empty
    | | | | +-rw icmp:icmp
    | | | | | +-rw icmp:rate-limiting?  uint32
    | | | | | +-rw icmp:echo-reply?    empty
    | | | | | +-rw icmp:redirect?    empty
    | | | | | +-rw icmp:unreachable? empty
    | | | | +-rw igmp:igmp
    | | | | | +-rw igmp:igmpl3-last-member-query-interval? igmp-snooping:lmqt-type
    | | | | | +-rw igmp:igmpl3-query-interval?      igmp-snooping:qi-type

```

```

    | | | | +--rw igmp:igmpl3-query-max-response-time?      igmp-snooping:qmrt-type
    | | | | +--rw igmp:igmpl3-immediate-leave?            empty
    | | | | +--rw igmp:igmpl3-version?                  uint32
    | | | | +--rw igmp:igmpl3-static-group* [igmpl3-sg-addr]
    | | | |   +--rw igmp:igmpl3-sg-addr      inet:ipv4-address
    | | | +--rw isis:intf-router-isis
    | | |   +--rw isis:int-router-isis
    | | |     +--rw isis:interface-ip-router-isis?  empty
    | | +--rw ospf:interface-eth-ospf-conf
    | |   +--rw ospf:ospf1
    | |     +--rw ospf:area?                      ospf-area-id
    | |     +--rw ospf:auth-change-wait-time?    common-def:time-interval-sec
    | |     +--rw ospf:authentication-key
    | |       +--rw ospf:no-encrypt-auth-key-table
    | |         +--rw ospf:no-encrypt-auth-key?  ospf-auth-psswd-string
    | |       +--rw ospf:auth-key-table
    | |         +--rw ospf:encryptptype?    key-type
    | |         +--rw ospf:auth-key?        ospf-auth-psswd-string
    | |     +--rw ospf:authentication
    | |       +--rw ospf:key-chain?      ospf-keychain-string
    | |     +--rw ospf:hello-interval?    common-def:time-interval-sec
    | |     +--rw ospf:dead-interval?    common-def:time-interval-sec
    | |     +--rw ospf:retransmit-interval?  common-def:time-interval-sec
    | |     +--rw ospf:transmit-delay?    common-def:time-interval-sec
    | |     +--rw ospf:md5-authentication
    | |       +--rw ospf:key-activation-wait-time?  common-def:time-interval-sec
    | |       +--rw ospf:no-encrypt-key-table
    | |         +--rw ospf:no-encrypt-key-id?  uint32
    | |         +--rw ospf:no-encrypt-key?        ospf-auth-psswd-string
    | |       +--rw ospf:key-table
    | |         +--rw ospf:key-id?          uint32
    | |         +--rw ospf:key?            key-type
    | |         +--rw ospf:md5-authentication-key?  ospf-auth-psswd-string
    | |     +--rw ospf:cost?            uint32
    | |     +--rw ospf:network?        enumeration
    | |     +--rw ospf:intf-ldp-sync?  enumeration
    | |     +--rw ospf:database-filter
    | |       +--rw ospf:all-out?      empty
    | |       +--rw ospf:all-external?  database-filter-options
    | |       +--rw ospf:all-summary-external?  database-filter-options
    | |     +--rw ospf:mtu-ignore?    empty
    | |     +--rw ospf:active?       empty
    | |     +--rw ospf:passive?     empty
    | |     +--rw ospf:priority?    uint32
    | |     +--rw ospf:bfd
    | |       +--rw ospf:intf-bfd-enable?  empty
    | | +--rw pim:pim-intf-phyc-cont
    | |   +--rw pim:pim-int-cmd
    | |     +--rw pim:pim-sparse?      empty
    | |     +--rw pim:pim
    | |       +--rw pim:neighbor-filter?  ip-prefix-name-t
    | |       +--rw pim:dr-priority?    uint32
    | |       +--rw pim:ttl-threshold?  uint32
    | |     +--rw pim:mcast-bdry-prefix-list?  ip-prefix-name-t
    | | +--rw vrf
    | |   +--rw forwarding?        common-def:vrf-name
    | | +--rw reload-delay
    | |   +--rw reload-delay-enable?  empty
    | |   +--rw reload-delay-time?   reload-delay-type
    | | +--rw ipv6
    | |   +--rw raguard?          empty
    | |   +--rw ipv6-config:ipv6-config
    | |     +--rw ipv6-config:address
    | |       +--rw ipv6-config:use-link-local-only?  empty

```

```

    | | | | |   +-rw ipv6-config:link-local-config
    | | | | |   |   +-rw ipv6-config:link-local-address?    inet:ipv6-address
    | | | | |   |   +-rw ipv6-config:link-local?          empty
    | | | | |   +-rw ipv6-config:ipv6-address* [address]
    | | | | |   |   +-rw ipv6-config:address        union
    | | | | |   |   +-rw ipv6-config:secondary?      empty
    | | | | |   +-rw ipv6-config:eui-config
    | | | | |   |   +-rw ipv6-config:eui64?        empty
    | | | | |   |   +-rw ipv6-config:eui-secondary? empty
    | | | | |   +-rw ipv6-config:anycast?        empty
    | | | | |   +-rw ipv6-config:mtu?           ip-mtu
    | | | | +-rw dhcpv6:interface-phy-dhcp-conf
    | | | |   +-rw dhcpv6:dhcp
    | | | |     +-rw dhcpv6:relay
    | | | |       +-rw dhcpv6:servers* [relay-ip-addr]
    | | | |         +-rw dhcpv6:relay-ip-addr      dhcpv6:ip-addr
    | | | |         +-rw dhcpv6:server-vrf-name?  common-def:vrf-name
    | | | |         +-rw dhcpv6:interface
    | | | |           +-rw dhcpv6:interface-type?  dhcpv6-iftype
    | | | |           +-rw dhcpv6:interface-name?  dhcpv6-ifname
    | | | |         +-rw dhcpv6:source-interface
    | | | |           +-rw dhcpv6:source-intf-type?  dhcpv6-relay-src-interface-type
    | | | |           +-rw dhcpv6:source-intf-name?  dhcpv6-src-ifname
    | | | |           +-rw dhcpv6:source-ip?        dhcpv6:ip-addr
    | | | +-rw icmp:icmpv6
    | | |   +-rw icmp:rate-limiting?    uint32
    | | |   +-rw icmp:echo-reply?      empty
    | | |   +-rw icmp:redirect?      empty
    | | |   +-rw icmp:unreachable?   empty
    | | |   +-rw ipv6-access-list:access-group* [ipv6-access-list ip-direction]
    | | |     +-rw ipv6-access-list:ipv6-access-list      ipv6-l3-acl-policy-name
    | | |     +-rw ipv6-access-list:ip-direction        enumeration
    | | |     +-rw ipv6-access-list:traffic-type?      enumeration
    | | | +-rw ip-policy:policy
    | | |   +-rw ip-policy:route-map
    | | |     +-rw ip-policy:ipv6-route-map-name?  common-def:name-string63
    | | +-rw ipv6-nd-ra:ipv6-nd-ra
    | |   +-rw ipv6-nd-ra:ipv6-intf-cmds
    | |     +-rw ipv6-nd-ra:vrrp-suppress-interface-ra? empty
    | |   +-rw ipv6-nd-ra:nd
    | |     |   +-rw ipv6-nd-ra:managed-config-flag?  empty
    | |     |   +-rw ipv6-nd-ra:other-config-flag?  empty
    | |     |   +-rw ipv6-nd-ra:broadcast-mac-trap? empty
    | |     |   +-rw ipv6-nd-ra:ra-lifetime?        common-def:time-interval-sec
    | |     |   +-rw ipv6-nd-ra:reachable-time?    common-def:time-interval-msec
    | |     |   +-rw ipv6-nd-ra:mtu?              uint32
    | |     |   +-rw ipv6-nd-ra:retrans-timer?    common-def:time-interval-msec
    | |     |   +-rw ipv6-nd-ra:hoplimit?        uint32
    | |     |   +-rw ipv6-nd-ra:ns-interval?      common-def:time-interval-sec
    | |     |   +-rw ipv6-nd-ra:suppress-ra
    | |     |     +-rw ipv6-nd-ra:suppress-ra-flag? empty
    | |     |     +-rw ipv6-nd-ra:suppress-ra-mtu? empty
    | |     |     +-rw ipv6-nd-ra:suppress-ra-all? empty
    | |     |   +-rw ipv6-nd-ra:ra-interval
    | |     |     +-rw ipv6-nd-ra:max-interval?  common-def:time-interval-sec
    | |     |     +-rw ipv6-nd-ra:min?          common-def:time-interval-sec
    | |     |   +-rw ipv6-nd-ra:send-ra?        empty
    | |     |   +-rw ipv6-nd-ra:router-preference
    | |     |     +-rw ipv6-nd-ra:router-pref-high? empty
    | |     |     +-rw ipv6-nd-ra:router-pref-low?  empty
    | |     |     +-rw ipv6-nd-ra:router-pref-medium? empty
    | |     |   +-rw ipv6-nd-ra:ra-dns-server* [dns-server-prefix]
    | |     |     +-rw ipv6-nd-ra:dns-server-prefix      inet:ipv6-
    | |   address

```

```

    | | | | | | +--rw ipv6-nd-ra:dns-server-lifetime-multiplier? uint32
    | | | | | | +--rw ipv6-nd-ra:ra-domain-name* [domain-name-string]
    | | | | | | +--rw ipv6-nd-ra:domain-name-string string
    | | | | | | +--rw ipv6-nd-ra:domain-name-lifetime-multiplier? uint32
    | | | | | | +--rw ipv6-nd-ra:address
    | | | | | | +--rw ipv6-nd-ra:suppressing-address* [suppress-ipv6-address]
    | | | | | | | +--rw ipv6-nd-ra:suppress-ipv6-address nd-suppress-ipv6-
address
    | | | | | | +--rw ipv6-nd-ra:suppress-per-address? empty
    | | | | | | +--rw ipv6-nd-ra:address-suppress-all? empty
    | | | | | | +--rw ipv6-nd-ra:dad
    | | | | | | +--rw ipv6-nd-ra:attempts? uint32
    | | | | | | +--rw ipv6-nd-ra:time? common-def:time-interval-sec
    | | | | | | +--rw ipv6-nd-ra:cache
    | | | | | | +--rw ipv6-nd-ra:expire? common-def:time-interval-sec
    | | | | | | +--rw ipv6-nd-ra:cache-limit? uint32
    | | | | | | +--rw ipv6-nd-ra:prefix* [prefix-ipv6-address]
    | | | | | | | +--rw ipv6-nd-ra:prefix-ipv6-address inet:ipv6-prefix
    | | | | | | +--rw ipv6-nd-ra:lifetime
    | | | | | | | +--rw (ch-valid-type)?
    | | | | | | | +--:(ca-no-advertise)
    | | | | | | | | +--rw ipv6-nd-ra:no-advertise? empty
    | | | | | | | +--:(ca-valid-lifetime)
    | | | | | | | | +--rw ipv6-nd-ra:valid-lifetime? common-def:time-
interval-sec
    | | | | | | +--:(ca-valid-infinite)
    | | | | | | | +--rw ipv6-nd-ra:valid-infinite? empty
    | | | | | +--rw ipv6-nd-ra:preferred
    | | | | | | +--rw (ch-preferred-type)?
    | | | | | | | +--:(ca-preferred-lifetime)
    | | | | | | | | +--rw ipv6-nd-ra:preferred-lifetime? common-
def:time-interval-sec
    | | | | | | | +--:(ca-preferred-infinite)
    | | | | | | | | +--rw ipv6-nd-ra:preferred-infinite? empty
    | | | | | | +--rw ipv6-nd-ra:prefix-flags
    | | | | | | | +--rw ipv6-nd-ra:no-autoconfig? empty
    | | | | | | | +--rw ipv6-nd-ra:no-onlink? empty
    | | | | | | | +--rw ipv6-nd-ra:off-link? empty
    | | | | | | +--rw ipv6-nd-ra:neighbor* [ipv6-address]
    | | | | | | | +--rw ipv6-nd-ra:ipv6-address neighbor-ipv6-address
    | | | | | | | +--rw ipv6-nd-ra:hardware-address? macAddr
    | | | | +--rw isis:intf-ipv6-router-isis
    | | | | | +--rw isis:int-ipv6-router-isis
    | | | | | | +--rw isis:interface-ipv6-router-isis? empty
    | | | | +--rw mld:mld-phy-intf-cfg
    | | | | | +--rw mld:mld
    | | | | | | +--rw mld:last-member-query-interval? mld-snooping:lmqt-type
    | | | | | | +--rw mld:query-interval? mld-snooping:qi-type
    | | | | | | +--rw mld:query-max-response-time? mld-snooping:qmrt-type
    | | | | | | +--rw mld:immediate-leave? empty
    | | | | | | +--rw mld:version? uint32
    | | | | | | +--rw mld:static-group* [13-sg-addr]
    | | | | | | | +--rw mld:13-sg-addr inet:ipv6-address
    | | | | +--rw ospfv3:interface-ospfv3-conf
    | | | | | +--rw ospfv3:interface-area? ospf:ospf-area-id
    | | | | | +--rw ospfv3:active? empty
    | | | | | +--rw ospfv3:passive? empty
    | | | | | +--rw ospfv3:bfd
    | | | | | | +--rw ospfv3:bfd-enable? empty
    | | | | | | +--rw ospfv3:cost? uint32
    | | | | | | +--rw ospfv3:instance? uint32
    | | | | | | +--rw ospfv3:mtu-ignore? empty
    | | | | | | +--rw ospfv3:network? enumeration
    | | | | | | +--rw ospfv3:priority? uint32

```

```

    | | | | +--rw ospfv3:suppress-linklsa?           empty
    | | | | +--rw ospfv3:authentication
    | | | | | +--rw ospfv3:key-chain?             string
    | | | | | +--rw ospfv3:ipsec-auth-key-config
    | | | | | | +--rw ospfv3:spi?                 spi-value-type
    | | | | | | +--rw (ch-algorithm)?
    | | | | | | | +---(ca-ah-algorithm)
    | | | | | | | | +--rw ospfv3:ah?              algorithm-type-ah
    | | | | | | | | +--rw ospfv3:ah-key?         ipsec-authentication-hexkey-string
    | | | | | | | +---(ca-esp-algorithm)
    | | | | | | | | +--rw ospfv3:esp?            algorithm-type-esp
    | | | | | | | | +--rw ospfv3:esp-auth?        algorithm-type-ah
    | | | | | | | | +--rw ospfv3:esp-auth-key?   ipsec-authentication-hexkey-string
    | | | | | +--rw ospfv3:ipsec
    | | | | | | +--rw ospfv3:ipsec-authentication-disable? empty
    | | | | | | +--rw ospfv3:ifc-key-add-remove-interval? common-def:time-
interval-sec
    | | | | | +--rw ospfv3:link-interval-properties
    | | | | | | +--rw ospfv3:hello-interval?       common-def:time-interval-sec
    | | | | | | +--rw ospfv3:dead-interval?        common-def:time-interval-sec
    | | | | | | +--rw ospfv3:hello-jitter?        uint32
    | | | | | | +--rw ospfv3:retransmit-interval?  common-def:time-interval-sec
    | | | | | | +--rw ospfv3:transmit-delay?       common-def:time-interval-sec
    | | | | | +--rw pim:pim-intf-phy-cont
    | | | | | | +--rw pim:ipv6-pim-int-cmd
    | | | | | | | +--rw pim:pim-sparse?          empty
    | | | | | | | +--rw pim:pim
    | | | | | | | | +--rw pim:neighbor-filter?    ip-prefix-name-t
    | | | | | | | | +--rw pim:dr-priority?        uint32
    | | | | | | | | +--rw pim:ttl-threshold?      uint32
    | | | | | | | +--rw pim:mcast-bdry-prefix-list? ip-prefix-name-t
    | | | | | +--rw vrrpv3:vrrpv3-group* [vrid]
    | | | | | | +--rw vrrpv3:vrid                  vrid-type
    | | | | | | +--rw vrrpv3:use-v2-checksum?     empty
    | | | | | | +--rw vrrpv3:virtual-ip* [virtual-ipaddr]
    | | | | | | | +--rw vrrpv3:virtual-ipaddr    inet:ipv6-address
    | | | | | +--rw vrrpv3:track
    | | | | | | +--rw vrrpv3:interface* [interface-type interface-name]
    | | | | | | | +--rw vrrpv3:interface-type    track-iftype
    | | | | | | | +--rw vrrpv3:interface-name   track-ifname
    | | | | | | | +--rw vrrpv3:track-priority?   uint8
    | | | | | +--rw vrrpv3:advertisement-interval? uint32
    | | | | | +--rw vrrpv3:enable?                empty
    | | | | | +--rw vrrpv3:hold-time?             uint32
    | | | | | +--rw vrrpv3:preempt-mode?         empty
    | | | | | +--rw vrrpv3:priority?              uint8
    | | | | | +--rw vrrpv3:description?          string
    | | | | +--rw vrrpv3:vrrpv3e-group* [vrid]
    | | | | | +--rw vrrpv3:vrid                  vrrpe-vrid-type
    | | | | | | +--rw vrrpv3:virtual-ip* [virtual-ipaddr]
    | | | | | | | +--rw vrrpv3:virtual-ipaddr    inet:ipv6-address
    | | | | | +--rw vrrpv3:track
    | | | | | | +--rw vrrpv3:interface* [interface-type interface-name]
    | | | | | | | +--rw vrrpv3:interface-type    track-iftype
    | | | | | | | +--rw vrrpv3:interface-name   track-ifname
    | | | | | | | +--rw vrrpv3:track-priority?   uint8
    | | | | | +--rw vrrpv3:enable?                empty
    | | | | | +--rw vrrpv3:hold-time?             uint32
    | | | | | +--rw vrrpv3:preempt-mode?         empty
    | | | | | +--rw vrrpv3:priority?              uint8
    | | | | | +--rw vrrpv3:description?          string
    | | | | | +--rw vrrpv3:advertise-backup?    empty
    | | | | | +--rw vrrpv3:nd-advertisement-timer? uint32
    | | | | | +--rw vrrpv3:advertisement-interval-scale? uint32

```

```

    | | |
    | | |     +--rw vrrpv3:backup-advertisement-interval?      uint32
    | | |     +--rw vrrpv3:vrrpe-advertisement-interval?      uint32
    | | |     +--rw vrrpv3:short-path-forwarding
    | | |         +--rw vrrpv3:basic?                      empty
    | | |         +--rw vrrpv3:revert-priority?        uint8
    | | +---rw track
    | | |     +--rw track_enable?      empty
    | | |     +--rw min-link?        uint32
    | | |     +--rw interface* [track-interface-type track-interface-name]
    | | |         +--rw track-interface-type    enumeration
    | | |         +--rw track-interface-name   string
    | | +---rw remove
    | | |     +--rw remove-all-track-interfaces?  empty
    | | +---rw bfd
    | | |     +--rw interval
    | | |         +--rw min-tx?          bfd-tx-interval-type
    | | |         +--rw min-rx?          bfd-rx-interval-type
    | | |         +--rw multiplier?      bfd-multiplier-type
    | | |     +--rw bfd-shutdown?      empty
    | | +---rw snmp
    | | |     +--rw trap
    | | |         +--rw link-status
    | | |             +--rw snmp-link-disable?  empty
    | | +---rw redundant-management
    | | |     +--rw redundant-enable?  empty
    | | +---rw vepa
    | | |     +--rw vepa-enable?      empty
    | | +---rw edge-loop-detection-native
    | | |     +--rw loop-detection-native? empty
    | | +---rw edge-loop-detection
    | | |     +--rw eldprio?          uint32
    | | |     +--rw eldshutdown-disable? empty
    | | |     +--rw eldvlan?          ui32-vlan-range
    | | +---rw priority-tag-enable?           empty
    | | +---rw strip-header?                enumeration
    | | +---rw endpoint-tracking
    | | |     +--rw endpoint-tracking-enable? empty
    | | |     +--rw timeout
    | | |         +--rw reauth-period?    uint32
    | | +---rw bpdu-drop-enable?           empty
    | | +---rw core-isolation-track?      empty
    | | +---rw ethernet-segment!
    | | |     +--rw esi?              string
    | | |     +--rw load-balance-mode?  enumeration
    | | +---rw tunable-optics
    | | |     +--rw sfpp
    | | |         +--rw channel?       tunable-optics-sfpp-channel-type
    | | +---rw mac-access-list:mac
    | | |     +--rw mac-access-list:access-group* [mac-access-list mac-direction]
    | | |         +--rw mac-access-list:mac-access-list  mac-acl-name
    | | |         +--rw mac-access-list:mac-direction    enumeration
    | | |         +--rw mac-access-list:traffic-type?  enumeration
    | | +---rw lif:logical-interface
    | | |     +--rw lif:ethernet* [instance-id]
    | | |         +--rw lif:instance-id      lif-interface-type
    | | |         +--rw lif:shutdown?       empty
    | | |         +--rw lif:name?         string
    | | |         +--rw lif:untagged
    | | |             +--rw lif:untagged-vlan
    | | |                 +--rw lif:untagged-vlan-id?  uint32
    | | |             +--rw lif:tagged-outer-vlan
    | | |                 +--rw lif:outer-tagged-vlan-id? uint32
    | | |                 +--rw lif:inner-tagged-vlan-id? uint32
    | | +---rw qos-mls:storm-control

```

```

| | | +--rw qos-mls:ingress* [protocol-type]
| | |
| | |     +--rw qos-mls:protocol-type      enumeration
| | |     +--rw qos-mls:rate-format?      enumeration
| | |     +--rw qos-mls:rate-bps?        rate-limit-bps-type
| | |     +--rw qos-mls:rate-percent?    rate-limit-percentage-type
| | |     +--rw qos-mls:bum-action?      enumeration
| | +--rw qos-mls:qos
| | |
| | |     +--rw qos-mls:default-cos?      cos-id-type
| | |     +--rw qos-mls:default-tc?        traffic-class-id-type
| | |     +--rw qos-mls:trust
| | |     |     +--rw qos-mls:trust-cos?    empty
| | |     |     +--rw qos-mls:trust-dscp?    empty
| | |     +--rw qos-mls:remark
| | |     |     +--rw qos-mls:remark-dscp?  empty
| | |     +--rw qos-mls:cos-mutation?      map-name-type
| | |     +--rw qos-mls:cos-mutation-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:traffic-class-cos?   map-name-type
| | |     +--rw qos-mls:traffic-class-cos-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:cos-traffic-class?   map-name-type
| | |     +--rw qos-mls:cos-traffic-class-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:traffic-class-dscp?   map-name-type
| | |     +--rw qos-mls:traffic-class-dscp-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:dscp-mutation?      map-name-type
| | |     +--rw qos-mls:dscp-mutation-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:dscp-traffic-class?   map-name-type
| | |     +--rw qos-mls:dscp-traffic-class-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:dscp-cos?        map-name-type
| | |     +--rw qos-mls:dscp-cos-builtin
| | |     |     +--rw qos-mls:map-name?    builtin-map-name-type
| | |     +--rw qos-mls:random-detect
| | |     |     +--rw qos-mls:traffic-class* [red-tc-value red-dp-value]
| | |     |         +--rw qos-mls:red-tc-value      traffic-class-id-type
| | |     |         +--rw qos-mls:red-dp-value      drop-precedence-id-type
| | |     |         +--rw qos-mls:red-profile-id?    red-profile-id-type
| | |     +--rw qos-mls:drop-monitor
| | |     |     +--rw qos-mls:drop-monitor-enable?  empty
| | |     +--rw qos-mls:port-speed-up?          uint32
| | |     +--rw qos-mls:flowcontrol
| | |     |     +--rw qos-mls:link-level-flowcontrol
| | |     |     |     +--rw qos-mls:flowcontrol-tx?  enumeration
| | |     |     |     +--rw qos-mls:flowcontrol-rx?  enumeration
| | |     |     +--rw qos-mls:pfc* [pfc-cos]
| | |     |     |     +--rw qos-mls:pfc-cos          cos-id-type
| | |     |     |     +--rw qos-mls:pfc-flowcontrol-tx  enumeration
| | |     |     |     +--rw qos-mls:pfc-flowcontrol-rx  enumeration
| | |     +--rw qos-mls:threshold
| | |     |     +--rw qos-mls:threshold-tx-on?    flowcontrol-threshold-type
| | |     |     +--rw qos-mls:threshold-tx-off?    flowcontrol-threshold-type
| | |     +--rw qos-mls:pfc-threshold
| | |     |     +--rw qos-mls:threshold
| | |     |     |     +--rw qos-mls:pfc* [pfc-threshold-cos]
| | |     |     |     |     +--rw qos-mls:pfc-threshold-cos      cos-id-type
| | |     |     |     |     +--rw qos-mls:pfc-threshold-tx-on?  flowcontrol-threshold-type
| | |     |     |     |     +--rw qos-mls:pfc-threshold-tx-off?  flowcontrol-threshold-type
| | |     +--rw qos-mls:rx-queue
| | |     |     +--rw qos-mls:cos-threshold
| | |     |     |     +--rw qos-mls:cos0-threshold?  uint32
| | |     |     |     +--rw qos-mls:cos1-threshold?  uint32

```

```

| | |
| | |   |   +--rw qos-mls:cos2-threshold?    uint32
| | |   |   +--rw qos-mls:cos3-threshold?    uint32
| | |   |   +--rw qos-mls:cos4-threshold?    uint32
| | |   |   +--rw qos-mls:cos5-threshold?    uint32
| | |   |   +--rw qos-mls:cos6-threshold?    uint32
| | |   |   +--rw qos-mls:cos7-threshold?    uint32
| | |   +--rw qos-mls:unicast
| | |   |   +--rw qos-mls:queue-size* [traffic-class]
| | |   |   |   +--rw qos-mls:traffic-class      traffic-class-id-type
| | |   |   |   +--rw qos-mls:min-queue-size?    min-queue-size-type
| | |   |   |   +--rw qos-mls:max-queue-size?    max-queue-size-type
| | |   +--rw qos-mls:multicast
| | |   |   +--rw qos-mls:guarantee-rate?      guarantee-rate-type
| | |   |   +--rw qos-mls:best-effort-rate?    best-effort-rate-type
| | |   |   +--rw qos-mls:queue-size* [traffic-class]
| | |   |   |   +--rw qos-mls:traffic-class      uint8
| | |   |   |   +--rw qos-mls:min-queue-size?    min-queue-size-type
| | |   |   |   +--rw qos-mls:max-queue-size?    max-queue-size-type
| | |   +--rw sflow:sflow
| | |   |   +--rw sflow:enable?          empty
| | |   |   +--rw sflow:polling-interval?  uint32
| | |   |   +--rw sflow:sample-rate?     uint32
| | |   +--rw qos-mqc:service-policy
| | |   |   +--rw qos-mqc:in?        map-name-type
| | |   |   +--rw qos-mqc:out?       map-name-type
| | |   +--rw ip-config:ip-forward
| | |   |   +--rw ip-config:ip
| | |   |   |   +--rw ip-config:forward?  empty
| | |   +--rw dle:delay-link-event
| | |   |   +--rw dle:delay-link
| | |   |   |   +--rw dle:delay-link-event-entry?  uint32
| | |   |   |   +--rw dle:delay-link-event-type?   enumeration
| | |   +--rw dot1x:dot1x
| | |   |   +--rw dot1x:authentication?    empty
| | |   |   +--rw dot1x:port-control?     enumeration
| | |   |   +--rw dot1x:protocol-version?  uint32
| | |   |   +--rw dot1x:quiet-period?    uint32
| | |   |   +--rw dot1x:reauthMax?      uint32
| | |   |   +--rw dot1x:max-req?       uint32
| | |   |   +--rw dot1x:reauthentication? empty
| | |   |   +--rw dot1x:filter-strict-security? empty
| | |   |   +--rw dot1x:timeout
| | |   |   |   +--rw dot1x:re-authperiod?  dot1x-reauth-timeout-interval
| | |   |   |   +--rw dot1x:supp-timeout?   dot1x-supp-timeout-interval
| | |   |   |   +--rw dot1x:tx-period?    dot1x-tx-timeout-interval
| | |   +--rw dot3ah:link-oam-interface
| | |   |   +--rw dot3ah:enable?        enumeration
| | |   |   +--rw dot3ah:allow-loopback? empty
| | |   |   +--rw dot3ah:remote-failure
| | |   |   |   +--rw dot3ah:dying-gasp
| | |   |   |   |   +--rw dot3ah:dying-gasp-action?  action-type
| | |   |   |   +--rw dot3ah:link-fault
| | |   |   |   |   +--rw dot3ah:link-fault-action?  action-type
| | |   |   +--rw dot3ah:critical-event
| | |   |   |   +--rw dot3ah:critical-event-action?  action-type
| | |   +--rw ip-access-list:ip-acl-interface
| | |   |   +--rw ip-access-list:ip
| | |   |   |   +--rw ip-access-list:access-group* [ip-access-list ip-direction]
| | |   |   |   |   +--rw ip-access-list:ip-access-list    13-acl-policy-name
| | |   |   |   |   +--rw ip-access-list:ip-direction      enumeration
| | |   |   |   |   +--rw ip-access-list:traffic-type?    enumeration
| | |   +--rw ip-access-list:ip-subnet-broadcast-acl-interface
| | |   |   +--rw ip-access-list:ip
| | |   |   |   +--rw ip-access-list:subnet-broadcast-acl* [ip-access-list]

```

```

    | | |
    | | |     +--rw ip-access-list:ip-access-list      13-acl-policy-name
    | | +-rw ip-policy:ip-pbr-interface
    | | | +-rw ip-policy:ip
    | | | | +-rw ip-policy:policy
    | | | | | +-rw ip-policy:route-map
    | | | | | | +-rw ip-policy:route-map-name?   common-def:name-string63
    | | +-rw isis:interface-eth-isis-conf
    | | | +-rw isis:intf-isis!
    | | | | +-rw isis:interface-isis
    | | | | | +-rw isis:auth-check
    | | | | | | +-rw isis:auth-check-level1
    | | | | | | | +-rw isis:interface-auth-check-level1-disable?   empty
    | | | | | | +-rw isis:auth-check-level2
    | | | | | | | +-rw isis:interface-auth-check-level2-disable?   empty
    | | | | +-rw isis:interface-reverse-metric!
    | | | | | +-rw isis:rev-metric-common-attributes
    | | | | | | +-rw isis:rev-metric-val?           uint32
    | | | | | | +-rw isis:rev-metric-whole-lan?   empty
    | | | | | | +-rw isis:rev-metric-te-def-metric? empty
    | | | | +-rw isis:interface-auth-mode
    | | | | | +-rw isis:interface-md5
    | | | | | | +-rw isis:interface-auth-mode-md5-level1?   empty
    | | | | | | +-rw isis:interface-auth-mode-md5-level2?   empty
    | | | | +-rw isis:interface-auth-key* [interface-auth-key-level]
    | | | | | +-rw isis:interface-auth-key-level   enumeration
    | | | | | +-rw isis:interface-auth-key-str?   string
    | | | | +-rw isis:interface-hello
    | | | | | +-rw isis:interface-hello-padding
    | | | | | | +-rw isis:interface-hello-padding-disable?   empty
    | | | | +-rw isis:interface-hello-interval* [interface-hello-interval-level]
    | | | | | +-rw isis:interface-hello-interval-level   enumeration
    | | | | | | +-rw isis:interface-hello-interval-val?   uint32
    | | | | +-rw isis:interface-hello-multiplier* [interface-hello-multiplier-
level]
    | | | | | | +-rw isis:interface-hello-multiplier-level   enumeration
    | | | | | | +-rw isis:interface-hello-multiplier-val?   uint32
    | | | | +-rw isis:circuit-type?           enumeration
    | | | | +-rw isis:interface-ipv6
    | | | | | +-rw isis:interface-ipv6-metric* [interface-ipv6-metric-level]
    | | | | | | +-rw isis:interface-ipv6-metric-level   enumeration
    | | | | | | +-rw isis:interface-ipv6-metric-val?   uint32
    | | | | +-rw isis:interface-metric* [interface-metric-level]
    | | | | | +-rw isis:interface-metric-level   enumeration
    | | | | | | +-rw isis:interface-metric-val?   uint32
    | | | | +-rw isis:interface-point-to-point?   empty
    | | | | +-rw isis:interface-passive?   empty
    | | | | +-rw isis:interface-priority
    | | | | | +-rw isis:interface-priority-level1?   uint32
    | | | | | | +-rw isis:interface-priority-level2?   uint32
    | | | | +-rw isis:interface-bfd
    | | | | | +-rw isis:interface-bfd-enable?   empty
    | | | | +-rw isis:interface-ldp-sync?           enumeration
    | | | | +-rw isis:segment-routing
    | | | | | +-rw isis:interface-segment-routing-disable?   empty
    | | | | +-rw isis:segment-routing-prefix-sid
    | | | | | +-rw isis:sr-prefix-sid-value?   uint32
    | | +-rw lacp-pdu-forward:lacp-pdu-forward
    | | | +-rw lacp-pdu-forward:enable?   empty
    | | +-rw lacp:lacp
    | | | +-rw lacp:timeout?           enumeration
    | | | +-rw lacp:std_port-priority?   uint32
    | | | +-rw lacp:default-up?       empty
    | | +-rw lfs:link-fault-signaling
    | | | +-rw lfs:rx?           enumeration

```

```

    |   |   |   +-rw lfs:tx?   enumeration
    |   |   +-rw lldp:lldp
    |   |   |   +-rw lldp:cee
    |   |   |   |   +-rw lldp:lldp-cee-on-off?   enumeration
    |   |   |   +-rw lldp:disable?   empty
    |   |   |   +-rw lldp:profile?   string
    |   |   +-rw vrrp:vrrp* [vrid version]
    |   |   |   +-rw vrrp:vrid           vrid-type
    |   |   |   +-rw vrrp:version        uint8
    |   |   |   +-rw vrrp:use-v2-checksum? empty
    |   |   |   +-rw vrrp:virtual-ip* [virtual-ipaddr]
    |   |   |   |   +-rw vrrp:virtual-ipaddr   inet:ipv4-address
    |   |   |   +-rw vrrp:track
    |   |   |   |   +-rw vrrp:interface* [interface-type interface-name]
    |   |   |   |   +-rw vrrp:interface-type track-iftype
    |   |   |   |   +-rw vrrp:interface-name track-ifname
    |   |   |   |   +-rw vrrp:track-priority? uint8
    |   |   |   +-rw vrrp:advertisement-interval? uint32
    |   |   |   +-rw vrrp:enable?       empty
    |   |   |   +-rw vrrp:hold-time?   uint32
    |   |   |   +-rw vrrp:preempt-mode? empty
    |   |   |   +-rw vrrp:arp
    |   |   |   |   +-rw vrrp:unicast-request
    |   |   |   |   +-rw vrrp:receive?   empty
    |   |   |   |   +-rw vrrp:priority?   uint8
    |   |   |   |   +-rw vrrp:description? string
    |   |   +-rw mct:cluster-client
    |   |   |   +-rw mct:client-id?   mct-eth-client-id-type
    |   |   +-rw mct:cluster-track
    |   |   |   +-rw mct:cluster-track-flag? empty
    |   |   +-rw mvrp:mvrp-intf
    |   |   |   +-rw mvrp:intf-enable? empty
    |   |   |   +-rw mvrp:applicant-mode? applicant-state-type
    |   |   |   +-rw mvrp:registration-mode
    |   |   |   |   +-rw mvrp:forbidden
    |   |   |   |   +-rw mvrp:vlan
    |   |   |   |   |   +-rw mvrp:add?   member-vlan-id
    |   |   |   |   |   +-rw mvrp:remove? member-vlan-id
    |   |   |   +-rw mvrp:timer
    |   |   |   |   +-rw mvrp:join?   uint32
    |   |   |   |   +-rw mvrp:leave?   uint32
    |   |   |   |   +-rw mvrp:leave-all? uint32
    |   |   +-rw openflow:openflow
    |   |   |   +-rw openflow:protected-vlans
    |   |   |   |   +-rw openflow:protected-vlan-add? ui32-vlan-range
    |   |   |   |   +-rw openflow:protected-vlan-remove? ui32-vlan-range
    |   |   |   +-rw openflow:enableInterfaceLevel
    |   |   |   |   +-rw openflow:modeType?   enumeration
    |   |   |   |   +-rw openflow:hybrid-mode? empty
    |   |   +-rw pld:link-error-disable
    |   |   |   +-rw pld:link-error-disable-entry? uint32
    |   |   |   +-rw pld:sampling-time-in-sec?   uint32
    |   |   |   +-rw pld:wait-time-in-sec?   uint32
    |   |   +-rw rmon:rmon
    |   |   |   +-rw rmon:collection
    |   |   |   |   +-rw rmon:ether-stats-entry* [ether-stats-index]
    |   |   |   |   |   +-rw rmon:ether-stats-index   ether-stats-index-type
    |   |   |   |   |   +-rw rmon:ether-stats-owner? owner-string
    |   |   |   |   +-rw rmon:history-control-entry* [history-control-index]
    |   |   |   |   |   +-rw rmon:history-control-index   history-control-index-
    type
    |   |   |   +-rw rmon:history-control-buckets-requested? history-control-buckets-
    requested-type
    |   |   |   +-rw rmon:history-control-interval?   history-control-

```

```

interval-type
| | |
| | | +--rw rmon:history-control-owner?           owner-string
| | +-rw rpf:rpf
| | | +-rw rpf:mode?    enumeration
| | +-rw uda-access-list:uda
| | | +-rw uda-access-list:access-group* [uda-access-list uda-direction]
| | | | +-rw uda-access-list:uda-access-list    uda-acl-name
| | | | +-rw uda-access-list:uda-direction      enumeration
| | | +-rw uda-access-list:policy
| | | | +-rw uda-access-list:route-map?    route-map-type
| | +-rw uda-access-list:offsets-container
| | | +-rw uda-access-list:offsets?    uda-profile-name
| +-rw udld:udld
| | +-rw udld:udld-enable?   empty
| +-rw xstp:spanning-tree
| | +-rw xstp:autoedge?      empty
| | +-rw xstp:cost?         uint32
| | +-rw xstp:portfast
| | | +-rw xstp:portfastbasic?  empty
| | | +-rw xstp:bpdu-guard?   empty
| | +-rw xstp:edgeport
| | | +-rw xstp:edgeportbasic? empty
| | | +-rw xstp:bpdu-guard?   empty
| | +-rw xstp:guard
| | | +-rw xstp:root?    empty
| | +-rw xstp:bpdu-mac?     enumeration
| | +-rw xstp:link-type?    enumeration
| | +-rw xstp:priority?    uint32
| | +-rw xstp:restricted-role? empty
| | +-rw xstp:restricted-tcn? empty
| | +-rw xstp:shutdown?    empty
| | +-rw xstp:vlan* [id]
| | | +-rw xstp:id        uint32
| | | +-rw xstp:cost?     uint32
| | | +-rw xstp:priority? uint32
| | | +-rw xstp:guard
| | | | +-rw xstp:root?   empty
| | +-rw xstp:instance* [id]
| | | +-rw xstp:id        mstp-instance-type
| | | +-rw xstp:cost?     uint32
| | | +-rw xstp:priority? uint32
| | | +-rw xstp:restricted-role? empty
| | | +-rw xstp:restricted-tcn? empty
| +-rw port-channel* [name]
| | +-rw name                  portchannel-type
| | +-rw cee?                  cee-map-name-type
| | +-rw vlag
| | | +-rw ignore-split?    empty
| | +-rw po-speed?            enumeration
| | +-rw vrf
| | | +-rw forwarding?     common-def:vrf-name
| | +-rw insight
| | | +-rw insight-enable?  empty
| | | +-rw insight-mmId?    uint32
| | +-rw reload-delay
| | | +-rw reload-delay-enable? empty
| | | +-rw reload-delay-time?  reload-delay-type
| | +-ro ifindex?             uint64
| | +-rw description?        string
| | +-rw shutdown?            empty
| | +-rw minimum-links?     uint32
| | +-rw mtu?                mtu-type
| | +-rw route-only?        empty
| | +-rw tag-type?           tpid-type

```

```

| |   +-rw maintenance-mode!
| |   |   +-rw rate-monitoring!
| |   |   |   +-rw threshold?    maint-mode-threshold
| |   +-rw switchport-basic
| |   |   +-rw basic?    empty
| |   +-rw switchport
| |   |   +-rw mode
| |   |   |   +-rw vlan-mode?    12-mode-type
| |   +-rw port-security!
| |   |   |   +-rw port-sec-max?          uint32
| |   |   |   +-rw port-sec-violation?      port-sec-violation
| |   |   |   +-rw port-security-mac-address* [mac-address port-sec-vlan]
| |   |   |   |   +-rw mac-address      mac-address-type
| |   |   |   |   +-rw port-sec-vlan    vlan-type
| |   |   |   +-rw sticky
| |   |   |   |   +-rw sticky-flag?        empty
| |   |   |   |   +-rw port-security-mac-address* [mac-address port-sec-vlan]
| |   |   |   |   |   +-rw mac-address      mac-address-type
| |   |   |   |   |   +-rw port-sec-vlan    vlan-type
| |   |   |   |   +-rw shutdown-time?      uint32
| |   +-rw access
| |   |   +-rw accessvlan?    vlan-type
| |   x--rw access-mac-vlan-classification
| |   |   +-rw access
| |   |   |   +-rw vlan* [access-vlan-id access-mac-address]
| |   |   |   |   +-rw access-vlan-id    vlan-type
| |   |   |   |   +-rw access-mac-address  mac-address-type
| |   x--rw access-mac-group-vlan-classification
| |   |   +-rw access
| |   |   |   +-rw vlan* [access-vlan-id access-mac-group]
| |   |   |   |   +-rw access-vlan-id    vlan-type
| |   |   |   |   +-rw access-mac-group  mac-group-id-type
| |   +-rw trunk
| |   |   +-rw allowed
| |   |   |   +-rw vlan
| |   |   |   |   +-rw all?    empty
| |   |   |   |   +-rw none?    empty
| |   |   |   |   +-rw add?    ui32-vlan-20k-range
| |   |   |   |   +-rw except?   ui32-1k-vlan-range
| |   |   |   |   +-rw remove?   ui32-1k-vlan-range
| |   |   x--rw vlanoper
| |   |   |   +-rw vlan
| |   |   |   |   +-rw add?    ui32-vlan-range
| |   |   |   |   +-rw remove?   ui32-vlan-range
| |   x--rw trunk-vlan-classification
| |   |   +-rw allowed
| |   |   |   +-rw vlan
| |   |   |   |   +-rw add* [trunk-vlan-id]
| |   |   |   |   |   +-rw trunk-vlan-id    non-dot1q-vlan-type
| |   |   |   |   |   +-rw trunk-ctag-range? ui32-ctag-range
| |   |   |   +-rw remove* [trunk-vlan-id]
| |   |   |   |   +-rw trunk-vlan-id    non-dot1q-vlan-type
| |   |   |   |   +-rw trunk-ctag-range? ui32-ctag-range
| |   x--rw default-vlan-config
| |   |   +-rw default-transparent-vlan?  non-dot1q-vlan-type
| |   +-rw tag!
| |   |   +-rw native-vlan?    empty
| |   +-rw native-vlan-classification
| |   |   +-rw native-vlan-id?    native-vlan-type
| |   |   x--rw native-vlan-ctag-id?  dot1q-vlan-type
| |   x--rw native-vlan-xtagged-config
| |   |   +-rw native-vlan-id-xtagged?    vlan-type
| |   |   +-rw native-vlan-ctag-id-xtagged?  dot1q-vlan-type
| |   |   +-rw native-vlan-egress-type-xtagged? enumeration

```

```

| | |     x--rw native-vlan-untagged-config
| | |         +-rw native-vlan-id-untagged?    vlan-type
| | +---rw bfd-software-session?                      empty
| | +---rw ip
| | |     +-rw source-guard
| | |         +-rw source-guard-enable?   empty
| | |     +-rw ip-config:ip-config
| | |         +-rw ip-config:mtu?          ip-mtu
| | |         +-rw ip-config:directed-broadcast? empty
| | |         +-rw ip-config:irdp?        empty
| | |         +-rw ip-config:proxy-arp?   empty
| | |         +-rw ip-config:arp
| | |             +-rw ip-config:learn-any? empty
| | |             +-rw ip-config:arp-aging-timeout? uint32
| | |             +-rw ip-config:address* [address]
| | |                 +-rw ip-config:address      union
| | |                 +-rw ip-config:secondary?   empty
| | |                 +-rw ip-config:ospf-passive? empty
| | |                 +-rw ip-config:ospf-ignore?   empty
| | |             +-rw ip-config:unnumbered
| | |                 +-rw ip-config:ip-donor-interface-type? ip-unnumbered-donor-
interface-type_t
| | |                 +-rw ip-config:ip-donor-interface-name? ip-unnumbered-donor-
interface-name_t
| | |                     +-rw dai:arp
| | |                     +-rw dai:inspection
| | |                         +-rw dai:trust?   empty
| | |                         +-rw dai:filter
| | |                             +-rw dai:acl-name? dai-acl-policy-name
| | +---rw dhcp:interface-po-dhcp-conf
| | |     +-rw dhcp:dhcp
| | |         +-rw dhcp:relay
| | |             +-rw dhcp:servers* [relay-ip-addr server-vrf-name]
| | |                 +-rw dhcp:relay-ip-addr    dhcp-ipv4-address
| | |                 +-rw dhcp:server-vrf-name common-def:vrf-name
| | |             +-rw dhcp:gateway
| | |                 +-rw dhcp:gateway-address? dhcp-ipv4-address
| | |                 +-rw dhcp:gw-intf-type?   dhcp-gateway-interface-type
| | |                 +-rw dhcp:gw-intf-name?   dhcp-gateway-interface-name
| | |             +-rw dhcp:dhcp
| | |                 +-rw dhcp:snooping
| | |                     +-rw dhcp:dhcp-snooping-trust? empty
| | |             +-rw icmp:icmp
| | |                 +-rw icmp:rate-limiting?  uint32
| | |                 +-rw icmp:echo-reply?    empty
| | |                 +-rw icmp:redirect?    empty
| | |                 +-rw icmp:unreachable? empty
| | |             +-rw isis:intf-router-isis
| | |                 +-rw isis:int-router-isis
| | |                     +-rw isis:interface-ip-router-isis? empty
| | +---rw ospf:interface-PO-ospf-conf
| | |     +-rw ospf:ospf1
| | |         +-rw ospf:area?           ospf-area-id
| | |         +-rw ospf:auth-change-wait-time? common-def:time-interval-sec
| | |         +-rw ospf:authentication-key
| | |             | +-rw ospf:no-encrypt-auth-key-table
| | |                 | | +-rw ospf:no-encrypt-auth-key?  ospf-auth-psswd-string
| | |                 | | +-rw ospf:auth-key-table
| | |                     | | +-rw ospf:encrypt-type?   key-type
| | |                     | | +-rw ospf:auth-key?      ospf-auth-psswd-string
| | |             +-rw ospf:authentication
| | |                 | +-rw ospf:key-chain?   ospf-keychain-string
| | |                 +-rw ospf:hello-interval? common-def:time-interval-sec
| | |                 +-rw ospf:dead-interval?  common-def:time-interval-sec

```

```

| | |
| | |     +-rw ospf:retransmit-interval?      common-def:time-interval-sec
| | |     +-rw ospf:transmit-delay?           common-def:time-interval-sec
| | |     +-rw ospf:md5-authentication
| | |     | +-rw ospf:key-activation-wait-time?   common-def:time-interval-sec
| | |     | +-rw ospf:no-encrypt-key-table
| | |     | | +-rw ospf:no-encrypt-key-id?    uint32
| | |     | | +-rw ospf:no-encrypt-key?       ospf-auth-psswd-string
| | |     | +-rw ospf:key-table
| | |     | | +-rw ospf:key-id?             uint32
| | |     | | +-rw ospf:key?              key-type
| | |     | | +-rw ospf:md5-authentication-key? ospf-auth-psswd-string
| | |     +-rw ospf:cost?                uint32
| | |     +-rw ospf:network?            enumeration
| | |     +-rw ospf:intf-ldp-sync?      enumeration
| | |     +-rw ospf:database-filter
| | |     | +-rw ospf:all-out?          empty
| | |     | +-rw ospf:all-external?      database-filter-options
| | |     | +-rw ospf:all-summary-external? database-filter-options
| | |     +-rw ospf:mtu-ignore?        empty
| | |     +-rw ospf:active?           empty
| | |     +-rw ospf:passive?          empty
| | |     +-rw ospf:priority?         uint32
| | |     +-rw ospf:bfd
| | |     | +-rw ospf:intf-bfd-enable? empty
| | +-rw ipv6
| | |     +-rw raguard?             empty
| | |     +-rw ipv6-config:ipv6-config
| | |     | +-rw ipv6-config:address
| | |     | | +-rw ipv6-config:use-link-local-only? empty
| | |     | | +-rw ipv6-config:link-local-config
| | |     | | | +-rw ipv6-config:link-local-address?  inet:ipv6-address
| | |     | | | +-rw ipv6-config:link-local?        empty
| | |     | | +-rw ipv6-config:ipv6-address* [address]
| | |     | | | +-rw ipv6-config:address      union
| | |     | | | +-rw ipv6-config:secondary?    empty
| | |     | | +-rw ipv6-config:eui-config
| | |     | | | +-rw ipv6-config:eui64?       empty
| | |     | | | +-rw ipv6-config:eui-secondary? empty
| | |     | | +-rw ipv6-config:anycast?      empty
| | |     | +-rw ipv6-config:mtu?          ip-mtu
| | |     +-rw dhcpv6:interface-po-dhcp-conf
| | |     | +-rw dhcpv6:dhcp
| | |     | | +-rw dhcpv6:relay
| | |     | | | +-rw dhcpv6:servers* [relay-ip-addr]
| | |     | | | | +-rw dhcpv6:relay-ip-addr  dhcp-ipv6-address
| | |     | | | | +-rw dhcpv6:server-vrf-name? common-def:vrf-name
| | |     | | | +-rw dhcpv6:interface
| | |     | | | | +-rw dhcpv6:interface-type?  dhcpv6-iftype
| | |     | | | | +-rw dhcpv6:interface-name?  dhcpv6-ifname
| | |     | | +-rw dhcpv6:source-interface
| | |     | | | +-rw dhcpv6:source-intf-type? dhcpv6-relay-src-interface-type
| | |     | | | +-rw dhcpv6:source-intf-name? dhcpv6-src-ifname
| | |     | | +-rw dhcpv6:source-ip?       dhcp-ipv6-address
| | |     +-rw icmp:icmpv6
| | |     | +-rw icmp:rate-limiting?    uint32
| | |     | +-rw icmp:echo-reply?      empty
| | |     | +-rw icmp:redirect?       empty
| | |     | +-rw icmp:unreachable?    empty
| | |     +-rw ipv6-access-list:access-group* [ipv6-access-list ip-direction]
| | |     | +-rw ipv6-access-list:ipv6-access-list    ipv6-13-acl-policy-name
| | |     | | +-rw ipv6-access-list:ip-direction      enumeration
| | |     | | +-rw ipv6-access-list:traffic-type?    enumeration
| | |     +-rw ip-policy:policy
| | |     | +-rw ip-policy:route-map

```

```

    | | | |   +--rw ip-policy:ipv6-route-map-name?    common-def:name-string63
    | | | +-rw ipv6-nd-ra:ipv6-nd-ra
    | | |   +-rw ipv6-nd-ra:ipv6-intf-cmds
    | | |     +-rw ipv6-nd-ra:vrrp-suppress-interface-ra?  empty
    | | |     +-rw ipv6-nd-ra:nd
    | | |       +--rw ipv6-nd-ra:managed-config-flag?  empty
    | | |       +--rw ipv6-nd-ra:other-config-flag?  empty
    | | |       +--rw ipv6-nd-ra:broadcast-mac-trap?  empty
    | | |       +--rw ipv6-nd-ra:ra-lifetime?        common-def:time-interval-sec
    | | |       +--rw ipv6-nd-ra:reachable-time?    common-def:time-interval-msec
    | | |       +-rw ipv6-nd-ra:mtu?                uint32
    | | |       +-rw ipv6-nd-ra:retrans-timer?    common-def:time-interval-msec
    | | |       +-rw ipv6-nd-ra:hoplimit?        uint32
    | | |       +-rw ipv6-nd-ra:ns-interval?    common-def:time-interval-sec
    | | |       +-rw ipv6-nd-ra:suppress-ra
    | | |         +--rw ipv6-nd-ra:suppress-ra-flag?  empty
    | | |         +--rw ipv6-nd-ra:suppress-ra-mtu?  empty
    | | |         +--rw ipv6-nd-ra:suppress-ra-all?  empty
    | | |       +-rw ipv6-nd-ra:ra-interval
    | | |         +--rw ipv6-nd-ra:max-interval?  common-def:time-interval-sec
    | | |         +--rw ipv6-nd-ra:min?        common-def:time-interval-sec
    | | |       +-rw ipv6-nd-ra:send-ra?      empty
    | | |       +-rw ipv6-nd-ra:router-preference
    | | |         +--rw ipv6-nd-ra:router-pref-high?  empty
    | | |         +--rw ipv6-nd-ra:router-pref-low?   empty
    | | |         +--rw ipv6-nd-ra:router-pref-medium? empty
    | | |       +-rw ipv6-nd-ra:ra-dns-server* [dns-server-prefix]
    | | |         +--rw ipv6-nd-ra:dns-server-prefix  inet:ipv6-
address
    | | |           +-rw ipv6-nd-ra:dns-server-lifetime-multiplier?  uint32
    | | |           +-rw ipv6-nd-ra:ra-domain-name* [domain-name-string]
    | | |             +-rw ipv6-nd-ra:domain-name-string  string
    | | |             +-rw ipv6-nd-ra:domain-name-lifetime-multiplier?  uint32
    | | |           +-rw ipv6-nd-ra:address
    | | |             +-rw ipv6-nd-ra:suppressing-address* [suppress-ipv6-address]
    | | |               +-rw ipv6-nd-ra:suppress-ipv6-address  nd-suppress-ipv6-
address
    | | |                 +-rw ipv6-nd-ra:suppress-per-address?  empty
    | | |                 +-rw ipv6-nd-ra:address-suppress-all?  empty
    | | |               +-rw ipv6-nd-ra:dad
    | | |                 +-rw ipv6-nd-ra:attempts?    uint32
    | | |                 +-rw ipv6-nd-ra:time?        common-def:time-interval-sec
    | | |               +-rw ipv6-nd-ra:cache
    | | |                 +-rw ipv6-nd-ra:expire?      common-def:time-interval-sec
    | | |                 +-rw ipv6-nd-ra:cache-limit?  uint32
    | | |               +-rw ipv6-nd-ra:prefix* [prefix-ipv6-address]
    | | |                 +-rw ipv6-nd-ra:prefix-ipv6-address  inet:ipv6-prefix
    | | |                 +-rw ipv6-nd-ra:lifetime
    | | |                   +-rw (ch-valid-type)?
    | | |                     +--:(ca-no-advertise)
    | | |                       +--rw ipv6-nd-ra:no-advertise?  empty
    | | |                     +--:(ca-valid-lifetime)
    | | |                       +--rw ipv6-nd-ra:valid-lifetime?  common-
interval-sec
    | | |                         +--:(ca-valid-infinite)
    | | |                           +-rw ipv6-nd-ra:valid-infinite?  empty
    | | |                         +-rw ipv6-nd-ra:preferred
    | | |                           +-rw (ch-preferred-type)?
    | | |                             +--:(ca-preferred-lifetime)
    | | |                               +--rw ipv6-nd-ra:preferred-lifetime?  common-
def:time-interval-sec
    | | |                                 +--:(ca-preferred-infinite)
    | | |                                   +-rw ipv6-nd-ra:preferred-infinite?  empty
    | | |                                 +-rw ipv6-nd-ra:prefix-flags

```

```

| | | | |           +--rw ipv6-nd-ra:no-autoconfig?    empty
| | | | |           +--rw ipv6-nd-ra:no-onlink?      empty
| | | | |           +--rw ipv6-nd-ra:off-link?       empty
| | | | +--rw ipv6-nd-ra:neighbor* [ipv6-address]
| | | | |           +--rw ipv6-nd-ra:ipv6-address     neighbor-ipv6-address
| | | | |           +--rw ipv6-nd-ra:hardware-address? macAddr
| | | | +--rw isis:intf-ipv6-router-isis
| | | | |           +--rw isis:int-ipv6-router-isis
| | | | |           +--rw isis:interface-ipv6-router-isis? empty
| | | | +--rw ospfv3:interface-ospfv3-conf
| | | | |           +--rw ospfv3:interface-area?      ospf:ospf-area-id
| | | | |           +--rw ospfv3:active?            empty
| | | | |           +--rw ospfv3:passive?          empty
| | | | |           +--rw ospfv3:bfd
| | | | | |           +--rw ospfv3:bfd-enable?   empty
| | | | |           +--rw ospfv3:cost?             uint32
| | | | |           +--rw ospfv3:instance?        uint32
| | | | |           +--rw ospfv3:mtu-ignore?       empty
| | | | |           +--rw ospfv3:network?         enumeration
| | | | |           +--rw ospfv3:priority?        uint32
| | | | |           +--rw ospfv3:suppress-linklsa? empty
| | | | |           +--rw ospfv3:authentication
| | | | | |           +--rw ospfv3:key-chain?    string
| | | | |           +--rw ospfv3:ipsec-auth-key-config
| | | | | |           +--rw ospfv3:spi?          spi-value-type
| | | | | |           +--rw (ch-algorithm)?
| | | | | | |           +--:(ca-ah-algorithm)
| | | | | | | |           +--rw ospfv3:ah?        algorithm-type-ah
| | | | | | | |           +--rw ospfv3:ah-key?    ipsec-authentication-hexkey-string
| | | | | | |           +--:(ca-esp-algorithm)
| | | | | | | |           +--rw ospfv3:esp?        algorithm-type-esp
| | | | | | | |           +--rw ospfv3:esp-auth?   algorithm-type-ah
| | | | | | | |           +--rw ospfv3:esp-auth-key? ipsec-authentication-hexkey-string
| | | | | +--rw ospfv3:ipsec
| | | | | |           +--rw ospfv3:ipsec-authentication-disable? empty
| | | | | |           +--rw ospfv3:ifc-key-add-remove-interval? common-def:time-
interval-sec
| | | | |           +--rw ospfv3:link-interval-properties
| | | | | |           +--rw ospfv3:hello-interval?    common-def:time-interval-sec
| | | | | |           +--rw ospfv3:dead-interval?      common-def:time-interval-sec
| | | | | |           +--rw ospfv3:hello-jitter?     uint32
| | | | | |           +--rw ospfv3:retransmit-interval? common-def:time-interval-sec
| | | | | |           +--rw ospfv3:transmit-delay?     common-def:time-interval-sec
| | | | +--rw pim:pim-intf-po-cont
| | | | |           +--rw pim:ipv6-pim-int-cmd
| | | | | |           +--rw pim:pim-sparse?      empty
| | | | | |           +--rw pim:pim
| | | | | | |           +--rw pim:neighbor-filter?  ip-prefix-name-t
| | | | | | |           +--rw pim:dr-priority?     uint32
| | | | | | |           +--rw pim:ttl-threshold?   uint32
| | | | | | |           +--rw pim:mcast-bdry-prefix-list? ip-prefix-name-t
| | | | +--rw vrrpv3:vrrpv3-holder
| | | | |           +--rw vrrpv3:vrrpv3* [vrid]
| | | | | |           +--rw vrrpv3:vrid           vrid-type
| | | | | |           +--rw vrrpv3:virtual-ip* [virtual-ipaddr]
| | | | | | |           +--rw vrrpv3:virtual-ipaddr  inet:ipv6-address
| | | | | +--rw vrrpv3:track
| | | | | |           +--rw vrrpv3:interface* [interface-type interface-name]
| | | | | | |           +--rw vrrpv3:interface-type track-iftype
| | | | | | |           +--rw vrrpv3:interface-name track-ifname
| | | | | | |           +--rw vrrpv3:track-priority? uint8
| | | | | |           +--rw vrrpv3:advertisement-interval? uint32
| | | | | |           +--rw vrrpv3:enable?        empty
| | | | | |           +--rw vrrpv3:hold-time?     uint32

```

```

| | | | +--rw vrrpv3:preempt-mode?           empty
| | | | +--rw vrrpv3:priority?             uint8
| | | | +--rw vrrpv3:description?         string
| | | +--rw vrrpv3:vrrpv3e* [vrid]
| | | | +--rw vrrpv3:vrid                  vrid-type
| | | | +--rw vrrpv3:virtual-ip* [virtual-ipaddr]
| | | | | +--rw vrrpv3:virtual-ipaddr     inet:ipv6-address
| | | | +--rw vrrpv3:track
| | | | | +--rw vrrpv3:interface* [interface-type interface-name]
| | | | | | +--rw vrrpv3:interface-type   track-iftype
| | | | | | +--rw vrrpv3:interface-name   track-ifname
| | | | | | +--rw vrrpv3:track-priority?  uint8
| | | | +--rw vrrpv3:enable?              empty
| | | | +--rw vrrpv3:hold-time?          uint32
| | | | +--rw vrrpv3:preempt-mode?       empty
| | | | +--rw vrrpv3:priority?          uint8
| | | | +--rw vrrpv3:description?       string
| | | | +--rw vrrpv3:advertise-backup? empty
| | | | +--rw vrrpv3:nd-advertisement-timer? uint32
| | | | +--rw vrrpv3:advertisement-interval-scale? uint32
| | | | +--rw vrrpv3:backup-advertisement-interval? uint32
| | | | +--rw vrrpv3:vrrpe-advertisement-interval? uint32
| | | | +--rw vrrpv3:short-path-forwarding
| | | | | +--rw vrrpv3:basic?            empty
| | | | | +--rw vrrpv3:revert-priority?  uint8
| | | +--rw snmp
| | | | +--rw trap
| | | | | +--rw link-status
| | | | | | +--rw snmp-link-disable?   empty
| | | +--rw track
| | | | +--rw track_enable?           empty
| | | | +--rw min-link?              uint32
| | | | +--rw interface* [track-interface-type track-interface-name]
| | | | | +--rw track-interface-type  enumeration
| | | | | +--rw track-interface-name  string
| | | | +--rw remove
| | | | | +--rw remove-all-track-interfaces? empty
| | | +--rw bfd
| | | | +--rw interval
| | | | | +--rw min-tx?               bfd-tx-interval-type
| | | | | +--rw min-rx?               bfd-rx-interval-type
| | | | | +--rw multiplier?          bfd-multiplier-type
| | | | +--rw bfd-shutdown?          empty
| | | +--rw edge-loop-detection-native
| | | | +--rw loop-detection-native? empty
| | | +--rw edge-loop-detection
| | | | +--rw eldprio?              uint32
| | | | +--rw eldshutdown-disable?  empty
| | | | +--rw eldvlan?              ui32-vlan-range
| | | +--rw priority-tag-enable?    empty
| | | +--rw load-balance?
| | | | +--rw load-balance-type?    enumeration
| | | +--rw endpoint-tracking
| | | | +--rw endpoint-tracking-enable? empty
| | | | +--rw timeout
| | | | | +--rw reauth-period?      uint32
| | | +--rw bpdu-drop-enable?       empty
| | | +--rw core-isolation-track?  empty
| | +--rw ethernet-segment!
| | | +--rw lacp
| | | | +--rw system-id?           string
| | | | +--rw auto?                empty
| | | | +--rw esi?                 union
| | | | +--rw load-balance-mode?   enumeration

```

```

| |   +---rw mac-access-list:mac
| |   |   +---rw mac-access-list:access-group* [mac-access-list mac-direction]
| |   |   |   +---rw mac-access-list:mac-access-list      mac-acl-name
| |   |   |   +---rw mac-access-list:mac-direction      enumeration
| |   |   |   +---rw mac-access-list:traffic-type?    enumeration
| |   +---rw lif:logical-interface
| |   |   +---rw lif:port-channel* [pc-instance-id]
| |   |   |   +---rw lif:pc-instance-id        lif-port-channel-type
| |   |   |   +---rw lif:shutdown?           empty
| |   |   |   +---rw lif:name?             string
| |   |   |   +---rw lif:untagged
| |   |   |       +---rw lif:untagged-vlan
| |   |   |           +---rw lif:untagged-vlan-id?  uint32
| |   |   +---rw lif:tagged-outer-vlan
| |   |   |       +---rw lif:outer-tagged-vlan-id?  uint32
| |   |   |       +---rw lif:inner-tagged-vlan-id?  uint32
| |   +---rw qos-mls:storm-control
| |   |   +---rw qos-mls:ingress* [protocol-type]
| |   |   |   +---rw qos-mls:protocol-type  enumeration
| |   |   |   +---rw qos-mls:rate-format?   enumeration
| |   |   |   +---rw qos-mls:rate-bps?     rate-limit-bps-type
| |   |   |   +---rw qos-mls:rate-percent? rate-limit-percentage-type
| |   |   |   +---rw qos-mls:bum-action?   enumeration
| |   +---rw qos-mls:qos
| |   |   +---rw qos-mls:default-cos?      cos-id-type
| |   |   +---rw qos-mls:default-tc?       traffic-class-id-type
| |   +---rw qos-mls:trust
| |   |   |   +---rw qos-mls:trust-cos?   empty
| |   |   |   +---rw qos-mls:trust-dscp?   empty
| |   +---rw qos-mls:remark
| |   |   |   +---rw qos-mls:remark-dscp? empty
| |   |   +---rw qos-mls:cos-mutation?    map-name-type
| |   +---rw qos-mls:cos-mutation-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:traffic-class-cos? map-name-type
| |   +---rw qos-mls:traffic-class-cos-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:cos-traffic-class? map-name-type
| |   +---rw qos-mls:cos-traffic-class-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:traffic-class-dscp? map-name-type
| |   +---rw qos-mls:traffic-class-dscp-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:dscp-mutation?    map-name-type
| |   +---rw qos-mls:dscp-mutation-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:dscp-traffic-class? map-name-type
| |   +---rw qos-mls:dscp-traffic-class-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:dscp-cos?        map-name-type
| |   +---rw qos-mls:dscp-cos-builtin
| |   |   +---rw qos-mls:map-name?      builtin-map-name-type
| |   +---rw qos-mls:random-detect
| |   |   +---rw qos-mls:traffic-class* [red-tc-value red-dp-value]
| |   |   |   +---rw qos-mls:red-tc-value   traffic-class-id-type
| |   |   |   +---rw qos-mls:red-dp-value  drop-precedence-id-type
| |   |   |   +---rw qos-mls:red-profile-id? red-profile-id-type
| |   +---rw qos-mls:drop-monitor
| |   |   +---rw qos-mls:drop-monitor-enable? empty
| |   +---rw qos-mls:port-speed-up?    uint32
| |   +---rw qos-mls:flowcontrol
| |   |   +---rw qos-mls:link-level-flowcontrol
| |   |       +---rw qos-mls:flowcontrol-tx?  enumeration
| |   |       +---rw qos-mls:flowcontrol-rx?  enumeration

```

```

    |   |   |
    |   |   +-rw qos-mls:pfc* [pfc-cos]
    |   |   |   +-rw qos-mls:pfc-cos          cos-id-type
    |   |   |   +-rw qos-mls:pfc-flowcontrol-tx  enumeration
    |   |   |   +-rw qos-mls:pfc-flowcontrol-rx  enumeration
    |   |   +-rw qos-mls:threshold
    |   |   |   +-rw qos-mls:threshold-tx-on?   flowcontrol-threshold-type
    |   |   |   +-rw qos-mls:threshold-tx-off?   flowcontrol-threshold-type
    |   |   +-rw qos-mls:pfc-threshold
    |   |   |   +-rw qos-mls:threshold
    |   |   |   |   +-rw qos-mls:pfc* [pfc-threshold-cos]
    |   |   |   |   +-rw qos-mls:pfc-threshold-cos      cos-id-type
    |   |   |   |   +-rw qos-mls:pfc-threshold-tx-on?   flowcontrol-threshold-type
    |   |   |   |   +-rw qos-mls:pfc-threshold-tx-off?   flowcontrol-threshold-type
    |   |   +-rw sflow:sflow
    |   |   |   +-rw sflow:enable?        empty
    |   |   |   +-rw sflow:polling-interval?  uint32
    |   |   |   +-rw sflow:sample-rate?     uint32
    |   |   +-rw qos-mqc:service-policy
    |   |   |   +-rw qos-mqc:in?       map-name-type
    |   |   |   +-rw qos-mqc:out?      map-name-type
    |   |   +-rw ip-access-list:ip-acl-interface
    |   |   |   +-rw ip-access-list:ip
    |   |   |   |   +-rw ip-access-list:access-group* [ip-access-list ip-direction]
    |   |   |   |   +-rw ip-access-list:ip-access-list  13-acl-policy-name
    |   |   |   |   +-rw ip-access-list:ip-direction  enumeration
    |   |   |   |   +-rw ip-access-list:traffic-type?  enumeration
    |   |   +-rw ip-access-list:ip-subnet-broadcast-acl-interface
    |   |   |   +-rw ip-access-list:ip
    |   |   |   |   +-rw ip-access-list:subnet-broadcast-acl* [ip-access-list]
    |   |   |   |   +-rw ip-access-list:ip-access-list  13-acl-policy-name
    |   |   +-rw ip-policy:ip-pbr-interface
    |   |   |   +-rw ip-policy:ip
    |   |   |   +-rw ip-policy:policy
    |   |   |   |   +-rw ip-policy:route-map
    |   |   |   |   |   +-rw ip-policy:route-map-name?  common-def:name-string63
    |   |   +-rw isis:intf-isis!
    |   |   |   +-rw isis:interface-isis
    |   |   |   |   +-rw isis:auth-check
    |   |   |   |   |   +-rw isis:auth-check-level1
    |   |   |   |   |   |   +-rw isis:interface-auth-check-level1-disable?  empty
    |   |   |   |   |   +-rw isis:auth-check-level2
    |   |   |   |   |   |   +-rw isis:interface-auth-check-level2-disable?  empty
    |   |   |   +-rw isis:interface-reverse-metric!
    |   |   |   |   +-rw isis:rev-metric-common-attributes
    |   |   |   |   |   +-rw isis:rev-metric-val?        uint32
    |   |   |   |   |   +-rw isis:rev-metric-whole-lan?  empty
    |   |   |   |   |   +-rw isis:rev-metric-te-def-metric? empty
    |   |   |   +-rw isis:interface-auth-mode
    |   |   |   |   +-rw isis:interface-md5
    |   |   |   |   |   +-rw isis:interface-auth-mode-md5-level1?  empty
    |   |   |   |   |   +-rw isis:interface-auth-mode-md5-level2?  empty
    |   |   |   +-rw isis:interface-auth-key* [interface-auth-key-level]
    |   |   |   |   +-rw isis:interface-auth-key-level  enumeration
    |   |   |   |   +-rw isis:interface-auth-key-str?    string
    |   |   |   +-rw isis:interface-hello
    |   |   |   |   +-rw isis:interface-hello-padding
    |   |   |   |   |   +-rw isis:interface-hello-padding-disable?  empty
    |   |   |   +-rw isis:interface-hello-interval* [interface-hello-interval-level]
    |   |   |   |   +-rw isis:interface-hello-interval-level  enumeration
    |   |   |   |   +-rw isis:interface-hello-interval-val?   uint32
    |   |   |   +-rw isis:interface-hello-multiplier* [interface-hello-multiplier-level]
    |   |   |   |   +-rw isis:interface-hello-multiplier-level  enumeration
    |   |   |   |   +-rw isis:interface-hello-multiplier-val?   uint32
    |   |   |   +-rw isis:circuit-type?           enumeration

```

```

| | |
| | |    +--rw isis:interface-ipv6
| | |    |    +--rw isis:interface-ipv6-metric* [interface-ipv6-metric-level]
| | |    |    |    +-rw isis:interface-ipv6-metric-level    enumeration
| | |    |    |    +-rw isis:interface-ipv6-metric-val?    uint32
| | |    +--rw isis:interface-metric* [interface-metric-level]
| | |    |    +-rw isis:interface-metric-level    enumeration
| | |    |    +-rw isis:interface-metric-val?    uint32
| | |    +--rw isis:interface-point-to-point?    empty
| | |    +--rw isis:interface-passive?    empty
| | |    +--rw isis:interface-priority
| | |    |    +-rw isis:interface-priority-level1?    uint32
| | |    |    +-rw isis:interface-priority-level2?    uint32
| | |    +--rw isis:interface-bfd
| | |    |    +-rw isis:interface-bfd-enable?    empty
| | |    +--rw isis:interface-ldp-sync?    enumeration
| | |    +--rw isis:segment-routing
| | |    |    +-rw isis:interface-segment-routing-disable?    empty
| | |    +--rw isis:segment-routing-prefix-sid
| | |    |    +-rw isis:sr-prefix-sid-value?    uint32
| | +--rw lacp-pdu-forward:lacp-pdu-forward
| | |    +-rw lacp-pdu-forward:enable?    empty
| | +--rw vrrp:vrrp* [vrid version]
| | |    +-rw vrrp:vrid                      vrid-type
| | |    +-rw vrrp:version                   uint8
| | |    +-rw vrrp:virtual-ip* [virtual-ipaddr]
| | |    |    +-rw vrrp:virtual-ipaddr    inet:ipv4-address
| | |    +-rw vrrp:track
| | |    |    +-rw vrrp:interface* [interface-type interface-name]
| | |    |    |    +-rw vrrp:interface-type   track-iftype
| | |    |    |    +-rw vrrp:interface-name  track-ifname
| | |    |    |    +-rw vrrp:track-priority?  uint8
| | |    +-rw vrrp:advertisement-interval?  uint32
| | |    +-rw vrrp:enable?                  empty
| | |    +-rw vrrp:hold-time?              uint32
| | |    +-rw vrrp:preempt-mode?          empty
| | |    +-rw vrrp:arp
| | |    |    +-rw vrrp:unicast-request
| | |    |    +-rw vrrp:receive?          empty
| | |    +-rw vrrp:priority?            uint8
| | |    +-rw vrrp:description?        string
| | +--rw vrrp:vrrp-e* [vrid]
| | |    +-rw vrrp:vrid                      vrid-type
| | |    +-rw vrrp:virtual-ip* [virtual-ipaddr]
| | |    |    +-rw vrrp:virtual-ipaddr    inet:ipv4-address
| | |    +-rw vrrp:track
| | |    |    +-rw vrrp:interface* [interface-type interface-name]
| | |    |    |    +-rw vrrp:interface-type   track-iftype
| | |    |    |    +-rw vrrp:interface-name  track-ifname
| | |    |    |    +-rw vrrp:track-priority?  uint8
| | |    +-rw vrrp:advertisement-interval?  uint32
| | |    +-rw vrrp:enable?                  empty
| | |    +-rw vrrp:hold-time?              uint32
| | |    +-rw vrrp:preempt-mode?          empty
| | |    +-rw vrrp:arp
| | |    |    +-rw vrrp:unicast-request
| | |    |    +-rw vrrp:receive?          empty
| | |    +-rw vrrp:priority?            uint8
| | |    +-rw vrrp:description?        string
| | +-rw mct:cluster-client
| | |    +-rw mct:client-id?      mct-po-client-id-type
| | +-rw mct:cluster-track
| | |    +-rw mct:cluster-track-flag?  empty
| | +-rw mvrp:mvrp-intf
| | |    +-rw mvrp:intf-enable?      empty

```

```

| | |   +-rw mvrp:applicant-mode?      applicant-state-type
| | |   +-rw mvrp:registration-mode
| | |   |   +-rw mvrp:forbidden
| | |   |   +-rw mvrp:vlan
| | |   |   |   +-rw mvrp:add?      member-vlan-id
| | |   |   |   +-rw mvrp:remove?    member-vlan-id
| | |   +-rw mvrp:timer
| | |   |   +-rw mvrp:join?        uint32
| | |   |   +-rw mvrp:leave?       uint32
| | |   |   +-rw mvrp:leave-all?   uint32
| | |   +-rw openflow:openflowPo
| | |   |   +-rw openflow:enablePoMode
| | |   |   +-rw openflow:modeTypePo?  enumeration
| | |   +-rw uda-access-list:uda
| | |   |   +-rw uda-access-list:access-group* [uda-access-list uda-direction]
| | |   |   |   +-rw uda-access-list:uda-access-list  uda-acl-name
| | |   |   |   +-rw uda-access-list:uda-direction   enumeration
| | |   |   +-rw uda-access-list:policy
| | |   |   |   +-rw uda-access-list:route-map?    route-map-type
| | |   +-rw uda-access-list:offsets-container
| | |   |   +-rw uda-access-list:offsets?     uda-profile-name
| | |   +-rw xstp:spanning-tree
| | |   |   +-rw xstp:autoedge?      empty
| | |   |   +-rw xstp:cost?        uint32
| | |   |   +-rw xstp:portfast
| | |   |   |   +-rw xstp:portfastbasic?  empty
| | |   |   |   +-rw xstp:bpdu-guard?    empty
| | |   |   +-rw xstp:edgeport
| | |   |   |   +-rw xstp:edgeportbasic?  empty
| | |   |   |   +-rw xstp:bpdu-guard?    empty
| | |   |   +-rw xstp:guard
| | |   |   |   +-rw xstp:root?      empty
| | |   |   +-rw xstp:bpdu-mac?    enumeration
| | |   |   +-rw xstp:link-type?   enumeration
| | |   |   +-rw xstp:priority?    uint32
| | |   |   +-rw xstp:restricted-role? empty
| | |   |   +-rw xstp:restricted-tcn? empty
| | |   |   +-rw xstp:shutdown?    empty
| | |   |   +-rw xstp:vlan* [id]
| | |   |   |   +-rw xstp:id        uint32
| | |   |   |   +-rw xstp:cost?    uint32
| | |   |   |   +-rw xstp:priority? uint32
| | |   |   |   +-rw xstp:guard
| | |   |   |   |   +-rw xstp:root?  empty
| | |   |   +-rw xstp:instance* [id]
| | |   |   |   +-rw xstp:id        mstp-instance-type
| | |   |   |   +-rw xstp:cost?    uint32
| | |   |   |   +-rw xstp:priority? uint32
| | |   |   |   +-rw xstp:restricted-role? empty
| | |   |   |   +-rw xstp:restricted-tcn? empty
| | |   +-rw management* [name]
| | |   |   +-rw name          standalone-man-interface-type
| | |   +-rw tcp
| | |   |   +-rw tcp_burstrate?  uint32
| | |   |   +-rw tcp_lockdown?   uint32
| | |   +-rw ip
| | |   |   +-rw icmp
| | |   |   |   +-rw unreachable? empty
| | |   |   |   +-rw echo_reply?  empty
| | |   |   |   +-rw rate_limiting? uint32
| | |   |   +-rw address
| | |   |   |   +-rw dhcp?       empty
| | |   |   |   +-rw ip-address? common-def:ipv4-address-prefix-type
| | |   |   +-rw gateway

```

```

| | | | +--rw gateway-address?    inet:ipv4-address
| | | | +--rw oper-address
| | | | +--ro oper-ip-address?   common-def:ipv4-address-prefix-type
| | | | +--rw oper-gateway-con
| | | | +--ro oper-gateway?    inet:ipv4-address
| | | | +--rw ip-access-list:access-group
| | | |     +--rw ip-access-list:mgmt-ip-access-list?   13-acl-policy-name
| | | |     +--rw ip-access-list:mgmt-ip-direction?      enumeration
| | | +--rw ipv6
| | | | +--rw icmpv6
| | | | | +--rw v6_unreachable?   empty
| | | | | +--rw v6_echo_reply?   empty
| | | | | +--rw v6_rate_limiting? uint32
| | | | +--rw ipv6-address-cont
| | | | | +--rw ipv6-global-cont
| | | | | | +--rw ipv6-global-address?       common-def:ipv6-address-prefix
| | | | | | +--rw ipv6-global-address-eui64? empty
| | | | | +--rw autoconfig?           empty
| | | | | +--rw dhcpv6?            empty
| | | | +--ro ipv6-address*        string
| | | | +--ro ipv6-gateways*       string
| | | | +--rw ipv6-access-list:access-group
| | | | | +--rw ipv6-access-list:mgmt-ipv6-access-list?   ipv6-13-acl-policy-name
| | | | | +--rw ipv6-access-list:mgmt-ip-direction?      enumeration
| | +--rw vrf
| | | +--rw vrf-forwarding?     common-def:vrf-name
| | +--rw speed?               enumeration
| | +--rw line-speed
| | | +--ro actual?           string
| | | +--ro configured?       string
| | +--rw shutdown_management? empty
| | +--ro shutdown_management_oper? string
| | +--rw redundant
| | | +--rw management
| | | | +--ro redundant-management-port? string
| | +--ro rmeinfo?             string
| +--rw gre-vxlan:tunnel* [identifier]
| | +--rw gre-vxlan:identifier          uint32
| | +--rw gre-vxlan:mode
| | | +--rw gre-vxlan:gre
| | | | +--rw gre-vxlan:ip?   empty
| | +--rw gre-vxlan:gre-source
| | | +--rw (source-cmd)?
| | | | +--:(ca-source-address)
| | | | | +--rw gre-vxlan:source-address?   inet:ipv4-address
| | | | +--:(ca-interface-loopback)
| | | | | +--rw gre-vxlan:interface-loopback? lo:intf-loopback-port-type
| | | | +--:(ca-interface-ethernet)
| | | | | +--rw gre-vxlan:interface-ethernet?   interface:interface-type
| | | | +--:(ca-interface-ve)
| | | | | +--rw gre-vxlan:interface-ve?        uint32
| | +--rw gre-vxlan:tunnel-destination?   inet:ipv4-address
| | +--rw gre-vxlan:tunnel-shutdown?     empty
| | +--rw gre-vxlan:tunnel-router-interface
| | | +--rw gre-vxlan:router-ve?   uint32
| | +--rw gre-vxlan:gre-ttl?           uint32
| | +--rw gre-vxlan:gre-dscp?         uint32
| | +--rw gre-vxlan:tunnel-name?
| | +--rw gre-vxlan:dscp-ttl-mode?   enumeration
| | +--rw gre-vxlan:statistics?      empty
| | +--rw gre-vxlan:keepalive
| | | +--rw gre-vxlan:time-interval?  uint32
| | | +--rw gre-vxlan:retry-count?   uint32
| +--rw interface-vlan

```

```

|   +-rw interface
|   +-rw vlan* [name]
|       +-rw name                               vlan-type
|       +-rw mac-learning
|           +-rw mac-learning-disable?    empty
|       +-rw statistics?
|           +-rw statistics-sync?      empty
|       +-rw loop-detection?
|           +-rw loop-detection-shutdown-disable? empty
|       +-rw router-interface
|           +-rw ve-config?    ve-type
|       +-ro ifindex?                    uint64
|       +-rw description?              string
|       +-rw vlan-name?
|       +-rw ip
|           +-rw dai:arp
|               +-rw dai:inspection
|                   +-rw dai:trust?    empty
|               +-rw dai:filter
|                   +-rw dai:acl-name?  dai-acl-policy-name
|           +-rw dhcp:dhcp
|               +-rw dhcp:snooping
|                   +-rw dhcp:vlan-dhcp-snooping-enable? empty
|           +-rw igmp-snooping:igmpPIM
|               +-rw igmp-snooping:snooping
|                   +-rw igmp-snooping:vlan-pimv4-enable? empty
|           +-rw igmp-snooping:igmpVlan
|               +-rw igmp-snooping:snooping
|                   +-rw igmp-snooping:igmps-version?          igmps-version-
type
|           +-rw igmp-snooping:igmps-last-member-query-interval? lmqt-type
|           +-rw igmp-snooping:igmps-query-max-response-time? qmrt-type
|           +-rw igmp-snooping:igmps-query-interval?          qi-type
|           +-rw igmp-snooping:igmps-enable?                  empty
|           +-rw igmp-snooping:igmps-fast-leave?             empty
|           +-rw igmp-snooping:restrict-unknown-multicast? empty
|           +-rw igmp-snooping:igmps-querier
|               +-rw igmp-snooping:igmps-qenable?    empty
|               +-rw igmp-snooping:igmps_mrouter
|                   +-rw igmp-snooping:igmps-interface* [igmps-if-type igmps-value]
|                       +-rw igmp-snooping:igmps-if-type    enumeration
|                       +-rw igmp-snooping:igmps-value     string-type
|                   +-rw igmp-snooping:igmps_static-group* [igmps-mcast-address igmps-
interface igmps-if-type igmps-value]
|                       +-rw igmp-snooping:igmps-mcast-address  inet:ipv4-address
|                       +-rw igmp-snooping:igmps-interface    enumeration
|                       +-rw igmp-snooping:igmps-if-type    enumeration
|                       +-rw igmp-snooping:igmps-value     string-type
|           +-rw ipv6
|               +-rw mld-snooping:mldPIM
|                   +-rw mld-snooping:snooping
|                       +-rw mld-snooping:vlan-pimv6-enable? empty
|               +-rw mld-snooping:mldVlan
|                   +-rw mld-snooping:snooping
|                       +-rw mld-snooping:last-member-query-interval? lmqt-type
|                       +-rw mld-snooping:query-max-response-time? qmrt-type
|                       +-rw mld-snooping:query-interval?          qi-type
|                       +-rw mld-snooping:mldVersion?            version-type
|                       +-rw mld-snooping:enable?                empty
|                       +-rw mld-snooping:fast-leave?             empty
|                   +-rw mld-snooping:querier
|                       +-rw mld-snooping:qenable?    empty
|                   +-rw mld-snooping:mrouter
|                       +-rw mld-snooping:interface* [if-type value]

```

```

|   |   |   +-rw mld-snooping:if-type    enumeration
|   |   |   +-rw mld-snooping:value     string-type
|   |   +-rw mld-snooping:static-group* [mcast-address interface if-type value]
|   |   |   +-rw mld-snooping:mcast-address  inet:ipv6-address
|   |   |   +-rw mld-snooping:interface    enumeration
|   |   |   +-rw mld-snooping:if-type    enumeration
|   |   |   +-rw mld-snooping:value     string-type
|   +-rw mac-access-list:mac
|   |   +-rw mac-access-list:access-group* [mac-access-list mac-direction]
|   |   |   +-rw mac-access-list:mac-access-list  mac-acl-name
|   |   |   +-rw mac-access-list:mac-direction    enumeration
|   |   |   +-rw mac-access-list:traffic-type?  enumeration
|   +-rw arp:suppress-arp
|   |   +-rw arp:suppress-arp-enable?  empty
|   +-rw span:remote-span?          empty
|   +-rw ipv6-nd-ra:suppress-nd
|   |   +-rw ipv6-nd-ra:suppress-nd-enable?  empty
|   +-rw xstp:spanning-tree
|   |   +-rw xstp:stp-shutdown?  empty
+-rw protocol
|   +-rw dot3ah:link-oam!
|   |   +-rw dot3ah:shutdown?  empty
|   |   +-rw dot3ah:pdu-rate?  uint32
|   |   +-rw dot3ah:time-out?  uint32
|   +-rw eld:edge-loop-detection!
|   |   +-rw eld:pdu-rx-limit?  uint32
|   |   +-rw eld:hello-interval?  uint32
|   |   +-rw eld:shutdown-time?  uint32
|   |   +-rw eld:raslog-duration?  uint32
|   +-rw lldp:lldp!
|   |   +-rw lldp:description?      string
|   |   +-rw lldp:hello?          uint32
|   |   +-rw lldp:mode?           enumeration
|   |   +-rw lldp:multiplier?     uint32
|   |   +-rw lldp:advertise
|   |   |   +-rw lldp:dot1-tlv?    empty
|   |   |   +-rw lldp:dot3-tlv?    empty
|   |   |   +-rw lldp:bgp-auto-nbr-tlv?  empty
|   |   |   +-rw lldp:optional-tlv
|   |   |   |   +-rw lldp:management-address?  empty
|   |   |   |   +-rw lldp:port-description?  empty
|   |   |   |   +-rw lldp:system-capabilities?  empty
|   |   |   |   +-rw lldp:adv-tlv-system-description?  empty
|   |   |   |   +-rw lldp:adv-tlv-system-name?  empty
|   |   |   +-rw lldp:system-name?      string
|   |   +-rw lldp:system-description?  string
|   |   +-rw lldp:disable?          empty
|   |   +-rw lldp:profile* [profile-name]
|   |   |   +-rw lldp:profile-name  string
|   |   |   +-rw lldp:description?  string
|   |   |   +-rw lldp:hello?       uint32
|   |   |   +-rw lldp:mode?        enumeration
|   |   |   +-rw lldp:multiplier?  uint32
|   |   |   +-rw lldp:advertise
|   |   |   |   +-rw lldp:dot1-tlv?    empty
|   |   |   |   +-rw lldp:dot3-tlv?    empty
|   |   |   |   +-rw lldp:bgp-auto-nbr-tlv?  empty
|   |   |   |   +-rw lldp:optional-tlv
|   |   |   |   |   +-rw lldp:management-address?  empty
|   |   |   |   |   +-rw lldp:port-description?  empty
|   |   |   |   |   +-rw lldp:system-capabilities?  empty
|   |   |   |   |   +-rw lldp:adv-tlv-system-description?  empty
|   |   |   |   |   +-rw lldp:adv-tlv-system-name?  empty
|   +-rw mvrp:mvrp-global!

```

```

| |   +--rw mvrp:timer
| |     +--rw mvrp:join?          uint32
| |     +--rw mvrp:leave?         uint32
| |     +--rw mvrp:leave-all?    uint32
| +-rw udld:udld!
| |   +--rw udld:hello?         uint32
| |   +--rw udld:multiplier?    uint32
| |   +--rw udld:shutdown?      empty
| +-rw xstp:spanning-tree
|   +--rw xstp:stp!
|     +--rw xstp:timer-config
|       +--rw xstp:hello-time?  uint32
|       +--rw xstp:forward-delay? uint32
|       +--rw xstp:max-age?    uint32
|       +--rw xstp:description? string
|       +--rw xstp:bridge-priority? uint32
|       +--rw xstp:error-disable-timeout
|       +--rw xstp:enable?      empty
|       +--rw xstp:interval?    uint32
|     +--rw xstp:port-channel
|       +--rw xstp:path-cost?   enumeration
|       +--rw xstp:shutdown?    empty
| +-rw xstp:rstp!
|   +--rw xstp:timer-config
|     +--rw xstp:hello-time?  uint32
|     +--rw xstp:forward-delay? uint32
|     +--rw xstp:max-age?    uint32
|     +--rw xstp:description? string
|     +--rw xstp:bridge-priority? uint32
|     +--rw xstp:error-disable-timeout
|     +--rw xstp:enable?      empty
|     +--rw xstp:interval?    uint32
|   +--rw xstp:port-channel
|     +--rw xstp:path-cost?   enumeration
|     +--rw xstp:shutdown?    empty
|     +--rw xstp:transmit-holdcount? uint32
| +-rw xstp:pvst!
|   +--rw xstp:timer-config
|     +--rw xstp:hello-time?  uint32
|     +--rw xstp:forward-delay? uint32
|     +--rw xstp:max-age?    uint32
|     +--rw xstp:description? string
|     +--rw xstp:bridge-priority? uint32
|     +--rw xstp:error-disable-timeout
|     +--rw xstp:enable?      empty
|     +--rw xstp:interval?    uint32
|   +--rw xstp:port-channel
|     +--rw xstp:path-cost?   enumeration
|     +--rw xstp:shutdown?    empty
|     +--rw xstp:vlan* [id]
|       +--rw xstp:id          uint32
|       +--rw xstp:priority?    uint32
|       +--rw xstp:timer-config
|         +--rw xstp:hello-time?  uint32
|         +--rw xstp:forward-delay? uint32
|         +--rw xstp:max-age?    uint32
| +-rw xstp:rpvst!
|   +--rw xstp:timer-config
|     +--rw xstp:hello-time?  uint32
|     +--rw xstp:forward-delay? uint32
|     +--rw xstp:max-age?    uint32
|     +--rw xstp:description? string
|     +--rw xstp:bridge-priority? uint32
|     +--rw xstp:error-disable-timeout

```

```

|   |   |   +--rw xstp:enable?      empty
|   |   |   +--rw xstp:interval?    uint32
|   |   +--rw xstp:port-channel
|   |   |   +--rw xstp:path-cost?   enumeration
|   |   +--rw xstp:shutdown?       empty
|   |   +--rw xstp:vlan* [id]
|   |   |   +--rw xstp:id          uint32
|   |   |   +--rw xstp:priority?    uint32
|   |   |   +--rw xstp:timer-config
|   |   |   |   +--rw xstp:hello-time?  uint32
|   |   |   |   +--rw xstp:forward-delay? uint32
|   |   |   |   +--rw xstp:max-age?   uint32
|   |   +--rw xstp:transmit-holdcount?  uint32
+--rw xstp:mstp!
  +--rw xstp:timer-config
    |   +--rw xstp:hello-time?  uint32
    |   +--rw xstp:forward-delay? uint32
    |   +--rw xstp:max-age?   uint32
    +--rw xstp:description?     string
    +--rw xstp:bridge-priority? uint32
    +--rw xstp:error-disable-timeout
    |   +--rw xstp:enable?      empty
    |   +--rw xstp:interval?    uint32
    +--rw xstp:port-channel
    |   +--rw xstp:path-cost?   enumeration
    +--rw xstp:shutdown?       empty
    +--rw xstp:cisco-interoperability? enumeration
    +--rw xstp:instance* [id]
      |   +--rw xstp:id          mstp-instance-type
      |   +--rw xstp:vlan?        xstp-ui32-vlan-range
      |   +--rw xstp:priority?    uint32
      +--rw xstp:region?         string
      +--rw xstp:revision?      uint16
      +--rw xstp:max-hops?     uint32
      +--rw xstp:transmit-holdcount?  uint32
+--rw global-mtu-conf
  +--rw global-12-mtu?          mtu-type
  +--rw global-12-bpdu?          empty
  +--rw global-reload-delay?    reload-delay-type
  +--rw ingress-vlan-mapped-ve-counter? empty
  +--rw tunneled-arp-trap
    |   +--rw tunneled-arp-trap-enable? empty
  +--rw ip-config:ip
    |   +--rw ip-config:global-ip-mtu?  ip-mtu
    |   +--rw ip-config:option
      |   |   +--rw ip-config:option-disable? empty
      |   |   +--rw control-plane:ip-option-disable-cpu? empty
      |   +--rw ip-config:icmp-fragment
      |   |   +--rw ip-config:icmp-fragment-enable? empty
      +--rw ip-config:arp
        +--rw ip-config:gratuitous
        +--rw ip-config:garp-none?   empty
+--rw ipv6-config:ipv6
  +--rw ipv6-config:global-ipv6-mtu? ip-mtu

```

brocade-interface-ext

RPCs

```

module: brocade-interface-ext
rpcs:
  +---x set-interface-admin-status
  | +---w input
  | | +---w interface* [interface-name]
  | | | +---w interface-name      string
  | | +---w admin-state?    intf-admin-status
  | +--ro output
  |   +---ro interface-status* [interface-name]
  |   | +---ro interface-name      string
  |   | +---ro admin-state-status?  intf-admin-state-update-status
  |   | +---ro oper-state-status?   intf-oper-state-update-status
  |   +---ro overall-status?     overall-operation-status
  +---x get-vlan-brief
  | +---w input
  | | +---w (request-type)?
  | | +---:(get-request)
  | | | +---w vlan-id?           interface:vlan-type
  | | +---:(get-next-request)
  | | | +---w last-rcvd-vlan-id?  interface:vlan-type
  | +--ro output
  |   +---ro configured-vlans-count?   uint32
  |   +---ro provisioned-vlans-count?   uint32
  |   +---ro unprovisioned-vlans-count?  uint32
  |   +---ro vlan* [vlan-id]
  |   | +---ro vlan-id            interface:vlan-type
  |   | +---ro vlan-type?         enumeration
  |   | +---ro vlan-name?        string
  |   | +---ro ve-interface?     interface:ve-type
  |   | +---ro vlan-state?       enumeration
  |   | +---ro interface* [interface-type interface-name]
  |   |   +---ro interface-type   enumeration
  |   |   +---ro interface-name   union
  |   |   +---ro tag?             enumeration
  |   |   +---ro classification* [classification-type classification-value]
  |   |     +---ro classification-type  enumeration
  |   |     +---ro classification-value string
  |   +---ro last-vlan-id?       interface:vlan-type
  |   +---ro has-more?          boolean
  +---x get-interface-switchport
  | +---w input
  | | +---w (request-type)?
  | | +---:(get-next-request)
  | | | +---w last-received-interface
  | | |   +---w interface-type?   enumeration
  | | |   +---w interface-name?   union
  | +--ro output
  |   +---ro switchport* [interface-type interface-name]
  |   | +---ro interface-type      enumeration
  |   | +---ro interface-name      union
  |   | +---ro mode?              interface:switchport-mode-type
  |   | +---ro ingress-filter-enabled? boolean
  |   | +---ro acceptable-frame-type? enumeration
  |   | +---ro default-vlan?      interface:vlan-type
  |   | +---ro active-vlans
  |   |   +---ro vlanid*   interface:vlan-type
  |   | +---ro inactive-vlans
  |   |   +---ro vlanid*   interface:vlan-type

```

```

|     +--ro has-more?    boolean
+---x get-ip-interface
| +---w input
| | +---w (request-type)?
| | | +---:(get-request)
| | | | +---w interface-type?      enumeration
| | | | +---w interface-name?     union
| | | +---:(get-next-request)
| | | | +---w last-received-interface
| | | | +---w interface-type?      enumeration
| | | | +---w interface-name?     union
| +--ro output
|   +---ro interface* [interface-type interface-name]
|   | +---ro interface-type      enumeration
|   | +---ro interface-name      union
|   | +---ro if-name?           string
|   | +---ro ip-address* [ipv4]
|   | | +---ro ipv4             string
|   | | +---ro ipv4-type?       enumeration
|   | | +---ro broadcast?       string
|   | | +---ro ip-mtu?          ip-config:ip-mtu
|   | +---ro if-state?         enumeration
|   | +---ro line-protocol-state? enumeration
|   | +---ro proxy-arp?        string
|   | +---ro vrf?              string
|   | +---ro redundant-management? boolean
|   +---ro has-more?    boolean
+---x get-interface-detail
| +---w input
| | +---w (request-type)?
| | | +---:(get-request)
| | | | +---w interface-type?      enumeration
| | | | +---w interface-name?     union
| | | +---:(get-next-request)
| | | | +---w last-rcvd-interface
| | | | +---w interface-type?      enumeration
| | | | +---w interface-name?     union
| +--ro output
|   +---ro interface* [interface-type interface-name]
|   | +---ro interface-type      enumeration
|   | +---ro interface-name      union
|   | +---ro ifindex?           uint64
|   | +---ro mtu?               interface:mtu-type
|   | +---ro ip-mtu?            ip-config:ip-mtu
|   | +---ro if-name?           string
|   | +---ro if-state?         enumeration
|   | +---ro line-protocol-state? enumeration
|   | +---ro line-protocol-state-info? string
|   | +---ro line-protocol-exception-info? string
|   | +---ro hardware-type?    enumeration
|   | +---ro logical-hardware-address? yang:mac-address
|   | +---ro current-hardware-address? yang:mac-address
|   | +---ro media-type?       enumeration
|   | +---ro wavelength?      uint32
|   | +---ro if-description?   string
|   | +---ro actual-line-speed? string
|   | +---ro configured-line-speed? line-speed
|   | +---ro line-duplex-state? enumeration
|   | +---ro queuing-strategy?  enumeration
|   | +---ro port-role?       enumeration
|   | +---ro port-mode?        enumeration
|   | +---ro ifHCInOctets?     yang:counter64
|   | +---ro ifHCInUcastPkts?  yang:counter64
|   | +---ro ifHCInMulticastPkts? yang:counter64

```

```

|   |   +-+ro ifHCInBroadcastPkts?           yang:counter64
|   |   +-+ro ifHCInErrors?                 yang:counter64
|   |   +-+ro ifHCOutOctets?                yang:counter64
|   |   +-+ro ifHCOutUcastPkts?              yang:counter64
|   |   +-+ro ifHCOutMulticastPkts?         yang:counter64
|   |   +-+ro ifHCOutBroadcastPkts?          yang:counter64
|   |   +-+ro ifHCOutErrors?                yang:counter64
|   |   +-+ro redundant-management?        boolean
|   |   +-+ro bfd-software-session?        boolean
|   +-+ro has-more?                      boolean
+---x get-media-detail
    +-+w input
      |   +-+w interface-type?    enumeration
      |   +-+w interface-name?    union
    +-+ro output
      +-+ro interface* [interface-type interface-name]
        +-+ro interface-type    enumeration
        +-+ro interface-name     union
        +-+ro (interface-identifier)?
          +---:(sfp)
            |   +-+ro sfp
              |       +-+ro speed?          line-speed
              |       +-+ro connector?       enumeration
              |       +-+ro encoding?        enumeration
              |       +-+ro vendor-name?      string
              |       +-+ro vendor-oui?       string
              |       +-+ro vendor-pn?        string
              |       +-+ro vendor-rev?       string
              |       +-+ro distance?        enumeration
              |       +-+ro media-form-factor? enumeration
              |       +-+ro wavelength?      string
              |       +-+ro serial-no?       string
              |       +-+ro date-code?       string
              |       +-+ro temperature?     uint32
              |       +-+ro voltage?         decimal64
              |       +-+ro current?         decimal64
              |       +-+ro tx-power?        decimal64
              |       +-+ro rx-power?        decimal64
          +---:(on-board)
            |   +-+ro on-board
              |       +-+ro speed?          line-speed
              |       +-+ro connector?       enumeration
              |       +-+ro encoding?        enumeration
              |       +-+ro vendor-name?      string
              |       +-+ro vendor-oui?       string
              |       +-+ro vendor-pn?        string
              |       +-+ro vendor-rev?       string
          +---:(gbic)
            |   +-+ro gbc
              |       +-+ro vendor-name?      string
              |       +-+ro vendor-oui?       string
              |       +-+ro vendor-pn?        string
              |       +-+ro vendor-rev?       string
          +---:(xfp)
            |   +-+ro xfp
              |       +-+ro vendor-name?      string
              |       +-+ro vendor-oui?       string
              |       +-+ro vendor-pn?        string
              |       +-+ro vendor-rev?       string
          +---:(xff)
            |   +-+ro xff
              |       +-+ro vendor-name?      string
              |       +-+ro vendor-oui?       string
              |       +-+ro vendor-pn?        string

```

```
|     +-+ro vendor-rev?    string
+---:(xfp)
|     +-+ro xfp
|         +-+ro vendor-name?  string
|         +-+ro vendor-oui?   string
|         +-+ro vendor-pn?    string
|         +-+ro vendor-rev?   string
+---:(unknown)
|     +-+ro unknown
|         +-+ro vendor-name?  string
|         +-+ro vendor-oui?   string
|         +-+ro vendor-pn?    string
|         +-+ro vendor-rev?   string
+---:(qsfp)
|     +-+ro qsfp
|         +-+ro speed?        line-speed
|         +-+ro connector?    enumeration
|         +-+ro encoding?     enumeration
|         +-+ro vendor-name?   string
|         +-+ro vendor-oui?   string
|         +-+ro vendor-pn?    string
|         +-+ro vendor-rev?   string
|         +-+ro distance?     enumeration
|         +-+ro media-form-factor? enumeration
|         +-+ro wavelength?   string
|         +-+ro serial-no?    string
|         +-+ro date-code?    string
|         +-+ro temperature?  uint32
|         +-+ro voltage?      decimal64
|         +-+ro current?      decimal64
|         +-+ro tx-power?     decimal64
|         +-+ro rx-power?     decimal64
+---:(qsfpp)
|     +-+ro qsfpp
|         +-+ro speed?        line-speed
|         +-+ro connector?    enumeration
|         +-+ro encoding?     enumeration
|         +-+ro vendor-name?   string
|         +-+ro vendor-oui?   string
|         +-+ro vendor-pn?    string
|         +-+ro vendor-rev?   string
|         +-+ro distance?     enumeration
|         +-+ro media-form-factor? enumeration
|         +-+ro wavelength?   string
|         +-+ro serial-no?    string
|         +-+ro date-code?    string
|         +-+ro temperature?  uint32
|         +-+ro voltage?      decimal64
|         +-+ro current?      decimal64
|         +-+ro tx-power?     decimal64
|         +-+ro rx-power?     decimal64
+---:(cfp)
|     +-+ro cfp
|         +-+ro speed?        line-speed
|         +-+ro connector?    enumeration
|         +-+ro encoding?     enumeration
|         +-+ro vendor-name?   string
|         +-+ro vendor-oui?   string
|         +-+ro vendor-pn?    string
|         +-+ro vendor-rev?   string
|         +-+ro distance?     enumeration
|         +-+ro media-form-factor? enumeration
|         +-+ro wavelength?   string
|         +-+ro serial-no?    string
```

```
|   +-+ro date-code?          string
|   +-+ro temperature?       uint32
|   +-+ro voltage?           decimal64
|   +-+ro current?           decimal64
|   +-+ro tx-power?          decimal64
|   +-+ro rx-power?          decimal64
+---:(qsfp28)
|   +-+ro qsfp28
|     +-+ro speed?           line-speed
|     +-+ro connector?        enumeration
|     +-+ro encoding?         enumeration
|     +-+ro vendor-name?      string
|     +-+ro vendor-oui?       string
|     +-+ro vendor-pn?        string
|     +-+ro vendor-rev?       string
|     +-+ro distance?         enumeration
|     +-+ro media-form-factor? enumeration
|     +-+ro wavelength?       string
|     +-+ro serial-no?        string
|     +-+ro date-code?         string
|     +-+ro temperature?       uint32
|     +-+ro voltage?          decimal64
|     +-+ro current?          decimal64
|     +-+ro tx-power?          decimal64
|     +-+ro rx-power?          decimal64
+---:(cfp2)
|   +-+ro cfp2
|     +-+ro speed?           line-speed
|     +-+ro connector?        enumeration
|     +-+ro encoding?         enumeration
|     +-+ro vendor-name?      string
|     +-+ro vendor-oui?       string
|     +-+ro vendor-pn?        string
|     +-+ro vendor-rev?       string
|     +-+ro distance?         enumeration
|     +-+ro media-form-factor? enumeration
|     +-+ro wavelength?       string
|     +-+ro serial-no?        string
|     +-+ro date-code?         string
|     +-+ro temperature?       uint32
|     +-+ro voltage?          decimal64
|     +-+ro current?          decimal64
|     +-+ro tx-power?          decimal64
|     +-+ro rx-power?          decimal64
```

brocade-intf-loopback

Top-level container

```
module: brocade-intf-loopback
  +-rw hide-intf-loopback-holder /*drop-node-name*/
    +-rw interface
      +-rw loopback [id] /*alt-name:Loopback*/
        +-rw id           intf-loopback-port-type
        +-rw vrf
          | +-rw forwarding? common-def:vrf-name
        +-rw intf-loopback /*drop-node-name*/
          | +-rw shutdown? empty
```

brocade-ip-access-list

Top-level container

```

module: brocade-ip-access-list
  +-rw ip-acl
  | +-rw ip
  |   +-rw access-list
  |     +-rw standard* [name]
  |       | +-rw name          13-acl-policy-name
  |       | +-rw remark?      13-acl-remark-name
  |       | +-rw hide-ip-acl-std
  |       |   +-rw seq* [seq-id]
  |       |     +-rw seq-id      seq-id-std-ext
  |       |     +-rw action       enumeration
  |       |     +-rw src-host-any-sip union
  |       |     +-rw src-host-ip    sip
  |       |     +-rw src-mask      sip-mask
  |       |     +-rw count?       empty
  |       |     +-rw count-sync? empty
  |       |     +-rw log?         empty
  |       |     +-rw copy-sflow? empty
  +-rw extended* [name]
    +-rw name          13-acl-policy-name
    +-rw remark?      13-acl-remark-name
    +-rw hide-ip-acl-ext
      +-rw seq* [seq-id]
        +-rw seq-id      seq-id-std-ext
        +-rw action       enumeration
        +-rw protocol-type union
        +-rw src-host-any-sip union
        +-rw src-host-ip    sip
        +-rw src-mask      sip-mask
        +-rw sport?        enumeration
        +-rw sport-number-eq-neq-tcp union
        +-rw sport-number-lt-tcp union
        +-rw sport-number-gt-tcp union
        +-rw sport-number-eq-neq-udp union
        +-rw sport-number-lt-udp union
        +-rw sport-number-gt-udp union
        +-rw sport-number-range-lower-tcp union
        +-rw sport-number-range-lower-udp union
        +-rw sport-number-range-higher-tcp union
        +-rw sport-number-range-higher-udp union
        +-rw dst-host-any-dip union
        +-rw dst-host-ip    dip
        +-rw dst-mask      dip-mask
        +-rw dport?
          +-rw dport-number-eq-neq-tcp union
          +-rw dport-number-lt-tcp union
          +-rw dport-number-gt-tcp union
          +-rw dport-number-eq-neq-udp union
          +-rw dport-number-lt-udp union
          +-rw dport-number-gt-udp union
          +-rw dport-number-range-lower-tcp union
          +-rw dport-number-range-lower-udp union
          +-rw dport-number-range-higher-tcp union
          +-rw dport-number-range-higher-udp union
          +-rw icmp-type?    icmp-type-uint
          +-rw icmp-code?    icmp-code-uint
          +-rw ip-ttl?       ip-ttl-uint
          +-rw dscp?         union

```

```
|           +-rw dscp-force?          dscprmkrk-uint
|           +-rw drop-precedence-force?  drop-prec-uint
|           +-rw urg?              empty
|           +-rw ack?              empty
|           +-rw push?             empty
|           +-rw fin?              empty
|           +-rw rst?              empty
|           +-rw sync?             empty
|           +-rw vlan?             interface:vlan-type
|           +-rw connlimit?        precedence-uint
|           +-rw fragment?         empty
|           +-rw non-fragment?     empty
|           +-rw count?            empty
|           +-rw count-sync?      empty
|           +-rw log?              empty
|           +-rw mirror?           empty
|           +-rw copy-sflow?       empty
+-rw acl-mirror
  +-rw source* [src-interface-type src-interface-name destination dst-interface-type
dst-interface-name]
    +-rw src-interface-type   enumeration
    +-rw src-interface-name   mirror-ifname
    +-rw destination          enumeration
    +-rw dst-interface-type   enumeration
    +-rw dst-interface-name   mirror-ifname
```

brocade-ip-administration

External augmentations

```
module: brocade-ip-administration
  +-rw dhcpcd
    +-ro restart
    +-ro input
    +-ro output
      +-ro mesg?    string
```

brocade-ip-config

Using this module, you can apply primary and secondary IP addresses to a physical interface, port-channel, or VE interface.

External augmentations

```
module: brocade-common-def
  +-rw ip
    |  |  +-rw ip-config:ip-config
    |  |  |  +-rw ip-config:mtu?          ip-mtu
    |  |  |  +-rw ip-config:directed-broadcast?  empty
    |  |  |  +-rw ip-config:proxy-arp?        empty
    |  |  |  +-rw ip-config:arp-aging-timeout?  uint32
    |  |  |  +-rw ip-config:address [address]
    |  |  |      +-rw ip-config:address      union
    |  |  |  +-rw ip-config:secondary?       empty
    |  |  |  +-rw ip-config:ospf-passive?   empty
    |  |  |  +-rw ip-config:ospf-ignore?    empty
```

brocade-ip-policy

IP route policy controls how routes or IP subnets are transported from one subsystem to another subsystem. The IP route policy may perform “permit” or “deny” actions so that matched routes may be allowed or denied to the target subsystem accordingly. Additionally, an IP route policy may be used to modify the characteristics of a matched route and IP subnet pair.

This module models two types of IP route policies: prefix lists and route maps.

Top-level container

```
module: brocade-ip-policy
  +-rw hide-filter-change-update-delay-holder
    +-rw filter-change-update-delay* [filter-delay-value]
      +-rw filter-delay-value     uint32
```

brocade-ipv6-access-list

Top-level container

```

module: brocade-ipv6-access-list
  +-rw ipv6-acl
    +-rw ipv6
      +-rw access-list
        +-rw standard* [name]
          | +-rw name          ipv6-13-acl-policy-name
          | +-rw remark?     ip-access-list:13-acl-remark-name
          | +-rw seq* [seq-id]
          |   +-rw seq-id      ip-access-list:seq-id-std-ext
          |   +-rw action       enumeration
          |   +-rw src-host-any-sip union
          |   +-rw src-host-ip  sip
          |   +-rw src-mask     sip-mask
          |   +-rw count?      empty
          |   +-rw count-sync? empty
          |   +-rw log?        empty
          |   +-rw copy-sflow? empty
        +-rw extended* [name]
          +-rw name          ipv6-13-acl-policy-name
          +-rw remark?     ip-access-list:13-acl-remark-name
          +-rw seq* [seq-id]
            +-rw seq-id      ip-access-list:seq-id-std-ext
            +-rw action       enumeration
            +-rw protocol-type union
            +-rw src-host-any-sip union
            +-rw src-host-ip  sip
            +-rw src-mask     sip-mask
            +-rw sport?       enumeration
            +-rw sport-number-eq-neq-tcp union
            +-rw sport-number-lt-tcp union
            +-rw sport-number-gt-tcp union
            +-rw sport-number-eq-neq-udp union
            +-rw sport-number-lt-udp union
            +-rw sport-number-gt-udp union
            +-rw sport-number-range-lower-tcp union
            +-rw sport-number-range-lower-udp union
            +-rw sport-number-range-higher-tcp union
            +-rw sport-number-range-higher-udp union
            +-rw dst-host-any-dip union
            +-rw dst-host-ip   dip
            +-rw dst-mask      dip-mask
            +-rw dport?        enumeration
            +-rw dport-number-eq-neq-tcp union
            +-rw dport-number-lt-tcp union
            +-rw dport-number-gt-tcp union
            +-rw dport-number-eq-neq-udp union
            +-rw dport-number-lt-udp union
            +-rw dport-number-gt-udp union
            +-rw dport-number-range-lower-tcp union
            +-rw dport-number-range-lower-udp union
            +-rw dport-number-range-higher-tcp union
            +-rw dport-number-range-higher-udp union
            +-rw dscp?         union
            +-rw dscp-force?   ip-access-list:dscprmrk-uint
            +-rw drop-precedence-force? ip-access-list:drop-prec-uint
            +-rw urg?          empty
            +-rw ack?          empty
            +-rw push?         empty

```

+--rw fin?	empty
+--rw rst?	empty
+--rw sync?	empty
+--rw vlan?	interface:vlan-type
+--rw connlimit?	precedence-uint
+--rw count?	empty
+--rw count-sync?	empty
+--rw log?	empty
+--rw mirror?	empty
+--rw copy-sflow?	empty

brocade-isis

External augmentations

```
module: brocade-interface
  +-rw ip-config:ip
    |  +-rw ip-config:ip-config
    |  |  +-rw ip-config:address [address]
    |  |  +-rw ip-config:address      union
    |  +-rw isis:intf-router-isis
    |  |  +-rw isis:int-router-isis
    |  |  +-rw isis:interface-ip-router-isis?  empty

  module: brocade-interface
    +-rw isis:intf-router-isis
    |  +-rw isis:int-router-isis
    |  +-rw isis:interface-ip-router-isis?  empty

  module: brocade-interface
    +-rw isis:intf-router-isis
    |  +-rw isis:int-router-isis
    |  +-rw isis:interface-ip-router-isis?  empty
```

brocade-isis-operational

Top-level container

```

module: brocade-isis-operational
  +-ro adj-neighbor-entries-state
    | +-ro adj-neighbor* [neighbor-id]
    |   +-ro adj-state-change-time?      uint32
    |   +-ro adj-type?                  isis-adj-type
    |   +-ro adj-state?                string
    |   +-ro neighbor-id?             string
    |   +-ro circuit-intf-name?     string
    |   +-ro snpa?                   string
    |   +-ro adj-holding-time?      uint8
    |   +-ro adj-priority?          uint8
    |   +-ro adj-mtprot?            isis-adj-prot-type
    |   +-ro adj-prot?              isis-adj-prot-type
    |   +-ro remaining-time?       uint32
    |   +-ro adj-3way-state?       isis-dcm-3way-adj-state
    |   +-ro host-name?            string
    |   +-ro adj-lan-name?          string
    |   +-ro adj-lan-id?            uint8
    |   +-ro adj-p2p-circ-id?      uint32
    |   +-ro adj-num-adds?         uint8
    |   +-ro adj-use?               isis-spf-level
    |   +-ro ip-circuit-id?        uint32
    |   +-ro adj-address?          inet:ipv4-address
    |   +-ro ip6-circuit-id?       uint32
    |   +-ro adj-ip6-address?     string
    |   +-ro bfd-holdover-interval? uint8
    |   +-ro adj-bfd-holdover-time? uint8
    |   +-ro bfd-state?            string
    |   +-ro adj-area* [adj-asi-area-name]
    |     +-ro adj-asi-area-name   string
  +-ro counts-state
    | +-ro areamis?                uint32
    | +-ro maxareamis?             uint32
    | +-ro badidlen?                uint32
    | +-ro seqskip?                 uint32
    | +-ro segerr?                  uint32
    | +-ro l1dbol?                  uint32
    | +-ro l2dbol?                  uint32
    | +-ro ownpurge?                uint32
    | +-ro csnp-11authfail?        uint32
    | +-ro csnp-12authfail?        uint32
    | +-ro psnp-11authfail?        uint32
    | +-ro psnp-12authfail?        uint32
    | +-ro circ-11authfail?        uint32
    | +-ro circ-12authfail?        uint32
    | +-ro sr-isis-error-info
      |   +-ro sr-isis-e-same-node-sid-diff-prefix-level?  uint32
      |   +-ro sr-isis-e-no-adj-label-space?                  uint32
      |   +-ro sr-isis-error-counts-per-level-info* [level]
        |     +-ro level                                isis-level
        |     +-ro sr-isis-e-same-node-sid-diff-pre-add?  uint32
        |     +-ro sr-isis-e-same-pre-add-diff-node-sid?  uint32
        |     +-ro sr-isis-e-prefix-sid-flag-n-unset?   uint32
        |     +-ro sr-isis-e-prefix-sid-out-of-my-srgb?  uint32
        |     +-ro sr-isis-e-prefix-no-sr-capability?   uint32
        |     +-ro sr-isis-e-prefix-sid-out-of-nh-srgb?  uint32
        |     +-ro sr-isis-e-cap-sub-tlv-flag-i-unset?  uint32
      |   +-ro bad-lsp-log* [type-index]

```

```

|   +-+ro type-index      uint8
|   +-+ro time-stamp?    uint32
|   +-+ro l1-count?      uint32
|   +-+ro l2-count?      uint32
+-+ro debug-isis-info-state
|   +-+ro global?        boolean
|   +-+ro adj?           boolean
|   +-+ro error?         boolean
|   +-+ro interface?     boolean
|   +-+ro l1-csnp?       boolean
|   +-+ro l2-csnp?       boolean
|   +-+ro l1-hello?      boolean
|   +-+ro l2-hello?      boolean
|   +-+ro l1-lsp?        boolean
|   +-+ro l2-lsp?        boolean
|   +-+ro l1-psnp?       boolean
|   +-+ro l2-psnp?       boolean
|   +-+ro lspdum?        boolean
|   +-+ro lsflood?       boolean
|   +-+ro memory?        boolean
|   +-+ro nsr?           boolean
|   +-+ro pp-hello?      boolean
|   +-+ro pspf?          boolean
|   +-+ro pspf-detail?   boolean
|   +-+ro redist?        boolean
|   +-+ro route-table?   boolean
|   +-+ro spf?           boolean
|   +-+ro spf-log?       boolean
|   +-+ro spf-stct?     boolean
|   +-+ro te?            boolean
|   +-+ro trace?         boolean
+-+ro isis-state
|   +-+ro global-isis-info
|   |   +-+ro isis-protocol?      boolean
|   |   +-+ro isis-state?        boolean
|   |   +-+ro is-type?          uint32
|   |   +-+ro system-id?        string
|   |   +-+ro area-addresses?   string
|   |   +-+ro database-state-level-1? string
|   |   +-+ro database-state-level-2? string
|   |   +-+ro database-state-level-1-2? string
|   |   +-+ro overload-reason?   string
|   |   +-+ro check-alarm?      boolean
|   |   +-+ro overload-state-since? string
|   |   +-+ro overload-state-rem-time? string
|   |   +-+ro admin-distance?   uint32
|   |   +-+ro v6-admin-distance? uint32
|   |   +-+ro max-paths?        uint32
|   |   +-+ro v6-max-paths?    uint32
|   |   +-+ro default-redis-metric? uint32
|   |   +-+ro v6-default-redis-metric? uint32
|   |   +-+ro default-link-metric-l1-conf? uint32
|   |   +-+ro default-link-metric-l1-adv? uint32
|   |   +-+ro default-link-metric-l2-conf? uint32
|   |   +-+ro default-link-metric-l2-adv? uint32
|   |   +-+ro v6-default-link-metric-l1-conf? uint32
|   |   +-+ro v6-default-link-metric-l1-adv? uint32
|   |   +-+ro v6-default-link-metric-l2-conf? uint32
|   |   +-+ro v6-default-link-metric-l2-adv? uint32
|   |   +-+ro redis-protocol?    string
|   |   +-+ro no-routes-redis?   uint32
|   |   +-+ro v6-redis-protocol? string
|   |   +-+ro v6-no-routes-redis? uint32
|   |   +-+ro auth-mode-l1?     string

```

```

| | +-+ro auth-mode-l2?                      string
| | +-+ro auth-key-l1?                      string
| | +-+ro auth-key-l2?                      string
| | +-+ro 11-auth-no-check?                  isis-status
| | +-+ro 12-auth-no-check?                  isis-status
| | +-+ro metric-style-l1?                  string
| | +-+ro metric-style-l2?                  string
| | +-+ro graceful-restart-helper?        boolean
| | +-+ro pspf-optimization?                boolean
| | +-+ro spf-max-wait-l1?                 uint32
| | +-+ro spf-max-wait-l2?                 uint32
| | +-+ro spf-init-wait-l1?                uint32
| | +-+ro spf-init-wait-l2?                uint32
| | +-+ro spf-second-wait-l1?              uint32
| | +-+ro spf-second-wait-l2?              uint32
| | +-+ro spf-scheduled-l1?                string
| | +-+ro spf-scheduled-l2?                string
| | +-+ro pspf-max-wait?                  uint32
| | +-+ro pspf-init-wait?                 uint32
| | +-+ro pspf-second-wait?               uint32
| | +-+ro pspf-scheduled?                 string
| | +-+ro spf6-max-wait-l1?                uint32
| | +-+ro spf6-max-wait-l2?                uint32
| | +-+ro spf6-init-wait-l1?               uint32
| | +-+ro spf6-init-wait-l2?               uint32
| | +-+ro spf6-second-wait-l1?              uint32
| | +-+ro spf6-second-wait-l2?              uint32
| | +-+ro spf6-scheduled-l1?                string
| | +-+ro spf6-scheduled-l2?                string
| | +-+ro pspf6-max-wait?                 uint32
| | +-+ro pspf6-init-wait?                 uint32
| | +-+ro pspf6-second-wait?               uint32
| | +-+ro pspf6-scheduled?                 string
| | +-+ro lsp-max-lifetime?                uint32
| | +-+ro lsp-refresh-interval?            uint32
| | +-+ro lsp-gen-interval?                uint32
| | +-+ro lsp-retrans-interval?            uint32
| | +-+ro lsp-interval?                   uint32
| | +-+ro.snp-csnp-interval?                uint32
| | +-+ro.snp-psnp-interval?                uint32
| | +-+ro hello-padding?                  boolean
| | +-+ro hello-padding-ptp?               uint32
| | +-+ro ptp-handshake?                  boolean
| | +-+ro bgp-ipv4-converged?              boolean
| | +-+ro bgp-ipv6-converged?              boolean
| | +-+ro isis-te?                       boolean
| | +-+ro isis-shortcuts?                 string
| | +-+ro isis-reverse-metric?             uint32
| | +-+ro isis-reverse-metric-wbit?       uint32
| | +-+ro isis-reverse-metric-sbit?       uint32
| | +-+ro bfd-enabled?                   boolean
| | +-+ro bfd-hold-interval?              uint32
| | +-+ro nsr-enabled?                   boolean
| | +-+ro nsr-state?                     string
| | +-+ro nsr-sync-state?                 boolean
| | +-+ro isis-is-mp?                    boolean
| | +-+ro ldp-sync?                      boolean
| | +-+ro ldp-sync-holddown-time?        uint32
| +-+ro router-isis-config
| | +-+ro nsr-state?                     isis-status
| | +-+ro lsp-flood-count?                uint16
| | +-+ro lsp-fast-flood-count?          uint16
| | +-+ro fast-flood-wait-count?         uint16
| | +-+ro hello-padding?                 isis-status

```

```

| |   +-+ro hello-padding-ptp?      isis-status
| |   +-+ro csnp-interval?        uint16
| |   +-+ro lsp-gen-interval?      uint16
| |   +-+ro lsp-interval?        uint32
| |   +-+ro lsp-refresh-interval?  uint16
| |   +-+ro lsp-lifetime?        uint16
| |   +-+ro retransmit-interval?  uint16
| |   +-+ro pspf-enabled?        isis-status
| |   +-+ro ispf-enabled?        isis-status
| |   +-+ro istct-spf-enabled?    isis-status
| |   +-+ro overload-state?      isis-status
| |   +-+ro overload-startup-time?  uint32
| |   +-+ro overload-wait-on-bgp?  isis-status
| |   +-+ro overload-bgp-wait-time?  uint32
| |   +-+ro enable-code-assertions?  isis-status
| |   +-+ro graceful-restart-helper?  isis-status
| |   +-+ro isis-hostname-enabled?  isis-status
| |   +-+ro bfd?                  boolean
| |   +-+ro bfd-holdover-interval?  uint8
| |   +-+ro isis-system-info
| |   |   +-+ro protocol-enabled?  isis-status
| |   |   +-+ro operation-mode?    isis-level
| |   |   +-+ro system-id?        string
| |   |   +-+ro nsap* [net-addr]
| |   |   |   +-+ro length?       uint8
| |   |   |   +-+ro net-addr?     string
| |   +-+ro ll1-auth-profile
| |   |   +-+ro auth-check?      isis-status
| |   |   +-+ro auth-mode?       auth-mode
| |   |   +-+ro auth-key?        string
| |   +-+ro ll2-auth-profile
| |   |   +-+ro auth-check?      isis-status
| |   |   +-+ro auth-mode?       auth-mode
| |   |   +-+ro auth-key?        string
| |   +-+ro log-handler
| |   |   +-+ro log-adj-state-change?  isis-status
| |   |   +-+ro log-bad-lsp?      isis-status
| |   +-+ro ll1-spfp-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro ll2-spfp-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro ll1-spfp6-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro ll2-spfp6-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro pspf-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro pspf6-timer
| |   |   +-+ro init-delay-time?  uint32
| |   |   +-+ro hold-down-time?  uint32
| |   |   +-+ro max-time?        uint32
| |   +-+ro is-address-family-v4
| |   |   +-+ro afi?              isis-afi
| |   |   +-+ro safi?            isis-safi

```

```

| | | +-+ro originate-default-route?      isis-status
| | | +-+ro originate-default-routemap-name? string
| | | +-+ro default-metric?            uint16
| | | +-+ro 11-default-link-metric?    uint32
| | | +-+ro 12-default-link-metric?    uint32
| | | +-+ro administrative-distance? uint32
| | | +-+ro maximum-equal-cost-paths? uint32
| | | +-+ro redist-static
| | | | +-+ro redist-enabled?          isis-status
| | | | +-+ro redist-level?           isis-level
| | | | +-+ro redist-metric?          uint32
| | | | +-+ro redist-metric-type?    is-redist-metric-type
| | | | +-+ro redist-routemap-name?   string
| | | | +-+ro redist-connected
| | | | | +-+ro redist-enabled?        isis-status
| | | | | +-+ro redist-level?         isis-level
| | | | | +-+ro redist-metric?        uint32
| | | | | +-+ro redist-metric-type?  is-redist-metric-type
| | | | | +-+ro redist-routemap-name? string
| | | | +-+ro redist-bgp
| | | | | +-+ro redist-enabled?        isis-status
| | | | | +-+ro redist-level?         isis-level
| | | | | +-+ro redist-metric?        uint32
| | | | | +-+ro redist-metric-type?  is-redist-metric-type
| | | | | +-+ro redist-routemap-name? string
| | | | +-+ro redist-isis
| | | | | +-+ro redist-is-12-to-11?   isis-status
| | | | | +-+ro redist-is-12-to-11-prefix? string
| | | | | +-+ro redist-is-11-to-12?   isis-status
| | | | | +-+ro redist-is-11-to-12-prefix? string
| | | | +-+ro redist-ospf
| | | | | +-+ro redist-enabled?        isis-status
| | | | | +-+ro redist-level?         isis-level
| | | | | +-+ro redist-metric?        uint32
| | | | | +-+ro redist-metric-type?  is-redist-metric-type
| | | | | +-+ro redist-routemap-name? string
| | | | | +-+ro ospf-internal-enabled? isis-status
| | | | | +-+ro ospf-external1-enabled? isis-status
| | | | | +-+ro ospf-external2-enabled? isis-status
| | | | | +-+ro 11-wide-metric-enabled? boolean
| | | | | +-+ro 12-wide-metric-enabled? boolean
| | | | +-+ro ldp-sync-enabled?       isis-status
| | | | +-+ro ldp-sync-hold-down?    uint16
| | | | +-+ro summary-address-v4* [address]
| | | | | +-+ro address             inet:ipv4-address
| | | | | +-+ro ipv4-mask?          inet:ipv4-address
| | | | | +-+ro level?              isis-level
| | | | +-+ro sr-srgb-range* [level]
| | | | | +-+ro lower-range-value?  uint32
| | | | | +-+ro upper-range-value?  uint32
| | | | | +-+ro level               isis-level
| | | +-+ro is-address-family-v6
| | | | +-+ro afi?                isis-afi
| | | | +-+ro safi?              isis-safi
| | | | +-+ro originate-default-route? isis-status
| | | | +-+ro originate-default-routemap-name? string
| | | | +-+ro default-metric?      uint16
| | | | +-+ro 11-default-link-metric? uint32
| | | | +-+ro 12-default-link-metric? uint32
| | | | +-+ro administrative-distance? uint32
| | | | +-+ro maximum-equal-cost-paths? uint32
| | | | +-+ro redist-static
| | | | | +-+ro redist-enabled?    isis-status
| | | | | +-+ro redist-level?     isis-level

```

```

    | | | | +--ro redist-metric?          uint32
    | | | | +--ro redist-metric-type?   is-redist-metric-type
    | | | | +--ro redist-routemap-name? string
    | | | +--ro redist-connected
    | | | | +--ro redist-enabled?       isis-status
    | | | | +--ro redist-level?        isis-level
    | | | | +--ro redist-metric?       uint32
    | | | | +--ro redist-metric-type?  is-redist-metric-type
    | | | | +--ro redist-routemap-name? string
    | | | +--ro redist-bgp
    | | | | +--ro redist-enabled?       isis-status
    | | | | +--ro redist-level?        isis-level
    | | | | +--ro redist-metric?       uint32
    | | | | +--ro redist-metric-type?  is-redist-metric-type
    | | | | +--ro redist-routemap-name? string
    | | | +--ro redist-isis
    | | | | +--ro redist-is-12-to-11?   isis-status
    | | | | +--ro redist-is-12-to-11-prefix? string
    | | | | +--ro redist-is-11-to-12?   isis-status
    | | | | +--ro redist-is-11-to-12-prefix? string
    | | | +--ro redist-ospf
    | | | | +--ro redist-enabled?       isis-status
    | | | | +--ro redist-level?        isis-level
    | | | | +--ro redist-metric?       uint32
    | | | | +--ro redist-metric-type?  is-redist-metric-type
    | | | | +--ro redist-routemap-name? string
    | | | | +--ro ospf-internal-enabled? isis-status
    | | | | +--ro ospf-external1-enabled? isis-status
    | | | | +--ro ospf-external2-enabled? isis-status
    | | | | +--ro adjacency-check?      isis-status
    | | | | +--ro multi-topology?      isis-status
    | | | | +--ro mt-transition-state? boolean
    | | | +--ro summary-prefix-v6* [address]
    | | | | +--ro address     string
    | | | | +--ro level?      isis-level
    | | | +--ro reverse-metric
    | | | | +--ro reverse-metric-value? uint32
    | | | | +--ro rev-metric-whole-lan? isis-status
    | | | | +--ro rev-metric-te-def-metric? isis-status
    | | | | +--ro rev-metric-tlv-type?  uint32
    | | | +--ro debug-handler
    | | | | +--ro debug-nsr?  isis-status
    | | +--ro host-table
    | | | +--ro hostname-enabled?  boolean
    | | | +--ro isis-router-entry* [system-id]
    | | | | +--ro system-id   string
    | | | | +--ro host-name?   string
    | | | | +--ro is-local?    boolean
    | | +--ro ipv4-routes
    | | | +--ro total-routes-count?  uint32
    | | | +--ro ipv4-route-entry* [ipv4-dest-addr ipv4-subnet-mask ipv4-prefix-len]
    | | | | +--ro level?      uint8
    | | | | +--ro cost?       uint32
    | | | | +--ro tag?        uint32
    | | | | +--ro flags?      uint16
    | | | | +--ro is-11-summarized? boolean
    | | | | +--ro is-12-summarized? boolean
    | | | | +--ro is-summary?   boolean
    | | | | +--ro ipv4-dest-addr  inet:ipv4-address
    | | | | +--ro ipv4-subnet-mask  inet:ipv4-address
    | | | | +--ro ipv4-prefix-len int8
    | | | | +--ro nh-info* [outgoing-intf-type outgoing-intf-number]
    | | | | | +--ro ipv4-nh-addr?   inet:ipv4-address
    | | | | | +--ro outgoing-intf-type  isis-interface-type

```

```

| |         +--ro outgoing-intf-number    string
| +-ro ipv6-routes
| |   +--ro level1-route-count?    uint32
| |   +--ro level2-route-count?    uint32
| |   +--ro ecmp-route-count?    uint32
| |   +--ro total-routes-count?    uint32
| |   +--ro ipv6-route-entry* [ipv6-dest-addr ipv6-prefix-len]
| |     +--ro level?          uint8
| |     +--ro cost?           uint32
| |     +--ro tag?            uint32
| |     +--ro flags?          uint16
| |     +--ro is-l1-summarized? boolean
| |     +--ro is-l2-summarized? boolean
| |     +--ro is-summary?      boolean
| |     +--ro ipv6-dest-addr    string
| |     +--ro ipv6-prefix-len   uint8
| |     +--ro nh-info* [outgoing-intf-type outgoing-intf-number]
| |       +--ro ipv6-nh-addr?    string
| |       +--ro outgoing-intf-type  isis-interface-type
| |       +--ro outgoing-intf-number string
| +-ro interface-brief
| |   +--ro isis-intf-brief* [intf-type intf-number]
| |     +--ro intf-type        isis-interface-type
| |     +--ro intf-number      string
| |     +--ro circuit-type?    isis-circ-type
| |     +--ro is-circuit-passive? isis-status
| |     +--ro circuit-mode?    isis-level
| |     +--ro circ-state?      boolean
| |     +--ro mtu-size?        uint16
| |     +--ro circ-adj-up?     uint16
| |     +--ro circ-changes?    uint32
| |     +--ro adj-changes?     uint32
| |     +--ro is-l1-dist?      boolean
| |     +--ro is-l2-dist?      boolean
| +-ro interface-detail
| |   +--ro isis-intf* [intf-type intf-number]
| |     +--ro intf-type        isis-interface-type
| |     +--ro intf-number      string
| |     +--ro v4circuit-enabled? isis-status
| |     +--ro v6circuit-enabled? isis-status
| |     +--ro circuit-id?      uint16
| |     +--ro circuit-ifid?    uint16
| |     +--ro circuit-state?   boolean
| |     +--ro circuit-ip-state? boolean
| |     +--ro circuit-ipv6-state? boolean
| |     +--ro mpls-enabled?    boolean
| |     +--ro circuit-mode?    isis-level
| |     +--ro circuit-type?    isis-circ-type
| |     +--ro circuit-encap?   isis-circ-encap
| |     +--ro is-circuit-passive? isis-status
| |     +--ro mtu-size?        uint16
| |     +--ro padding-enabled? isis-status
| |     +--ro bfd-enabled?    isis-status
| |     +--ro circ-chstats
| |       |   +--ro circ-changes?  uint32
| |       |   +--ro adj-changes?  uint32
| |       |   +--ro adj-rej?      uint32
| |       |   +--ro l1authfail?   uint32
| |       |   +--ro l2authfail?   uint32
| |       |   +--ro bad-lsps?     uint32
| |       |   +--ro ctrl-out?    uint32
| |       |   +--ro ctrl-in?     uint32
| |     +--ro mpls-info
| |       |   +--ro te-enabled?   isis-status

```

```

| | | | +--ro admin-group?      uint32
| | | | +--ro te-metric?       uint32
| | | | +--ro max-link-bw?    uint32
| | | | +--ro max-reserv-bw?  uint32
| | | | +--ro unreserv-bw*   uint32
| | | +---ro reverse-metric-info
| | | | +--ro is-global-config?   boolean
| | | | +--ro reverse-metric-value? uint32
| | | | +--ro rev-metric-whole-lan?  isis-status
| | | | +--ro rev-metric-te-def-metric? isis-status
| | | +---ro ldp-sync-info
| | | | +--ro ldp-sync-enabled?    isis-status
| | | | +--ro ldp-sync-hold-down?  uint16
| | | | +--ro ldp-in-sync?        boolean
| | | | +--ro remain-hd-time?     uint32
| | | | +--ro ldp-sync-hd-expired? boolean
| | | +---ro circ-metrics* [level]
| | | | +--ro level              isis-level
| | | | +--ro auth-check?        isis-status
| | | | +--ro auth-mode?         auth-mode
| | | | +--ro auth-key?          string
| | | | +--ro circ-metric?       uint32
| | | | +--ro ip6-circ-metric?   uint32
| | | | +--ro circ-priority?    uint8
| | | | +--ro hello-int?        uint32
| | | | +--ro hello-mult?       uint32
| | | | +--ro dis?               string
| | | | +--ro dis-ch?            uint32
| | | | +--ro next-hello?       uint32
| | | | +--ro active-adj?       uint32
| | | +---ro ip-info* [ip-add]
| | | | +--ro ip-add             inet:ipv4-address
| | | | +--ro ip-prefix?         uint8
| | | +---ro ip6-info* [ip6-add]
| | | | +--ro ip6-add            inet:ipv6-address
| | | | +--ro ip6-prefix?        uint8
| | | | +--ro is-link-local?    boolean
| | | +---ro sr-info* [level]
| | | | +--ro level              isis-level
| | | | +--ro sr-disabled?      boolean
| | | | +--ro ip-add?            inet:ipv4-address
| | | | +--ro ip-prefix?          uint8
| | | | +--ro sid-value?         uint32
| | +---ro shortcuts
| | | +--ro configured?        uint32
| | | +--ro up?                 uint32
| | | +--ro announced?          uint32
| | | +---ro isis-shortcut-entry* [level]
| | | | +--ro level              isis-level
| | | | +--ro lsp-name?          string
| | | | +--ro system-id?         string
| | | | +--ro protocol?          string
| | | | +--ro announced?         boolean
| | | | +--ro to-address?        inet:ipv4-address
| | | | +--ro spf-metric?         uint32
| | | | +--ro announce-metric?   uint32
| | | | +--ro lsp-metric?         uint32
| | | | +--ro relative-metric?  uint32
| | | | +--ro mpls-timestamp?   string
| | +---ro sid
| | | +---ro isis-sid-entry* [level]
| | | | +--ro type?              string
| | | | +--ro to?                string
| | | | +--ro label?             uint32

```

```

| | |     +-ro intf?          string
| | |     +-ro level           isis-level
| | |     +-ro value?         uint32
| | |     +-ro flags?          string
| | |     +-ro algo-weight?    uint8
| +-ro database* [level]
| |     +-ro isis-operation?   boolean
| |     +-ro level             uint32
| |     +-ro lsp-level1-count? uint32
| |     +-ro lsp-level2-count? uint32
| |     +-ro lsp-level1-loading? uint32
| |     +-ro lsp-level2-loading? uint32
| |     +-ro lsp-level1-fragments? uint32
| |     +-ro lsp-level2-fragments? uint32
| |     +-ro lsp-level1-pseudo?   uint32
| |     +-ro lsp-level2-pseudo?   uint32
| |     +-ro lsp-level1-pseudo-fragments? uint32
| |     +-ro lsp-level2-pseudo-fragments? uint32
| |     +-ro lsp-level1-my-count?  uint32
| |     +-ro lsp-level2-my-count?  uint32
| |     +-ro lsp-level1-my-lsp-fragments? uint32
| |     +-ro lsp-level2-my-lsp-fragments? uint32
| |     +-ro lsp-level1-my-pseudo?   uint32
| |     +-ro lsp-level2-my-pseudo?   uint32
| |     +-ro lsp-level1-my-pseudo-fragments? uint32
| |     +-ro lsp-level2-my-pseudo-fragments? uint32
| |     +-ro lsp-level1-checksum?   uint32
| |     +-ro lsp-level2-checksum?   uint32
| |     +-ro lsp-entry* [lsp-level lsp-id]
| | |     +-ro lsp-level        uint32
| | |     +-ro lsp-id           string
| | |     +-ro lsp-seq-no?      uint32
| | |     +-ro lsp-checksum?    uint16
| | |     +-ro lsp-holddtime?   uint32
| | |     +-ro lsp-att?         uint32
| | |     +-ro lsp-p?           uint32
| | |     +-ro lsp-ol?           uint32
| | |     +-ro lsp-tlv-entry* [type]
| | | |     +-ro type          uint32
| | | |     +-ro length?       uint32
| | | |     +-ro value*         binary
+-ro traffic-state
| +-ro ll-hello-rx?   uint32
| +-ro ll-hello-tx?   uint32
| +-ro 12-hello-rx?   uint32
| +-ro 12-hello-tx?   uint32
| +-ro pp-hello-rx?   uint32
| +-ro pp-hello-tx?   uint32
| +-ro 11-lsp-rx?     uint32
| +-ro 11-lsp-tx?     uint32
| +-ro 12-lsp-rx?     uint32
| +-ro 12-lsp-tx?     uint32
| +-ro 11-csnp-rx?    uint32
| +-ro 11-csnp-tx?    uint32
| +-ro 12-csnp-rx?    uint32
| +-ro 12-csnp-tx?    uint32
| +-ro 11-psnp-rx?    uint32
| +-ro 11-psnp-tx?    uint32
| +-ro 12-psnp-rx?    uint32
| +-ro 12-psnp-tx?    uint32
+-ro spf-log-state* [spf-log-version]
| +-ro spf-log-version  isis-safi
+-ro spf-log-levels* [level]
| +-ro level            isis-level

```

```
+--ro log-counts?          uint16
+--ro spf-trigger-count?    uint16
+--ro node-count?          uint16
+--ro spf-log-events* [spf-log-index]
    +--ro spf-log-index          uint16
    +--ro isis-spf-log-reason?  isis-spf-log-reason-code
    +--ro isis-lsp-name?        string
    +--ro brief-reason?        string
    +--ro event-count?         uint16
    +--ro node-count?          uint16
    +--ro time-stamp-ms?       uint32
    +--ro duration-ms?         uint32
    +--ro ipv4-routes?         uint32
    +--ro ipv6-routes?         uint32
    +--ro first-trigger-change? string
    +--ro first-trigger-time-stamp-ms? uint32
    +--ro first-trigger-detail-reason? string
    +--ro last-trigger-change?  string
    +--ro last-trigger-time-stamp-ms? uint32
    +--ro last-trigger-detail-reason? string
```

brocade-keychain

Top-level container

```
+--rw keychain* [name-of-keychain]
  +-rw name-of-keychain      string
  +-rw accept-tolerance?    uint32
  +-rw key* [key-id]
    +-rw key-id              uint32
    +-rw key-string
      |  +-rw key-string-text?   string
      |  +-rw encryption-level?  uint32
    +-rw accept-lifetime
      |  +-rw local?           boolean
      |  +-rw start-time?       time-format-start
      |  +-rw (duration-options)?
        |    +---(duration-option-value-case)
        |    |  +-rw duration-value?  uint32
        |    +---(duration-option-infinite-case)
        |    |  +-rw infinite?       empty
        |    +---(duration-option-end-time)
        |      +-rw end-time?       time-format-end
    +-rw key-algorithm?       key_algo
```

brocade-l2sys-operational

Top-level container

```
module: brocade-l2sys-operational
  +-+ro bd-mac-br-state
    |  +-+ro total-mac-count?      uint32
    |  +-+ro static-mac-count?    uint32
    |  +-+ro dyn-mac-count?      uint32
    |  +-+ro evpn-mac-count?     uint32
    +-+ro bridge-domain-mac-state* [bd-id]
      +-+ro bd-id                  uint32
      +-+ro no-of-mac?            uint32
      +-+ro no-of-static-mac?     uint32
```

brocade-lacp

Top-level container

```
module: brocade-lacp
  +-rw lacp
    +-rw system-priority?  uint32
```

External augmentations

```
module: brocade-interface
  +-rw interface
  |  +-rw ethernet [name]
  |  |  +-rw lacp:lacp
  |  |  |  +-rw lacp:timeout?          enumeration
  |  |  |  +-rw lacp:std_port-priority? uint32 /*alt-name:port-priority*/
  |  |  |  +-rw lacp:default-up?      empty
```

brocade-lag

Top-level container

```
module: brocade-lag
  +-rw port-channel-redundancy-group* [group-id]
    +-rw group-id          po-redundancy-group-type
    +-rw port-channel* [name]
      |  +-rw name           interface:portchannel-type
      |  +-rw port-channel-active?   empty
    +-rw activate?        empty
```

RPCs

```
rpcs:
  +---x get-port-channel-detail
    |  +---w input
    |  |  +---w (request-type)?
    |  |  |  +---:(get-request)
    |  |  |  |  +---w aggregator-id?      interface:portchannel-type
    |  |  |  +---:(get-next-request)
    |  |  |  |  +---w last-aggregator-id?  interface:portchannel-type
    |  +---ro output
      |  +---ro lacp*
        |  |  +---ro aggregator-id?      interface:portchannel-type
        |  |  +---ro aggregator-type?    enumeration
        |  |  +---ro isvlag?            boolean
        |  |  +---ro aggregator-mode?   enumeration
        |  |  +---ro admin-key?         lacp-key
        |  |  +---ro oper-key?         lacp-key
        |  |  +---ro actor-system-id?  yang:mac-address
        |  |  +---ro partner-system-id? yang:mac-address
        |  |  +---ro system-priority?  uint32
        |  |  +---ro partner-oper-priority? uint32
        |  |  +---ro rx-link-count?   uint64
        |  |  +---ro tx-link-count?   uint64
        |  |  +---ro individual-agg?  uint32
        |  |  +---ro ready-agg?       uint32
        |  |  +---ro partner-oper-key? lacp-key
        |  |  +---ro aggr-member*
          |  |  |  +---ro interface-type?  enumeration
          |  |  |  +---ro interface-name?  union
          |  |  |  +---ro actor-port?     uint64
          |  |  |  +---ro sync?          uint64
        |  +---ro has-more?        boolean
  +---x get-portchannel-info-by-intf
    +---w input
      |  +---w interface-type?  enumeration
      |  +---w interface-name?  union
    +---ro output
      +---ro lacp
        +---ro interface-type?      enumeration
        +---ro interface-name?      union
        +---ro actor-port?         uint64
        +---ro admin-key?          lacp-key
        +---ro oper-key?          lacp-key
        +---ro actor-system-id?   yang:mac-address
        +---ro partner-system-id?  yang:mac-address
        +---ro system-priority?   uint32
        +---ro partner-oper-priority? uint32
        +---ro actor-priority?    uint32
```

+--ro receive-machine-state?	enumeration
+--ro periodic-transmission-machine-state?	enumeration
+--ro mux-machine-state?	enumeration
+--ro admin-state?	lacp-state
+--ro oper-state?	lacp-state
+--ro partner-oper-state?	lacp-state
+--ro partner-oper-port?	uint64
+--ro actor-chip-number?	uint32
+--ro actor-max-deskew?	uint32
+--ro partner-chip-number?	uint32
+--ro partner-max-deskew?	uint32
+--ro actor-brcd-state?	brcd-trunk-states
+--ro partner-brcd-state?	brcd-trunk-states

brocade-lfs

Top-level container

```
module: brocade-lfs
  +-rw link-fault-signaling
    +-rw rx?    enumeration
    +-rw tx?    enumeration
```

External augmentations

```
module: brocade-interface
  |  |  +-rw lfs:link-fault-signaling
  |  |  |  +-rw lfs:rx?    enumeration
  |  |  |  +-rw lfs:tx?    enumeration
```

brocade-license

This module supports custom actions to perform operations such as installing and uninstalling a license, returning license ID information, returning license key values, and returning licensing information about dynamic Ports on Demand (POD).

Top-level container

```
module: brocade-license
  +--rw license
    |  +---x add
    |  |  +---w input
    |  |  |  +---w (str-file)?
    |  |  |  +---:(licStr)
    |  |  |  |  +---w licStr      string
    |  |  |  |  +---:(FTP-URL)
    |  |  |  |  |  +---w FTP-URL   string
    |  |  |  |  +---:(SCP-URL)
    |  |  |  |  |  +---w SCP-URL   string
    |  |  |  +---w slot?       uint32
    |  +---x remove
    |  |  +---w input
    |  |  |  +---w licStr      common-def:feature-type
    |  |  |  +---w slot?       uint32
    |  +---x eula
    |  |  +---w input
    |  |  |  +---w (accept-or-decline)?
    |  |  |  +---:(accept)
    |  |  |  |  +---w accept     eula_features
    |  |  |  +---:(decline)
    |  |  |  |  +---w decline    eula_features
  +-rw dpod
    +-rw port-id* [port-id]
      +-rw port-id      interface:interface-type
      +-rw operation?   license-dpod-operation-type
```

brocade-linecard-management

Top-level container

```
module: brocade-linecard-management
  +-rw global-lc-holder
  |  +-rw linecard
  |    +-rw linecards* [linecardName]
  |      +-rw linecardName      linecardid
  |      +-rw linecardType?    enumeration
  +-rw linecardservice
  |  +---x power-off
  |  |  +---w input
  |  |    +---w (blade-type)?
  |  |      +---:(linecard)
  |  |      |  +---w linecard?    slotnum
  |  |      +---:(sfm)
  |  |      |  +---w sfm?        sfmnum
  |  |      +---:(psu)
  |  |      +---w psu?        psunum
  |  +---x power-on
  |    +---w input
  |      +---w (blade-type)?
  |      +---:(linecard)
  |      |  +---w linecard?    slotnum
  |      +---:(sfm)
  |      |  +---w sfm?        sfmnum
  |      +---:(psu)
  |      +---w psu?        psunum
  +-rw latch-detection-config
    +-rw disable-latch-detection
    |  +---x latch-detection-disable
    |  +---w input
    |    +---w (blade-type)?
    |    +---:(linecard)
    |      +---w linecard      fusion_slotnum
    +-rw enable-latch-detection
      +---x latch-detection-enable
      +---w input
      +---w (blade-type)?
      +---:(linecard)
      +---w linecard      fusion_slotnum
```

brocade-lldp

LLDP is a data-link layer protocol, operating above the MAC service layer, that performs basic neighbor discovery. The discovery process involves advertising the network device identity, capabilities, and interconnections on an IEEE 802 LAN network.

The protocol is formally referred to by the IEEE as Station and Media Access Control Connectivity Discovery specified in standards document 802.1AB.

External augmentations

```

module: brocade-interface
  +-rw interface
    | +-rw ethernet [name]
    | | +-rw lldp:lldp
    | | | +-rw lldp:dcbx-version?      enumeration
    | | | +-rw lldp:disable?          empty
    | | | +-rw lldp:iscsi-priority?   uint32
    | | | +-rw lldp:profile?          string
    | +-rw ethernet [name]
    | | +-rw lldp:lldp
    | | | +-rw lldp:dcbx-version?      enumeration
    | | | +-rw lldp:disable?          empty
    | | | +-rw lldp:iscsi-priority?   uint32
    | | | +-rw lldp:profile?          string
    | +-rw ethernet [name]
    | | +-rw lldp:lldp
    | | | +-rw lldp:dcbx-version?      enumeration
    | | | +-rw lldp:disable?          empty
    | | | +-rw lldp:iscsi-priority?   uint32
    | | | +-rw lldp:profile?          string
    | +-rw ethernet [name]
    | | +-rw lldp:lldp
    | | | +-rw lldp:cee
    | | | | +-rw lldp:lldp-cee-on-off? enumeration /*drop-node-name*/
    | | | | +-rw lldp:dcbx-version?      enumeration
    | | | | +-rw lldp:disable?          empty
    | | | | +-rw lldp:iscsi-priority?   uint32
    | | | | +-rw lldp:profile?          string
  +-rw protocol
    | +-rw lldp:lldp?
    | | +-rw lldp:description?        string
    | | +-rw lldp:hello?              uint32
    | | +-rw lldp:mode?               enumeration
    | | +-rw lldp:multipplier?       uint32
    | | +-rw lldp:advertise
    | | | +-rw lldp:dcbx-fcoe-app-tlv?     empty
    | | | +-rw lldp:dcbx-fcoe-logical-link-tlv? empty
    | | | +-rw lldp:dcbx-iscsi-app-tlv?     empty
    | | | +-rw lldp:dcbx-tlv?             empty
    | | | +-rw lldp:dot1-tlv?            empty
    | | | +-rw lldp:dot3-tlv?            empty
    | | | +-rw lldp:optional-tlv
    | | | | +-rw lldp:management-address?   empty
    | | | | +-rw lldp:port-description?    empty
    | | | | +-rw lldp:system-capabilities? empty
    | | | | +-rw lldp:adv-tlv-system-description? empty /*alt-name:system-
description*/
    | | | | +-rw lldp:adv-tlv-system-name?   empty /*alt-name:system-name*/
    | | | +-rw lldp:system-name?           string
    | | | +-rw lldp:system-description?    string

```

```
| |   +--rw lldp:iscsi-priority?      uint32
| |   +--rw lldp:disable?           empty
| |   +--rw lldp:profile [profile-name]
| |     +--rw lldp:profile-name    string
| |     +--rw lldp:description?   string
| |     +--rw lldp:hello?         uint32
| |     +--rw lldp:mode?          enumeration
| |     +--rw lldp:multiplier?   uint32
| |     +--rw lldp:advertise
| |       +--rw lldp:dcbx-fcoe-app-tlv?  empty
| |       +--rw lldp:dcbx-fcoe-logical-link-tlv?  empty
| |       +--rw lldp:dcbx-iscsi-app-tlv?  empty
| |       +--rw lldp:dcbx-tlv?        empty
| |       +--rw lldp:dot1-tlv?       empty
| |       +--rw lldp:dot3-tlv?       empty
| |       +--rw lldp:optional-tlv
| |         +--rw lldp:management-address?  empty
| |         +--rw lldp:port-description?  empty
| |         +--rw lldp:system-capabilities?  empty
| |         +--rw lldp:adv-tlv-system-description?  empty /*alt-name:system-description*/
| |           +--rw lldp:adv-tlv-system-name?  empty /*alt-name:system-name*/
```

brocade-lldp-ext

RPCs

```
rpcs:  
  +---x get-lldp-neighbor-detail  
    +---w input  
    |  +---w (request-type)?  
    |  |  +---: (get-request)  
    |  |  |  +---w interface-type?      enumeration  
    |  |  |  +---w interface-name?     union  
    |  +---: (get-next-request)  
    |  |  +---w last-rcvd-ifindex?   uint32  
  +--ro output  
    +---ro lldp-neighbor-detail* [local-interface-name remote-interface-name]  
      |  +---ro local-interface-name          string  
      |  +---ro local-interface-mac?         interface:mac-address-type  
      |  +---ro local-interface-ifindex?     uint64  
      |  +---ro remote-interface-name        string  
      |  +---ro remote-interface-mac?        interface:mac-address-type  
      |  +---ro remote-management-address?   inet:ip-address  
      |  +---ro remote-unnum-interface-mac?  interface:mac-address-type  
      |  +---ro remote-unnum-ip-address?    inet:ip-address  
      |  +---ro remote-port-description?    string  
      |  +---ro remote-chassis-id?          string  
      |  +---ro remote-system-name?         string  
      |  +---ro remote-system-description?  string  
      |  +---ro dead-interval?            uint64  
      |  +---ro remaining-life?           uint64  
      |  +---ro lldp-pdu-transmitted?      yang:counter64  
      |  +---ro lldp-pdu-received?        yang:counter64  
      |  +---ro bgp-remote-as-number?      uint32  
      |  +---ro bgp-remote-peer-address?   inet:ip-address  
      |  +---ro bgp-remote-group-id?      uint32  
      |  +---ro bgp-remote-id?           inet:ip-address  
      |  +---ro bgp-remote-session-cap?   uint64  
      |  +---ro bgp-remote-session-key-chain? string  
      +---ro has-more?                 boolean
```

brocade-mac-access-list

A custom RPC enables retrieval of the configured ingress and egress policies per interface.

Top-level container

```

module: brocade-mac-access-list
  +-rw mac
    +-rw access-list
      +-rw standard* [name]
        |  +-rw name                  mac-acl-name
        |  +-rw hide-mac-acl-std
        |    +-rw seq* [seq-id]
        |      +-rw seq-id           uint64
        |      +-rw action            enumeration
        |      +-rw source             union
        |      +-rw srchost            mac-address-type
        |      +-rw src-mac-addr-mask src-dst-mac-address-mask-type
        |      +-rw count?
        |      +-rw count-sync?
        |      +-rw log?
        |      +-rw copy-sflow?
      +-rw extended* [name]
        +-rw name                  mac-acl-name
        +-rw hide-mac-acl-ext
          +-rw seq* [seq-id]
            +-rw seq-id           uint64
            +-rw action            enumeration
            +-rw source             union
            +-rw srchost            mac-address-type
            +-rw src-mac-addr-mask src-dst-mac-address-mask-type
            +-rw dst                union
            +-rw dsthost            mac-address-type
            +-rw dst-mac-addr-mask src-dst-mac-address-mask-type
            +-rw vlan-tag-format?
            +-rw vlan?
            +-rw vlan-id-mask?
            +-rw outer-vlan?
            +-rw outer-vlan-id-mask?
            +-rw inner-vlan?
            +-rw inner-vlan-id-mask?
            +-rw ethertype?
            +-rw arp-guard?
            +-rw pcp?
            +-rw pcp-force?
            +-rw drop-precedence-force?
            +-rw known-unicast-only?
            +-rw unknown-unicast-only?
            +-rw count?
            +-rw count-sync?
            +-rw log?
            +-rw mirror?
            +-rw copy-sflow?

```

RPCs

Return the ingress and egress policies for an interface:

```
rpcs:  
  +---x get-mac-acl-for-intf  
  +---w input  
    |  +---w interface-type?  enumeration  
    |  +---w interface-name?  union  
    |  +---w direction?      enumeration  
  +--ro output  
    +--ro interface* [interface-type interface-name]  
      +--ro interface-type  enumeration  
      +--ro interface-name  union  
      +--ro ingress-policy*  
        |  +--ro policy-name?  string  
      +--ro egress-policy*  
        +--ro policy-name?  string
```

brocade-mac-address-table

Top-level container

```

module: brocade-mac-address-table
  +-rw mac-address-table
    +-rw static
      |  +-rw static-mac* [mac-address forward interface-type interface-name vlan vlanid]
      |  |  +-rw mac-address          mac-access-list:mac-address-type
      |  |  +-rw forward            enumeration
      |  |  +-rw interface-type     enumeration
      |  |  +-rw interface-name     string
      |  |  +-rw vlan              enumeration
      |  |  +-rw vlanid            interface:vlan-type
      |  +-rw static-ac-lif* [mac-address-lif forward-lif logical-interface interface-
      type-lif logical-interface-name]
        |    +-rw mac-address-lif      mac-access-list:mac-address-type
        |    +-rw forward-lif         enumeration
        |    +-rw logical-interface   enumeration
        |    +-rw interface-type-lif  enumeration
        |    +-rw logical-interface-name logical-ifname
    +-rw aging-time
    |  +-rw legacy-time-out?    uint32
  +-rw mac-move
    |  +-rw mac-move-detect-enable?  empty
    |  +-rw mac-move-limit?        uint32
    |  +-rw mac-move-action?       enumeration
    |  +-rw auto-recovery
      |    +-rw auto-recovery-enable?  empty
      |    +-rw auto-recovery-time?   uint32
  +-rw consistency-check
    +-rw mac-consistency-check-suppress?  empty
    +-rw mac-consistency-check-interval?  uint32

```

RPCs

```

rpcs:
  +---x get-mac-address-table
    +---w input
      |  +---w (request-type)?
      |    +---:(get-request)
      |    |  +---w mac-address?           yang:mac-address
      |    +---:(get-interface-based-request)
      |    |  +---w forwarding-interface
      |    |    +---w interface-type?    enumeration
      |    |    +---w interface-name?    union
      |    |    +---w mac-type?          enumeration
      |    +---:(get-next-request)
      |      +---w last-mac-address-details
      |        +---w last-mac-address?  yang:mac-address
      |        +---w last-vlan-id?     interface:vlan-type
      |        +---w last-mac-type?    enumeration
      |        +---w forwarding-interface-type?  enumeration
      |        +---w forwarding-interface-name?  union
      |        +---w mac-address-type?  enumeration
    +---ro output
      +---ro mac-address-table* [vlanid mac-address]
        |  +---ro vlanid             interface:vlan-type
        |  +---ro mac-address        yang:mac-address
        |  +---ro mac-type?          enumeration

```

```
|   +-+ro mac-state?          enumeration
|   +-+ro forwarding-interface*
|       +-+ro interface-type?  enumeration
|       +-+ro interface-name?  union
+-+ro has-more?           boolean
```

brocade-mc-hms-operational

Top-level container

```

module: brocade-mc-hms-operational
  +-ro igmp-snooping-state
    | +-ro multicast-ssm-mapping
      | | +-ro ssm-maps* [prefix-list-name]
        | |   +-ro prefix-list-name    string
        | |   +-ro src-ip-addr?      inet:ipv4-address
    +-ro igmp-statistics
      | | +-ro igmp-statistics* [interface-name]
        | |   +-ro interface-name     string
        | |   +-ro query-edge-received?  uint32
        | |   +-ro query-edge-sent?    uint32
        | |   +-ro query-edge-rx-errors? uint32
        | |   +-ro v1-report-edge-received?  uint32
        | |   +-ro v1-report-edge-sent?    uint32
        | |   +-ro v1-report-edge-rx-errors? uint32
        | |   +-ro v2-report-edge-received?  uint32
        | |   +-ro v2-report-edge-sent?    uint32
        | |   +-ro v2-report-edge-rx-errors? uint32
        | |   +-ro v3-report-edge-received?  uint32
        | |   +-ro v3-report-edge-sent?    uint32
        | |   +-ro v3-report-edge-rx-errors? uint32
        | |   +-ro grp-leave-edge-received?  uint32
        | |   +-ro grp-leave-edge-sent?    uint32
        | |   +-ro grp-leave-edge-rx-errors? uint32
        | |   +-ro pim-hello-edge-received?  uint32
        | |   +-ro pim-hello-edge-sent?    uint32
        | |   +-ro pim-hello-edge-rx-errors? uint32
        | |   +-ro error-unknown-types?   uint32
        | |   +-ro error-bad-length?     uint32
        | |   +-ro error-bad-checksum?   uint32
    +-ro debug-igmp
      | | +-ro enable-any?      uint8
      | | +-ro error?          uint8
      | | +-ro events?         uint8
      | | +-ro group?          uint8
      | | +-ro packets?        uint8
      | | +-ro grp-addr?       inet:ipv4-address
      | | +-ro protocol?       uint8
      | | +-ro query?          uint8
      | | +-ro v1-report?      uint8
      | | +-ro direction?      string
      | | +-ro phy-port-name?  string
      | | +-ro io-port-name?   string
    +-ro igmp-snooping-vlans* [vlan-id]
      | | +-ro vlan-id          uint32
      | | +-ro igmp-snooping-vlans* [vlan-id]
        | |   +-ro vlan-id          uint32
        | |   +-ro multicast-router-ports?  string
        | |   +-ro is-querier?        uint8
        | |   +-ro igmp-operation-mode?  uint32
        | |   +-ro fast-leave?        uint8
        | |   +-ro qmr?              uint32
        | |   +-ro lmqi?             uint32
        | |   +-ro qi?               uint32
        | |   +-ro version?          uint8
        | |   +-ro num-of-mcast-grps? uint32
        | |   +-ro vlan-groups* [grp-ip-addr]
          | |     +-ro grp-ip-addr     inet:ipv4-address

```

```
| |           +--ro member-ports?    string
| +-ro igmp-snooping-mrouters* [vlan-id]
| |   +--ro vlan-id          uint32
| |   +--ro igmp-snooping-mrouters* [vlan-id]
| |     +--ro vlan-id          uint32
| |     +--ro interface-name?  string
| |     +--ro expiry-time?    int32
| +-ro igmp-l3-interfaces* [interface-name]
| |   +--ro interface-name    string
| |   +--ro igmp-l3-interfaces* [interface-name igmp-querier]
| |     +--ro interface-name      string
| |     +--ro is-igmp-enabled?  uint8
| |     +--ro query-interval?  uint32
| |     +--ro other-querier-interval?  uint32
| |     +--ro query-reponse-time?  uint32
| |     +--ro last-member-query-interval?  uint32
| |     +--ro immediate-leave?  uint8
| |     +--ro igmp-querier      inet:ipv4-address
| |     +--ro is-igmp-querier-local?  uint8
| |     +--ro igmp-version?    uint8
| +-ro igmp-groups* [group-addr interface-name]
| |   +--ro group-addr        inet:ipv4-address
| |   +--ro interface-name    string
| |   +--ro igmp-groups* [group-addr interface-name]
| |     +--ro group-addr      inet:ipv4-address
| |     +--ro interface-name  string
| |     +--ro uptime?        string
| |     +--ro expiry-time?   string
| |     +--ro last-reporter?  inet:ipv4-address
| |     +--ro filter-mode?   uint8
| |     +--ro member-ship?   string
| |     +--ro igmpv3-sources* [interface-name]
| |       +--ro interface-name  string
| |       +--ro incl-src-ip* [ipv4-addr]
| |         +--ro ipv4-addr    inet:ipv4-address
| |       +--ro excl-src-ip* [ipv4-addr]
| |         +--ro ipv4-addr    inet:ipv4-address
| +-ro igmp-mct-groups* [cluster-id client-id]
| |   +--ro cluster-id      uint32
| |   +--ro client-id       uint32
| |   +--ro igmp-entry* [grp-addr src-addr interface-name member-intf]
| |     +--ro grp-addr      string
| |     +--ro src-addr      string
| |     +--ro interface-name  string
| |     +--ro member-intf    string
| |     +--ro member-type?   string
| |     +--ro filter-mode?   string
| |     +--ro mcast-df?     string
| |     +--ro peer-addr?    string
| +-ro pim-snp-groups* [vlan-id type]
| |   +--ro vlan-id        uint32
| |   +--ro type            string
| |   +--ro pim-snp-groups* [group-addr vlan-id]
| |     +--ro group-addr    inet:ipv4-address
| |     +--ro vlan-id       uint32
| |     +--ro uptime?       string
| |     +--ro expiry-time?  string
| |     +--ro last-reporter?  inet:ipv4-address
| |     +--ro pim-snp-sources* [src-addr]
| |       +--ro src-addr    inet:ipv4-address
| |       +--ro src-flags?   uint8
| |       +--ro src-uptime?  string
| |     +--ro pim-snp-sg-member-ports* [interface-name]
| |       +--ro interface-name  string
```

```

| | | | +--ro mbr-flags?          uint8
| | | | +--ro flag-string?      string
| | | | +--ro mbr-uptime?       string
| | | +--ro pim-snp-wg-member-ports* [interface-name]
| | | | +--ro interface-name    string
| | | | +--ro mbr-flags?          uint8
| | | | +--ro flag-string?      string
| | | | +--ro mbr-uptime?       string
| | +--ro igmp-multicast-snooping-vlans* [vlan-id]
| | | +--ro vlan-id             uint32
| | | +--ro igmp-multicast-snooping-vlans* [vlan-id]
| | | | +--ro vlan-id           uint32
| | | | +--ro pim-sn-status?     uint8
| | | | +--ro igmp-sn-status?    uint8
| | | | +--ro igmp-version?      uint8
| | +--ro igmp-interface-statistics
| | | +--ro interface-name?      string
| | | +--ro query-edge-received? uint32
| | | +--ro query-edge-sent?     uint32
| | | +--ro query-edge-rx-errors? uint32
| | | +--ro v1-report-edge-received? uint32
| | | +--ro v1-report-edge-sent?   uint32
| | | +--ro v1-report-edge-rx-errors? uint32
| | | +--ro v2-report-edge-received? uint32
| | | +--ro v2-report-edge-sent?   uint32
| | | +--ro v2-report-edge-rx-errors? uint32
| | | +--ro v3-report-edge-received? uint32
| | | +--ro v3-report-edge-sent?   uint32
| | | +--ro v3-report-edge-rx-errors? uint32
| | | +--ro grp-leave-edge-received? uint32
| | | +--ro grp-leave-edge-sent?   uint32
| | | +--ro grp-leave-edge-rx-errors? uint32
| | | +--ro pim-hello-edge-received? uint32
| | | +--ro pim-hello-edge-sent?   uint32
| | | +--ro pim-hello-edge-rx-errors? uint32
| | | +--ro error-unknown-types?  uint32
| | | +--ro error-bad-length?     uint32
| | | +--ro error-bad-checksum?   uint32
+--ro igmp-multicast-snooping-bridge-domains-state* [bd-id]
| +--ro bd-id                  uint32
| +--ro igmp-multicast-snooping-bridge-domains* [bd-id]
| | +--ro bd-id                uint32
| | +--ro pim-sn-status?        uint8
| | +--ro igmp-sn-status?       uint8
| | +--ro igmp-version?         uint8
+--ro igmp-snooping-bridge-domain-mrouters-state* [bd-id]
| +--ro bd-id                  uint32
| +--ro igmp-snooping-bridge-domain-mrouters* [bd-id]
| | +--ro bd-id                uint32
| | +--ro interface-name?       string
| | +--ro expiry-time?          int32
+--ro igmp-snooping-bridge-domains-state* [bd-id]
| +--ro bd-id                  uint32
| +--ro igmp-snooping-bridge-domains* [bd-id]
| | +--ro bd-id                uint32
| | +--ro multicast-router-ports? string
| | +--ro is querier?           uint8
| | +--ro igmp-operation-mode?   uint32
| | +--ro fast-leave?            uint8
| | +--ro qmrt?                 uint32
| | +--ro lmqi?                 uint32
| | +--ro qi?                   uint32
| | +--ro version?               uint8
| | +--ro num-of-mcast-grps?    uint32

```

```
+--ro vlan-groups* [grp-ip-addr]
    +-+ro grp-ip-addr      inet:ipv4-address
    +-+ro member-ports?    string
```

brocade-mct

Top-level container

```
module: brocade-mct
  +-rw lvtep
    |  +-rw broadcast-local-bias?    empty
    +-rw cluster* [cluster-name]
      +-rw cluster-name          common-def:name-string64
      +-rw peer?                inet:ipv4-address
      +-rw peer-interface
        |  +-rw peer-if-type?   enumeration
        |  +-rw peer-if-name?  peer-ifname
      +-rw client-pw?          empty
      +-rw bringup-delay?     uint32
      +-rw peer-keepalive!
        |  +-rw destination
          |    |  +-rw destination-ip?    inet:ipv4-address
          |    |  +-rw source-interface?  enumeration
          |    |  +-rw if-name?         peer-ifname
          |    +-rw auto?            empty
          |    +-rw role?            enumeration
      +-rw member
        |  +-rw vlan
          |    |  +-rw all?          empty
          |    |  +-rw none?         empty
          |    |  +-rw add?          interface:ui32-vlan-20k-range
          |    |  +-rw except?       interface:ui32-vlan-20k-range
          |    |  +-rw remove?       interface:ui32-vlan-20k-range
        |  +-rw bridge-domain
          |    +-rw bd_all?        empty
          |    +-rw bd_none?       empty
          |    +-rw bd_add?        bd:ui32-bridge-domain-20k-range
          |    +-rw bd_except?     bd:ui32-bridge-domain-20k-range
          |    +-rw bd_remove?     bd:ui32-bridge-domain-20k-range
      +-rw shutdown
        +-rw shutdown_all?    empty
        +-rw clients?         empty
```

brocade-mld-snooping

Top-level container

```
+--rw mld-snooping
    +-rw ipv6
        +-rw pim
            |  +-rw snooping
            |      +-rw pimv6-enable?    empty
        +-rw mld
            +-rw ssm-map
                +-rw ssmmap-enable?      empty
            +-rw mlds-prefix-list* [mlds-prefix-list-name mlds-prefix-src-addr]
                +-rw mlds-prefix-list-name    ipv6-prefix-name-t
                +-rw mlds-prefix-src-addr    inet:ipv6-address
```

brocade-mpls

Top-level container

```
module: brocade-mpls
  +-rw mpls-config
    +-rw router
      +-rw mpls!
        +-rw mpls-cmds-holder
          +-rw lsp-xc-traps
            |  +-rw lsp-xc-traps-enable?  empty
          +-rw policy!
            |  +-rw policy-admin-group* [admin-group-name admin-group-number]
            |  |  +-rw admin-group-name  string
            |  |  +-rw admin-group-number  uint32
            |  +-rw backup-retry-time?  uint32
            |  +-rw cspf-computation-mode
            |  |  +-rw use-bypass-liberal?  empty
            |  |  +-rw use-bypass-metric?  empty
            |  |  +-rw ignore-overload-bit?  empty
            |  |  +-rw cspf-metric-type?  cspf-computation-mode
            |  +-rw cspf-group-computation
            |  |  +-rw add-penalty?  empty
            |  +-rw cspf-interface-constraint?  empty
            |  +-rw handle-isis-neighbor-down?  empty
            |  +-rw handle-ospf-neighbor-down?  empty
            |  +-rw retry-time?  uint32
            |  +-rw retry-limit?  uint32
            |  +-rw rapid-retry?  enable-disable
            |  +-rw rsvp-periodic-flooding-time?  uint32
            |  +-rw rsvp-flooding-threshold
              |  +-rw rsvp-flooding-threshold-down*  uint32
              |  +-rw rsvp-flooding-threshold-up*  uint32
            |  +-rw soft-preemption
              |  +-rw cleanup-timer?  uint32
            |  +-rw global-auto-bandwidth!
              |  +-rw autobw-sample-interval?  uint32
              |  +-rw autobw-num-sample-record?  uint32
            |  +-rw implicit-commit
              |  +-rw (implicit-commit-options)?
                |  +-:(implicit-commit-case-all)
                  |  |  +-rw implicit-commit-all?  empty
                |  +-:(implicit-commit-case-selective)
                  |  |  +-rw implicit-commit-autobw-adjustment?  empty
                  |  |  +-rw implicit-commit-lsp-reoptimize-timer?  empty
            |  +-rw traffic-engineering
              |  +-rw isis-set-level?  enumeration
              |  +-rw traffic-eng-ospf
                |  +-rw area
                  +-rw (ch-ospf-area-type)?
                    +-:(ca-area-type-ip-address)
                      |  +-rw ospf-area-as-ip-address?  inet:ipv4-address
                    +-:(ca-area-type-decimal)
                      |  +-rw ospf-area-as-decimal?  uint32
                    +-:(ca-area-all)
                      +-rw ospf-area-all?  empty
              |  +-rw qos-ttl-mode?  enumeration
              |  +-rw ingress-tunnel-accounting?  empty
              |  +-rw transit-session-accounting?  empty
              |  +-rw switchover-activation-delay?  uint32
              |  +-rw switchover-hold-tear-delay?  uint32
```

```

    +-rw rsvp!
    | +-rw refresh-interval?                      uint32
    | +-rw refresh-multiple?                     uint32
    | +-rw g-refresh-reduction
    | | +-rw summary-refresh?      empty
    | | +-rw bundle-message!
    | | | +-rw bundle-send-delay?   uint32
    | +-rw g-reliable-messaging!
    | | +-rw rapid-retrans-decay?     uint32
    | | +-rw rapid-retrans-interval?   uint32
    | | +-rw rapid-retry-limit?      uint32
    | +-rw global-rsvp-hello!
    | | +-rw global-rsvp-hello-interval?   uint32
    | | +-rw global-rsvp-hello-tolerance?  uint32
    | +-rw global-rsvp-hello-acknowledgements? empty
    | +-rw g-rsvp-backup-bw-guarantee?        empty
    | +-rw delay-resv-send?                  empty
    +-rw ldp!
    | +-rw ldp-holder
    | | +-rw ldp-ecmp?                      uint32
    | | +-rw ldp-hello-interval-basic?      uint32
    | | +-rw ldp-hello-interval-target?      uint32
    | | +-rw ldp-hello-timeout-basic?       uint32
    | | +-rw ldp-hello-timeout-target?      uint32
    | | +-rw ldp-ka-int?                   uint32
    | | +-rw ldp-ka-int-cnt?              uint32
    | | +-rw ldp-ka-timeout?              uint32
    | | +-rw ldp-fec-filter-in?           string
    | | +-rw ldp-fec-filter-out?          string
    | | +-rw ldp-advertise-label?        string
    | | +-rw ldp-fec-128-for-auto-discovered? empty
    | | +-rw ldp-lsr-id?                inet:ipv4-address
    | +-rw ldp-session* [ldp-session-ip]
    | | +-rw ldp-session-ip             inet:ipv4-address
    | | +-rw ldp-session-fec-filter-out? string
    | | +-rw ldp-session-auth-key?      string
    | +-rw ldp-targeted-peer* [ldp-targeted-peer-ip]
    | | +-rw ldp-targeted-peer-ip      inet:ipv4-address
    | +-rw ldp-rcv-label-silence-time?   uint32
    | +-rw ldp-gr!
    | | +-rw ldp-gr-helper-only?        empty
    | | +-rw ldp-gr-max-neighbor-reconnect-time? uint32
    | | +-rw ldp-gr-max-neighbor-recovery-time?  uint32
    | | +-rw ldp-gr-reconnect-time?     uint32
    | | +-rw ldp-gr-recovery-time?     uint32
    | +-rw ldp-eol!
    | | +-rw ldp-eol-tx-silence?       uint32
    | | +-rw ldp-eol-notification?     uint32
    | | +-rw ldp-tunnel-metric?        uint32
    | | +-rw ldp-lw-delay?            uint32
    +-rw dynamic-bypass!
    | +-rw mpls-dynamic-bypass-sub-cmds
    | | +-rw dynamic-bypass-max-bypasses?   uint32
    | | +-rw dynamic-bypass-max-bypasses-per-mp? uint32
    | | +-rw dynamic-bypass-enable-all-interfaces? empty
    | | +-rw dynamic-bypass-reoptimize-timer?   uint32
    | | +-rw dynamic-bypass-disable?         empty
    +-rw mpls-interface* [interface-type interface-name]
    | +-rw interface-type               enumeration
    | +-rw interface-name              interface-type
    | +-rw mpls-interface-ldp-enable?   empty
    | +-rw ldp-params
    | | +-rw ldp-param-cmds
    | | | +-rw hello-interval?      uint32

```

```

    | |     +--rw hello-timeout?      uint32
    | +-rw rsvp
    | |   +-rw rsvp-reservable-bandwidth
    | | |   +-rw (rsvp-reservable-bandwidth-options)?
    | | |   +--:(reservable-bandwidth-case-exact)
    | | |   |   +-rw reservable-bandwidth?          uint32
    | | |   |   +-:(reservable-bandwidth-case-percentage)
    | | |   |   |   +-rw reservable-bandwidth-percentage?  uint32
    | | +-rw rsvp-authentication
    | | |   +-rw rsvp-authentication-key?  string
    | | +-rw interface-rsvp-hello!
    | | |   +-rw rsvp-hello-interval?   uint32
    | | |   +-rw rsvp-hello-tolerance?  uint32
    | | +-rw rsvp-hello-disable?       empty
    | | +-rw rsvp-te-metric?          uint32
    | | +-rw rsvp-intf-flooding-threshold
    | | |   +-rw rsvp-intf-flooding-threshold-down*  uint32
    | | |   +-rw rsvp-intf-flooding-threshold-up*   uint32
    | | +-rw interface-rsvp-admin-group*   string
    | | +-rw interface-refresh-reduction
    | | |   +-rw summary-refresh?           empty
    | | |   +-rw bundle-message!
    | | | |   +-rw bundle-send-delay?   uint32
    | | | +-rw rsvp-refresh-reduction-disable? empty
    | | +-rw interface-reliable-messaging!
    | | |   +-rw rapid-retrans-decay?      uint32
    | | |   +-rw rapid-retrans-interval?   uint32
    | | |   +-rw rapid-retry-limit?       uint32
    | | |   +-rw rsvp-reliable-messaging-disable? empty
    +-rw interface-dynamic-bypass!
    +-rw mpls-interface-dynamic-bypass-sub-cmds
    |   +-rw interface-dynamic-bypass-disable?      empty
    |   +-rw interface-dynamic-bypass-max-bypasses?  uint32
    |   +-rw interface-dynamic-bypass-max-bypasses-per-mp?  uint32
    |   +-rw interface-dynamic-bypass-reoptimize-timer?  uint32
    |   +-rw interface-dynamic-bypass-cos?            uint32
    |   +-rw interface-dynamic-bypass-from?          inet:ip-
address
    |   +-rw interface-dynamic-bypass-adaptive?      enable-
disable
    |   +-rw interface-dynamic-bypass-record-route?  enable-
disable
    |   +-rw interface-dynamic-bypass-hop-limit?      uint8
    |   +-rw interface-dynamic-bypass-exclude-any*    string
    |   +-rw interface-dynamic-bypass-include-any*    string
    |   +-rw interface-dynamic-bypass-include-all*   string
    |   +-rw interface-dynamic-bypass-primary-path?  string
    |   +-rw interface-dynamic-bypass-name-prefix?   string
    |   +-rw interface-dynamic-bypass-tie-breaking?  tie-
breaking
    |   +-rw interface-dynamic-bypass-cspf-computation-mode? cspf-
computation-mode
    |   +-rw priority
    |   |   +-rw interface-dynamic-bypass-setup-priority?   uint32
    |   |   +-rw interface-dynamic-bypass-holding-priority?  uint32
    |   +-rw traffic-eng
    |   |   +-rw interface-dynamic-bypass-traffic-eng-max-burst?  uint32
    |   |   +-rw interface-dynamic-bypass-traffic-eng-max-rate?  uint32
    |   |   +-rw interface-dynamic-bypass-traffic-eng-mean-rate? uint32
    +-rw autobw-template* [autobw-template-name]
    |   +-rw autobw-template-name   string
    |   +-rw adjustment-interval?  uint32
    |   +-rw adjustment-threshold
    |   |   +-rw (threshold-options)?

```

```

| |     +--:(threshold-case-percentage)
| |     |   +-rw threshold-percentage?    uint32
| |     +--:(threshold-case-table)
| |     |   +-rw use-threshold-table?    empty
| +-rw min-bandwidth?          uint32
| +-rw max-bandwidth?          uint32
| +-rw overflow-limit?        uint32
| +-rw underflow-limit?       uint32
| +-rw mode?                  autobw-mode
| +-rw sample-recording?      enable-disable
+--rw autobw-threshold-table!
|   +-rw autobw-threshold-table-bandwidth* [bandwidth-value]
|   |   +-rw bandwidth-value           uint32
|   |   +-rw autobw-threshold-table-threshold?  uint32
|   +-rw max-bw-threshold
|     +-rw (max-bw-threshold-options)?
|       +--:(max-bw-threshold-case-absolute)
|         |   +-rw max-bw-threshold-absolute?    uint32
|       +--:(max-bw-threshold-case-percentage)
|         +-rw max-bw-threshold-percentage?    uint32
+--rw cspf-group* [cspf-group-name]
|   +-rw cspf-group-name          string
|   +-rw cspf-group-ip* [cspf-group-ip-address]
|     |   +-rw cspf-group-ip-address    inet:ipv4-address
|   +-rw cspf-group-link* [cspf-group-link-from cspf-group-link-to]
|     |   +-rw cspf-group-link-from    inet:ipv4-address
|     |   +-rw cspf-group-link-to     inet:ipv4-address
|   +-rw cspf-group-subnet* [cspf-group-subnet-ip]
|     |   +-rw cspf-group-subnet-ip   inet:ipv4-prefix
|   +-rw cspf-group-node* [cspf-group-node-ip]
|     |   +-rw cspf-group-node-ip    inet:ipv4-address
|   +-rw cspf-group-penalty-n
|     +-rw cspf-group-penalty?      uint32
+--rw path* [path-name]
|   +-rw path-name               string
|   +-rw path-hop* [path-hop-ip]
|     |   +-rw path-hop-ip          inet:ipv4-address
|     |   +-rw path-hop-type?      strict-loose-hop
|   +-rw path-insert* [path-insert-ip]
|     +-rw path-insert-ip         inet:ipv4-address
|     +-rw path-insert-type?      strict-loose-hop
|     +-rw path-insert-before-hop-ip?  inet:ipv4-address
+--rw bypass-lsp* [bypass-lsp-name]
|   +-rw bypass-lsp-name          string
|   +-rw bypass-lsp-dest-address?  inet:ipv4-address
|   +-rw bypass-lsp-src-address?  inet:ipv4-address
|   +-rw bypass-lsp-tie-breaking? tie-breaking
|   +-rw lsp-adaptive?           empty
|   +-rw lsp-reoptimize-timer?    uint32
|   +-rw lsp-commit?             empty
|   +-rw lsp-record?             enable-disable
|   +-rw lsp-cos?                uint32
|   +-rw lsp-hop-limit?          uint16
|   +-rw lsp-cspf-computation-mode? cspf-computation-mode
|   +-rw lsp-traffic-engineering
|     |   +-rw lsp-te-mean-rate?    uint32
|     |   +-rw lsp-te-max-rate?    uint32
|     |   +-rw lsp-te-max-burst?   uint32
|   +-rw priority
|     |   +-rw lsp-setup-priority?  uint32
|     |   +-rw lsp-hold-priority?   uint32
|   +-rw lsp-exclude-any*         string
|   +-rw lsp-include-any*         string
|   +-rw lsp-include-all*         string

```

```

|   |   +-rw exclude-interface* [bypass-exclude-interface-type bypass-exclude-
interface-name]
|   |   |   +-rw bypass-exclude-interface-type      mpls-interface-type
|   |   |   +-rw bypass-exclude-interface-name    interface-type
|   |   +-rw bypass-lsp-primary-path?          string
|   |   +-rw bypass-lsp-enable?              empty
|   +-rw lsp* [lsp-name]
|   |   +-rw lsp-name                      string
|   |   +-rw lsp-dest-address?            inet:ipv4-address
|   |   +-rw lsp-cspf?                  enable-disable
|   |   +-rw lsp-ipmtu?                uint32
|   |   +-rw lsp-metric?              uint32
|   |   +-rw lsp-revert-timer?        uint32
|   |   +-rw lsp-tie-breaking?       tie-breaking
|   |   +-rw lsp-src-address?        inet:ipv4-address
|   |   +-rw lsp-primary-path?      string
|   |   +-rw lsp-adaptive?          empty
|   |   +-rw lsp-reoptimize-timer?  uint32
|   |   +-rw lsp-commit?            empty
|   |   +-rw lsp-record?            enable-disable
|   |   +-rw lsp-cos?               uint32
|   |   +-rw lsp-hop-limit?         uint16
|   |   +-rw lsp-cspf-computation-mode? cspf-computation-mode
|   +-rw lsp-traffic-engineering
|   |   +-rw lsp-te-mean-rate?     uint32
|   |   +-rw lsp-te-max-rate?     uint32
|   |   +-rw lsp-te-max-burst?    uint32
|   |   +-rw priority
|   |   |   +-rw lsp-setup-priority?  uint32
|   |   |   +-rw lsp-hold-priority?  uint32
|   |   +-rw lsp-exclude-any*      string
|   |   +-rw lsp-include-any*      string
|   |   +-rw lsp-include-all*      string
|   |   +-rw lsp-soft-preemption?  empty
|   |   +-rw lsp-auto-bandwidth!
|   |   |   +-rw lsp-autobw-template? -> ../../autobw-template/autobw-
template-name
|   |   |   +-rw adjustment-interval?  uint32
|   |   |   +-rw adjustment-threshold
|   |   |   |   +-rw (threshold-options)?
|   |   |   |   |   +-:(threshold-case-percentage)
|   |   |   |   |   |   +-rw threshold-percentage?  uint32
|   |   |   |   |   +-:(threshold-case-table)
|   |   |   |   |   |   +-rw use-threshold-table?  empty
|   |   |   +-rw min-bandwidth?      uint32
|   |   |   +-rw max-bandwidth?      uint32
|   |   |   +-rw overflow-limit?    uint32
|   |   |   +-rw underflow-limit?   uint32
|   |   |   +-rw mode?              autobw-mode
|   |   |   +-rw sample-recording?  enable-disable
|   +-rw lsp-frr!
|   |   +-rw lsp-frr-bandwidth
|   |   |   +-rw (lsp-frr-bandwidth-options)?
|   |   |   |   +-:(lsp-frr-bandwidth-case-exact)
|   |   |   |   |   +-rw lsp-frr-bandwidth?          uint32
|   |   |   |   |   +-:(lsp-frr-bandwidth-case-inherit)
|   |   |   |   |   |   +-rw lsp-frr-bandwidth-inherit?  empty
|   |   |   +-rw lsp-frr-exclude-any*      string
|   |   |   +-rw lsp-frr-include-any*      string
|   |   |   +-rw lsp-frr-include-all*      string
|   |   |   +-rw lsp-frr-hop-limit?        uint8
|   |   |   +-rw lsp-frr-facility-backup?  empty
|   |   |   +-rw lsp-frr-link-protection?  empty
|   |   |   +-rw lsp-frr-priority

```

```

    | | | +--rw lsp-frr-setup-priority?      uint32
    | | | +--rw lsp-frr-hold-priority?      uint32
    | | +--rw lsp-frr-revertive
    | |   +--rw lsp-frr-revertive-holdtime?    uint8
    | |   +--rw lsp-frr-revertive-mode-global?  enable-disable
    | +--rw secondary-path* [secpath-name]
    |   +--rw secpath-name                  string
    |   +--rw secpath-standby              empty
    |   +--rw secpath-cspf?                enable-disable
    |   +--rw secpath-ipmtu?              uint32
    |   +--rw lsp-adaptive?               empty
    |   +--rw lsp-reoptimize-timer?       uint32
    |   +--rw lsp-commit?                 empty
    |   +--rw lsp-record?                 enable-disable
    |   +--rw lsp-cos?                   uint32
    |   +--rw lsp-hop-limit?             uint16
    |   +--rw lsp-cspf-computation-mode? cspf-computation-mode
    |   +--rw lsp-traffic-engineering
    |     +--rw lsp-te-mean-rate?        uint32
    |     +--rw lsp-te-max-rate?        uint32
    |     +--rw lsp-te-max-burst?       uint32
    |   +--rw priority
    |     +--rw lsp-setup-priority?     uint32
    |     +--rw lsp-hold-priority?      uint32
    |     +--rw lsp-exclude-any*       string
    |     +--rw lsp-include-any*       string
    |     +--rw lsp-include-all*       string
    |     +--rw secpath-soft-preemption? empty
    |     +--rw secpath-auto-bandwidth!
    |       +--rw secpath-autobw-template?  -> ../../../../../../autobw-
template/autobw-template-name
    |       +--rw adjustment-interval?    uint32
    |       +--rw adjustment-threshold
    |         +--rw (threshold-options)?
    |           +--:(threshold-case-percentage)
    |             +--rw threshold-percentage?  uint32
    |           +--:(threshold-case-table)
    |             +--rw use-threshold-table?  empty
    |           +--rw min-bandwidth?       uint32
    |           +--rw max-bandwidth?       uint32
    |           +--rw overflow-limit?     uint32
    |           +--rw underflow-limit?   uint32
    |           +--rw mode?              autobw-mode
    |           +--rw sample-recording?  enable-disable
    | +--rw lsp-select-path
    |   +--rw lsp-select-path-mode?     enumeration
    |   +--rw (choice-lsp-select-path-type)?
    |     +--:(case-lsp-select-path-type-primary)
    |       +--rw lsp-select-path-primary? empty
    |     +--:(case-lsp-select-path-type-secondary)
    |       +--rw lsp-select-path-secondary-name? string
    | +--rw lsp-enable?               empty
    +--rw segment-routing!
    +--rw sr-holder
      +--rw srgb* [lower-bound upper-bound]
        +--rw lower-bound    uint32
        +--rw upper-bound    uint32
      +--rw tunnel-metric?   uint32
      +--rw load-sharing?    uint32

```

RPCs

```
rpcs:  
  +--x clear-mpls-lsp  
  | +---w input  
  |   +---w mpls-clear-lsp-name-in?    string  
  +--x clear-mpls-rsvp-statistics  
  | +---ro output  
  |   +---ro clear-mpls-rsvp-statistics-out  
  |   +---ro clear-mpls-rsvp-statistics-ret-msg?    string  
  +--x clear-mpls-rsvp-statistics-neighbor  
  | +---w input  
  |   +---w clear-mpls-rsvp-statistics-neighbor-address?    mpls-ipv4-address  
  |   +---w clear-mpls-rsvp-statistics-neighbor-all?        boolean  
  | +---ro output  
  |   +---ro clear-mpls-rsvp-statistics-neighbor-out  
  |   +---ro clear-mpls-rsvp-statistics-neighbor-ret-msg?    string  
  +--x clear-mpls-ldp-statistics  
  | +---ro output  
  |   +---ro clear-mpls-ldp-statistics-out  
  |   +---ro clear-mpls-ldp-statistics-ret-msg?    string  
  +--x clear-mpls-statistics  
  | +---w input  
  |   +---w mpls-clear-statistics-type?    uint8  
  |   +---w protocol?                  string  
  |   +---w fec-prefix?                mpls-ipv4-prefix  
  |   +---w prefix-address?            mpls-ipv4-address  
  |   +---w prefix-mask?              mpls-ipv4-subnet-mask  
  |   +---w label?                   uint8  
  |   +---w in-label?                uint32  
  |   +---w tunnel-id-present?  
  |   +---w tunnel-id?                uint32  
  |   +---w bypass?                  uint8  
  |   +---w tunnel-name?              string  
  |   +---w tunnel-dest?              mpls-ipv4-address  
  | +---ro output  
  |   +---ro mpls-clear-statistics-ret-msg?    string  
  +--x clear-mpls-ldp-neighbor  
  | +---w input  
  |   +---w mpls-clear-all-ldp-sessions?    boolean  
  |   +---w mpls-clear-one-ldp-sessions?    inet:ipv4-address  
  | +---ro output  
  |   +---ro clear-mpls-ldp-neighbor-out  
  |   +---ro clear-mpls-ldp-neighbor-ret-msg?    string
```

brocade-mpls-operational

Top-level container

```

module: brocade-mpls-operational
  +-ro mpls-state
    | +-ro paths-configured?          uint32
    | +-ro lpsps-configured?         uint32
    | +-ro lpsps-enabled?            uint32
    | +-ro lpsps-operational?        uint32
    | +-ro detour-lpsps-up?          uint32
    | +-ro backup-lpsps-up?          uint32
    | +-ro bypass-lpsps?             uint32
    | +-ro bypass-lpsps-up?          uint32
    | +-ro bypass-lpsps-enabled?     uint32
    | +-ro ldp-lpsps-operational?    uint32
    | +-ro isis-link-fecs?           uint32
    | +-ro isis-prefix-fecs?         uint32
    | +-ro ospf-link-fecs?           uint32
    | +-ro ospf-prefix-fecs?         uint32
    | +-ro transit-lpsps-configured? uint32
    | +-ro transit-lpsps-enabled?    uint32
    | +-ro transit-lpsps-operational? uint32
    | +-ro cspf-groups-configured?   uint32
    | +-ro tunnels-supported?        uint32
    | +-ro tunnels-allocated?        uint32
    | +-ro cross-connects-supported? uint32
    | +-ro cross-connects-allocated? uint32
    | +-ro auto-bw-templates-supported? uint32
    | +-ro auto-bw-templates-configured? uint32
    | +-ro times-enabled?            uint32
    | +-ro ldp
      | +-ro ldp-initialized?          boolean
      | +-ro lsr-id?                 inet:ipv4-address
      | +-ro lsr-id-configured?       boolean
      | +-ro loopback?                uint8
      | +-ro hello-interval-link?     uint32
      | +-ro hello-interval-target?   uint32
      | +-ro hold-time-sent-link?     uint32
      | +-ro hold-time-sent-target?   uint32
      | +-ro ka-interval?             uint32
      | +-ro ka-multiple?             uint32
      | +-ro ka-timeout?              uint32
      | +-ro ka-timeout-default?      boolean
      | +-ro load-sharing?             uint8
      | +-ro advertise-fecs-for-prefix-list? string
      | +-ro advertise-fecs-for-prefix-list-exists? boolean
      | +-ro inbound-fecs-filtering-prefix-list? string
      | +-ro inbound-fecs-filtering-prefix-list-exists? boolean
      | +-ro outbound-fecs-filtering-prefix-list? string
      | +-ro outbound-fecs-filtering-prefix-list-exists? boolean
      | +-ro tunnel-metric?            uint16
      | +-ro fec-128-used-for-auto-disc-current? boolean
      | +-ro fec-128-used-for-auto-disc-configured? boolean
      | +-ro end-of-lib?               boolean
      | +-ro eol-notification-time?    uint32
      | +-ro tx-silence-time?          uint32
      | +-ro rx-silence-time?          uint32
      | +-ro gr-enable?                boolean
      | +-ro gr-helper?                boolean
      | +-ro gr-reconnect-time?        uint32
      | +-ro gr-max-peer-reconnect-time? uint32

```

```

| |   +-+ro gr-recovery-time?                      uint32
| |   +-+ro gr-max-peer-recovery-time?            uint32
| |   +-+ro forwarding-state-timer-running?       boolean
| |   +-+ro forwarding-state-timer-remaining?     uint32
| |   +-+ro lwd-delay?                           uint32
| |   +-+ro lwd-default?                         boolean
| |   +-+ro ldp-session-summary
| |   |   +-+ro num-link-sessions?                uint32
| |   |   +-+ro num-operational-link-sessions?    uint32
| |   |   +-+ro num-targeted-sessions?             uint32
| |   |   +-+ro num-operational-targeted-sessions? uint32
| |   +-+ro tunnels
| |   |   +-+ro total-tunnel-count?               uint32
| |   |   +-+ro ldp-tunnels* [tunnel-destination prefix-length]
| |   |   |   +-+ro tunnel-interface-index?        uint32
| |   |   |   +-+ro tunnel-metric?                 uint32
| |   |   |   +-+ro name?                        string
| |   |   |   +-+ro tunnel-lsp-state?              uint32
| |   |   |   +-+ro tunnel-vif?                  uint32
| |   |   |   +-+ro protocol-type?                mpls-protocol
| |   |   |   +-+ro out-segments* [outgoing-interface]
| |   |   |   |   +-+ro outgoing-interface      string
| |   |   |   |   +-+ro next-hop-ipaddress?       inet:ipv4-address
| |   |   |   +-+ro tunnel-destination          inet:ipv4-address
| |   |   |   +-+ro prefix-length                uint32
| |   +-+ro statistics
| |   |   +-+ro protocol-errors* [stats-group]
| |   |   |   +-+ro stats-group                 mpls-ldp-stats-error-group
| |   |   |   +-+ro protocol-error* [error-type]
| |   |   |   |   +-+ro error-type              uint32
| |   |   |   |   +-+ro count?                  uint32
| |   |   +-+ro protocol-stats* [stats-group]
| |   |   |   +-+ro stats-group                 mpls-ldp-stats-error-group
| |   |   |   +-+ro protocol-stat* [stat-type]
| |   |   |   |   +-+ro stat-type              uint32
| |   |   |   |   +-+ro rx-count?                uint32
| |   |   |   |   +-+ro tx-count?                uint32
| |   +-+ro ldp-fec-statistics
| |   |   +-+ro number-of-prefix-fec?           uint32
| |   |   +-+ro number-of-prefix-fec-installed? uint32
| |   |   +-+ro number-of-prefix-fec-filtered-in? uint32
| |   |   +-+ro number-of-prefix-fec-filtered-out? uint32
| |   |   +-+ro number-of-vc-fec-128?           uint32
| |   |   +-+ro number-of-vc-fec-129?           uint32
| |   |   +-+ro number-of-vc-fec-installed?      uint32
| |   |   +-+ro number-of-route-upd-proc-errors? uint32
| |   |   +-+ro number-of-vc-fec-proc-errors?     uint32
| |   |   +-+ro number-of-prefix-fec-lwd?        uint32
| |   |   +-+ro number-of-vc-fec?                 uint32
| |   +-+ro interface* [interface-name]
| |   |   +-+ro interface-name                string
| |   |   +-+ro interface-index?              uint32
| |   |   +-+ro label-space?                 uint32
| |   |   +-+ro neighbor-count?              uint32
| |   |   +-+ro hello-interval?              uint32
| |   |   +-+ro hello-timeout?              uint32
| |   |   +-+ro hello-next?                 uint32
| |   +-+ro ldp-database* [peer-ip own-ip]
| |   |   +-+ro peer-ip          inet:ipv4-address
| |   |   +-+ro own-ip           inet:ipv4-address
| |   |   +-+ro upstream* [index]
| |   |   |   +-+ro label?           uint32
| |   |   |   +-+ro prefix?          inet:ipv4-address
| |   |   |   +-+ro prefix-length?    uint32

```

```

    | | | | +--ro fec-type?      uint32
    | | | | +--ro stale?       boolean
    | | | | +--ro index        uint32
    | | | +--ro downstream* [index]
    | | | | +--ro label?       uint32
    | | | | +--ro prefix?      inet:ipv4-address
    | | | | +--ro prefix-length? uint32
    | | | | +--ro fec-type?      uint32
    | | | | +--ro stale?       boolean
    | | | | +--ro index        uint32
    | | | | +--ro state?       string
    | | | | +--ro filtered?     boolean
    | | | | +--ro lwd?          boolean
    | | | +--ro targeted-peer* [mpls-ldp-targeted-peer-id]
    | | | | +--ro mpls-ldp-targeted-peer-id   inet:ipv4-address
    | | +--ro path* [path-key]
    | | | +--ro path-key        uint32
    | | | +--ro destination-route?   inet:ipv4-prefix
    | | | +--ro upstream-sessions* [ip]
    | | | | +--ro ip             inet:ipv4-address
    | | | | +--ro labelspace?     uint32
    | | | | +--ro label?         uint32
    | | | +--ro downstream-sessions* [ip interface]
    | | | | +--ro ip             inet:ipv4-address
    | | | | +--ro interface       string
    | | | | +--ro labelspace?     uint32
    | | | | +--ro label?         uint32
    | | +--ro ldp-neighbors* [neighbor-ldpid labelspaceid]
    | | | +--ro neighbor-ldpid      inet:ipv4-address
    | | | +--ro labelspaceid       uint8
    | | | +--ro neighbor-transport?   inet:ipv4-address
    | | | +--ro interface-name?     string
    | | | +--ro max-hold-time?     uint32
    | | | +--ro time-left?         uint32
    | | | +--ro up-time?           string
    | | | +--ro configured-hold-time? uint32
    | | | +--ro neighbor-proposed-hold-time? uint32
    | | +--ro ldp-session* [peer-ldp-id peer-label-space-id]
    | | | +--ro peer-ldp-id        inet:ipv4-address
    | | | +--ro peer-label-space-id  uint8
    | | | +--ro state?            string
    | | | +--ro adjacency?        string
    | | | +--ro role?              string
    | | | +--ro max-hold?          uint32
    | | | +--ro time-left?         uint32
    | | | +--ro session-status?    string
    | | | +--ro local-ldp-id?      string
    | | | +--ro local-lblspc-id?    string
    | | | +--ro next-keepalive?    uint32
    | | | +--ro entity-index?      uint32
    | | | +--ro targeted-adj-added? string
    | | | +--ro is-retry?          boolean
    | | | +--ro next-retry?        uint32
    | | | +--ro keepalive-interval? uint32
    | | | +--ro local-keepalive-timeout? uint32
    | | | +--ro peer-proposed-keepalive-timeout? uint32
    | | | +--ro session-up-time?    string
    | | | +--ro md5-auth-key?      string
    | | | +--ro tcp-conn-local?    string
    | | | +--ro tcp-conn-remote?    string
    | | | +--ro tcp-state?         string
    | | | +--ro num-fecs-received-from-peer? uint32
    | | | +--ro num-fecs-installed-from-peer? uint32
    | | | +--ro is-fecs-pending-uninstall? boolean

```

```

| | | +--ro num-fecs-filtered-out?          uint32
| | | +--ro num-fecs-filtered-in?           uint32
| | | +--ro filter-prefix-list-name?       string
| | | +--ro filter-prefix-list-exists?     boolean
| | | +--ro is-only-gr-valid?             boolean
| | | +--ro gr-enabled?                  boolean
| | | +--ro peer-reconnect-time?         uint32
| | | +--ro peer-recovery-time?          uint32
| | | +--ro reconnect-time-in-use?       uint32
| | | +--ro reconnect-time-remaining?    uint32
| | | +--ro recovery-time-in-use?        uint32
| | | +--ro recovery-time-remaining?     uint32
| | | +--ro gr-state?                   string
| | | +--ro local-eol-unrecognized-notification? boolean
| | | +--ro remote-eol-unrecognized-notification? boolean
| | | +--ro does-session-support-eol?    boolean
| | | +--ro local-state?                boolean
| | | +--ro remote-state?               boolean
| | | +--ro eol-notification-time?      uint32
| | | +--ro eol-notification-time-remaining? uint32
| | | +--ro eol-tx-label-silence-time?   uint32
| | | +--ro eol-tx-label-silence-time-remaining? uint32
| | | +--ro eol-rx-label-silence-time?   uint32
| | | +--ro eol-rx-label-silence-time-remaining? uint32
| | | +--ro filtered?                  session-filter-type
| | | +--ro interfaces*                string
| | | +--ro addresses*                string
| | | +--ro session-ldp-stats
| | | | +--ro protocol-errors* [stats-group]
| | | | | +--ro stats-group          mpls-ldp-stats-error-group
| | | | | +--ro protocol-error* [error-type]
| | | | | | +--ro error-type        uint32
| | | | | | +--ro count?            uint32
| | | | | +--ro protocol-stats* [stats-group]
| | | | | | +--ro stats-group        mpls-ldp-stats-error-group
| | | | | | +--ro protocol-stat* [stat-type]
| | | | | | | +--ro stat-type        uint32
| | | | | | | +--ro rx-count?       uint32
| | | | | | | +--ro tx-count?       uint32
| | | | | +--ro filtered-fecs-in* [fec-addr fec-type]
| | | | | | +--ro fec-addr          inet:ipv4-prefix
| | | | | | +--ro fec-type          fec-type
| | | | | | +--ro label?            uint32
| | | | +--ro filtered-fecs-out* [fec-addr fec-type]
| | | | | +--ro fec-addr          inet:ipv4-prefix
| | | | | | +--ro fec-type          fec-type
| | | | +--ro ldp-fec-prefix* [destination]
| | | | | +--ro destination        string
| | | | | +--ro state?              string
| | | | | +--ro ingress?            string
| | | | | +--ro egress?             string
| | | | | +--ro filtered?           string
| | | | | +--ro lwd?                string
| | | | | +--ro filter-type?       fec-filter-type
| | | | | +--ro prefix-filtered?    string
| | | | | +--ro longer?             boolean
| | | | | +--ro prefix-feccb?      uint32
| | | | | +--ro prefix-idx?        uint32
| | | | | +--ro prefix-type?       uint32
| | | | | +--ro prefix-pend-notif? string
| | | | | +--ro prefix-um-dist-done? string
| | | | | +--ro prefix-lwd-started? string
| | | | | +--ro prefix-is-ldp-o-rsvp? boolean
| | | | | +--ro prefix-excess-dms?  boolean

```

```

| | | | +--ro nexthops* [nexthop]
| | | | | +--ro nexthop      string
| | | | | +--ro out-intf?   string
| | | | +--ro prefix-downstream* [mapping-index]
| | | | | +--ro local-ldp-id?    inet:ipv4-address
| | | | | +--ro local-ldp-lblspc?  uint32
| | | | | +--ro peer-ldp-id?    inet:ipv4-address
| | | | | +--ro peer-ldp-lblspc?  uint32
| | | | | +--ro label?        uint32
| | | | | +--ro state?        string
| | | | | +--ro fec-filtered-state?  uint32
| | | | | +--ro fec-stale?     uint32
| | | | | +--ro fecccb?       uint32
| | | | | +--ro fec-dm-state-dw?  uint32
| | | | | +--ro mapping-index  uint32
| | | | +--ro prefix-upstream* [mapping-index]
| | | | | +--ro local-ldp-id?    inet:ipv4-address
| | | | | +--ro local-ldp-lblspc?  uint32
| | | | | +--ro peer-ldp-id?    inet:ipv4-address
| | | | | +--ro peer-ldp-lbiscpc? uint32
| | | | | +--ro label?        uint32
| | | | | +--ro state?        string
| | | | | +--ro fec-filtered-state?  uint32
| | | | | +--ro fec-stale?     uint32
| | | | | +--ro fecccb?       uint32
| | | | | +--ro fec-dm-state-dw?  uint32
| | | | | +--ro mapping-index  uint32
| | | +--ro ldp-fec-vc* [peer-id vc-id vc-fec-type vc-type]
| | | | +--ro peer-id          inet:ipv4-address
| | | | +--ro vc-id            uint32
| | | | +--ro vc-fec-type     uint32
| | | | +--ro vc-type          uint32
| | | | +--ro peer-lblspc?     uint32
| | | | +--ro state?          string
| | | | +--ro peer-vc-type?    uint32
| | | | +--ro ingress?        string
| | | | +--ro egress?         string
| | | | +--ro vc-fecccb?      uint32
| | | | +--ro vc-idx?         uint32
| | | | +--ro prefix-pend-notif? string
| | | | +--ro prefix-um-dist-done? string
| | | | +--ro vc-grp-id?      uint32
| | | | +--ro vc-local-mtu?    uint32
| | | | +--ro vc-remote-mtu?   uint32
| | | | +--ro vc-mtu-enforcement? uint32
| | | | +--ro vc-ag?           string
| | | | +--ro vc-local-flow-label-tx? uint32
| | | | +--ro vc-local-flow-label-rx? uint32
| | | | +--ro vc-remote-flow-label-tx? uint32
| | | | +--ro vc-remote-flow-label-rx? uint32
| | | | +--ro vc-control-word-preferred? uint32
| | | | +--ro vc-control-word-in-use?  uint32
| | | +--ro vc-downstream* [mapping-index]
| | | | +--ro local-ldp-id?    inet:ipv4-address
| | | | +--ro local-ldp-lblspc?  uint32
| | | | +--ro peer-ldp-id?    inet:ipv4-address
| | | | +--ro peer-ldp-lbiscpc? uint32
| | | | +--ro label?        uint32
| | | | +--ro state?        string
| | | | +--ro fec-filtered-state?  uint32
| | | | +--ro fec-stale?     uint32
| | | | +--ro fecccb?       uint32
| | | | +--ro fec-dm-state-dw?  uint32
| | | | +--ro mapping-index  uint32

```

```

| |     +--ro vc-upstream* [mapping-index]
| |         +--ro local-ldp-id?          inet:ipv4-address
| |         +--ro local-ldp-lblspc?      uint32
| |         +--ro peer-ldp-id?          inet:ipv4-address
| |         +--ro peer-ldp-lblspc?      uint32
| |         +--ro label?              uint32
| |         +--ro state?              string
| |         +--ro fec-filtered-state?  uint32
| |         +--ro fec-stale?          uint32
| |         +--ro fecccb?            uint32
| |         +--ro fec-dm-state-dw?   uint32
| |         +--ro mapping-index      uint32
| +--ro memory
| |     +--ro total-non-pool-memory?  uint32
| |     +--ro pools* [pool-index]
| |         +--ro pool-index        uint32
| |             +--ro sub-pools* [sub-pool-index]
| |                 +--ro sub-pool-index    uint32
| |                 +--ro gen-size?       uint32
| |                 +--ro block-size?     uint32
| |                 +--ro gen-blocks?    uint32
| |                 +--ro current-gens?  uint32
| |                 +--ro current-blocks? uint32
| |                 +--ro free-blocks?    uint32
| |     +--ro stats* [mem-stats-index]
| |         +--ro mem-stats-index    uint32
| |         +--ro mem-type?          string
| |         +--ro num-alloc?         uint32
| |         +--ro total-bytes?       uint32
| |         +--ro total-allocs?      uint32
| |         +--ro total-frees?       uint32
| |         +--ro peak-alloc?        uint32
| |         +--ro alloc-fails?       uint32
| |         +--ro free-fails?        uint32
| +--ro policy
| |     +--ro cspf-intf?           uint8
| |     +--ro cspf-group-computation-mode? mpls-cspf-grp-comp-mode
| |     +--ro cspf-comp-mode?       uint32
| |     +--ro cspf-comp-ignore-overload-bit? uint8
| |     +--ro implicit-commit-value? uint32
| |     +--ro qos-ttl-mode?        qos-ttl-mode
| |     +--ro rtm-route-filter-enabled? boolean
| |     +--ro rtm-route-filter-all-ibgp-enabled? boolean
| |     +--ro ingress-tnnl-actg?    uint8
| |     +--ro transit-session-actg?  uint8
| |     +--ro load-interval?        uint16
| |     +--ro te-policy-protocol?   te-protocol
| |     +--ro te-policy-flags?      uint16
| |     +--ro te-policy-area?       uint32
| |     +--ro handle-isis-nbr-down? uint8
| |     +--ro handle-ospf-nbr-down? uint8
| |     +--ro max-lsp-retries?     uint16
| |     +--ro fast-retry-on?       uint8
| |     +--ro lsp-retry-interval?  uint16
| |     +--ro frr-backup-retry-interval? uint32
| |     +--ro auto-bandwidth-enabled? uint8
| |     +--ro autobw-sample-interval? uint32
| |     +--ro autobw-num-sample-record? uint32
| |     +--ro soft-preempt-cleanup-timer? uint16
| |     +--ro rsvp-periodic-flooding-timer? uint16
| |     +--ro switchover-activation-delay? uint32
| |     +--ro switchover-hold-tear-delay? uint32
| |     +--ro admin-groups* [name]
| |         +--ro name              string

```

```

| | |   +-ro group-number?    uint8
| | +-ro rsvp-flooding-thresholds* [threshold-type]
| |   +-ro threshold-type      string
| |   +-ro flooding-thresholds*  uint32
| +-ro rsvp
|   +-ro protocol-status?      boolean
|   +-ro refresh-interval?     uint16
|   +-ro refresh-multiple?     uint16
|   +-ro transport-address?    inet:ipv4-address
|   +-ro delay-resv-sending?   boolean
|   +-ro backup-bandwidth-requirement? boolean
|   +-ro msgid-epoch*          uint32
|   +-ro statistics
|     | +-ro packet-error-counters
|       | +-ro rx-pkt-bad-length?           uint64
|       | +-ro rx-pkt-unknown-type?        uint64
|       | +-ro rx-pkt-bad-version?         uint64
|       | +-ro rx-pkt-bad-checksum?        uint64
|       | +-ro rx-pkt-non-mpls-if?        uint64
|       | +-ro mem-alloc-fail?            uint64
|       | +-ro rx-md5-auth-error?         uint64
|       | +-ro path-state-timeout?       uint64
|       | +-ro resv-state-timeout?       uint64
|       | +-ro pkt-with-msg-id-drop?     uint64
|       | +-ro pkt-with-sref-drop?       uint64
|       | +-ro rx-pkt-bad-length-since-last-clear? uint64
|       | +-ro rx-pkt-unknown-type-since-last-clear? uint64
|       | +-ro rx-pkt-bad-version-since-last-clear? uint64
|       | +-ro rx-pkt-bad-checksum-since-last-clear? uint64
|       | +-ro rx-pkt-non-mpls-if-since-last-clear? uint64
|       | +-ro mem-alloc-fail-since-last-clear?  uint64
|       | +-ro rx-md5-auth-error-since-last-clear? uint64
|       | +-ro path-state-timeout-since-last-clear? uint64
|       | +-ro resv-state-timeout-since-last-clear? uint64
|       | +-ro pkt-with-msg-id-drop-since-last-clear? uint64
|       | +-ro pkt-with-sref-drop-since-last-clear?  uint64
|       | +-ro path-errors?              uint64
|       | +-ro resv-errors?             uint64
|       | +-ro patherr-errors?          uint64
|       | +-ro resverr-errors?          uint64
|       | +-ro pathtear-errors?         uint64
|       | +-ro resvtEAR-errors?         uint64
|       | +-ro resvconf-errors?         uint64
|       | +-ro bundle-errors?          uint64
|       | +-ro ack-errors?             uint64
|       | +-ro sumrefresh-errors?      uint64
|       | +-ro hello-errors?           uint64
|       | +-ro nackobject-errors?      uint64
|       | +-ro path-errors-since-last-clear? uint64
|       | +-ro resv-errors-since-last-clear? uint64
|       | +-ro patherr-errors-since-last-clear? uint64
|       | +-ro resverr-errors-since-last-clear? uint64
|       | +-ro pathtear-errors-since-last-clear? uint64
|       | +-ro resvtEAR-errors-since-last-clear? uint64
|       | +-ro resvconf-errors-since-last-clear? uint64
|       | +-ro bundle-errors-since-last-clear?  uint64
|       | +-ro ack-errors-since-last-clear?   uint64
|       | +-ro sumrefresh-errors-since-last-clear? uint64
|       | +-ro hello-errors-since-last-clear?  uint64
|       | +-ro nackobject-errors-since-last-clear? uint64
|     | +-ro packet-counters
|       | +-ro path-tx?                uint64
|       | +-ro resv-tx?                uint64
|       | +-ro patherr-tx?              uint64

```

```

| | |
| | | +--ro resverr-tx?          uint64
| | | +--ro pathtear-tx?         uint64
| | | +--ro resvtear-tx?         uint64
| | | +--ro resvconf-tx?         uint64
| | | +--ro bundle-tx?          uint64
| | | +--ro ack-tx?             uint64
| | | +--ro sumrefresh-tx?      uint64
| | | +--ro hello-tx?           uint64
| | | +--ro path-rx?             uint64
| | | +--ro resv-rx?             uint64
| | | +--ro patherr-rx?          uint64
| | | +--ro resverr-rx?          uint64
| | | +--ro pathtear-rx?          uint64
| | | +--ro resvtear-rx?          uint64
| | | +--ro resvconf-rx?          uint64
| | | +--ro bundle-rx?           uint64
| | | +--ro ack-rx?              uint64
| | | +--ro sumrefresh-rx?        uint64
| | | +--ro hello-rx?             uint64
| | | +--ro path-tx-since-last-clear? uint64
| | | +--ro resv-tx-since-last-clear? uint64
| | | +--ro patherr-tx-since-last-clear? uint64
| | | +--ro resverr-tx-since-last-clear? uint64
| | | +--ro pathtear-tx-since-last-clear? uint64
| | | +--ro resvtear-tx-since-last-clear? uint64
| | | +--ro resvconf-tx-since-last-clear? uint64
| | | +--ro bundle-tx-since-last-clear? uint64
| | | +--ro ack-tx-since-last-clear? uint64
| | | +--ro sumrefresh-tx-since-last-clear? uint64
| | | +--ro hello-tx-since-last-clear? uint64
| | | +--ro path-rx-since-last-clear? uint64
| | | +--ro resv-rx-since-last-clear? uint64
| | | +--ro patherr-rx-since-last-clear? uint64
| | | +--ro resverr-rx-since-last-clear? uint64
| | | +--ro pathtear-rx-since-last-clear? uint64
| | | +--ro resvtear-rx-since-last-clear? uint64
| | | +--ro resvconf-rx-since-last-clear? uint64
| | | +--ro bundle-rx-since-last-clear? uint64
| | | +--ro ack-rx-since-last-clear? uint64
| | | +--ro sumrefresh-rx-since-last-clear? uint64
| | | +--ro hello-rx-since-last-clear? uint64
| | +--ro igr-sync
| | | +--ro isis-nbr-down-enabled? boolean
| | | +--ro ospf-nbr-down-enabled? boolean
| | | +--ro link* [ip-address nbr-ip-address]
| | | | +--ro ip-address      inet:ipv4-address
| | | | +--ro nbr-ip-address   inet:ipv4-address
| | | | +--ro remote-ip?      inet:ipv4-address
| | | | +--ro lsp-count?       uint32
| | | | +--ro lsp* [lsp-name lsp-instance-id]
| | | | | +--ro lsp-name        string
| | | | | +--ro lsp-instance-id uint32
| | | | | +--ro path-name?      string
| | | | | +--ro cspf-enabled?   boolean
| | | | | +--ro rro-enabled?    boolean
| | | | | +--ro frr-enabled?    boolean
| | | | | +--ro nbr-down-enabled? boolean
| | | | | +--ro link-count?     uint32
| | | | | +--ro nbr-down-inprogress? boolean
| | | | | +--ro cspf-hop-count?  uint32
| | | | | +--ro rro-hop-count?   uint32
| | | | | +--ro hops* [index hop-type]
| | | | | | +--ro index          uint32
| | | | | | +--ro hop-type       igr-sync-hop-type

```

```

| | | |     +-ro ip-address?      inet:ipv4-address
| | | |     +-ro nbr-ip-address?  inet:ipv4-address
| | | +-ro lsp* [lsp-name lsp-instance-id]
| | | |     +-ro lsp-name        string
| | | |     +-ro lsp-instance-id uint32
| | | |     +-ro path-name?     string
| | | |     +-ro cspf-enabled?   boolean
| | | |     +-ro rro-enabled?    boolean
| | | |     +-ro frr-enabled?    boolean
| | | |     +-ro nbr-down-enabled? boolean
| | | |     +-ro link-count?    uint32
| | | |     +-ro nbr-down-inprogress? boolean
| | | |     +-ro cspf-hop-count? uint32
| | | |     +-ro rro-hop-count?  uint32
| | | |     +-ro hops* [index hop-type]
| | | | |     +-ro index          uint32
| | | | |     +-ro hop-type       igp-sync-hop-type
| | | | |     +-ro ip-address?    inet:ipv4-address
| | | | |     +-ro nbr-ip-address?  inet:ipv4-address
| | | +-ro interfaces* [interface-name]
| | | |     +-ro interface-name   string
| | | |     +-ro interface-type   dcm-interface-type
| | | |     +-ro interface-index? uint32
| | | |     +-ro admin-status?    boolean
| | | |     +-ro oper-status?     boolean
| | | |     +-ro is-tunnel-interface? boolean
| | | |     +-ro hello-interval?  uint32
| | | |     +-ro hello-tolerance? uint32
| | | |     +-ro hello-status?    feature-config-status
| | | |     +-ro is-md5-auth-enabled? boolean
| | | |     +-ro reliable-messages? feature-config-status
| | | |     +-ro bundle-messages?  feature-config-status
| | | |     +-ro summary-refresh?  feature-config-status
| | | |     +-ro active-outsegs?   uint32
| | | |     +-ro inactive-outsegs? uint32
| | | |     +-ro bandwith-resv-outsegs? uint32
| | | |     +-ro active-backup-outsegs? uint32
| | | |     +-ro inactive-backup-outsegs? uint32
| | | |     +-ro interface-preempts? uint32
| | | |     +-ro interface-resv-soft-preempts? uint32
| | | |     +-ro interface-flooding-up-threshold? feature-config-source
| | | |     +-ro interface-flooding-down-threshold? feature-config-source
| | | |     +-ro duplicate-preempts-dropped?   uint32
| | | |     +-ro bypass-interface?    boolean
| | | |     +-ro interface-tunnel-name?  string
| | | |     +-ro bypass-tunnel-interface-name? string
| | | |     +-ro interface-te-up-thresholds*  uint32
| | | |     +-ro interface-te-down-thresholds* uint32
| | | |     +-ro error-counters
| | | | |     +-ro recv-md5-auth-errors?      uint64
| | | | |     +-ro pkt-with-msgid-drop?      uint64
| | | | |     +-ro pkt-with-sref-drop?      uint64
| | | | |     +-ro nackobject-errors?      uint64
| | | | |     +-ro recv-md5-auth-errors-since-last-clear? uint64
| | | | |     +-ro pkt-with-msgid-drop-since-last-clear? uint64
| | | | |     +-ro pkt-with-sref-drop-since-last-clear?  uint64
| | | | |     +-ro nackobject-errors-since-last-clear?  uint64
| | | |     +-ro packet-counters
| | | | |     +-ro path-tx?           uint64
| | | | |     +-ro resv-tx?          uint64
| | | | |     +-ro patherr-tx?        uint64
| | | | |     +-ro resverr-tx?        uint64
| | | | |     +-ro pathtear-tx?       uint64
| | | | |     +-ro resvtear-tx?       uint64

```

```

| | |
| | | +--ro resvconf-tx?          uint64
| | | +--ro bundle-tx?           uint64
| | | +--ro ack-tx?             uint64
| | | +--ro sumrefresh-tx?       uint64
| | | +--ro hello-tx?           uint64
| | | +--ro path-rx?            uint64
| | | +--ro resv-rx?             uint64
| | | +--ro patherr-rx?          uint64
| | | +--ro resverr-rx?          uint64
| | | +--ro pathtear-rx?         uint64
| | | +--ro resvtEAR-rx?         uint64
| | | +--ro resvconf-rx?          uint64
| | | +--ro bundle-rx?           uint64
| | | +--ro ack-rx?              uint64
| | | +--ro sumrefresh-rx?        uint64
| | | +--ro hello-rx?             uint64
| | | +--ro path-tx-since-last-clear? uint64
| | | +--ro resv-tx-since-last-clear? uint64
| | | +--ro patherr-tx-since-last-clear? uint64
| | | +--ro resverr-tx-since-last-clear? uint64
| | | +--ro pathtear-tx-since-last-clear? uint64
| | | +--ro resvtEAR-tx-since-last-clear? uint64
| | | +--ro resvconf-tx-since-last-clear? uint64
| | | +--ro bundle-tx-since-last-clear? uint64
| | | +--ro ack-tx-since-last-clear? uint64
| | | +--ro sumrefresh-tx-since-last-clear? uint64
| | | +--ro hello-tx-since-last-clear? uint64
| | | +--ro path-rx-since-last-clear? uint64
| | | +--ro resv-rx-since-last-clear? uint64
| | | +--ro patherr-rx-since-last-clear? uint64
| | | +--ro resverr-rx-since-last-clear? uint64
| | | +--ro pathtear-rx-since-last-clear? uint64
| | | +--ro resvtEAR-rx-since-last-clear? uint64
| | | +--ro resvconf-rx-since-last-clear? uint64
| | | +--ro bundle-rx-since-last-clear? uint64
| | | +--ro ack-rx-since-last-clear? uint64
| | | +--ro sumrefresh-rx-since-last-clear? uint64
| | | +--ro hello-rx-since-last-clear? uint64
| | +--ro sessions* [dest-ip-addr src-ip-addr tunnel-id session-role]
| | | +--ro dest-ip-addr          inet:ipv4-address
| | | +--ro src-ip-addr          inet:ipv4-address
| | | +--ro tunnel-id            uint16
| | | +--ro session-role          session-role
| | | +--ro session-operational-status? boolean
| | | +--ro psbs* [path-index]
| | | | +--ro path-index          uint32
| | | | +--ro session-name?        string
| | | | +--ro session-type?        session-type
| | | | +--ro path-operational-status? boolean
| | | | +--ro session-in-label?      uint32
| | | | +--ro session-out-label?      uint32
| | | | +--ro session-out-interface? string
| | | | +--ro lsp-id?              uint32
| | | | +--ro flap-lock?           uint32
| | | | +--ro path-refresh?         uint32
| | | | +--ro path-refresh-ttd?       uint32
| | | | +--ro resv-refresh?         uint32
| | | | +--ro resv-refresh-ttd?       uint32
| | | | +--ro tspec-peak?           uint32
| | | | +--ro tspec-rate?            uint32
| | | | +--ro tspec-size?            uint32
| | | | +--ro tspec-minimum?          uint32
| | | | +--ro tspec-m?               uint32
| | | | +--ro psb-setup-priority?     uint8

```

			+--ro psb-hold-priority?	uint8
			+--ro session-attribute-all-flags?	uint8
			+--ro sa-flag-label-recording?	boolean
			+--ro sa-flag-soft-preemption-desired?	boolean
			+--ro sa-flag-se-style?	boolean
			+--ro sa-flag-local-protect?	boolean
			+--ro sa-flag-bandwidth-protect?	boolean
			+--ro sa-flag-session-protection-type?	session-
	protection-type			
			+--ro session-soft-preemption-wait-timer?	uint32
			+--ro session-preemption-wait-timer?	uint32
			+--ro frr-detour?	boolean
			+--ro frr-facility?	boolean
			+--ro frr-unknown-backup-mode-desired?	boolean
			+--ro frr-unknown-flags?	uint8
			+--ro frr-psb-setup-priority?	uint8
			+--ro frr-psb-hold-priority?	uint8
			+--ro frr-bandwidth?	uint32
			+--ro frr-hoplimit?	uint8
			+--ro frr-method?	frr-method
			+--ro frr-nh-node-protection-available?	boolean
			+--ro frr-nh-node-protection-in-use?	boolean
			+--ro frr-nh-link-protection-available?	boolean
			+--ro frr-nh-link-protection-in-use?	boolean
			+--ro frr-bandwidth-protection-available?	boolean
			+--ro frr-lsp-bringup-abandoned?	boolean
			+--ro frr-updown-transitions?	uint32
			+--ro frr-retries?	uint32
			+--ro frr-session-protection-available?	boolean
			+--ro frr-next-retry?	uint32
			+--ro frr-cost?	uint32
			+--ro frr-cspf-group-computation-mode?	frr-cspf-group-
	computation-mode			
			+--ro frr-cspf-group-computation-mode-use-bypass-liberal?	boolean
			+--ro is-downstream-backup-psb?	boolean
			+--ro is-backup-psb?	boolean
			+--ro is-upstream-psb?	boolean
			+--ro is-ps-frr-detour-sent?	boolean
			+--ro is-ps-frr-backup-sent?	boolean
			+--ro is-ps-frr-detour-received?	boolean
			+--ro is-ps-frr-backup-received?	boolean
			+--ro path-received-from-ip?	inet:ipv4-
	address			
			+--ro path-received-interface?	string
			+--ro path-received-auth-on?	boolean
			+--ro path-received-message-id?	uint32
			+--ro path-downstream-only?	boolean
			+--ro path-sent-to-ip?	inet:ipv4-
	address			
			+--ro path-sent-interface?	string
			+--ro path-sent-auth-on?	boolean
			+--ro path-sent-message-id?	uint32
			+--ro resv-received-from-ip?	inet:ipv4-
	address			
			+--ro resv-received-interface?	string
			+--ro resv-received-auth-on?	boolean
			+--ro resv-received-message-id?	uint32
			+--ro session-riding-bypass-name?	string
			+--ro session-style?	session-
	reservation-style			
			+--ro points-of-local-repair-detour-rcvd*	inet:ipv4-
	address			
			+--ro avoid-nodes-detour-rcvd*	inet:ipv4-
	address			

```

    |   |   |
    |   |   +--ro points-of-local-repair-detour-sent*           inet:ipv4-
address
    |   |   +--ro avoid-nodes-detour-sent*           inet:ipv4-
address
    |   |   +--ro session-ero-hops* [ip-addr]
    |   |   |   +--ro ip-addr                           inet:ipv4-address
    |   |   |   +--ro ero-flag-is-strict-hop?     boolean
    |   |   +--ro session-rro-hops* [ip-addr]
    |   |   |   +--ro ip-addr                           inet:ipv4-address
    |   |   |   +--ro rro-flag-is-local-protect-available? boolean
    |   |   |   +--ro rro-flag-is-local-protect-in-use?  boolean
    |   |   |   +--ro rro-flag-rro-is-router-id?      boolean
    |   |   |   +--ro rro-flag-rro-node-protect?       boolean
    |   |   |   +--ro rro-flag-rro-bandwidth-protect? boolean
    |   |   +--ro neighbors* [neighbor-ip-addr]
    |   |   |   +--ro neighbor-ip-addr                 inet:ipv4-address
    |   |   |   +--ro neighbor-interface?            string
    |   |   |   +--ro neighbor-status?              string
    |   |   |   +--ro neighbor-last-status-change? string
    |   |   |   +--ro rsvp-hello-tx?                uint32
    |   |   |   +--ro rsvp-hello-rx?                uint32
    |   |   |   +--ro refresh-reduction-support?   boolean
    |   |   |   +--ro msg-id-support?               boolean
    |   |   |   +--ro active-lsps?                  uint32
    |   |   |   +--ro rsvp-hello-interval?          uint32
    |   |   |   +--ro rsvp-hello-tolerance?         uint32
    |   |   |   +--ro neighbor-remote-instance?     uint32
    |   |   |   +--ro neighbor-local-instance?       uint32
    |   |   |   +--ro last-hello-rx?                uint32
    |   |   |   +--ro next-hello-req-tx?             uint32
    |   |   +--ro dynamic-bypass
    |   |   |   +--ro dynamic-bypass-global
    |   |   |   |   +--ro config-enable?           uint16
    |   |   |   |   +--ro config-enable-all?        uint16
    |   |   |   |   +--ro reoptimize-timer?         uint32
    |   |   |   |   +--ro max-bypasses-per-mp?      uint16
    |   |   |   |   +--ro max-bypasses?            uint16
    |   |   |   |   +--ro bypass-count?            uint16
    |   |   |   +--ro dynamic-bypass-interface* [if-name]
    |   |   |   |   +--ro if-index?                uint32
    |   |   |   |   +--ro if-name?                 string
    |   |   |   |   +--ro if-type?                 mpls-if-type
    |   |   |   |   +--ro active-status?          uint8
    |   |   |   |   +--ro admin-type?            uint8
    |   |   |   |   +--ro admin-status?          uint8
    |   |   |   |   +--ro hop-limit?             uint8
    |   |   |   |   +--ro tie-breaking?          uint8
    |   |   |   |   +--ro cos?                  uint8
    |   |   |   |   +--ro cspf-comp-mode?        uint8
    |   |   |   |   +--ro setup-priority?        uint8
    |   |   |   |   +--ro hold-priority?         uint8
    |   |   |   |   +--ro traffic-eng-max-rate?  uint32
    |   |   |   |   +--ro traffic-eng-mean-rate? uint32
    |   |   |   |   +--ro traffic-eng-max-burst? uint32
    |   |   |   |   +--ro from-addr?             inet:ipv4-address
    |   |   |   |   +--ro reoptimize-timer?       uint32
    |   |   |   |   +--ro adaptive?             uint32
    |   |   |   |   +--ro record-route?          uint32
    |   |   |   |   +--ro name-prefix?           string
    |   |   |   |   +--ro primary-path?          string
    |   |   |   |   +--ro max-bypasses-per-mp?  uint16
    |   |   |   |   +--ro bypass-count?          uint16
    |   |   |   |   +--ro exclude-any?           uint32
    |   |   |   |   +--ro include-all?           uint32

```

```

| | |   +-+ro include-any?          uint32
| | |   +-+ro status-flags?       uint32
| | |   +-+ro mp-count?          uint32
| | |   +-+ro mp-infos* [router-id]
| | |     +-+ro router-id        inet:ipv4-address
| | |     +-+ro bypass-count?    uint16
| | +-+ro te
| | |   +-+ro ospf-te-enabled?  boolean
| | |   +-+ro isis-te-enabled?  boolean
| | |   +-+ro ospf-area-id?     inet:ipv4-address
| | |   +-+ro isis-level-id?    uint32
| | |   +-+ro database
| | |     +-+ro router-id?      inet:ipv4-address
| | |     +-+ro area* [area-id level-id]
| | |       +-+ro igr-isis?      boolean
| | |       +-+ro igr-ospf?       boolean
| | |       +-+ro area-id        inet:ipv4-address
| | |       +-+ro level-id       uint32
| | |       +-+ro host-name?     string
| | |       +-+ro router-id?     inet:ipv4-address
| | |       +-+ro total-network-nodes? uint32
| | |       +-+ro total-router-nodes? uint32
| | |       +-+ro total-p2p-links?  uint32
| | |       +-+ro total-p2mp-links? uint32
| | |       +-+ro node* [local-node-id local-router-id]
| | |         +-+ro igr-isis?      boolean
| | |         +-+ro igr-ospf?       boolean
| | |         +-+ro area-id?      inet:ipv4-address
| | |         +-+ro level-id?     uint32
| | |         +-+ro router?       boolean
| | |         +-+ro network?      boolean
| | |         +-+ro host-name?    string
| | |         +-+ro local-node-id string
| | |         +-+ro local-router-id inet:ipv4-address
| | |         +-+ro gen-code?     uint32
| | |         +-+ro lsa-id?       uint32
| | |         +-+ro total-p2p-links? uint32
| | |         +-+ro total-p2mp-links? uint32
| | |         +-+ro overloaded?   uint32
| | |         +-+ro link* [local-node-id remote-node-id local-router-id remote-router-
id local-ip remote-ip]
| | |           |   +-+ro igr-isis?      boolean
| | |           |   +-+ro igr-ospf?       boolean
| | |           |   +-+ro area-id?      inet:ipv4-address
| | |           |   +-+ro level-id?     uint32
| | |           |   +-+ro local-node-id string
| | |           |   +-+ro remote-node-id string
| | |           |   +-+ro local-router-id inet:ipv4-address
| | |           |   +-+ro remote-router-id inet:ipv4-address
| | |           |   +-+ro local-host-name? string
| | |           |   +-+ro remote-host-name? string
| | |           |   +-+ro router?       boolean
| | |           |   +-+ro network?     boolean
| | |           |   +-+ro p2p?        boolean
| | |           |   +-+ro p2mp?       boolean
| | |           |   +-+ro local-ip      inet:ipv4-address
| | |           |   +-+ro remote-ip    inet:ipv4-address
| | |           |   +-+ro gen-code?   uint32
| | |           |   +-+ro lsa-id?     uint32
| | |           |   +-+ro pending-delete? uint32
| | |           |   +-+ro igr-metric?  uint32
| | |           |   +-+ro te-metric?   uint32
| | |           |   +-+ro admin-group? uint32
| | |           |   +-+ro max-bandwidth? uint32

```

```

| | |
| | | | +--ro max-reservable-bandwidth?      uint32
| | | | +--ro unreserved-priority-0-bandwidth?  uint32
| | | | +--ro unreserved-priority-1-bandwidth?  uint32
| | | | +--ro unreserved-priority-2-bandwidth?  uint32
| | | | +--ro unreserved-priority-3-bandwidth?  uint32
| | | | +--ro unreserved-priority-4-bandwidth?  uint32
| | | | +--ro unreserved-priority-5-bandwidth?  uint32
| | | | +--ro unreserved-priority-6-bandwidth?  uint32
| | | | +--ro unreserved-priority-7-bandwidth?  uint32
| | | | +--ro srlg* [name]
| | | | | +--ro name      string
| | | | | +--ro penalty?  uint32
| | | | +--ro srlg* [name]
| | | | | +--ro name      string
| | | | | +--ro penalty?  uint32
| | | +--ro router-id-map* [ip-address]
| | | | +--ro ip-address    inet:ipv4-address
| | | | +--ro router-id?   inet:ipv4-address
| | | | +--ro resolved?   boolean
| | | | +--ro igp-isis?   boolean
| | | | +--ro igp-ospf?   boolean
| | | | +--ro isis-level? uint32
| | | | +--ro ospf-area?  inet:ipv4-address
| | | | +--ro origin-ted? boolean
| | | | +--ro origin-path? uint32
| | | | +--ro origin-lsp?  uint32
| | | | +--ro origin-other? boolean
| | | +--ro autobw-threshold-table-summary
| | | | +--ro total-number-of-autobw-threshold-table-entries? uint32
| | +--ro statistics-oam
| | | +--ro usr-ping-count?      uint32
| | | +--ro usr-traceroute-count? uint32
| | | +--ro echo-req-sent-count? uint32
| | | +--ro echo-req-received-count? uint32
| | | +--ro echo-req-timeout-count? uint32
| | | +--ro echo-resp-sent-count? uint32
| | | +--ro echo-resp-received-count? uint32
| | | +--ro return-codes* [number]
| | | | +--ro number      uint32
| | | | +--ro name?       string
| | | | +--ro tx-count?   uint32
| | | | +--ro rx-count?   uint32
| | +--ro bfd
| | | +--ro admin-status?      uint8
| | | +--ro min-tx-interval?   uint32
| | | +--ro min-rx-interval?   uint32
| | | +--ro detection-time-multiplier? uint8
| | +--ro interface* [interface-name]
| | | +--ro interface-name      string
| | | +--ro interface-index?   uint32
| | | +--ro admin-status?     boolean
| | | +--ro oper-status?     boolean
| | | +--ro mtu?             uint32
| | | +--ro bypass-lsp-count? uint32
| | | +--ro max-lsp-priority-level? uint32
| | | +--ro is-ldp-enabled?   boolean
| | | +--ro ldp-tunnel-count? uint32
| | | +--ro ldp-transit-tunnel-count? uint32
| | | +--ro is-gre-port?     boolean
| | | +--ro admin-group?     uint32
| | | +--ro admin-group-max? uint8
| | | +--ro admin-group-min? uint8
| | | +--ro te-metric?       uint32
| | | +--ro max-bandwidth?   uint32

```

```

| |   +-+ro max-resv-bandwidth?          uint32
| |   +-+ro max-resv-bandwidth-percentage?  uint32
| |   +-+ro resv-bandwidth*             uint32
| |   +-+ro advert-unreserved-bandwidth*  uint32
| |   +-+ro under-provisioned-bandwidth*  uint32
| +-+ro path* [path-name]
| |   +-+ro path-name      string
| |   +-+ro usage-count?   uint32
| |   +-+ro path-hops* [hop-address]
| |     | +-+ro hop-address  inet:ipv4-address
| |     | +-+ro hop-type?    uint8
| |   +-+ro path-lsps* [lsp-name]
| |     +-+ro lsp-name      string
| |     +-+ro lsp-type?    uint32
| +-+ro auto-bandwidth-template* [name]
| |   +-+ro name           string
| |   +-+ro adjustment-interval?  uint32
| |   +-+ro adjustment-threshold? uint32
| |   +-+ro maximum-bandwidth?   uint32
| |   +-+ro minimum-bandwidth?   uint32
| |   +-+ro overflow-limit?    uint32
| |   +-+ro underflow-limit?   uint32
| |   +-+ro mode?           boolean
| |   +-+ro sample-recording? boolean
| |   +-+ro associated-paths-count? uint32
| |   +-+ro associated-paths* [lsp-name]
| |     +-+ro lsp-name      string
| |     +-+ro path-name?   string
| |     +-+ro is-active?   boolean
| +-+ro autobw-threshold-table-entry* [bandwidth]
| |   +-+ro bandwidth       uint32
| |   +-+ro threshold?     uint32
| |   +-+ro is-percentage-threshold? boolean
| +-+ro lsp* [lsp-name]
| |   +-+ro lsp-name      string
| |   +-+ro lsp-type?    lsp-type
| |   +-+ro bypass-lsp-type? bypass-lsp-type
| |   +-+ro interface?   string
| |   +-+ro history*     string
| |   +-+ro autobw-history* string
| |   +-+ro basic
| |     | +-+ro tunnel-vif-index?   uint32
| |     | +-+ro lsp-type-bypass?  boolean
| |     | +-+ro lsp-type-dynamic? boolean
| |     | +-+ro from-address-configured? boolean
| |     | +-+ro from-address?    inet:ipv4-address
| |     | +-+ro to-address?     inet:ipv4-address
| |     | +-+ro admin-up?      boolean
| |     | +-+ro operational-status?  lsp-operational-status
| |     | +-+ro lsp-is-active?   boolean
| |     | +-+ro lsp-has-primary-path? boolean
| |     | +-+ro path-name?     string
| |     | +-+ro out-label?    uint32
| |     | +-+ro out-interface-name? string
| |     | +-+ro primary-up?   boolean
| |     | +-+ro primary-active? boolean
| |     | +-+ro lsp-has-secondary? boolean
| |     | +-+ro secondary-up?   boolean
| |     | +-+ro secondary-active? boolean
| |     | +-+ro lsp-has-selected-secondary? boolean
| |     | +-+ro selected-secondary-up? boolean
| |     | +-+ro selected-secondary-active? boolean
| |     | +-+ro primary-is-selected? boolean
| |     | +-+ro lsp-has-frr?   boolean

```

+--ro frr-up?	boolean
+--ro frr-active?	boolean
+--ro up-down-count?	uint32
+--ro retry-count?	uint32
+--ro down-reason?	string
+--ro forwarding	
+--ro tunnel-vif-index?	uint32
+--ro lsp-id?	uint32
+--ro forwarding-up?	boolean
+--ro primary-active?	boolean
+--ro primary-up?	boolean
+--ro secondary-active?	boolean
+--ro secondary-up?	boolean
+--ro selected-secondary-active?	boolean
+--ro selected-secondary-up?	boolean
+--ro frr-active?	boolean
+--ro frr-up?	boolean
+--ro instance-id?	uint32
+--ro out-port-id?	uint32
+--ro out-port-name?	string
+--ro out-label?	uint32
+--ro frr	
+--ro configured?	boolean
+--ro one-to-one?	boolean
+--ro one-to-many?	boolean
+--ro protection-type?	lsp-frr-protection-type
+--ro frr-up?	boolean
+--ro active?	boolean
+--ro priority-configured?	boolean
+--ro setup-priority?	uint8
+--ro holding-priority?	uint8
+--ro hop-limit-configured?	boolean
+--ro hop-limit?	uint8
+--ro bandwidth-inherited?	boolean
+--ro bandwidth-configured?	boolean
+--ro bandwidth?	uint32
+--ro down-reason?	string
+--ro computation-mode?	lsp-cspf-computation-mode
+--ro group-computation-mode-default?	boolean
+--ro group-computation-mode-add-penalty?	boolean
+--ro group-computation-mode-exclude-groups?	boolean
+--ro group-computation-mode-high-cost?	boolean
+--ro out-port-id?	uint32
+--ro out-port-name?	string
+--ro out-label?	uint32
+--ro path-cost?	uint32
+--ro bypass-name?	string
+--ro has-secondary-swithover-time?	uint32
+--ro secondary-swithover-time?	uint32
+--ro hold-time?	uint32
+--ro global-revertive?	uint32
+--ro revertive-timer-expired?	uint32
+--ro fwdg-state-primary-up?	boolean
+--ro fwdg-state-primary-active?	boolean
+--ro fwdg-state-primary-down?	boolean
+--ro fwdg-state-secondary-up?	boolean
+--ro fwdg-state-secondary-active?	boolean
+--ro fwdg-state-secondary-down?	boolean
+--ro fwdg-state-detour-up?	boolean
+--ro fwdg-state-detour-active?	boolean
+--ro fwdg-state-detour-down?	boolean
+--ro admin-group-configured?	boolean
+--ro admin-group-lists* [list-type]	
+--ro list-type	lsp-admin-group-list-type

```

    |   |   |
    |   |   +--ro admin-group* [admin-group-id]
    |   |   |   +-ro admin-group-id      uint32
    |   |   |   +-ro admin-group-name?  string
    |   |   |   +-ro exclude-any?     boolean
    |   |   |   +-ro include-all?    boolean
    |   |   |   +-ro include-any?    boolean
    |   |   +-ro backup
    |   |   |   +-ro backup-present?   boolean
    |   |   |   +-ro backup-count?    uint32
    |   |   |   +-ro backup-ingress-count?  uint32
    |   |   |   +-ro backup-ingress-active-count?  uint32
    |   |   |   +-ro backup-transit-count?   uint32
    |   |   |   +-ro backup-transit-active-count?  uint32
    |   |   |   +-ro backup-ingress* [backup-from-address backup-to-address backup-name]
    |   |   |   |   +-ro backup-from-address  inet:ipv4-address
    |   |   |   |   +-ro backup-to-address   inet:ipv4-address
    |   |   |   |   +-ro backup-name       string
    |   |   |   |   +-ro backup-is-active?  boolean
    |   |   |   +-ro backup-transit* [backup-from-address backup-to-address backup-name]
    |   |   |   |   +-ro backup-from-address  inet:ipv4-address
    |   |   |   |   +-ro backup-to-address   inet:ipv4-address
    |   |   |   |   +-ro backup-name       string
    |   |   |   |   +-ro backup-is-active?  boolean
    |   |   +-ro auto-bandwidth
    |   |   |   +-ro adjustment-interval?   uint32
    |   |   |   +-ro adjustment-threshold?  uint32
    |   |   |   +-ro maximum-bandwidth?    uint32
    |   |   |   +-ro minimum-bandwidth?   uint32
    |   |   |   +-ro overflow-limit?     uint32
    |   |   |   +-ro underflow-limit?   uint32
    |   |   |   +-ro mode?             autobw-mode
    |   |   |   +-ro sample-recording?  boolean
    |   |   |   +-ro is-adjustment-interval-inherited? boolean
    |   |   |   +-ro is-adjustment-threshold-inherited? boolean
    |   |   |   +-ro is-maximum-bandwidth-inherited? boolean
    |   |   |   +-ro is-minimum-bandwidth-inherited? boolean
    |   |   |   +-ro is-overflow-limit-inherited? boolean
    |   |   |   +-ro is-underflow-limit-inherited? boolean
    |   |   |   +-ro is-mode-inherited?   boolean
    |   |   |   +-ro is-sample-recording-inherited? boolean
    |   |   |   +-ro working-status?    uint8
    |   |   |   +-ro num-samples-collected? uint32
    |   |   |   +-ro last-sample-traffic-rate? uint32
    |   |   |   +-ro maximum-of-samples-collected? uint32
    |   |   |   +-ro maximum-of-underflow-samples? uint32
    |   |   |   +-ro overflow-count?    uint32
    |   |   |   +-ro underflow-count?   uint32
    |   |   |   +-ro time-to-adjustment? uint32
    |   |   |   +-ro adjustment-status?  uint8
    |   |   |   +-ro previous-bandwidth? uint32
    |   |   |   +-ro new-bandwidth?     uint32
    |   |   |   +-ro adjustment-reason? uint8
    |   |   |   +-ro time-of-last-adjustment? string
    |   |   +-ro instances* [instance-id lsp-id]
    |   |   |   +-ro instance-id        uint32
    |   |   |   +-ro lsp-id           uint32
    |   |   |   +-ro current-instance? boolean
    |   |   |   +-ro new-instance?    boolean
    |   |   |   +-ro old-instance?   boolean
    |   |   |   +-ro is-primary?     boolean
    |   |   |   +-ro is-current-secondary? boolean
    |   |   |   +-ro is-selected-secondary? boolean
    |   |   |   +-ro instance-admin-up? boolean
    |   |   |   +-ro instance-is-up?   boolean

```

+--ro instance-is-active?	boolean
+--ro is-adaptive?	boolean
+--ro is-bypass?	boolean
+--ro is-dynamic-bypass?	boolean
+--ro config-admin-up?	boolean
+--ro config-from-address-configured?	boolean
+--ro config-from-address?	inet:ipv4-address
+--ro config-to-address?	inet:ipv4-address
+--ro config-type-bypass?	boolean
+--ro config-type-dynamic?	boolean
+--ro config-adaptive?	boolean
+--ro config-ospf-area?	inet:ipv4-address
+--ro config-isis-level?	uint32
+--ro config-number-of-retries-configured?	boolean
+--ro config-number-of-retries?	uint32
+--ro config-path-select-mode?	lsp-path-selection-mode
+--ro config-path-selected-path?	lsp-selected-path
+--ro config-path-selected-secondary-name?	string
+--ro config-revert-time-configured?	boolean
+--ro config-revert-time?	uint32
+--ro config-retry-count-configured?	boolean
+--ro config-retry-count?	uint32
+--ro config-enable-ldp-tunnelling?	boolean
+--ro config-shortcut-ospf?	boolean
+--ro config-shortcut-area-configured?	boolean
+--ro config-shortcut-area?	uint32
+--ro config-notify-ospf?	boolean
+--ro config-shortcut-isis?	boolean
+--ro config-isis-shortcut-level-configured?	boolean
+--ro config-isis-shortcut-level?	uint32
+--ro config-notify-isis?	boolean
+--ro config-metric-configured?	boolean
+--ro config-metric?	uint32
+--ro config-ospf-ignore-metric?	boolean
+--ro config-ospf-relative-metric?	uint32
+--ro config-ospf-announce-metric?	boolean
+--ro config-ospf-aaf?	uint32
+--ro config-isis-ignore-metric?	boolean
+--ro config-isis-relative-metric?	uint32
+--ro config-isis-announce-configured?	boolean
+--ro config-isis-announce-metric?	uint32
+--ro config-path-configured?	boolean
+--ro config-path?	string
+--ro config-reoptimize-timer-configured?	boolean
+--ro config-reoptimize-time?	uint32
+--ro config-tspec-mtu-configured?	boolean
+--ro config-tspec-mtu?	uint32
+--ro config-cos-configured?	boolean
+--ro config-cos?	uint8
+--ro config-mtu-configured?	boolean
+--ro config-mtu?	uint32
+--ro config-tie-breaking-configured?	boolean
+--ro config-tie-break-random?	boolean
+--ro config-tie-break-least-fill?	boolean
+--ro config-tie-break-most-fill?	boolean
+--ro config-cspf-disabled?	boolean
+--ro config-rro-disabled?	boolean
+--ro config-hot-standby?	boolean
+--ro config-pinned?	boolean
+--ro config-persistenc?	boolean
+--ro config-frr-global-revertive?	boolean
+--ro config-frr-hold-time?	uint32
+--ro config-soft-preempt?	boolean
+--ro config-exclude-interface-change?	boolean

+--ro config-priority-configured?	boolean
+--ro config-setup-priority?	uint8
+--ro config-holding-priority?	uint8
+--ro config-hop-limit-configured?	boolean
+--ro config-hop-limit?	uint8
+--ro config-traffic-eng-rate-configured?	boolean
+--ro config-traffic-eng-mean-rate?	uint32
+--ro config-traffic-eng-max-rate?	uint32
+--ro config-traffic-eng-max-burst?	uint32
+--ro config-abw-configured?	boolean
+--ro config-bfd-configured?	boolean
+--ro config-admin-group-configured?	boolean
+--ro config-cspf-computation-mode?	lsp-cspf-computation-mode
+--ro path-computed-by-cspf?	boolean
+--ro path-computed-by-interface-constraint?	boolean
+--ro cspf-computation-mode?	lsp-cspf-computation-mode
+--ro cspf-group-computation-mode-default?	boolean
+--ro cspf-group-computation-mode-add-penalty?	boolean
+--ro cspf-group-computation-mode-exclude-groups?	boolean
+--ro cspf-group-computation-mode-high-cost?	boolean
+--ro cspf-path-cost?	uint32
+--ro cspf-path-area?	uint32
+--ro cspf-computation-error?	uint32
+--ro cspf-exclude-hops-present?	boolean
+--ro rsvp-session-present?	boolean
+--ro rsvp-session-state-up?	boolean
+--ro rsvp-session-state?	uint8
+--ro rsvp-session-path-error-code?	uint32
+--ro rsvp-session-path-error-value?	uint32
+--ro rsvp-session-path-error-node-address?	inet:ipv4-address
+--ro rsvp-session-rro-hops-present?	boolean
+--ro config-exclude-interface-configured?	boolean
+--ro maximum-bandwidth?	uint32
+--ro unreserved-priority-0-bandwidth?	uint32
+--ro unreserved-priority-1-bandwidth?	uint32
+--ro unreserved-priority-2-bandwidth?	uint32
+--ro unreserved-priority-3-bandwidth?	uint32
+--ro unreserved-priority-4-bandwidth?	uint32
+--ro unreserved-priority-5-bandwidth?	uint32
+--ro unreserved-priority-6-bandwidth?	uint32
+--ro unreserved-priority-7-bandwidth?	uint32
+--ro config-frr-configured?	boolean
+--ro config-frr-one-to-one?	boolean
+--ro config-frr-one-to-many?	boolean
+--ro config-frr-priority-configured?	boolean
+--ro config-frr-setup-priority?	uint8
+--ro config-frr-holding-priority?	uint8
+--ro config-frr-hop-limit-configured?	boolean
+--ro config-frr-hop-limit?	uint8
+--ro config-frr-bandwidth-inherited?	boolean
+--ro config-frr-bandwidth-configured?	boolean
+--ro config-frr-bandwidth?	uint32
+--ro config-frr-admin-group-configured?	boolean
+--ro reoptimize-ignore-count?	uint32
+--ro reoptimize-time-count?	uint32
+--ro instance-frr-configured?	uint32
+--ro instance-frr-up?	uint32
+--ro instance-frr-active?	uint32
+--ro instance-out-port-id?	uint32
+--ro instance-out-port-name?	string
+--ro instance-out-label?	uint32
+--ro instance-revert-time?	uint32
+--ro instance-retry-count?	uint32
+--ro instance-up-down-count?	uint32

```

| | | +--ro instance-metric?                      uint8
| | | +--ro instance-down-reason?                string
| | | +--ro current-signaled-mean-rate?         uint32
| | | +--ro config-exclude-interfaces*          string
| | | +--ro lsp-hops* [hop-index hop-address]
| | | | +--ro hop-index                         uint32
| | | | +--ro hop-address                        inet:ipv4-address
| | | | +--ro lsp-hop-type?                     lsp-hop-type
| | | | +--ro is-strict-hop?                   boolean
| | | | +--ro hop-is-router-id?                boolean
| | | | +--ro protection?                     boolean
| | | | +--ro node-protection?                boolean
| | | | +--ro bandwidth-protection?           boolean
| | | | +--ro protection-in-use?              boolean
| | | | +--ro auto-bandwidth
| | | | | +--ro config-template?            string
| | | | | +--ro adjustment-interval?        uint32
| | | | | +--ro adjustment-threshold?       uint32
| | | | | +--ro maximum-bandwidth?          uint32
| | | | | +--ro minimum-bandwidth?          uint32
| | | | | +--ro overflow-limit?             uint32
| | | | | +--ro underflow-limit?            uint32
| | | | | +--ro mode?                      autobw-mode
| | | | | +--ro sample-recording?          boolean
| | | | +--ro admin-group-lists* [list-type]
| | | | | +--ro list-type                 lsp-admin-group-list-type
| | | | | +--ro admin-group* [admin-group-id]
| | | | | | +--ro admin-group-id          uint32
| | | | | | +--ro admin-group-name?      string
| | | | | | +--ro exclude-any?           boolean
| | | | | | +--ro include-all?           boolean
| | | | | | +--ro include-any?           boolean
| | | | +--ro secondary-path* [path-name instance-id]
| | | | | +--ro path-name               string
| | | | | +--ro instance-id            boolean
| | | | +--ro path-up?                boolean
| | | | +--ro active?                 boolean
| | | | +--ro committed?              boolean
| | | | +--ro is-new-instance?        boolean
| | | | +--ro is-current-secondary?   boolean
| | | | +--ro is-selected-secondary?  boolean
| | | | +--ro config-adaptive?       boolean
| | | | +--ro config-reoptimize-timer-configured? boolean
| | | | +--ro config-reoptimize-timer?    uint32
| | | | +--ro config-reoptimize-timer-count? uint32
| | | | +--ro config-tspec-mtu-configured? boolean
| | | | +--ro config-tspec-mtu?        uint32
| | | | +--ro config-cos-configured?   boolean
| | | | +--ro config-cos?              uint32
| | | | +--ro config-mtu-configured?   boolean
| | | | +--ro config-mtu?              uint32
| | | | +--ro config-tie-breaking-configured? boolean
| | | | +--ro config-tie-break-random?  boolean
| | | | +--ro config-tie-break-least-fill? boolean
| | | | +--ro config-tie-break-most-fill? boolean
| | | | +--ro config-cspf-disabled?    boolean
| | | | +--ro config-rro-disabled?    boolean
| | | | +--ro config-hot-standby?     boolean
| | | | +--ro config-pinned?          boolean
| | | | +--ro config-persistent?     boolean
| | | | +--ro config-soft-preempt?    boolean
| | | | +--ro config-priority-configured? boolean
| | | | +--ro config-setup-prority?   uint8
| | | | +--ro config-holding-prority?  uint8

```

```

| | | +--ro config-hop-limit-configured? boolean
| | | +--ro config-hop-limit? uint8
| | | +--ro config-traffic-eng-rate-configured? boolean
| | | +--ro config-traffic-eng-mean-rate? uint32
| | | +--ro config-traffic-eng-max-rate? uint32
| | | +--ro config-traffic-eng-max-burst? uint32
| | | +--ro config-abw-configured? boolean
| | | +--ro config-cspf-computation-mode? lsp-cspf-computation-mode
| | | +--ro config-admin-group-configured? boolean
| | | +--ro admin-group-lists* [list-type]
| | | | +--ro list-type lsp-admin-group-list-type
| | | | +--ro admin-group* [admin-group-id]
| | | | | +--ro admin-group-id uint32
| | | | | +--ro admin-group-name? string
| | | | | +--ro exclude-any? boolean
| | | | | +--ro include-all? boolean
| | | | | +--ro include-any? boolean
| | | +--ro auto-bandwidth
| | | | +--ro config-template? string
| | | | +--ro adjustment-interval? uint32
| | | | +--ro adjustment-threshold? uint32
| | | | +--ro maximum-bandwidth? uint32
| | | | +--ro minimum-bandwidth? uint32
| | | | +--ro overflow-limit? uint32
| | | | +--ro underflow-limit? uint32
| | | | +--ro mode? autobw-mode
| | | | +--ro sample-recording? boolean
| | | +--ro forwarding-entry* [entry-index sync-index]
| | | | +--ro entry-index uint32
| | | | +--ro sync-index uint32
| | | | +--ro dest-ip-prefix? inet:ipv4-prefix
| | | | +--ro in-label? uint32
| | | | +--ro out-label? uint32
| | | | +--ro protocol? mpls-protocol
| | | | +--ro out-interface-name? string
| | | | +--ro nexthop-ip-addr? inet:ipv4-address
| | | | +--ro type? mpls-forwarding-entry-type
| | | | +--ro isis-level? uint32
| | | +--ro route* [entry-index]
| | | | +--ro entry-index uint32
| | | | +--ro outseg-index? uint32
| | | | +--ro dest-ip-prefix? inet:ipv4-prefix
| | | | +--ro gateway-ip-addr? inet:ipv4-address
| | | | +--ro out-interface-name? string
| | | | +--ro out-label? uint32
| | | | +--ro protocol? mpls-protocol
| | | | +--ro vif-index? uint32
| | | | +--ro metric? uint32
| | | | +--ro use-count? uint32
| | | | +--ro isis-level? uint32
| | | +--ro tunnel-traffic-statistics* [index]
| | | | +--ro number-of-packets? uint64
| | | | +--ro number-of-packets-since-clear? uint64
| | | | +--ro number-of-bytes? uint64
| | | | +--ro number-of-bytes-since-clear? uint64
| | | | +--ro packets-per-second? uint64
| | | | +--ro bytes-per-second? uint64
| | | | +--ro averaging-interval-seconds? uint32
| | | | +--ro index uint32
| | | | +--ro protocol? mpls-protocol
| | | | +--ro name? string
| | | | +--ro is-bypass? boolean
| | | | +--ro statistics-valid? boolean
| | | +--ro transit-traffic-statistics* [in-label]

```

```
|   +-+ro number-of-packets?          uint64
|   +-+ro number-of-packets-since-clear?  uint64
|   +-+ro number-of-bytes?            uint64
|   +-+ro number-of-bytes-since-clear?  uint64
|   +-+ro packets-per-second?         uint64
|   +-+ro bytes-per-second?          uint64
|   +-+ro averaging-interval-seconds? uint32
|   +-+ro in-label                  uint32
|   +-+ro protocol?                mpls-protocol
|   +-+ro statistics-valid?         boolean
+-+ro sr-state
|   +-+ro tunnels
|   |   +-+ro total-tunnel-count?    uint32
|   |   +-+ro sr-tunnels* [tunnel-destination prefix-length]
|   |   |   +-+ro tunnel-interface-index?  uint32
|   |   |   +-+ro tunnel-metric?        uint32
|   |   |   +-+ro name?               string
|   |   |   +-+ro tunnel-lsp-state?   uint32
|   |   |   +-+ro tunnel-vif?        uint32
|   |   |   +-+ro protocol-type?     mpls-protocol
|   |   |   +-+ro out-segments* [outgoing-interface]
|   |   |   |   +-+ro outgoing-interface  string
|   |   |   |   +-+ro next-hop-ipaddress?  inet:ipv4-address
|   |   |   +-+ro tunnel-destination      inet:ipv4-address
|   |   |   +-+ro prefix-length        uint32
|   +-+ro summary
|       +-+ro load-sharing?          uint8
|       +-+ro tunnel-metric?        uint16
|       +-+ro current-srgb-range
|       |   +-+ro lower-range-value?  uint32
|       |   +-+ro upper-range-value?  uint32
|       +-+ro pending-srgb-range
|           +-+ro lower-range-value?  uint32
|           +-+ro upper-range-value?  uint32
+-+ro tunnel-status-state* [tunnel-destination]
    +-+ro tunnel-destination      uint32
    +-+ro oper-status?            boolean
```

brocade-nameserver

This module provides the means for monitoring the operation and configuring some parameters, of one or more instances of the Fibre Channel Name Server functionality.

The Fibre Channel Name Server provides a way for N_Ports and NL_Ports to register and discover Fibre Channel attributes. Such attributes include names, addresses, types, features, and so on, at various protocol layers, including upper layer protocols specific to Fibre Channel, which are sometimes referred to as FC-4s.

Physically, Fibre Channel is an interconnection of multiple communication points, called N_Ports, interconnected either by a switching network, called a fabric, or by a point-to-point link. A Fibre Channel “node” consists of one or more N_Ports. A fabric may consist of multiple Interconnect Elements, some of which are switches. An N_Port connects to the fabric by way of a port on a switch called an F_Port. When multiple FC nodes are connected to a single port on a switch by way of an Arbitrated Loop topology, the switch port is called an FL_Port, and the nodes' ports are called NL_Ports. The term Nx_Port is used to refer to either an N_Port or an NL_Port.

RPCs

```

rpcs:
  +---x get-nameserver-detail
  +-+ro output
    +-+ro show-nameserver* [nameserver-portid]
      +-+ro nameserver-portid          nameserver-portid-type
      +-+ro nameserver-portname?      common-def:wwn-type
      +-+ro nameserver-nodename?      common-def:wwn-type
      +-+ro nameserver-scr?          uint32
      +-+ro nameserver-fc4s?          nameserver-fc4s-type
      +-+ro nameserver-portsymb?     nameserver-symbolic-name-type
      +-+ro nameserver-nodesymb?     nameserver-symbolic-name-type
      +-+ro nameserver-fabric-portname? common-def:wwn-type
      +-+ro nameserver-permanent-portname? common-def:wwn-type
      +-+ro nameserver-devicetype?    nameserver-devicetype-type
      +-+ro nameserver-index?         uint32
      +-+ro nameserver-porttype?      nameserver-porttype-type
      +-+ro nameserver-cos?           nameserver-cos-type
      +-+ro nameserver-sharearea?     nameserver-sharearea-type
      +-+ro nameserver-redirect?      nameserver-redirect-type
      +-+ro nameserver-xlatedomain?   nameserver-xlatedomain-type
      +-+ro nameserver-connected-via-ag? nameserver-connected-via-ag-type
      +-+ro nameserver-ag-base-device? nameserver-ag-base-device-type
      +-+ro nameserver-real?          nameserver-real-type
      +-+ro nameserver-cascaded?      nameserver-cascaded-type

```

brocade-netconf-ext

RPCs

```
rpcs:  
  +---x get-netconf-client-capabilities  
    +---w input  
    |  +---w session-id?  uint32  
    +--ro output  
      +--ro session*  
        +--ro session-id?  uint32  
        +--ro user-name?  string  
        +--ro vendor?  string  
        +--ro product?  string  
        +--ro version?  string  
        +--ro identity?  string  
        +--ro af-type?  enumeration  
        +--ro host-ip-v6?  inet:ipv6-address  
        +--ro host-ip?  inet:ipv4-address  
        +--ro time?  ietfyang:date-and-time
```

brocade-nsm-operational

Top-level container

```

module: brocade-nsm-operational
  +-ro bridge-domain-state
    | +-ro intf-name?           string
    | +-ro bridge-domain-counter
    |   | +-ro no-of-bd?        uint32
    |   | +-ro no-of-vpls-bd?   uint32
    | +-ro bridge-domain-list* [bd-id]
      | +-ro bd-id              uint32
      | +-ro vc-id?             uint32
      | +-ro active-ac-lif-count?  uint16
      | +-ro config-ac-lif-count?  uint16
      | +-ro active-vfi-lif-count?  uint16
      | +-ro config-vfi-lif-count?  uint16
      | +-ro local-switching?    boolean
      | +-ro block-bpdu?         boolean
      | +-ro bd-type?            uint16
      | +-ro ve-ifindex?         uint32
      | +-ro ve-id?              uint32
      | +-ro pw-profile?         string
      | +-ro mac-limit?          uint16
      | +-ro statistics?         boolean
      | +-ro mac-addr-withdrawal? boolean
      | +-ro mct-enabled?        boolean
      | +-ro description?        string
      | +-ro mac-learning-disable? boolean
      +-ro outer-vlan-list* [outer-vlan]
        +-ro outer-vlan           uint32
        +-ro no-of-up-tagged-ports?  uint32
        +-ro no-of-up-untagged-ports?  uint32
        +-ro untagged-ports-list* [lif-name]
          | +-ro lif-name            string
          | +-ro lif-ifindex?        uint32
          | +-ro lif-main-intf-type? nsm-dcm-lif-main-intf-type
          | +-ro outer-vlan?         uint32
          | +-ro flags?              uint32
          | +-ro ivid?               uint32
          | +-ro encaps-id?          uint32
          | +-ro ingress-stats-id?   uint32
          | +-ro egress-stats-id?   uint32
          | +-ro op-state?            boolean
          | +-ro service-instance?   uint32
        +-ro tagged-ports-list* [lif-name]
          +-ro lif-name            string
          +-ro lif-ifindex?        uint32
          +-ro lif-main-intf-type? nsm-dcm-lif-main-intf-type
          +-ro outer-vlan?         uint32
          +-ro inner-vlan?          uint32
          +-ro flags?              uint32
          +-ro ivid?               uint32
          +-ro encaps-id?          uint32
          +-ro ingress-stats-id?   uint32
          +-ro egress-stats-id?   uint32
          +-ro op-state?            boolean
          +-ro service-instance?   uint32
  +-ro logical-interface-state
    | +-ro main-interface-physical* [interface-index intf-name]
      | | +-ro protocol-status?   boolean
      | | +-ro admin-status?     boolean

```

```

| |   +--ro counters* [implicit-lifs explicit-lifs]
| |   |   +--ro lif-type?                      intf-type
| |   |   +--ro total-lifs?                    uint32
| |   |   +--ro protocol-status-up-lifs?    uint32
| |   |   +--ro binded-lifs?                  uint32
| |   |   +--ro unbinded-lifs?                uint32
| |   |   +--ro implicit-lifs?                uint32
| |   |   +--ro explicit-lifs?                uint32
| |   +--ro interface-index                 uint32
| |   +--ro intf-type?                      intf-type
| |   +--ro intf-name                       string
| |   +--ro is-tagged?                      boolean
| |   +--ro port-mode?                      string
| |   +--ro logical-interface-physical* [logical-interface-name]
| |   |   +--ro source-type?                  string
| |   |   +--ro protocol-status?            boolean
| |   |   +--ro admin-status?              boolean
| |   |   +--ro lif-index?                uint32
| |   |   +--ro bridge-domain-index?      uint32
| |   |   +--ro interface-name?           string
| |   |   +--ro is-binded?                boolean
| |   |   +--ro logical-interface-name   string
| |   |   +--ro outer-vlan-id?          uint32
| |   |   +--ro inner-vlan-id?          uint32
| |   |   +--ro intf-type?                intf-type
| |   |   +--ro is-tagged?                boolean
| |   +--ro main-interface-pseudo-wire* [interface-index]
| |   |   +--ro protocol-status?        boolean
| |   |   +--ro admin-status?          boolean
| |   |   +--ro counters* [implicit-lifs explicit-lifs]
| |   |   |   +--ro lif-type?                      intf-type
| |   |   |   +--ro total-lifs?                    uint32
| |   |   |   +--ro protocol-status-up-lifs?    uint32
| |   |   |   +--ro binded-lifs?                  uint32
| |   |   |   +--ro unbinded-lifs?                uint32
| |   |   |   +--ro implicit-lifs?                uint32
| |   |   |   +--ro explicit-lifs?                uint32
| |   |   +--ro interface-index             uint32
| |   +--ro logical-interface-pseudo-wire* [logical-interface-name]
| |   |   +--ro source-type?                  string
| |   |   +--ro protocol-status?            boolean
| |   |   +--ro admin-status?              boolean
| |   |   +--ro lif-index?                uint32
| |   |   +--ro bridge-domain-index?      uint32
| |   |   +--ro interface-name?           string
| |   |   +--ro is-binded?                boolean
| |   |   +--ro logical-interface-name   string
| |   |   +--ro ip-address?               inet:ipv4-address
| |   +--ro main-interface-tunnel* [interface-index]
| |   |   +--ro protocol-status?        boolean
| |   |   +--ro admin-status?          boolean
| |   |   +--ro counters* [implicit-lifs explicit-lifs]
| |   |   |   +--ro lif-type?                      intf-type
| |   |   |   +--ro total-lifs?                    uint32
| |   |   |   +--ro protocol-status-up-lifs?    uint32
| |   |   |   +--ro binded-lifs?                  uint32
| |   |   |   +--ro unbinded-lifs?                uint32
| |   |   |   +--ro implicit-lifs?                uint32
| |   |   |   +--ro explicit-lifs?                uint32
| |   |   +--ro interface-index             uint32
| |   +--ro logical-interface-tunnel* [logical-interface-name]
| |   |   +--ro source-type?                  string
| |   |   +--ro protocol-status?            boolean
| |   |   +--ro admin-status?              boolean

```

```
|      +-+ro lif-index?          uint32
|      +-+ro bridge-domain-index?  uint32
|      +-+ro interface-name?      string
|      +-+ro is-binded?          boolean
|      +-+ro logical-interface-name string
|      +-+ro vni-tni?            uint32
+-+ro packet-encap-processing-state
|  +-+ro packet-encap-info-list
|    +-+ro port-name?          string
|    +-+ro link-status?        string
|    +-+ro encaps-type?        string
|    +-+ro strip-status?       string
+-+ro sub-interface-statistics-state
|  +-+ro vlan-statistics* [vlan-id]
|    +-+ro vlan-id              uint32
|    +-+ro port-statistics* [port-id]
|      +-+ro rx-packets?        uint64
|      +-+ro tx-packets?        uint64
|      +-+ro rx-bytes?          uint64
|      +-+ro tx-bytes?          uint64
|      +-+ro port-id             uint32
|      +-+ro port-name?          string
|  +-+ro bridge-domain-statistics* [bd-id]
|    +-+ro bd-id                uint32
|    +-+ro lif-statistics* [lif-id]
|      +-+ro rx-packets?        uint64
|      +-+ro tx-packets?        uint64
|      +-+ro rx-bytes?          uint64
|      +-+ro tx-bytes?          uint64
|      +-+ro lif-id              uint32
|      +-+ro lif-name?           string
+-+ro topology-group-state
|  +-+ro topology-group-data* [topology-group-id]
|    +-+ro topology-group-id     uint16
|    +-+ro l2-protocol?          string
|    +-+ro master-vlan
|      |  +-+ro vlan-id           uint16
|      |  +-+ro control-ports?    string
|      |  +-+ro free-ports?        string
|    +-+ro member-vlan* [vlan-id]
|      |  +-+ro vlan-id           uint16
|      |  +-+ro free-ports?        string
|    +-+ro member-bd* [bd-id]
|      +-+ro bd-id                uint32
|      +-+ro free-ports?          string
+-+ro vpn-statistics-state
  +-+ro vpn-vrf-statistics* [vrf-name]
    +-+ro vrf-name               string
    +-+ro tunnel-in-pkt?         uint32
    +-+ro tunnel-out-pkt?        uint32
```

brocade-ntp

Top-level container

```

module: brocade-ntp
  +-rw ntp
    +-rw server* [ip]
      |  +-rw ip                      inet:ip-address
      |  +-rw use-vrf?                vrf-ntp
      |  +-rw key?                  uint32
      |  +-rw version?                uint32
      |  +-rw minpoll?                uint32
      |  +-rw maxpoll?                uint32
      |  +-rw source-interface-type?  aaa:track-iftype
      |  +-rw source-interface-number? string-type
    +-rw authentication-key* [keyid]
      |  +-rw keyid                  uint32
      |  +-rw encryption-type?      enc_type
      |  +-rw encryption-key?        string
      |  +-rw encryption-level?     enumeration
    +-rw peer* [peer-ip]
      |  +-rw peer-ip                inet:ip-address
      |  +-rw peer-use-vrf?          vrf-ntp
      |  +-rw peer-key?              uint32
      |  +-rw peer-version?          uint32
      |  +-rw peer-minpoll?          uint32
      |  +-rw peer-maxpoll?          uint32
      |  +-rw source-interface-type?  aaa:track-iftype
      |  +-rw source-interface-number? string-type
    +-rw source-ip?             srcip_type
    +-rw disable
      |  +-rw all?      empty
      |  +-rw serve?    empty
    +-rw authenticate?
    +-rw trusted-key*         trust-key

```

RPCs

Return address of the active NTP server:

```

rpcs:
  +---x show-ntp
  +-ro output
    +-ro active-server?   string

```

brocade-onie-grub

Top-level container

```
module: brocade-update-onie
  +-rw update
    | +-rw onie
    |   +---x scp
    |     | +---w input
    |     |   | +---w user      string
    |     |   | +---w password? string
    |     |   | +---w host      string
    |     |   | +---w directory string
    |     |   | +---w file?    string
    |     |   | +---w use-vrf? common-def:use-vrf
    |     +-ro output
    |       | +---ro upgrade-msg? string
    |     +---x ftp
    |       | +---w input
    |       |   | +---w user      string
    |       |   | +---w password? string
    |       |   | +---w host      string
    |       |   | +---w directory string
    |       |   | +---w file?    string
    |       |   | +---w use-vrf? common-def:use-vrf
    |       +-ro output
    |         | +---ro upgrade-msg? string
    |     +---x sftp
    |       +---w input
    |         | +---w user      string
    |         | +---w password? string
    |         | +---w host      string
    |         | +---w directory string
    |         | +---w file?    string
    |         | +---w use-vrf? common-def:use-vrf
    |       +-ro output
    |         | +---ro upgrade-msg? string
```

Actions

Show the onie status:

```
module: brocade-chassis
  | +-rw firmware:update
  |   | +---x firmware:onieversion
  |   |   | +-ro firmware:output
  |   |   |   | +---ro firmware:onie-ver? string
  |   | +---x firmware:grubversion
  |   |   | +-ro firmware:output
  |   |   |   | +---ro firmware:grub-ver? string
```

brocade-ospf

External augmentations

```
+--rw ospf:interface-eth-ospf-conf
|   |   |   |   +-rw ospf:ospf1
|   |   |   |   +-rw ospf:area?                                ospf-area-id
|   |   |   |   +-rw ospf:auth-change-wait-time?    common-def:time-interval-sec
|   |   |   |   +-rw ospf:authentication-key
|   |   |   |   |   +-rw ospf:no-encrypt-auth-key-table
|   |   |   |   |   |   +-rw ospf:no-encrypt-auth-key?    ospf-auth-psswd-string
|   |   |   |   |   |   +-rw ospf:auth-key-table
|   |   |   |   |   |   |   +-rw ospf:encrypt-type?    key-type
|   |   |   |   |   |   |   +-rw ospf:auth-key?        ospf-auth-psswd-string
|   |   |   |   |   +-rw ospf:hello-interval?    common-def:time-interval-sec
|   |   |   |   +-rw ospf:dead-interval?    common-def:time-interval-sec
|   |   |   |   +-rw ospf:retransmit-interval?  common-def:time-interval-sec
|   |   |   |   +-rw ospf:transmit-delay?    common-def:time-interval-sec
|   |   |   |   +-rw ospf:md5-authentication
|   |   |   |   |   +-rw ospf:key-activation-wait-time?  common-def:time-interval-sec
|   |   |   |   |   +-rw ospf:no-encrypt-key-table
|   |   |   |   |   |   +-rw ospf:no-encrypt-key-id?    uint32
|   |   |   |   |   |   +-rw ospf:no-encrypt-key?    ospf-auth-psswd-string
|   |   |   |   |   +-rw ospf:key-table
|   |   |   |   |   |   +-rw ospf:key-id?        uint32
|   |   |   |   |   |   +-rw ospf:key?          key-type
|   |   |   |   |   |   +-rw ospf:md5-authentication-key?  ospf-auth-psswd-string
|   |   |   |   +-rw ospf:cost?        uint32
|   |   |   |   +-rw ospf:network?      enumeration
|   |   |   |   +-rw ospf:intf-ldp-sync?  enumeration
|   |   |   |   +-rw ospf:database-filter
|   |   |   |   |   +-rw ospf:all-out?      empty
|   |   |   |   |   +-rw ospf:all-external?  database-filter-options
|   |   |   |   |   +-rw ospf:all-summary-external?  database-filter-options
|   |   |   |   +-rw ospf:mtu-ignore?      empty
|   |   |   |   +-rw ospf:active?        empty
|   |   |   |   +-rw ospf:passive?       empty
|   |   |   |   +-rw ospf:priority?      uint32
|   |   |   |   +-rw ospf:bfd
|   |   |   |   |   +-rw ospf:intf-bfd-enable?  empty
```

brocade-ospfv3

External augmentations

```

module: brocade-interface
++-rw ospfv3:interface-ospfv3-conf
| | | | +--rw ospfv3:interface-area?           ospf:ospf-area-id
| | | | +--rw ospfv3:active?                   empty
| | | | +--rw ospfv3:passive?                 empty
| | | | +--rw ospfv3:bfd
| | | | | +--rw ospfv3:bfd-enable?   empty
| | | | +--rw ospfv3:cost?                  uint32
| | | | +--rw ospfv3:instance?             uint32
| | | | +--rw ospfv3:mtu-ignore?          empty
| | | | +--rw ospfv3:network?            enumeration
| | | | +--rw ospfv3:priority?           uint32
| | | | +--rw ospfv3:suppress-linklsa?    empty
| | | | +--rw ospfv3:authentication
| | | | | +--rw ospfv3:ipsec-auth-key-config
| | | | | | +--rw ospfv3:spi?           spi-value-type
| | | | | | +--rw (ch-algorithm)?
| | | | | | | +--:(ca-ah-algorithm)
| | | | | | | | +--rw ospfv3:ah?        algorithm-type-ah
| | | | | | | | +--rw ospfv3:ah-no-encrypt? empty
| | | | | | | | +--rw ospfv3:ah-key?     ipsec-authentication-
hexkey-string
| | | | | | | +--:(ca-esp-algorithm)
| | | | | | | | +--rw ospfv3:esp?         algorithm-type-esp
| | | | | | | | +--rw ospfv3:esp-no-encrypt? empty
| | | | | | | | +--rw ospfv3:esp-key?     ipsec-authentication-
hexkey-string
| | | | | | | | +--rw ospfv3:esp-auth?      algorithm-type-ah
| | | | | | | | +--rw ospfv3:esp-auth-no-encrypt? empty
| | | | | | | | +--rw ospfv3:esp-auth-key?   ipsec-authentication-
hexkey-string
| | | | | | | +--rw ospfv3:ipsec
| | | | | | | | +--rw ospfv3:ipsec-authentication-disable? empty
| | | | | | | | +--rw ospfv3:ifc-key-add-remove-interval? common-def:time-
interval-sec
| | | | | | | +--rw ospfv3:link-interval-properties
| | | | | | | | +--rw ospfv3:hello-interval?   common-def:time-interval-sec
| | | | | | | | +--rw ospfv3:dead-interval?    common-def:time-interval-sec
| | | | | | | | +--rw ospfv3:hello-jitter?     uint32
| | | | | | | | +--rw ospfv3:retransmit-interval? common-def:time-interval-sec
| | | | | | | | +--rw ospfv3:transmit-delay?    common-def:time-interval-sec

```

brocade-pim

External augmentations

```
module: brocade-interface
+--rw pim:pim-intf-phy-cont
|   |   |   +--rw pim:pim-int-cmd
|   |   |   +--rw pim:pim-sparse?          empty
|   |   |   +--rw pim:pim
|   |   |       |   +--rw pim:neighbor-filter?    ip-prefix-name-t
|   |   |       |   +--rw pim:dr-priority?      uint32
|   |   |       |   +--rw pim:ttl-threshold?    uint32
|   |   |   +--rw pim:mcast-bdry-prefix-list?  ip-prefix-name-t

module: brocade-interface
+--rw pim:pim-intf-vlan-cont
|   |   |   +--rw pim:pim-int-cmd
|   |   |   +--rw pim:pim-sparse?          empty
|   |   |   +--rw pim:pim
|   |   |       |   +--rw pim:neighbor-filter?    ip-prefix-name-t
|   |   |       |   +--rw pim:dr-priority?      uint32
|   |   |       |   +--rw pim:ttl-threshold?    uint32
|   |   |   +--rw pim:mcast-bdry-prefix-list?  ip-prefix-name-t

module: brocade-interface
+--rw pim:pim-intf-loopback-cont
|   |   |   +--rw pim:pim-int-cmd
|   |   |   +--rw pim:pim-sparse?          empty
|   |   |   +--rw pim:pim
|   |   |       |   +--rw pim:neighbor-filter?    ip-prefix-name-t
|   |   |       |   +--rw pim:dr-priority?      uint32
|   |   |       |   +--rw pim:ttl-threshold?    uint32
|   |   |   +--rw pim:mcast-bdry-prefix-list?  ip-prefix-name-t
```

brocade-pim-operational

Top-level container

```

module: brocade-pim-operational
  +-ro pim-mdt-state
    | +-ro local-vtep-address?      inet:ipv4-address
    | +-ro mdt-join-role?          mdt-join-role-type
    | +-ro group* [group-address]
      |   +-ro group-address      inet:ipv4-address
      |   +-ro is-default?        boolean
      |   +-ro tunnel-info* [id]
        |     +-ro id              uint32
        |     +-ro ifindex?         uint32
        |     +-ro state?          mdt-tunnel-state-type
      |   +-ro peer* [source-address]
        |     +-ro source-address    inet:ipv4-address
      |   +-ro rx-path* [source-vtep-address]
        |     +-ro source-vtep-address  inet:ipv4-address
        |     +-ro incoming-interface? string
        |     +-ro nexthop-address?   inet:ipv4-address
      |   +-ro tx-path* [outgoing-interface]
        |     +-ro outgoing-interface string
        |     +-ro nexthop-address?   inet:ipv4-address
      |   +-ro bridge-domain* [id]
        |     +-ro id              uint32
      |   +-ro vlan* [id]
        |     +-ro id              uint32
  +-ro pim6-anycast-state* [vrf-name anycast-rp]
    | +-ro vrf-name            string
    | +-ro anycast-rp          inet:ipv6-address
    | +-ro prefix-name?        string
    | +-ro peer-list* [ipv6-addr]
      |   +-ro ipv6-addr        inet:ipv6-address
  +-ro pim6-ecmp-state* [vrf-name addr-filter]
    | +-ro vrf-name            string
    | +-ro addr-filter          inet:ipv6-address
    | +-ro pim6-ecmp* [vrf-name src-ip rp-addr]
      |   +-ro vrf-name          string
      |   +-ro src-ip            inet:ipv6-address
      |   +-ro rp-addr            inet:ipv6-address
      |   +-ro upstream-nbr?     inet:ipv6-address
      |   +-ro interface-name?   string
      |   +-ro interface-count?  uint32
  +-ro pim6-global-state* [vrf-name]
    | +-ro vrf-name            string
    | +-ro enable-status?      boolean
    | +-ro max-mcache?         uint32
    | +-ro current-count?      uint32
    | +-ro hello-interval?     uint16
    | +-ro nbr-timeout?        uint16
    | +-ro jp-interval?        uint32
    | +-ro inact-interval?     uint16
    | +-ro hw-drop-status?     boolean
    | +-ro prune-wait-interval? uint8
    | +-ro reg-suppress-time?   uint16
    | +-ro reg-probe-time?     uint16
    | +-ro reg-stop-delay?      uint16
    | +-ro reg-suppress-interval? uint16
    | +-ro ssm-status?         boolean
    | +-ro spt-threshold?       uint32
    | +-ro ssm-default-prefix?  string

```

```

|   +-+ro ssm-prefix-name?      string
|   +-+ro route-precedence?    string
|   +-+ro interfaces* [vrf-name]
|     +-+ro vrf-name           string
|     +-+ro pim6-interface-data* [vrf-name interface-name interface-type]
|       +-+ro vrf-name          string
|       +-+ro interface-name    string
|       +-+ro interface-type    string
|       +-+ro enable-status?    boolean
|       +-+ro local-ip-addr?    inet:ipv6-address
|       +-+ro pim6-version?     uint8
|       +-+ro mode?             string
|       +-+ro dr-info?          string
|       +-+ro ttl-threshold?    uint8
|       +-+ro multicast-boundry? string
|       +-+ro dr-priority?      uint32
+-+ro pim6-mcache-state* [vrf-name src-addr grp-addr]
|   +-+ro vrf-name           string
|   +-+ro tot-entry-count?    uint32
|   +-+ro src-addr            inet:ipv6-address
|   +-+ro grp-addr            inet:ipv6-address
|   +-+ro incoming-if?        string
|   +-+ro rp-addr?            inet:ipv6-address
|   +-+ro uptime?             string
|   +-+ro flag-bmp?           uint32
|   +-+ro is-w-g?              uint8
|   +-+ro spt?                uint8
|   +-+ro rpt?                uint8
|   +-+ro reg?                uint8
|   +-+ro regsupp?            uint8
|   +-+ro regprobe?           uint8
|   +-+ro lsrc?                uint8
|   +-+ro lrcv?                uint8
|   +-+ro sp-mode?             uint8
|   +-+ro ssm-mode?            uint8
|   +-+ro need-rte?           uint8
|   +-+ro rpf-info?            string
|   +-+ro age-mask?           uint32
|   +-+ro kat?                 uint32
|   +-+ro join-desired?       boolean
|   +-+ro pim6-oif* [oif-name]
|     +-+ro oif-name           string
|     +-+ro age?                string
|     +-+ro expiry-time?       uint32
|     +-+ro oif-flags?          string
+-+ro pim6-mcache-summary-state* [vrf-name]
|   +-+ro vrf-name           string
|   +-+ro enable-status?      boolean
|   +-+ro total-mcache?       uint32
|   +-+ro num-sg?              uint32
|   +-+ro num-wg?              uint32
+-+ro pim-anycast-state* [vrf-name anycast-rp]
|   +-+ro vrf-name           string
|   +-+ro anycast-rp          inet:ipv4-address
|   +-+ro prefix-name?        string
|   +-+ro peer-list* [ipv4-addr]
|     +-+ro ipv4-addr         inet:ipv4-address
+-+ro pim-ecmp-state* [vrf-name addr-filter]
|   +-+ro vrf-name           string
|   +-+ro addr-filter          inet:ipv4-address
|   +-+ro pim-ecmp* [vrf-name src-ip rp-addr]
|     +-+ro vrf-name           string
|     +-+ro src-ip              inet:ipv4-address
|     +-+ro rp-addr              inet:ipv4-address

```

```

|     +--ro upstream-nbr?      inet:ipv4-address
|     +--ro interface-name?    string
|     +--ro interface-count?   uint32
+--ro pim-global-state* [vrf-name]
|     +--ro vrf-name           string
|     +--ro enable-status?    boolean
|     +--ro max-mcache?       uint32
|     +--ro current-count?   uint32
|     +--ro hello-interval?  uint16
|     +--ro nbr-timeout?     uint16
|     +--ro jp-interval?      uint32
|     +--ro inact-interval?  uint16
|     +--ro hw-drop-status?  boolean
|     +--ro prune-wait-interval?  uint8
|     +--ro reg-suppress-time?  uint16
|     +--ro reg-probe-time?   uint16
|     +--ro reg-stop-delay?   uint16
|     +--ro reg-suppress-interval?  uint16
|     +--ro ssm-status?       boolean
|     +--ro spt-threshold?   uint32
|     +--ro ssm-default-prefix?  string
|     +--ro ssm-prefix-name?  string
|     +--ro route-precedence? string
|     +--ro interfaces* [vrf-name]
|         +--ro vrf-name        string
|         +--ro pim-interface-data* [vrf-name interface-name interface-type]
|             +--ro vrf-name      string
|             +--ro interface-name string
|             +--ro interface-type string
|             +--ro enable-status? boolean
|             +--ro local-ip-addr?  inet:ipv4-address
|             +--ro pim-version?   uint8
|             +--ro mode?          string
|             +--ro dr-info?        string
|             +--ro ttl-threshold?  uint8
|             +--ro multicast-boundry?  string
|             +--ro dr-priority?   uint32
+--ro pim-mcache-state* [vrf-name src-addr grp-addr]
|     +--ro vrf-name           string
|     +--ro tot-entry-count?   uint32
|     +--ro src-addr           inet:ipv4-address
|     +--ro grp-addr           inet:ipv4-address
|     +--ro incoming-if?      string
|     +--ro rp-addr?           inet:ipv4-address
|     +--ro uptime?            string
|     +--ro flag-bmp?          uint32
|     +--ro is-w-g?            uint8
|     +--ro spt?               uint8
|     +--ro rpt?               uint8
|     +--ro reg?               uint8
|     +--ro regsupp?           uint8
|     +--ro regprobe?          uint8
|     +--ro lsrc?              uint8
|     +--ro lrcv?              uint8
|     +--ro sp-mode?           uint8
|     +--ro ssm-mode?          uint8
|     +--ro need-rte?          uint8
|     +--ro rpf-info?          string
|     +--ro age-mask?          uint32
|     +--ro kat?               uint32
|     +--ro join-desired?     boolean
|     +--ro mdt?               boolean
|     +--ro pim-oif* [oif-name]
|         +--ro oif-name        string

```

```
|     +-+ro age?          string
|     +-+ro expiry-time?  uint32
|     +-+ro oif-flags?    string
+-+ro pim-mcache-summary-state* [vrf-name]
    +-+ro vrf-name        string
    +-+ro enable-status?  boolean
    +-+ro total-mcache?   uint32
    +-+ro num-sg?         uint32
    +-+ro num-wg?         uint32
```

brocade-port-profile

Top-level container

```

++-rw port-profile* [name]
|   +-rw name                               common-def:name-string128
|   +-rw allow
|   |   +-rw nonprofiledmacs?    empty
|   +-rw vlan-profile!
|   |   +-rw switchport-basic
|   |   |   +-rw basic?    empty
|   |   +-rw switchport
|   |   |   +-rw mode
|   |   |   |   +-rw vlan-mode?    appm-sw-mode-type
|   |   +-rw access
|   |   |   +-rw vlan
|   |   |   |   +-rw name?    interface:vlan-type
|   |   +-rw access-mac-vlan-classification
|   |   |   +-rw access
|   |   |   |   +-rw vlan* [access-vlan-id access-mac-address]
|   |   |   |   |   +-rw access-vlan-id      interface:vlan-type
|   |   |   |   |   +-rw access-mac-address  interface:mac-address-type
|   |   +-rw access-mac-group-vlan-classification
|   |   |   +-rw access
|   |   |   |   +-rw vlan* [access-vlan-id access-mac-group]
|   |   |   |   |   +-rw access-vlan-id      interface:vlan-type
|   |   |   |   |   +-rw access-mac-group     uint32
|   +-rw trunk
|   |   +-rw allowed
|   |   |   +-rw vlan
|   |   |   |   +-rw all?    empty
|   |   |   |   +-rw none?    empty
|   |   |   |   +-rw add?    interface:ui32-vlan-range
|   |   |   |   +-rw except?   interface:ui32-vlan-range
|   |   |   |   +-rw remove?   interface:ui32-vlan-range
|   |   +-rw trunk-vlan-classification
|   |   |   +-rw allowed
|   |   |   |   +-rw vlan
|   |   |   |   |   +-rw add* [trunk-vlan-id trunk-ctag-id]
|   |   |   |   |   |   +-rw trunk-vlan-id      interface:vlan-type
|   |   |   |   |   |   +-rw trunk-ctag-id     interface:dot1q-vlan-type
|   |   |   |   +-rw remove* [trunk-vlan-id trunk-ctag-id]
|   |   |   |   |   +-rw trunk-vlan-id      interface:vlan-type
|   |   |   |   |   +-rw trunk-ctag-id     interface:dot1q-vlan-type
|   |   +-rw native-vlan-classification
|   |   |   +-rw native-vlan-id?      uint32
|   |   |   +-rw native-vlan-ctag-id?  interface:dot1q-vlan-type
|   |   +-rw native-vlan?          uint32
|   +-rw qos-profile!
|   |   +-rw cee?    common-def:name-string32
|   |   +-rw qos
|   |   |   +-rw cos?        int32
|   |   +-rw trust
|   |   |   +-rw trust-cos?  empty
|   +-rw cos-mutation?      common-def:name-string32
|   +-rw cos-traffic-class? common-def:name-string32
|   +-rw flowcontrol
|   |   +-rw flowcontrolglobal
|   |   |   +-rw tx?    enumeration
|   |   |   +-rw rx?    enumeration
|   |   +-rw pfc* [pfc-cos]
|   |   |   +-rw pfc-cos    int32

```

```
| |           +-rw pfc-tx      enumeration
| |           +-rw pfc-rx      enumeration
| +-rw security-profile!
| |   +-rw mac
| |   |   +-rw access-group
| |   |   |   +-rw access-group-name?  mac-access-list:mac-acl-name
| |   |   |   +-rw in?          empty
| |   +-rw ip
| |   |   +-rw access-group
| |   |   |   +-rw ipv4-access-group-name?  ip-access-list:13-acl-policy-name
| |   |   |   +-rw ipv4-in?        empty
| |   +-rw ipv6
| |   |   +-rw access-group
| |   |   |   +-rw ipv6-access-group-name?  ip-access-list:13-acl-policy-name
| |   |   |   +-rw ipv6-in?        empty
| +-rw restrict-flooding-container
|   +-rw restrict-flooding?  empty
+-rw port-profile-global
| +-rw port-profile* [name]
|   +-rw name          common-def:name-string128
|   +-rw activate?    empty
|   +-rw static* [mac-address]
|     +-rw mac-address  mac-access-list:mac-address-type
+-rw port-profile-domain* [port-profile-domain-name]
  +-rw port-profile-domain-name  port-profile-domain-name-type
  +-rw profile* [profile-name]
    +-rw profile-name  port-profile-name-type
```

brocade-preprovision

Top-level container

```
+--rw preprovision
    +-rw rbridge-id* [rbridge-id wwn]
        +-rw rbridge-id      common-def:rbridge-id-type
        +-rw wwn            common-def:wwn-type
```

RPC

```
rpcs:
    +---x show-bare-metal-state
        +-ro output
            +-ro bare-metal-state?    string
```

brocade-pw-profile

Top-level container

```
module: brocade-pw-profile
  +-rw pw-profile* [pw-profile-name]
    +-rw pw-profile-name    common-def:name-string64
    +-rw mtu-value?         uint32
    +-rw mtu-enforce?       boolean
    +-rw vc-mode?           enumeration
    +-rw flow-label?        empty
    +-rw control-word?      empty
```

brocade-pwm-operational

Top-level container

```

module: brocade-pwm-operational
  +-ro vc-peer-state
    | +-ro vc-peer-data* [vc-id]
    |   +-ro vc-id                      uint32
    |   +-ro vc-peer-address?          inet:ipv4-address
    |   +-ro vc-peer-state?            string
    |   +-ro vc-peer-uptime?           string
    |   +-ro vc-peer-load-balance?    boolean
    |   +-ro vc-peer-cos-enabled?    boolean
    |   +-ro vc-peer-cos-value?      uint8
    |   +-ro vc-ldp-tnnl-in-use?     string
    |   +-ro vc-local-label?          uint32
    |   +-ro vc-remote-label?         uint32
    |   +-ro vc-local-mtu?            uint32
    |   +-ro vc-remote-mtu?           uint32
    |   +-ro vc-local-type?          uint32
    |   +-ro vc-remote-type?          uint32
    |   +-ro vc-proto-tnnl* [vc-proto-name]
    |     +-ro vc-proto-name          string
    |     +-ro vc-ldp-tunnel-id?      uint32
    |     +-ro vc-ldp-name?           string
    |     +-ro vc-lsp-name?           string
    |     +-ro vc-peer-lsp-cos-enabled? boolean
    |     +-ro vc-peer-lsp-cos-value? uint8
    |   +-ro vc-assigned-lslp* [vc-lslp-name]
    |     +-ro vc-lslp-name          string
  +-ro bd-vc-peer-state* [vc-id]
    +-ro vc-id                      uint32
    +-ro bd-vc-peer-counter
    | +-ro no-of-peer-configured?    uint32
    | +-ro no-of-peer-operational?   uint32
  +-ro bd-vc-peer-data* [vc-peer-address]
    +-ro vc-peer-address          inet:ipv4-address
    +-ro vc-peer-state?            string
    +-ro vc-peer-uptime?           string
    +-ro vc-peer-load-balance?    boolean
    +-ro vc-peer-cos-enabled?    boolean
    +-ro vc-peer-cos-value?      uint8
    +-ro vc-ldp-tnnl-in-use?     string
    +-ro vc-local-label?          uint32
    +-ro vc-remote-label?         uint32
    +-ro vc-local-mtu?            uint32
    +-ro vc-remote-mtu?           uint32
    +-ro vc-local-type?          uint32
    +-ro vc-remote-type?          uint32
    +-ro vc-local-pw-status?      string
    +-ro vc-remote-pw-status?     string
    +-ro vc-local-flow-label-tx?  boolean
    +-ro vc-local-flow-label-rx?  boolean
    +-ro vc-remote-flow-label-tx? boolean
    +-ro vc-remote-flow-label-rx? boolean
    +-ro vc-local-control-word?   boolean
    +-ro vc-remote-control-word?  boolean
    +-ro vc-proto-tnnl* [vc-proto-name]
      +-ro vc-proto-name          string
      +-ro vc-ldp-tunnel-id?      uint32
      +-ro vc-ldp-name?           string
      +-ro vc-lslp-name?          string

```

```
|   +-+ro vc-peer-lsp-cos-enabled?    boolean
|   +-+ro vc-peer-lsp-cos-value?      uint8
+-+ro vc-assigned-lsp* [vc-lsp-name]
    +-+ro vc-lsp-name      string
```

brocade-qos-cee

Top-level container

```
+--rw cee-map* [name]
|   +--rw name                  cee-map-name-type
|   +--rw precedence?          int32
|   +--rw priority-group-table* [PGID]
|   |   +--rw PGID      qos-type-PGID
|   |   +--rw weight?    int32
|   |   +--rw pfc       enumeration
|   +--rw priority-table
|       +--rw map-cos0-pgid?  string
|       +--rw map-cos1-pgid?  string
|       +--rw map-cos2-pgid?  string
|       +--rw map-cos3-pgid?  string
|       +--rw map-cos4-pgid?  string
|       +--rw map-cos5-pgid?  string
|       +--rw map-cos6-pgid?  string
|       +--rw map-cos7-pgid?  string
+--rw nas
    +--rw auto-qos!
    |   +--rw set
    |       +--rw cos?      qos-mls:cos-id-type
    |       +--rw dscp?     qos-mls:dscp-id-type
+--rw server-ip* [server-ip]
    +--rw server-ip  nas-ip-prefix
    +--rw vrf* [vrf-name]
        +--rw vrf-name  string
    +--rw vlan* [vlan-number]
        +--rw vlan-number  interface:vlan-type
```

brocade-qos-cpu

External augmentations

```

module: brocade-qos-mls
  +-rw qos-cpu:cpu
    +-rw qos-cpu:slot [slot-id]
      +-rw qos-cpu:slot-id          slotid
    +-rw qos-cpu:port-group /*drop-node-name*/
      +-rw qos-cpu:port /*alt-name:port*/
        | +-rw qos-cpu:port-shaper /*alt-name:shaper*/
        |   +-rw qos-cpu:port-shaper-rate?           shaper-rate /*alt-name:rate*/
        |   +-rw qos-cpu:port-shaper-burst-size?     burst-size /*alt-name:busrt*/
      +-rw qos-cpu:group [group-id]
        +-rw qos-cpu:group-id          groupid
        +-rw qos-cpu:group-config-shaper-wfq /*drop-node-name*/
          +-rw qos-cpu:group-shaper
            | +-rw qos-cpu:group-shaper-rate?           shaper-rate /*alt-
              name:rate*/
            |   +-rw qos-cpu:group-shaper-burst-size?   burst-size /*alt-
              name:busrt*/
          +-rw qos-cpu:group-wfq
            | +-rw qos-cpu:group-wfq-weight?   weight-value /*alt-name:weight*/
          +-rw qos-cpu:group-prio [group-prio-id] /*drop-node-name*/
            +-rw qos-cpu:group-prio-id          priority /*alt-
              name:prio*/
            +-rw qos-cpu:group-prio-config-shaper-wfq /*drop-node-name*/
              +-rw qos-cpu:group-prio-shaper
                | +-rw qos-cpu:group-prio-shaper-rate?       shaper-rate /
                  *alt-name:rate*
                |   +-rw qos-cpu:group-prio-shaper-burst-size?   burst-size /
                  *alt-name:busrt*
              +-rw qos-cpu:group-prio-wfq
                +-rw qos-cpu:group-prio-wfq-weight?   weight-value /*alt-
                  name:weight*/

```

brocade-qos-mls

External augmentations

```

Module: brocade-qos-mls
  +-rw qos
    | +-rw map
    | | +-rw cos-mutation* [name]
    | | | +-rw name                      map-name-type
    | | | +-rw cos-to-cos-mappings* [from-cos]
    | | |   +-rw from-cos      cos-id-type
    | | |   +-rw to
    | | |     +-rw to-cos?    cos-id-type
    | | +-rw cos-traffic-class* [name]
    | | | +-rw name                      map-name-type
    | | | +-rw cos-to-tc-dp-mappings* [from-cos]
    | | |   +-rw from-cos      cos-id-type
    | | |   +-rw to
    | | |     +-rw to-traffic-class?    traffic-class-id-type
    | | |     +-rw to-drop-precedence? drop-precedence-id-type
    | | +-rw traffic-class-cos* [traffic-class-cos-map-name]
    | | | +-rw traffic-class-cos-map-name  map-name-type
    | | | +-rw tc-dp-to-cos-mapping* [from-traffic-class from-drop-precedence]
    | | |   +-rw from-traffic-class    traffic-class-id-type
    | | |   +-rw from-drop-precedence  drop-precedence-id-type
    | | |   +-rw to
    | | |     +-rw to-cos?    cos-id-type
    | | +-rw traffic-class-dscp* [name]
    | | | +-rw name                      map-name-type
    | | | +-rw traffic-class-to-dscp-mappings* [from-traffic-class from-drop-
precedence]
    | | |   +-rw from-traffic-class    traffic-class-id-type
    | | |   +-rw from-drop-precedence  drop-precedence-id-type
    | | |   +-rw to
    | | |     +-rw to-dscp?    dscp-id-type
    | | +-rw dscp-mutation* [dscp-mutation-map-name]
    | | | +-rw dscp-mutation-map-name  map-name-type
    | | | +-rw dscp-to-dscp-mapping* [dscp-in-values]
    | | |   +-rw dscp-in-values    dscp-id-range-type
    | | |   +-rw to
    | | |     +-rw to-value?    dscp-id-type
    | | +-rw dscp-traffic-class* [dscp-traffic-class-map-name]
    | | | +-rw dscp-traffic-class-map-name  map-name-type
    | | | +-rw dscp-to-tc-dp-mapping* [dscp-in-values]
    | | |   +-rw dscp-in-values    dscp-id-range-type
    | | |   +-rw to
    | | |     +-rw to-value?    traffic-class-id-type
    | | |     +-rw to-drop-precedence? drop-precedence-id-type
    | | +-rw dscp-cos* [dscp-cos-map-name]
    | | | +-rw dscp-cos-map-name  map-name-type
    | | | +-rw dscp-to-cos-mapping* [dscp-in-values]
    | | |   +-rw dscp-in-values    dscp-id-range-type
    | | |   +-rw to
    | | |     +-rw to-value?    cos-id-type
    | +-rw red-profile* [profile-id]
    | | +-rw profile-id        red-profile-id-type
    | | +-rw min-threshold    int32
    | | +-rw max-threshold    int32
    | | +-rw drop-probability int32
    | | +-rw ecn?             enumeration
    | +-rw tx-queue
    | | +-rw tx-queue-limit?  uint32

```

```

| |   +--rw scheduler
| |     +--rw strict-priority
| |       +--rw priority-number?          int32
| |       +--rw scheduler-type?         enumeration
| |       +--rw dwrr-traffic-class0?    int32
| |       +--rw dwrr-traffic-class1?    int32
| |       +--rw dwrr-traffic-class2?    int32
| |       +--rw dwrr-traffic-class3?    int32
| |       +--rw dwrr-traffic-class4?    int32
| |       +--rw dwrr-traffic-class5?    int32
| |       +--rw dwrr-traffic-class6?    int32
| |       +--rw dwrr-traffic-class-last? int32
| +--rw rx-queue
|   | +--rw rx-queue-limit?      uint32
| +--rw qos-cpu:cpu
|   +--rw qos-cpu:slot* [slot-id]
|     +--rw qos-cpu:slot-id           slotid
|     +--rw qos-cpu:port-group
|       +--rw qos-cpu:port
|         +--rw qos-cpu:port-shaper
|           +--rw qos-cpu:port-shaper-rate?      shaper-rate
|           +--rw qos-cpu:port-shaper-burst-size? port-burst-size
|     +--rw qos-cpu:group* [group-id]
|       +--rw qos-cpu:group-id           groupid
|       +--rw qos-cpu:group-config-shaper-wfq
|         +--rw qos-cpu:group-shaper
|           +--rw qos-cpu:group-shaper-rate?      shaper-rate
|           +--rw qos-cpu:group-shaper-burst-size? burst-size
|         +--rw qos-cpu:group-wfq
|           +--rw qos-cpu:group-wfq-weight?    weight-value
|       +--rw qos-cpu:group-prio* [group-prio-id]
|         +--rw qos-cpu:group-prio-id          priority
|         +--rw qos-cpu:group-prio-config-shaper-wfq
|           +--rw qos-cpu:group-prio-shaper
|             +--rw qos-cpu:group-prio-shaper-rate?      shaper-rate
|             +--rw qos-cpu:group-prio-shaper-burst-size? burst-size
|           +--rw qos-cpu:group-prio-wfq
|             +--rw qos-cpu:group-prio-wfq-weight?    weight-value
|     +--rw qos-cpu:queue-config* [queue-num]
|       +--rw qos-cpu:queue-num        uint32
|       +--rw qos-cpu:queue-rate?     uint32
+--rw storm-control
  +--rw ingress* [protocol-type]
    +--rw protocol-type    enumeration
    +--rw rate-format?    enumeration
    +--rw rate-bps?        rate-limit-bps-type

```

brocade-qos-mpls

Top-level container

```

module: brocade-qos-mpls
  +-rw qos-mpls
    +-rw map
      | +-rw exp-traffic-class* [exp-traffic-class-map-name]
      | | +-rw exp-traffic-class-map-name map-name-type
      | | +-rw exp* [exp-in-values]
      | |   +-rw exp-in-values uint32
      | |   +-rw to
      | |     +-rw priority? uint32
      | |     +-rw drop-precedence? uint32
      | +-rw traffic-class-exp* [traffic-class-exp-map-name]
      | | +-rw traffic-class-exp-map-name map-name-type
      | | +-rw priority* [priority-in-values drop-precedence]
      | |   +-rw priority-in-values uint32
      | |   +-rw drop-precedence uint32
      | |   +-rw to
      | |     +-rw exp? uint32
      | +-rw dscp-exp* [dscp-exp-map-name]
      | | +-rw dscp-exp-map-name map-name-type
      | | +-rw dscp* [dscp-in-values]
      | |   +-rw dscp-in-values uint32
      | |   +-rw to
      | |     +-rw exp? uint32
      | +-rw exp-dscp* [exp-dscp-map-name]
      | | +-rw exp-dscp-map-name map-name-type
      | | +-rw exp* [exp-in-values]
      | |   +-rw exp-in-values uint32
      | |   +-rw to
      | |     +-rw dscp? uint32
      | +-rw inexp-outexp* [inexp-outexp-map-name]
      |   +-rw inexp-outexp-map-name map-name-type
      |   +-rw in-exp* [in-exp-in-values]
      |     +-rw in-exp-in-values int32
      |     +-rw to
      |       +-rw out-exp? int32
    +-rw apply-qos-mpls:map-apply
      +-rw apply-qos-mpls:apply-exp-traffic-class-map-name
        | +-rw (apply-exp-traffic-class)?
        | | +-:(ca-map-name-cmd1)
        | |   | +-rw apply-qos-mpls:map-name-cmd1? map-name-type
        | | +-:(ca-all-zero-map-cmd1)
        | |   | +-rw apply-qos-mpls:all-zero-map-cmd1? empty
        | | +-:(ca-default-map-cmd1)
        | |   | +-rw apply-qos-mpls:default-map-cmd1? empty
        | +-rw apply-qos-mpls:All-cmd1? empty
      +-rw apply-qos-mpls:apply-traffic-class-exp-map-name
        | +-rw (apply-traffic-class-exp)?
        | | +-:(ca-map-name-cmd2)
        | |   | +-rw apply-qos-mpls:map-name-cmd2? map-name-type
        | | +-:(ca-all-zero-map-cmd2)
        | |   | +-rw apply-qos-mpls:all-zero-map-cmd2? empty
        | | +-:(ca-default-map-cmd2)
        | |   | +-rw apply-qos-mpls:default-map-cmd2? empty
        | +-rw apply-qos-mpls:All-cmd2? empty
      +-rw apply-qos-mpls:apply-dscp-exp-map-name
        | +-rw (apply-dscp-exp)?
        | | +-:(ca-map-name-cmd3)
        | |   | +-rw apply-qos-mpls:map-name-cmd3? map-name-type

```

```
|   |   +--:(ca-all-zero-map-cmd3)
|   |   |   +-rw apply-qos-mpls:all-zero-map-cmd3?    empty
|   |   +--:(ca-default-map-cmd3)
|   |   |   +-rw apply-qos-mpls:default-map-cmd3?    empty
|   +-rw apply-qos-mpls:All-cmd3?                  empty
+--rw apply-qos-mpls:apply-exp-dscp-map-name
    +-rw (apply-exp-dscp)?
    |   +--:(ca-map-name-cmd4)
    |   |   +-rw apply-qos-mpls:map-name-cmd4?        map-name-type
    |   +--:(ca-all-zero-map-cmd4)
    |   |   +-rw apply-qos-mpls:all-zero-map-cmd4?    empty
    |   +--:(ca-default-map-cmd4)
    |       +-rw apply-qos-mpls:default-map-cmd4?    empty
    +-rw apply-qos-mpls:All-cmd4?                  empty
```

brocade-qos-mqc

Top-level container

```

module: brocade-qos-mqc
  +-rw class-map* [name]
    | +-rw name      class-map-name-type
    | +-rw match
    |   +-rw access-group
    |     | +-rw access-group-name? mac-ip-acl-name
    |   +-rw vlan
    |     | +-rw vlan-range? interface:ui32-vlan-20k-range
    |   +-rw bridge-domain
    |     | +-rw bridge-domain-range? bd:ui32-bridge-domain-range
  +-rw policy-map* [name]
    | +-rw name      policy-map-name-type
    | +-rw class* [cl-name]
      |   +-rw cl-name      class-map-name-type
      |   +-rw police
      |     | +-rw cir?      uint64
      |     | +-rw cbs?      uint64
      |     | +-rw eir?      uint64
      |     | +-rw ebs?      uint64
      |   +-rw set
      |     | +-rw set_cos_tc
      |       | +-rw cos?      uint8
      |       | +-rw traffic-class? uint8
      |     | +-rw set_dscp
      |       | +-rw dscp?      uint16
      |   +-rw span
      |     | +-rw session?   session-type
    +-rw map
      | +-rw cos-mutation?          map-name-type
      | +-rw cos-mutation-builtin
      |   | +-rw map-name? qos-mls:builtin-map-name-type
      | +-rw cos-traffic-class?    map-name-type
      | +-rw cos-traffic-class-builtin
      |   | +-rw map-name? qos-mls:builtin-map-name-type
      | +-rw dscp-cos?             map-name-type
      | +-rw dscp-cos-builtin
      |   | +-rw map-name? qos-mls:builtin-map-name-type
      | +-rw dscp-traffic-class?  map-name-type
      | +-rw dscp-traffic-class-builtin
      |   | +-rw map-name? qos-mls:builtin-map-name-type
      | +-rw dscp-mutation?        map-name-type
      | +-rw dscp-mutation-builtin
      |   | +-rw map-name? qos-mls:builtin-map-name-type
  +-rw sflow-profile? sflow:profile-name-type
  +-rw shape
    | +-rw shaping_rate? shaping-rate-limit
  +-rw scheduler
    +-rw strict-priority
      +-rw priority-number?      uint8
      +-rw scheduler-type?      enumeration
      +-rw dwrr-traffic-class0? uint32
      +-rw dwrr-traffic-class1? uint32
      +-rw dwrr-traffic-class2? uint32
      +-rw dwrr-traffic-class3? uint32
      +-rw dwrr-traffic-class4? uint32
      +-rw dwrr-traffic-class5? uint32
      +-rw dwrr-traffic-class6? uint32
      +-rw dwrr-traffic-class-last? uint32

```

```
|      +---rw TC1?          shaping-rate-limit
|      +---rw TC2?          shaping-rate-limit
|      +---rw TC3?          shaping-rate-limit
|      +---rw TC4?          shaping-rate-limit
|      +---rw TC5?          shaping-rate-limit
|      +---rw TC6?          shaping-rate-limit
|      +---rw TC7?          shaping-rate-limit
+---rw system-qos
  +---rw qos
    +---rw service-policy* [direction policy-map-name]
      +---rw direction      enumeration
      +---rw policy-map-name map-name-type
```

brocade-qos-operational

Top-level container

```
+--ro cpu-cfg-state* [slot-id]
|   +--ro shaper-rate?      uint32
|   +--ro burst-size?       uint32
|   +--ro wfq-value?        uint32
|   +--ro slot-id           int8
|   +--ro cpu-cfg-group* [group-id]
|     +--ro shaper-rate?    uint32
|     +--ro burst-size?     uint32
|     +--ro wfq-value?      uint32
|     +--ro group-id         int8
|     +--ro cpu-cfg-prio* [prio-id]
|       +--ro shaper-rate?  uint32
|       +--ro burst-size?   uint32
|       +--ro wfq-value?    uint32
|       +--ro prio-id        int8
+--ro cpu-info-state* [group-id]
|   +--ro name?             string
|   +--ro egid?              uint32
|   +--ro group-id           int8
|   +--ro description?       string
+--ro cpu-queue-state* [queue-id cpu-rate-limit]
|   +--ro name?             string
|   +--ro shaper-rate?       uint32
|   +--ro queue-id           int8
|   +--ro cpu-rate-limit     int32
|   +--ro description?       string
+--ro qos-mpls-state* [map-type]
  +--ro map-type            string
  +--ro map-name?           string
  +--ro enabled-slots?      string
  +--ro traffic-class*     uint32
  +--ro drop-preced*        uint32
  +--ro exp*                uint32
  +--ro dscp*               uint32
```

brocade-ras

Top-level container

```

module: brocade-ras
  +--rw copy
    |  +--rw support
    |  |  +---x ftp
    |  |  |  +---w input
    |  |  |  |  +---w user      string
    |  |  |  |  +---w host      string
    |  |  |  |  +---w directory directory-path
    |  |  |  |  +---w password? string
    |  |  |  |  +---w timeout?  timeout-value
    |  |  |  |  +---w module?   string
    |  |  |  |  +---w group?    string
    |  |  |  |  +---w use-vrf?  common-def:use-vrf
    |  |  |  +---ro output
    |  |  |  |  +---ro supportSaveResult*
    |  |  |  |  |  +---ro status-code   copy-support-status
    |  |  |  |  |  +---ro status-str?  string
    |  |  +---x scp
    |  |  |  +---w input
    |  |  |  |  +---w user      string
    |  |  |  |  +---w host      string
    |  |  |  |  +---w directory directory-path
    |  |  |  |  +---w password? string
    |  |  |  |  +---w timeout?  timeout-value
    |  |  |  |  +---w module?   string
    |  |  |  |  +---w group?    string
    |  |  |  |  +---w use-vrf?  common-def:use-vrf
    |  |  |  |  +---w source-ip? inet:ip-address
    |  |  |  +---ro output
    |  |  |  |  +---ro supportSaveResult*
    |  |  |  |  |  +---ro status-code   copy-support-status
    |  |  |  |  |  +---ro status-str?  string
    |  |  +---x usb
    |  |  |  +---w input
    |  |  |  |  +---w directory  string
    |  |  |  |  +---w timeout?   timeout-value
    |  |  |  |  +---w module?   string
    |  |  |  +---ro output
    |  |  |  |  +---ro supportSaveResult*
    |  |  |  |  |  +---ro status-code   copy-support-status
    |  |  |  |  |  +---ro status-str?  string
    |  +---x support-interactive
    |  |  +---ro output
    |  |  |  +---ro result?    string
  +-rw logging
    |  +-rw raslog
    |  |  +---rw interface
    |  |  |  +---rw description? empty
    |  |  +---rw message
    |  |  |  +---rw msgId* [msgId]
    |  |  |  |  +---rw msgId     string
    |  |  |  |  +---rw severity? message-severity
    |  |  |  |  +---rw suppress? empty
    |  |  |  |  +---rw syslog?   empty
    |  |  +---rw module
    |  |  |  +---rw modId* [modId]
    |  |  |  |  +---rw modId     string
    |  |  +---rw console?    raslog-console
  
```

```

|   +-rw syslog-server* [syslogip use-vrf]
|   |   +-rw syslogip          inet:ip-address
|   |   +-rw use-vrf          common-def:use-vrf
|   |   +-rw format?          string
|   |   +-rw syslog-secure
|   |   |   +-rw secure?      empty
|   |   |   +-rw port?        uint16
|   |   +-rw udp-port?       uint16
|   |   +-rw source-interface
|   |   |   +-rw source-intf-type?  source-interface-type
|   |   +-rw ethernet
|   |   |   +-rw source-intf-name?  ethernet-iftype
|   |   +-rw loopback
|   |   |   +-rw source-intf-name?  loopback-iftype
|   |   +-rw ve
|   |   |   +-rw source-intf-name?  ve-iftype
|   |   +-rw management
|   |   |   +-rw source-intf-name?  mm-iftype
|   +-rw syslog-server-host* [hostname use-vrf]
|   |   +-rw hostname         string
|   |   +-rw use-vrf          common-def:use-vrf
|   |   +-rw format?          string
|   |   +-rw syslog-secure
|   |   |   +-rw secure?      empty
|   |   |   +-rw port?        uint16
|   |   +-rw udp-port?       uint16
|   |   +-rw source-interface
|   |   |   +-rw source-intf-type?  source-interface-type
|   |   +-rw ethernet
|   |   |   +-rw source-intf-name?  ethernet-iftype
|   |   +-rw loopback
|   |   |   +-rw source-intf-name?  loopback-iftype
|   |   +-rw ve
|   |   |   +-rw source-intf-name?  ve-iftype
|   |   +-rw management
|   |   |   +-rw source-intf-name?  mm-iftype
|   +-rw auditlog
|   |   +-rw class* [class]
|   |   |   +-rw class      audit-class
|   +-rw syslog-facility
|   |   +-rw local?    facility-enum
|   +-rw utility
|   |   +-rw enable
|   |   |   +-rw relp?      empty
|   +-rw destination_console
|   +-rw logging
|   |   +-rw raslog
|   |   |   +---x console
|   |   |   |   +---w input
|   |   |   |   |   +---w (ras-con)?
|   |   |   |   |   |   +---:(stop)
|   |   |   |   |   |   |   +-w stop      uint32
|   |   |   |   |   |   |   +---:(start)
|   |   |   |   |   |   |   |   +---w start?  empty
|   +-rw system-ras
|   |   +-rw usb
|   |   |   +---x on
|   |   |   +---x off
|   |   |   +---x dir
|   |   |   +---x remove
|   |   |   |   +---w input
|   |   |   |   |   +---w directory  string
|   |   |   |   |   +---w file      string
|   |   +---x tpvm

```

```

|   +-rw switch-attributes
|     +-rw chassis-name?    string
|     +-rw host-name?      string
+-rw support
|   +-rw autoupload-param
|   |   +-rw hostip        inet:ip-address
|   |   +-rw username       string
|   |   +-rw directory      string
|   |   +-rw protocol       string
|   |   +-rw password?     string
|   +-rw support-param
|   |   +-rw hostip        inet:ip-address
|   |   +-rw username       string
|   |   +-rw directory      string
|   |   +-rw protocol       string
|   |   +-rw password?     string
|   +-rw autoupload
|   |   +-rw enable?      empty
|   +-rw ffdc?           empty
+-rw logtest
|   +-rw raslog
|     +---x gmsg
|     +---w input
|     +---w messageID?   string
+-rw auditlog
  +---x gmsg
  +---w input
  +---w messageID?   string

```

RPCs

```

rpcs:
  +---x bna-config-cmd
  |   +---w input
  |   |   +---w src        string
  |   |   +---w dest       string
  |   |   +---w remove-tpvm? empty
  |   +-ro output
  |     +---ro session-id  uint32
  |     +---ro status       cmd-status
  |     +---ro status-string? string
  +---x bna-config-cmd-status
    +---w input
    |   +---w session-id  uint32
    +-ro output
      +---ro status       cmd-status
      +---ro status-string? string

```

brocade-ras-ext

Top-level container

```
module: brocade-ras-ext
  +-rw rasman
    +---x message
      |  +---w input
      |    +---w id      string
    +---x module
      |  +---w input
      |    +---w name     string
    +---x description
    +---x type
      +---w input
        +---w value     enumeration
```

External augmentations

```
module: brocade-common-def
  +-rw show
  |  +-rw ras-extensions:support
```

RPCs

```
rpcs:
  +---x show-raslog
    |  +---w input
    |    +---w number-of-latest-events?  uint32
    |  +-ro output
      +---ro show-all-raslog*
        |  +---ro number-of-entries?  uint32
        |  +---ro raslog-entries*
          |    +---ro index?          uint32
          |    +---ro message-id?      string
          |    +---ro date-and-time-info?  string
          |    +---ro severity?        enumeration
          |    +---ro repeat-count?    uint32
          |    +---ro message?         string
          |    +---ro message-flag?    enumeration
          |    +---ro log-type?        enumeration
          |    +---ro switch-or-chassis-name?  string
        +---ro cmd-status-error-msg?  string
  +---x show-support-save-status
    |  +-ro output
      +---ro show-support-save-status*
        |    +---ro status?          enumeration
        |    +---ro message?         string
        |    +---ro percentage-of-completion?  uint32
  +---x show-system-info
    +---ro output
      +---ro show-system-info*
        +---ro stack-mac?  ietfyang:mac-address
```

brocade-ras-operational

Top-level container

```

module: brocade-ras-operational
  +-ro cpu-state
    |  +-ro summary
    |  |  +-ro summary-cpu-load-average-one-min?      decimal164
    |  |  +-ro summary-cpu-load-average-five-min?     decimal164
    |  |  +-ro summary-cpu-load-average-fifteen-min?   decimal164
    |  |  +-ro summary-cpu-util-current?              decimal164
    |  |  +-ro summary-cpu-util-current-user?         decimal164
    |  |  +-ro summary-cpu-util-current-kernel?       decimal164
    |  |  +-ro summary-cpu-util-current-iowait?        decimal164
    |  +-ro history
    |  |  +-ro cpu-load-average-one-min?      decimal164
    |  |  +-ro cpu-load-average-five-min?     decimal164
    |  |  +-ro cpu-load-average-fifteen-min?   decimal164
    |  |  +-ro cpu-util-current?              decimal164
    |  |  +-ro cpu-util-current-user?         decimal164
    |  |  +-ro cpu-util-current-kernel?       decimal164
    |  |  +-ro cpu-util-current-iowait?        decimal164
    |  |  +-ro cpu-util-1min?                decimal164
    |  |  +-ro cpu-util-1min-user?          decimal164
    |  |  +-ro cpu-util-1min-kernel?        decimal164
    |  |  +-ro cpu-util-1min-iowait?        decimal164
    |  |  +-ro cpu-util-5min?              decimal164
    |  |  +-ro cpu-util-5min-user?          decimal164
    |  |  +-ro cpu-util-5min-kernel?        decimal164
    |  |  +-ro cpu-util-5min-iowait?        decimal164
    |  |  +-ro cpu-util-15min?             decimal164
    |  |  +-ro cpu-util-15min-user?          decimal164
    |  |  +-ro cpu-util-15min-kernel?        decimal164
    |  |  +-ro cpu-util-15min-iowait?        decimal164
    |  |  +-ro cpu-util-1hour?              decimal164
    |  |  +-ro cpu-util-1hour-user?          decimal164
    |  |  +-ro cpu-util-1hour-kernel?        decimal164
    |  |  +-ro cpu-util-1hour-iowait?        decimal164
    |  |  +-ro cpu-util-5hour?              decimal164
    |  |  +-ro cpu-util-5hour-user?          decimal164
    |  |  +-ro cpu-util-5hour-kernel?        decimal164
    |  |  +-ro cpu-util-5hour-iowait?        decimal164
    |  |  +-ro cpu-util-24hour?             decimal164
    |  |  +-ro cpu-util-24hour-user?          decimal164
    |  |  +-ro cpu-util-24hour-kernel?        decimal164
    |  |  +-ro cpu-util-24hour-iowait?        decimal164
    |  |  +-ro cpu-util-72hour?             decimal164
    |  |  +-ro cpu-util-72hour-user?          decimal164
    |  |  +-ro cpu-util-72hour-kernel?        decimal164
    |  |  +-ro cpu-util-72hour-iowait?        decimal164
    |  |  +-ro cpu-util-process-history* [cpu-process-id]
    |  |    +-ro cpu-process-id      uint32
    |  |    +-ro cpu-process-name?    string
    |  |    +-ro cpu-util-current?   decimal164
    |  |    +-ro cpu-util-1m?        decimal164
    |  |    +-ro cpu-util-5m?        decimal164
    |  |    +-ro cpu-util-15m?       decimal164
    |  |    +-ro cpu-util-1h?        decimal164
    |  |    +-ro cpu-util-5h?        decimal164
    |  |    +-ro cpu-util-24h?       decimal164
    |  |    +-ro cpu-util-72h?       decimal164
    |  +-ro top
  
```

```

| |   +-+ro cpu-curr-time?           string
| |   +-+ro cpu-system-uptime?      string
| |   +-+ro cpu-no-of-users?        uint32
| |   +-+ro cpu-load-average-one-min? decimal64
| |   +-+ro cpu-load-average-five-min? decimal64
| |   +-+ro cpu-load-average-fifteen-min? decimal64
| |   +-+ro cpu-total-task?         uint32
| |   +-+ro cpu-running-task?       uint32
| |   +-+ro cpu-sleeping-task?      uint32
| |   +-+ro cpu-stopped-task?       uint32
| |   +-+ro cpu-zombie-task?        uint32
| |   +-+ro cpu-util-user?          decimal64
| |   +-+ro cpu-util-kernel?        decimal64
| |   +-+ro cpu-util-nice?          decimal64
| |   +-+ro cpu-util-idle?          decimal64
| |   +-+ro cpu-util-iowait?        decimal64
| |   +-+ro cpu-util-hi?            decimal64
| |   +-+ro cpu-util-si?            decimal64
| |   +-+ro cpu-util-st?            decimal64
| |   +-+ro cpu-total-mem?          string
| |   +-+ro cpu-used-mem?          string
| |   +-+ro cpu-free-mem?          string
| |   +-+ro cpu-buffer-mem?         string
| |   +-+ro cpu-total-mem-swap?     string
| |   +-+ro cpu-used-mem-swap?     string
| |   +-+ro cpu-free-mem-swap?     string
| |   +-+ro cpu-cache-mem-swap?    string
| |   +-+ro cpu-top-process-information* [cpu-process-id]
| |     +-+ro cpu-process-id          uint32
| |     +-+ro cpu-process-user?       string
| |     +-+ro cpu-process-priority?   string
| |     +-+ro cpu-process-ni?         string
| |     +-+ro cpu-process-virtual-mem? string
| |     +-+ro cpu-process-resident-mem? string
| |     +-+ro cpu-process-shared-mem?  string
| |     +-+ro cpu-process-state?      string
| |     +-+ro cpu-process-cpuutil?    decimal64
| |     +-+ro cpu-process-memutil?    decimal64
| |     +-+ro cpu-process-running-time? string
| |     +-+ro cpu-process-cmd?        string
| +-+ro all-partition
|   +-+ro cpu-allpart-load* [cpu-blade-name]
|     +-+ro cpu-blade-name          string
|     +-+ro cpu-load-average-1min?   decimal64
|     +-+ro cpu-load-average-5min?   decimal64
|     +-+ro cpu-load-average-15min?  decimal64
|   +-+ro cpu-allpart-util* [cpu-blade-name]
|     +-+ro cpu-blade-name          string
|     +-+ro cpu-util-current?        decimal64
|     +-+ro cpu-util-user?          decimal64
|     +-+ro cpu-util-kernel?        decimal64
|     +-+ro cpu-util-iowait?        decimal64
| +-+ro process-list
|   +-+ro list-cpu-load-average-one-min? decimal64
|   +-+ro list-cpu-load-average-five-min? decimal64
|   +-+ro list-cpu-load-average-fifteen-min? decimal64
|   +-+ro list-cpu-util-current?        decimal64
|   +-+ro list-cpu-util-current-user?   decimal64
|   +-+ro list-cpu-util-current-kernel? decimal64
|   +-+ro list-cpu-util-current-iowait? decimal64
|   +-+ro cpu-process-list* [cpu-process-id]
|     +-+ro cpu-process-id          uint32
|     +-+ro cpu-process-name?        string
|     +-+ro cpu-process-util?        decimal64

```

```
|      +-+ro cpu-process-state?      string
|      +-+ro cpu-process-start-time?  string
+-+ro mem-state
  +-+ro summary
  |  +-+ro memory-used-percentage? decimal64
  |  +-+ro memory-total?          uint32
  |  +-+ro memory-total-used?    uint32
  |  +-+ro memory-total-free?    uint32
  |  +-+ro memory-low-free?     uint32
  |  +-+ro memory-high-free?    uint32
  |  +-+ro memory-cached?       uint32
  +-+ro mem-list
  |  +-+ro memory-used-percentage? decimal64
  |  +-+ro memory-total?          uint32
  |  +-+ro memory-total-used?    uint32
  |  +-+ro memory-total-free?    uint32
  |  +-+ro memory-low-free?     uint32
  |  +-+ro memory-high-free?    uint32
  |  +-+ro memory-cached?       uint32
  |  +-+ro memory-per-process* [memory-process-id]
  |    +-+ro memory-process-id    uint32
  |    +-+ro memory-process-name? string
  |    +-+ro memory-utilized?    decimal64
  |    +-+ro memory-utilized-vsize? uint32
  |    +-+ro memory-utilized-rss? uint32
  |    +-+ro memory-utilized-pss? uint32
  +-+ro mem-allpart
    +-+ro mem-allpart-sum* [memory-blade-name]
      +-+ro memory-blade-name      string
      +-+ro memory-used-percentage? decimal64
      +-+ro memory-total?          uint32
      +-+ro memory-total-used?    uint32
      +-+ro memory-total-free?    uint32
      +-+ro memory-cached?       uint32
```

brocade-rbridge-lag

Top-level container

```
module: brocade-rbridge-lag
  +-rw load-balance-lag
    +-rw load-balance
      |  +-rw hash
      |    +-rw ethernet
      |      |  +-rw sa-mac?    empty
      |      |  +-rw da-mac?    empty
      |      |  +-rw vlan?     empty
      |      |  +-rw etype?    empty
      +-rw ip
        |  +-rw src-l4-port?  empty
        |  +-rw dst-l4-port?  empty
        |  +-rw src-ip?      empty
        |  +-rw dst-ip?      empty
        |  +-rw protocol?    empty
      +-rw ipv6
        |  +-rw ipv6-src-l4-port?  empty
        |  +-rw ipv6-dst-l4-port?  empty
        |  +-rw ipv6-src-ip?      empty
        |  +-rw ipv6-dst-ip?      empty
        |  +-rw ipv6-next-hdr?    empty
      +-rw mpls
        |  +-rw label1?    empty
        |  +-rw label2?    empty
        |  +-rw label3?    empty
  +-rw lag
    +-rw hash
      +-rw hdr-start
        |  +-rw fwd-term?   enumeration
    +-rw bos
      |  +-rw start-skip?  enumeration
    +-rw hdr-count?
    +-rw rotate?
    +-rw normalize?
    +-rw srcport?
    +-rw pwctrlword?
    +-rw speculate-mpls
      +-rw enable-eth-ip?  enumeration
```

brocade-resource-monitor

Top-level container

```
+--rw resource-monitor
    +-rw cpu
        |  +-rw enable-cpu?          empty
        |  +-rw threshold-cpu?      uint32
        |  +-rw action-cpu?         resource-monitor-actiontype
        |  +-rw sample-rate-cpu?    uint32
        |  +-rw logging-rate-cpu?   uint32
        |  +-rw grace-period-cpu?   uint32
        |  +-rw offset-cpu?         uint32
    +-rw memory
        |  +-rw enable-memory?      empty
        |  +-rw threshold-memory?   uint32
        |  +-rw action-memory?      resource-monitor-actiontype
        |  +-rw sample-rate-memory?  uint32
        |  +-rw logging-rate-memory? uint32
        |  +-rw grace-period-memory? uint32
        |  +-rw offset-memory?      uint32
    +-rw process
        +-rw memory
            +-rw enable-process?     empty
            +-rw thresh-mem-alarm?   uint32
            +-rw thresh-mem-critic?  uint32
```

brocade-rmon

Top-level container

```
module: brocade-rmon
  +-rw rmon
    +-rw event-entry* [event-index]
      |  +-rw event-index          event-index-type
      |  +-rw event-description?   event-description-type
      |  +-rw log?                empty
      |  +-rw event-community?    string
      |  +-rw event-owner?        owner-string
    +-rw alarm-entry* [alarm-index]
      +-rw alarm-index           alarm-index-type
      +-rw snmp-oid              snmp-oid-type
      +-rw alarm-interval         uint32
      +-rw alarm-sample           alarm-sample-type
      +-rw alarm-rising-threshold uint32
      +-rw alarm-rising-event-index alarm-rising-event-index-type
      +-rw alarm-falling-threshold? uint32
      +-rw alarm-falling-event-index? alarm-falling-event-index-type
      +-rw alarm-owner?          owner-string
```

brocade-rpf

Top-level container

```
module: brocade-rpf
  +-rw rpf_config
    +-rw urpf-exclude-default?    empty
```

External augmentations

```
module: brocade-interface
  |  |  +-rw rpf:rpf
  |  |  |  +-rw rpf:log?    empty
  |  |  +-rw rpf:rpf-mode
  |  |  |  +-rw rpf:mode?   enumeration
```

brocade-rtm

Top-level Container

```
module: brocade-rtm
  +-rw prefix-independent-convergence-static!
  +-rw resilient-hash
    +-rw ecmp
      |  +-rw resilient-hash-ecmp-enable?  empty
    +-rw max-path?  uint32
```

brocade-sec-services

Top-level container

```

module: brocade-sec-services
  +-rw telnet-sa
  |  +-rw telnet
  |    +-rw server
  |      +-rw telnet-vrf-cont
  |        +-rw use-vrf* [use-vrf-name]
  |          +-rw use-vrf-name      string
  |          +-rw telnet-vrf-shutdown? empty
  +-rw ssh-sa
  |  +-rw ssh
  |    +-rw server
  |      |  +-rw key-exchange?      string
  |      |  +-rw rekey-interval?   uint32
  |      |  +-rw rekey-volume?     uint32
  |      |  +-rw ssh-server-port?  uint32
  |      |  +-rw cipher?          string
  |      |  +-rw mac?             string
  |      |  +-rw max-auth-tries?   uint32
  |      |  +-rw max-idle-timeout? uint32
  |      |  +-rw max-login-timeout? uint32
  |      |  +-rw key
  |      |    +-rw rsa?           rsa-bits-size
  |      |    +-rw ecdsa?         ecdsa-bits-size
  |      |    +-rw dsa?           empty
  |      |  +-rw ssh-vrf-cont
  |      |    +-rw use-vrf* [use-vrf-name]
  |      |      +-rw use-vrf-name      string
  |      |      +-rw ssh-vrf-shutdown? empty
  |      +-rw algorithm
  |        |  +-rw hostkey?      string
  |      +-rw certificate
  |        +-rw profile
  |          +-rw server
  |            +-rw trustpoint
  |              +-rw sign?      string
  +-rw client
    +-rw cipher?      string
    +-rw mac?         string
    +-rw key-exchange? string
    +-rw source-interface
      +-rw interface-type?  source-interface-type
      +-rw ethernet
        |  +-rw interface-name?  interface:interface-type
      +-rw loopback
        |  +-rw interface-name?  loopback:intf-loopback-port-type
      +-rw ve
        +-rw interface-name?  interface:ve-type
  +-rw ssh-server
  |  +---x restart
  +-rw grub!
    +-rw config-enable? empty
    +-rw user
      +-rw grub-username?  string
      +-rw grub-password?  string

```

External augmentations

```
module: brocade-common-def
  +-rw show
  |  +-rw brcd-sec-services:telnet
  |  |  +-rw brcd-sec-services:server

module: brocade-common-def
  +-rw show
  |  +-rw brcd-sec-services:ssh
  |  |  +-rw brcd-sec-services:server
  |  |  +-rw brcd-sec-services:client
```

brocade-sflow

Top-level container

```
module: brocade-sflow
  +-rw sflow
    | +-rw enable?          empty
    | +-rw null0-sampling? empty
    | +-rw collector-vrf?   common-def:vrf-name
    | +-rw agent-address
      | | +-rw agent-addr-type? ip-addr-type
      | | +-rw agent-interface-type? source-interface-type
      | | +-rw agent-interface-name? string-type
    | +-rw source-interface
      | | +-rw interface-type? source-interface-type
      | | +-rw interface-name? string-type
    | +-rw collector* [collector-ip-address collector-port-number use-vrf]
      | | +-rw collector-ip-address    inet:ip-address
      | | +-rw collector-port-number  uint32
      | | +-rw use-vrf               common-def:use-vrf
    | +-rw polling-interval?     uint32
    | +-rw sample-rate?         uint32
  +-rw sflow-profile* [profile-name]
    +-rw profile-name          profile-name-type
    +-rw profile-sampling-rate? uint32
```

External augmentations

```
module: brocade-interface
  +-rw interface
    | +-rw ethernet [name]
      | | +-rw sflow:sflow
        | | | +-rw sflow:enable?          empty
        | | | +-rw sflow:polling-interval? uint32
        | | | +-rw sflow:sample-rate?     uint32
```

brocade-snmp

Top-level container

```

module: brocade-snmp
  +-rw snmp-server
    +-rw context* [context-name]
      |  +-rw context-name      string
      |  +-rw vrf-name?        string
    +-rw community* [community]
      |  +-rw community      string
      |  +-rw groupname?     string
    +-rw user* [username]
      |  +-rw username       string
      |  +-rw groupname?     string
      |  +-rw auth?          enumeration
      |  +-rw auth-password? string
      |  +-rw priv?          enumeration
      |  +-rw priv-password? string
      |  +-rw encrypted?     empty
    +-rw v3host* [hostip username]
      |  +-rw hostip          inet:host
      |  +-rw username        string
      |  +-rw udp-port?       host-port
      |  +-rw notifytype?     enumeration
      |  +-rw engineid?       string
      |  +-rw severity-level? sev-level
      |  +-rw use-vrf?        use-vrf-option
      |  +-rw source-interface
        +-rw (source-interface-type)?
          +---:(loopback)
            |  +-rw loopback?     intf-loopback-port-type
          +---:(ve)
            |  +-rw ve?           ve-type
          +---:(management)
            +-rw management?   mm-iftype
    +-rw host* [ip community]
      |  +-rw ip              inet:host
      |  +-rw version?        host-version
      |  +-rw community        string
      |  +-rw udp-port?       host-port
      |  +-rw severity-level? sev-level
      |  +-rw use-vrf?        use-vrf-option
      |  +-rw source-interface
        +-rw (source-interface-type)?
          +---:(loopback)
            |  +-rw loopback?     intf-loopback-port-type
          +---:(ve)
            |  +-rw ve?           ve-type
          +---:(management)
            +-rw management?   mm-iftype
    +-rw agtconfig
      |  +-rw contact?       system-contact
      |  +-rw location?      system-location
      |  +-rw sys-descr?     system-description
    +-rw enable
      |  +-rw trap
        |    +-rw trap-flag?  empty
    +-rw preserve-statistics
      |  +-rw disable
        |    +-rw disable-flag? empty
    +-rw engineID-drop
  
```

```
|   +-+rw engineID
|     +-+rw local?    snmp-engineID
+-+rw view* [viewname mibtree]
|   +-+rw viewname      string
|   +-+rw mibtree       string
|   +-+rw mibtree-access?  mib-access
+-+rw group* [group-name group-version]
|   +-+rw group-name    string
|   +-+rw group-version  group-version-type
|   +-+rw group-auth-mode? auth-mode-option
|   +-+rw read?         string
|   +-+rw write?        string
|   +-+rw notify?       string
+-+rw mib
|   +-+rw community-map* [community]
|     +-+rw community    string
|     +-+rw context?     string
+-+rw trap
|   +-+rw bfd-std-mib?  empty
+-+rw use-vrf* [use-vrf-name]
  +-+rw use-vrf-name    string
  +-+rw snmp-vrf-shutdown? empty
```

RPCs

```
rpcs:
  +---x get-snmp-community
    +---w input
    |   +---w community    string
    +-ro output
      +---ro encrypted-community?  string
      +---ro groupname?        string
```

brocade-span

Top-level container

```
module: brocade-span
  +-rw monitor
    +-rw session* [session-number]
      +-rw session-number      session-type
      +-rw description?      string
      +-rw span-command
        +-rw source?          enumeration
        +-rw src-ethernet?    enumeration
        +-rw src-ethernet-val? span-if-type
        +-rw src-port-channel-val? interface:portchannel-type
        +-rw src-ve-val?      interface:ui32-vlan-range
        +-rw src-vlan-val?    interface:ui32-vlan-range
        +-rw destination?    enumeration
        +-rw dest-ethernet?   enumeration
        +-rw dest-ethernet-val? span-if-type
        +-rw dest-vlan-val?  interface:vlan-type
        +-rw dest-port-channel-val? interface:portchannel-type
        +-rw direction?      enumeration
        +-rw span-session-type? enumeration
        +-rw dest-erspan-id?  uint32
        +-rw source-ip?       inet:ipv4-address
        +-rw destination-ip?  inet:ipv4-address
        +-rw vrf?             common-def:use-vrf
        +-rw erspan-direction? enumeration
        +-rw erspan-session-type? enumeration
        +-rw dest-rspan-port-type? enumeration
        +-rw dest-rspan-ethernet-val? span-if-type
        +-rw dest-rspan-port-channel-val? interface:portchannel-type
        +-rw rspan-direction?  enumeration
        +-rw rspan-session-type? enumeration
```

External augmentations

```
module: brocade-interface
  +-rw interface-vlan
  |  +-rw interface
  |    +-rw vlan [name]
  |      |  +-rw span:remote-span?    empty /*alt-name:rspan-vlan*/
```

brocade-ssm-operational

Top-level container

```
module: brocade-ssm-operational
  +-ro app-telemetry-acl-list-state
    | +-ro acls* [type name direction seqid action rule status]
    |   +-ro type      string
    |   +-ro name      string
    |   +-ro direction string
    |   +-ro seqid     string
    |   +-ro action    string
    |   +-ro rule      string
    |   +-ro status    string
  +-ro app-telemetry-counters-state
    | +-ro counter-list* [name packets bytes]
    |   +-ro name      string
    |   +-ro packets   uint64
    |   +-ro bytes     uint64
  +-ro vxlan-acl-state
    | +-ro extended-data* [acl-name]
    |   +-ro acl-name   string
    |   +-ro seq-num?  uint32
    |   +-ro permit-deny? string
    |   +-ro dst-vtep-ip? inet:ipv4-address
    |   +-ro src-vtep-ip? inet:ipv4-address
    |   +-ro vni?       string
    |   +-ro vni-mask?  string
    |   +-ro native-tag? string
    |   +-ro dst-ip?    inet:ipv4-address
    |   +-ro dst-ip-mask? uint16
    |   +-ro src-ip?    inet:ipv4-address
    |   +-ro src-ip-mask? uint16
    |   +-ro dst-port?  uint16
    |   +-ro src-port?  uint16
    |   +-ro count?     uint64
    |   +-ro byte-count? uint64
    |   +-ro transit-name? string
    |   +-ro gateway-name? string
    |   +-ro sflow?      boolean
    |   +-ro redir-interface? string
    |   +-ro mirror-interface? string
  +-ro ip-source-guard-binding-entry-state* [mac-address]
    | +-ro interface?  string
    | +-ro ip-address? string
    | +-ro mac-address string
    | +-ro vlan-id?   uint32
  +-ro overlay-transit-state* [overlay-transit-name]
    +-ro overlay-transit-name  string
    +-ro binded-overlay-acl?  string
```

brocade-sysdiag-operational

Top-level container

```

module: brocade-sysdiag-operational
  +-ro hw-state
    |  +-ro hw-route-info* [slot tower etcam-profile snowball]
    |  +-ro slot          uint16
    |  +-ro tower          uint16
    |  +-ro lpm-percent?   decimal64
    |  +-ro lem-percent?   decimal64
    |  +-ro tcam-percent?  decimal64
    |  +-ro etcam-profile  uint16
    |  +-ro snowball        uint16
    |  +-ro lpm-ipv4*       uint32
    |  +-ro lpm-ipv6*       uint32
    |  +-ro lpm-other*      uint32
    |  +-ro lem-ipv4*       uint32
    |  +-ro lem-ipv6*       uint32
    |  +-ro lem-other*      uint32
    |  +-ro lpm-total*      uint32
    |  +-ro lem-total*      uint32
    |  +-ro tcam-ipv4*      uint32
    |  +-ro tcam-ipv6*      uint32
    |  +-ro tcam-total*     uint32
  +-ro tm-state
    |  +-ro cngn-mon-dev
      |  |  +-ro discard-pkt-threshold?  uint32
      |  |  +-ro discard-log-interval?   uint16
    |  +-ro cngn-mon-vqo
      |  |  +-ro discard-vqo-pkt-threshold?  uint32
      |  |  +-ro discard-vqo-log-interval?   uint16
    |  +-ro cngn-mon-del-pkt
      |  |  +-ro delete-pkt-threshold?  uint32
      |  |  +-ro delete-log-interval?   uint16
    |  +-ro tmdevicestataggr* [slot tower]
      |  |  +-ro slot                  uint16
      |  |  +-ro tower                 uint16
      |  |  +-ro ingress-total-pkt-cnt-aggr?  uint64
      |  |  +-ro cpu-pkt-cnt-aggr?      uint64
      |  |  +-ro nif-pkt-cnt-aggr?      uint64
      |  |  +-ro oamp-pkt-cnt-aggr?     uint64
      |  |  +-ro olp-pkt-cnt-aggr?     uint64
      |  |  +-ro rcy-pkt-cnt-aggr?     uint64
      |  |  +-ro mmu-pkt-cnt-aggr?     uint64
      |  |  +-ro enqueue-pkt-cnt-aggr?  uint64
      |  |  +-ro deque-pkt-cnt-aggr?   uint64
      |  |  +-ro total-discard-pkt-cnt-aggr?  uint64
      |  |  +-ro deleted-pkt-cnt-aggr?  uint64
      |  |  +-ro invalid-queue-pkt-aggr?  uint64
      |  |  +-ro ipt-fdt-pkt-cnt-aggr?  uint64
      |  |  +-ro ipt-crc-err-pkt-cnt-aggr?  uint64
      |  |  +-ro uni-pkt-cnt-aggr?      uint64
      |  |  +-ro fqp-pkt-cnt-aggr?      uint64
      |  |  +-ro uni-discard-pkt-cnt-aggr?  uint64
      |  |  +-ro mcast-discard-pkt-cnt-aggr?  uint64
      |  |  +-ro mcast-pkt-cnt-aggr?      uint64
      |  |  +-ro ehp-discard-cnt-aggr?   uint64
      |  |  +-ro prp-uc-discard-cnt-aggr?  uint64
      |  |  +-ro prp-mc-discard-cnt-aggr?  uint64
      |  |  +-ro prp-sop-uc-discard-cnt-aggr?  uint64
      |  |  +-ro prp-sop-mc-discard-cnt-aggr?  uint64

```

```

| |   +-+ro ehp-mc-high-discard-cnt-aggr?          uint64
| |   +-+ro ehp-mc-low-discard-cnt-aggr?          uint64
| |   +-+ro erpp-lag-pruning-discard-cnt-aggr?    uint64
| |   +-+ro erpp-pmf-discard-cnt-aggr?          uint64
| |   +-+ro erpp-vlan-membership-discard-cnt-aggr? uint64
| |   +-+ro epe-discard-cnt-aggr?          uint64
| |   +-+ro epe-cnt-aggr?          uint64
| |   +-+ro tot-egr-pkt-cnt-aggr?          uint64
| +-+ro non-empty-voq* [slot tower]                uint64
| |   +-+ro slot          uint16
| |   +-+ro tower          uint16
| |   +-+ro voq-id*        uint32
| |   +-+ro voq-size*       uint32
| +-+ro buf-pool-stats* [slot tower]
| |   +-+ro slot          uint16
| |   +-+ro tower          uint16
| |   +-+ro dram-size?     uint16
| |   +-+ro bd-occ-core0?   uint64
| |   +-+ro buf-occ-bytes-core0?  uint64
| |   +-+ro bd-occ-core1?   uint64
| |   +-+ro buf-occ-bytes-core1?  uint64
| +-+ro tmcpustatsslot* [slot-id cpugroup-id priority]
| |   +-+ro slot-id        uint16
| |   +-+ro cpugroup-id    uint16
| |   +-+ro priority        uint16
| |   +-+ro enqueuepkt?     uint64
| |   +-+ro enqueuebytes?   uint64
| |   +-+ro discardpkt?     uint64
| |   +-+ro discardbytes?   uint64
| |   +-+ro currdepth?      uint64
| |   +-+ro maxdepth?       uint64
| +-+ro tmcpustatsslotallgrp* [slot-id priority]
| |   +-+ro slot-id        uint16
| |   +-+ro priority        uint16
| |   +-+ro enqueuepkt?     uint64
| |   +-+ro enqueuebytes?   uint64
| |   +-+ro discardpkt?     uint64
| |   +-+ro discardbytes?   uint64
| |   +-+ro currdepth?      uint64
| |   +-+ro maxdepth?       uint64
| +-+ro tm-top-discard-pkt-data* [slot tower id]
| |   +-+ro slot          uint16
| |   +-+ro tower          uint16
| |   +-+ro id             uint16
| |   +-+ro dest-port?     string
| |   +-+ro priority?      uint16
| |   +-+ro queue?         uint32
| |   +-+ro discardpkt?    uint64
| +-+ro tm-top-max-queue-depth-data* [slot tower id]
| |   +-+ro slot          uint16
| |   +-+ro tower          uint16
| |   +-+ro id             uint16
| |   +-+ro dest-port?     string
| |   +-+ro priority?      uint16
| |   +-+ro queue?         uint32
| |   +-+ro max-queue-depth? uint32
| |   +-+ro min-threshold? uint32
| |   +-+ro max-utilization? uint32
| +-+ro tm-max-buff-util-data* [slot tower]
| |   +-+ro slot          uint16
| |   +-+ro tower          uint16
| |   +-+ro max-buff-size?  uint64
| |   +-+ro max-buff-util?  uint16
| +-+ro tmvoqstatistics* [ing-slot ing-tower egr-voqid]

```

```

|   +-+ro ing-slot          uint16
|   +-+ro ing-tower         uint16
|   +-+ro egr-voqid        uint16
|   +-+ro priority?        uint16
|   +-+ro enqueuepkt?      uint64
|   +-+ro enqueueubytes?   uint64
|   +-+ro discardpkt?     uint64
|   +-+ro discardbytes?   uint64
|   +-+ro currdepth?       uint64
|   +-+ro maxdepth?        uint64
+-+ro cpu-interface-state* [ifname]
|   +-+ro ifname      string
|   +-+ro stats
|       +-+ro gos-link-status?      string
|       +-+ro gos-tx-pkts-cnt?    uint64
|       +-+ro gos-tx-bytes-cnt?   uint64
|       +-+ro gos-tx-errors-cnt?  uint64
|       +-+ro gos-tx-drop-cnt?   uint64
|       +-+ro gos-tx-overrun-error-cnt?  uint64
|       +-+ro gos-tx-carrier-error-cnt? uint64
|       +-+ro gos-rx-pkts-cnt?   uint64
|       +-+ro gos-rx-bytes-cnt?  uint64
|       +-+ro gos-rx-errors-cnt? uint64
|       +-+ro gos-rx-drop-cnt?  uint64
|       +-+ro gos-rx-overrun-error-cnt?  uint64
|       +-+ro gos-rx-frame-error-cnt? uint64
|       +-+ro host-link-status?    string
|       +-+ro host-tx-pkts-cnt?   uint64
|       +-+ro host-tx-bytes-cnt?  uint64
|       +-+ro host-tx-errors-cnt? uint64
|       +-+ro host-tx-drop-cnt?  uint64
|       +-+ro host-tx-overrun-error-cnt?  uint64
|       +-+ro host-tx-carrier-error-cnt? uint64
|       +-+ro host-rx-pkts-cnt?   uint64
|       +-+ro host-rx-bytes-cnt?  uint64
|       +-+ro host-rx-errors-cnt? uint64
|       +-+ro host-rx-drop-cnt?  uint64
|       +-+ro host-rx-overrun-error-cnt?  uint64
|       +-+ro host-rx-frame-error-cnt? uint64
|       +-+ro host-tx-aborted-error-cnt?  uint64
|       +-+ro host-tx-fifo-error-cnt?   uint64
|       +-+ro host-tx-timeout-cnt?    uint64
|       +-+ro host-tx-flow-control-xon-cnt?  uint64
|       +-+ro host-tx-flow-control-xoff-cnt? uint64
|       +-+ro host-tx-pkts-64bytes-cnt?  uint64
|       +-+ro host-tx-pkts-64-127bytes-cnt? uint64
|       +-+ro host-tx-pkts-128-255bytes-cnt? uint64
|       +-+ro host-tx-pkts-256-511bytes-cnt? uint64
|       +-+ro host-tx-pkts-512-1023bytes-cnt? uint64
|       +-+ro host-tx-pkts-1024bytes-max-cnt? uint64
|       +-+ro host-tx-bcast-pkts-cnt?   uint64
|       +-+ro host-tx-mcast-pkts-cnt?  uint64
|       +-+ro host-rx-crc-error-cnt?   uint64
|       +-+ro host-rx-fifo-error-cnt?  uint64
|       +-+ro host-rx-missed-errors-cnt? uint64
|       +-+ro host-rx-no-dma-resource-cnt? uint64
|       +-+ro host-rx-flow-control-xon-cnt?  uint64
|       +-+ro host-rx-flow-control-xoff-cnt? uint64
|       +-+ro host-rx-pkts-64bytes-cnt?  uint64
|       +-+ro host-rx-pkts-64-127bytes-cnt? uint64
|       +-+ro host-rx-pkts-128-255bytes-cnt? uint64
|       +-+ro host-rx-pkts-256-511bytes-cnt? uint64
|       +-+ro host-rx-pkts-512-1023bytes-cnt? uint64
|       +-+ro host-rx-pkts-1024bytes-max-cnt? uint64

```

```
|     +--ro host-rx-good-pkts-cnt?          uint64
|     +--ro host-rx-bcast-pkts-cnt?          uint64
|     +--ro host-rx-mcast-pkts-cnt?          uint64
+--ro tm-link-connectivity-state* [device-id link port state speed loopback]
|   +--ro device-id      uint16
|   +--ro link          uint16
|   +--ro port          uint16
|   +--ro state          uint16
|   +--ro speed          string
|   +--ro loopback       uint16
+--ro tmmcastpriority-state* [slot-id priority]
|   +--ro slot-id        uint16
|   +--ro priority        uint16
|   +--ro enqueuepkt?    uint64
|   +--ro enqueuebytes?  uint64
|   +--ro discardpkt?    uint64
|   +--ro discardbytes?  uint64
|   +--ro currdepth?     uint64
|   +--ro maxdepth?      uint64
+--ro tmmcastpriorityall-state* [slot-id]
    +--ro slot-id        uint16
    +--ro enqueuepkt?    uint64
    +--ro enqueuebytes?  uint64
    +--ro discardpkt?    uint64
    +--ro discardbytes?  uint64
    +--ro currdepth?     uint64
    +--ro maxdepth?      uint64
```

brocade-sysmgr

External augmentations

```
module: brocade-common-def
  +-rw sysmgr:bpswitch
    |   +-ro sysmgr:clear-stats
    |   +-ro sysmgr:input
    |   +-ro sysmgr:output

module: brocade-common-def
  | +-rw sysmgr:bpswitch
  | | +-rw sysmgr:show-stats /*drop-node-name/
  | |   +-ro sysmgr:stats
  | |     +-ro sysmgr:input
  | |       +-ro (show-bpswitch-type)?
  | |         +--:(stats1)
  | |           | +-ro sysmgr:port?      uint32
  | |             +--:(stats2)
  | |               +-ro sysmgr:global?  empty
  | |               +-ro sysmgr:output
```

brocade-sysmgr-operational

Top-level container

```

module: brocade-sysmgr-operational
  +-ro sfm-state
    +-ro mcast* [mcastid]
      | +-ro mcastid          uint32
      | +-ro mcast-count?     uint32
      | +-ro mcast-sfmid?     uint32
      | +-ro mcast-feid?     uint32
      | +-ro mcast-sfmcount?  uint32
      | +-ro mcast-out*       uint32
    +-ro statistics* [statistics-sfmid]
      | +-ro statistics-sfmid   uint32
      | +-ro statistics-feid?   uint32
      | +-ro statistics-pipe?   uint32
      | +-ro statistics-dch-total-in?  uint32
      | +-ro statistics-dch-total-out?  uint32
      | +-ro statistics-dch-fifo-discard?  uint32
      | +-ro statistics-dch-reorder-discard?  uint32
      | +-ro statistics-dch-unreach-discard?  uint32
      | +-ro statistics-dch-max-q-size?   uint32
      | +-ro statistics-dcm-tot?   uint32
      | +-ro statistics-dcm-drop?  uint32
      | +-ro statistics-dcm-max?  uint32
      | +-ro statistics-dcl-tot-in?  uint32
      | +-ro statistics-dcl-tot-out?  uint32
      | +-ro statistics-dcl-dropped?  uint32
      | +-ro statistics-dcl-max?   uint32
    +-ro links* [links-sfmid]
      | +-ro links-count?     uint32
      | +-ro links-sfmid       uint32
      | +-ro links-feid?       uint32
      | +-ro links-crc*        uint32
      | +-ro links-size*       uint32
      | +-ro links-codegroup*  uint32
      | +-ro links-misalign*   uint32
      | +-ro links-lock*       uint32
      | +-ro links-accept*     uint32
      | +-ro links-error*      uint32
      | +-ro links-errorcount* uint32
    +-ro queue* [queue-sfmid]
      | +-ro queue-sfmid      uint32
      | +-ro queue-feid?       uint32
      | +-ro queue-pipe?       uint32
      | +-ro queue-dch-count?  uint32
      | +-ro queue-dcm-count?  uint32
      | +-ro queue-dcl-count?  uint32
      | +-ro queue-dch-value*  uint32
      | +-ro queue-dch-linkno* uint32
      | +-ro queue-dcm-value*  uint32
      | +-ro queue-dcm-linkno* uint32
      | +-ro queue-dcl-value*  uint32
      | +-ro queue-dcl-linkno* uint32
    +-ro thresholds* [thresholds-sfmid]
      | +-ro thresholds-sfmid   uint32
      | +-ro thresholds-feid?   uint32
      | +-ro thresholds-port?   uint32
      | +-ro thresholds-pipe*   uint32
      | +-ro thresholds-rxthreshold*  uint32
      | +-ro thresholds-txthreshold*  uint32

```

```
|   +--ro thresholds-midthreshold*  uint32
+--ro connectivity* [connectivity-sfmid]
|   +--ro connectivity-count?      uint32
|   +--ro connectivity-sfmid      uint32
|   +--ro connectivity-feid?      uint32
|   +--ro connectivity-type?      string
|   +--ro connectivity-linkid*    uint32
|   +--ro connectivity-moduleid*  uint32
|   +--ro connectivity-port*     uint32
+--ro serdesmode* [serdesmode-sfmid]
  +--ro serdesmode?          uint32
  +--ro serdesmode-sfmid     uint32
  +--ro serdesmode-feid?     uint32
```

brocade-sysmon

Use this module to mange TM and SFM error monitoring.

Top-level container

```
module: brocade-sysmon
  +-rw sysmon
    +-rw fe-access-check
      |  +-rw fe-access-check-disable?          empty
      |  +-rw fe-access-check-interval?        uint16
      |  +-rw fe-access-check-threshold?       uint8
      |  +-rw fe-access-check-recovery-threshold?  uint8
      |  +-rw fe-access-check-action?           enumeration
    +-rw link-crc-monitoring
      |  +-rw link-crc-mon-disable?          empty
      |  +-rw link-crc-mon-interval?        uint16
      |  +-rw link-crc-mon-threshold?       uint8
      |  +-rw link-crc-mon-action?           enumeration
    +-rw sfm-walk
      +-rw sfm-walk-auto?                  empty
      +-rw sfm-walk-dis-redundancy-check?  empty
      +-rw sfm-walk-interval?             uint16
      +-rw sfm-walk-threshold?            uint16
```

brocade-system

RPCs

```
rpcs:  
  +---x get-system-uptime  
  +-+ro output  
    +---ro show-system-uptime  
      |  +-+ro days?      common-def:time-interval-day  
      |  +-+ro hours?     common-def:time-interval-hour  
      |  +-+ro minutes?   common-def:time-interval-minute  
      |  +-+ro seconds?   common-def:time-interval-sec  
      +---ro cmd-error?   string
```

brocade-system-capabilities

Top-level container

```

module: brocade-system-capabilities
  +-+ro capabilities
    +-+ro power
      |  +-+ro lc_sfm?          boolean
      |  +-+ro psu_on_off?      boolean
    +-+ro temperature
      |  +-+ro tmpr_detail?    boolean
    +-+ro qos
      |  +-+ro mls
        |    |  +-+ro qos-cos-mutation-map?      boolean
        |    |  +-+ro qos-tc-to-cos-map?      boolean
        |    |  +-+ro qos-tc-to-dscp-map?      boolean
        |    |  +-+ro qos-dscp-mutation-map?      boolean
        |    |  +-+ro qos-dscp-to-cos-map?      boolean
        |    |  +-+ro qos-queue-limit-config?    boolean
        |    |  +-+ro qos-queue-scheduler-config? boolean
        |    |  +-+ro qos-rx-queue-limit-config? boolean
        |    |  +-+ro qos-show-tx-queue?       boolean
        |    |  +-+ro qos-show-rx-queue?       boolean
        |    |  +-+ro qos-intf-default-cos?     boolean
        |    |  +-+ro qos-intf-default-traffic-class? boolean
        |    |  +-+ro qos-intf-trust-cos?      boolean
        |    |  +-+ro qos-intf-trust-dscp?      boolean
        |    |  +-+ro qos-intf-remark-dscp?      boolean
        |    |  +-+ro qos-intf-drop-monitor?    boolean
        |    |  +-+ro qos-intf-rxqueue-costthreshold? boolean
        |    |  +-+ro qos-intf-po-storm-control? boolean
        |    |  +-+ro qos-ecn?                 boolean
        |    |  +-+ro flowcontrol
          |      |  +-+ro qos-flowcontrol?      boolean
          |      |  +-+ro qos-flowcontrol-tx?    boolean
          |      |  +-+ro qos-flowcontrol-pfc-config? boolean
          |      |  +-+ro clear-qos-flowcontrol-statistics? boolean
        |    +-+ro mqc
          |      |  +-+ro span?           boolean
          |      |  +-+ro vlan-based-actions? boolean
          |      |  +-+ro bd-based-actions? boolean
          |      |  +-+ro control-plane-policymap? boolean
          |      |  +-+ro classmap-sflow-profile? boolean
        |    +-+ro cpu
          |      |  +-+ro qos-cpu-slot?   boolean
    +-+ro maps
      |  +-+ro qos_mpls?   boolean
    +-+ro l3
      |  +-+ro rpf?        boolean
      |  +-+ro ip_option?  boolean
    +-+ro l2
      |  +-+ro port_profile?   boolean
      |  +-+ro overlap_vlan?  boolean
      |  +-+ro rspan?        boolean
      |  +-+ro mac_move?     boolean
      |  +-+ro consistency_check? boolean
      |  +-+ro learning_mode?  boolean
      |  +-+ro priority_tag?   boolean
      |  +-+ro internal_ns?    boolean
    +-+ro ipv6
      |  +-+ro ipv6Raguard?  boolean
    +-+ro ssm
  
```

```
|   +-+ro aclTrafficType?    boolean
+-+ro lag
|   +-+ro PortchannelRedundancy?    boolean
+-+ro license
|   +-+ro eula_display?    boolean
|   +-+ro dpod_display?    boolean
|   +-+ro slot_display?    boolean
+-+ro tm?                  boolean
+-+ro tm-voq-status?    boolean
+-+ro overlay
|   +-+ro gre?      boolean
|   +-+ro vxlan
|       +-+ro hardware-vtep?          boolean
|       +-+ro vtep-ip-ve?            boolean
|       +-+ro vxlan-tunnel-bfd?      boolean
|       +-+ro vxlan-tunnel-mac-learn-protocol-bgp? boolean
+-+ro openflow
|   +-+ro ofbase?    boolean
|   +-+ro ingress?    boolean
+-+ro vlan
|   +-+ro vlan-ipv6?    boolean
+-+ro router
|   +-+ro mpls?      boolean
|   +-+ro isis?      boolean
|   +-+ro pim?      boolean
+-+ro protocol
|   +-+ro mvrp?      boolean
+-+ro bridge-domain
|   +-+ro router-ve-default-pw-profile?  boolean
|   +-+ro router-ve-tag-pw-profile?    boolean
|   +-+ro vc-peer?                boolean
|   +-+ro p2p?                   boolean
|   +-+ro disallow-oar-ac?        boolean
+-+ro telemetry
|   +-+ro queue-profile?    boolean
+-+ro lldp
|   +-+ro bgp-auto-nbr-tlv?    boolean
+-+ro prefix-list
|   +-+ro description?    boolean
+-+ro mld
|   +-+ro mld-vlan-bd?    boolean
+-+ro bgp
|   +-+ro gr-timers?      boolean
|   +-+ro ipv4-flowspec?    boolean
|   +-+ro ipv6-flowspec?    boolean
+-+ro bfd
|   +-+ro bfd-max-session?  boolean
+-+ro interface-ip
|   +-+ro icmp-redirect?    boolean
|   +-+ro route-only?      boolean
+-+ro ethernet
|   +-+ro redundant-management? boolean
+-+ro load-balance
    +-+ro hashing?      boolean
```

brocade-system-maintenance

Top-level container

```
+--rw management-heartbeat
    +-rw manager!
        +-rw heartbeat-enable?          empty
        +-rw heartbeat-threshold-timer? uint32
        +-rw heartbeat-action?         mhb_action_type
```

RPCs

```
+---x get-maint-mode-status
|   +-ro output
|   +-ro config-status?      mm-config-status
|   +-ro overall-status?    mm-status-type
|   +-ro num-stages?        uint32
|   +-ro current-stage?    uint32
|   +-ro max-time?          uint32
|   +-ro max-enable-time?  uint32
|   +-ro max-disable-time? uint32
|   +-ro stages
|       +-ro stage* [stage-num]
|           +-ro stage-num     uint32
|           +-ro time-taken?   uint32
|           +-ro daemons
|               +-ro daemon* [daemon-name]
|                   +-ro daemon-name   string
|                   +-ro status?       mm-status-type
+---x get-system-maintenance-rate-monitoring
|   +-ro output
|       +-ro rate-monitoring* [interface-name]
|           +-ro interface-name  string
|           +-ro description?   string
|           +-ro local-state?   interface-state
|           +-ro exception?    string
|           +-ro rate?          string
+---x maintenance-mode-turn-off
|   +-ro output
|       +-ro result?   string
+---x heartbeat-manager-send-heartbeat
    +-ro output
        +-ro result?   string
```

brocade-system-monitor

When a threshold is breached or when a FRU is inserted or removed, a RASlog message is generated. Using this module, you can configure the marginal threshold and down threshold values for the following FRUs:

- Fans
- Power supplies
- Chassis ID (CID) card
- Each small form-factor pluggable (SFP) media interface
- Compact flash
- Management Module (MM)
- Line cards
- Switch Fabric Module (SFM)

Top-level container

```
module: brocade-system-monitor
  +-rw system-monitor
    |  +-rw fan
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  |  +-rw alert
    |  |  |  +-rw state?      supported-state
    |  |  |  +-rw action?      supported-actions
    |  +-rw power
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  |  +-rw alert
    |  |  |  +-rw state?      supported-state
    |  |  |  +-rw action?      supported-actions
    |  +-rw temp
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  +-rw cid-card
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  |  +-rw alert
    |  |  |  +-rw state?      supported-state
    |  |  |  +-rw action?      supported-actions
    |  +-rw compact-flash
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  +-rw MM
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  +-rw LineCard
    |  |  +-rw threshold
    |  |  |  +-rw marginal-threshold?  uint32
    |  |  |  +-rw down-threshold?      uint32
    |  |  +-rw alert
    |  |  |  +-rw state?      supported-state
```

```
| |     +--rw action?    supported-actions
| +-rw SFM
| |     +--rw threshold
| |       +--rw marginal-threshold?  uint32
| |       +--rw down-threshold?      uint32
| +-rw port!
| |     +--rw crc
| |       +--rw port-crc-mon-action?   enumeration
| |       +--rw port-crc-mon-interval?  uint16
| |       +--rw port-crc-mon-threshold? uint8
| |       +--rw port-crc-mon-disable?  empty
| +-rw tm!
| |     +--rw discard-packet
| |       +--rw tm-discard-packet-action?   enumeration
| |       +--rw tm-discard-packet-threshold?  uint32
| |       +--rw tm-discard-packet-interval?  uint16
| |     +--rw discard-voq-packet
| |       +--rw tm-discard-voq-packet-action?   enumeration
| |       +--rw tm-discard-voq-packet-threshold?  uint32
| |       +--rw tm-discard-voq-packet-interval?  uint16
| |     +--rw delete-packet
| |       +--rw tm-delete-packet-action?   enumeration
| |       +--rw tm-delete-packet-threshold?  uint32
| |       +--rw tm-delete-packet-interval?  uint16
+-rw system-monitor-mail
  +-rw fru
    +--rw enable?      empty
    +-rw email-list* [email]
      +--rw email      string
  +-rw sfp
    +--rw enable?      empty
    +-rw email-list* [email]
      +--rw email      string
  +-rw security
    +--rw enable?      empty
    +-rw email-list* [email]
      +--rw email      string
  +-rw interface
    +--rw enable?      empty
    +-rw email-list* [email]
      +--rw email      string
  +-rw relay* [host-ip]
    +--rw host-ip      inet:host
    +--rw domain-name? string
```

brocade-system-monitor-ext

RPCs

```
rpcs:  
  +--x show-system-monitor  
  +-ro output  
    +-ro switch-status*  
      +-ro switch-name?          string  
      +-ro switch-ip?           inet:ip-address  
      +-ro report-time?        ietfyang:date-and-time  
      +-ro switch-state?       system-monitor-health-state-enum  
      +-ro switch-state-reason? string  
      +-ro component-status*  
        |  +-ro component-name?   string  
        |  +-ro component-state? system-monitor-health-state-enum  
      +-ro port-status*  
        +-ro port-area?         uint32  
        +-ro port-name?          string  
        +-ro port-state?        system-monitor-port-state-enum
```

brocade-system-watermark

Top-level container

```
module: brocade-system-watermark
  +-rw system-config
    +-rw interface
      |  +-rw utilization-watermark?  empty
    +-rw system-maintenance:maintenance!
      +-rw system-maintenance:enable?          empty
      +-rw system-maintenance:convergence-time?  uint32
      +-rw system-maintenance:shutdown-time?    uint32
      +-rw system-maintenance:enable-on-reboot?  empty
```

brocade-telemetry

Top-level container

```

module: brocade-telemetry
  +-rw telemetry
    +-rw collector* [collector-name]
      | +-rw collector-name          common-def:name-string32
      | +-rw collector-ip
        | | +-rw collector-ip-address?   inet:ipv4-address
        | | +-rw collector-port?        inet:port-number
        | +-rw use-vrf?              common-def:use-vrf
        | +-rw source-interface
          | | +-rw source-intf-type?   source-interface-type
          | | +-rw ethernet
            | | | +-rw source-intf-name?   ethernet-iftype
          | | +-rw loopback
            | | | +-rw source-intf-name?   loopback-iftype
          | | +-rw ve
            | | | +-rw source-intf-name?   ve-iftype
          | | +-rw management
            | | | +-rw source-intf-name?   mm-iftype
        +-rw collector-profile* [collector-profile-type collector-profilename]
          | +-rw collector-profile-type   telemetry-profile-type
          | +-rw collector-profilename   collector-profile-name-type
        +-rw collector-encoding?   collector-encoding-type
        +-rw collector-activate?   empty
    +-rw server* [use-vrf]
      | +-rw use-vrf      common-def:use-vrf
      | +-rw transport?   service-transport-type
      | +-rw port?        service-port-type
      | +-rw activate?    empty
    +-rw profile
      | +-rw system-utilization* [name]
        | | +-rw name          system-profile-name-type
        | | +-rw interval?    system-profile-interval-type
        | | +-rw add* [object]
          | | | +-rw object    system-profile-object-type
      | +-rw interface* [name]
        | | +-rw name          interface-profile-name-type
        | | +-rw interval?    interface-profile-interval-type
        | | +-rw interface* [interface-range]
          | | | +-rw interface-range  phy-interface-range-cli-pattern
        | | +-rw add* [object]
          | | | +-rw object    interface-profile-object-type
      | +-rw enhanced-queue-discard-pkts* [name]
        | | +-rw name          enhanced-queue-discard-pkts-profile-name-type
        | | +-rw interval?    queue-profile-interval-type
        | | +-rw interface-range?  phy-interface-range-cli-pattern
        | | +-rw add* [object]
          | | | +-rw object    enhanced-queue-discard-pkts-profile-object-type
      | +-rw enhanced-queue-max-queue-depth* [name]
        | | +-rw name          enhanced-queue-max-queue-depth-profile-name-type
        | | +-rw interval?    queue-profile-interval-type
        | | +-rw interface-range?  phy-interface-range-cli-pattern
        | | +-rw add* [object]
          | | | +-rw object    enhanced-queue-max-queue-depth-profile-object-type
      | +-rw queue* [name]
        | | +-rw name          queue-profile-name-type
        | | +-rw interval?    queue-profile-interval-type
        | | +-rw interface-range?  phy-interface-range-cli-pattern
        | | +-rw add* [object]

```

```
| |     +--rw object    queue-profile-object-type
| +-rw mpls-traffic-lsp* [name]
| |   +-rw name          mpls-traffic-lsp-profile-name-type
| |   +-rw interval?      mpls-traffic-profile-interval-type
| |   +-rw mpls-traffic-lsps* [mpls-traffic-lsp-name]
| |   |  +-rw mpls-traffic-lsp-name  string
| |   +-rw add* [object]
| |     +--rw object    mpls-traffic-profile-object-type
| +-rw mpls-traffic-bypass* [name]
| |   +-rw name          mpls-traffic-bypass-profile-name-type
| |   +-rw interval?      mpls-traffic-profile-interval-type
| |   +-rw mpls-traffic-bypasses* [mpls-traffic-bypass-name]
| |   |  +-rw mpls-traffic-bypass-name  string
| |   +-rw add* [object]
| |     +--rw object    mpls-traffic-profile-object-type
| +-rw mpls-traffic-fec* [name]
|   +-rw name          mpls-traffic-fec-profile-name-type
|   +-rw interval?      mpls-traffic-profile-interval-type
|   +-rw mpls-traffic-fecs* [mpls-traffic-fec-address]
|   |  +-rw mpls-traffic-fec-address  inet:ipv4-address
|   +-rw add* [object]
|     +--rw object    mpls-traffic-profile-object-type
+-rw reset
  +---x profile
  +---w input
  +---w profile-type?  telemetry-profile-type
```

brocade-terminal

Top-level container

```
module: brocade-terminal
  +-rw terminal-cfg
    +-rw line* [sessionid]
      +-rw sessionid          terminal-type
      +-rw exec-timeout?     uint32
```

brocade-threshold-monitor

The following components are monitored:

- CPU usage
- 1-, 10-, and 40-Gigabit Ethernet interfaces
- Memory usage
- Security parameters, including Telnet violations and login violations

Top-level container

```
module: brocade-threshold-monitor
  +-rw threshold-monitor-hidden
    +-rw threshold-monitor
      +-rw sfp
        |  +-rw apply?      supported-config
        |  +-rw pause?      empty
        |  +-rw policy* [policy_name]
        |    +-rw policy_name   string
        |    +-rw area* [type area_value]
        |      +-rw type       enumeration
        |      +-rw area_value  enumeration
        |      +-rw threshold
        |        |  +-rw high-threshold?  int32
        |        |  +-rw low-threshold?  int32
        |        |  +-rw buffer?        int32
        |        +-rw alert
        |          +-rw above
        |            |  +-rw above-highthresh-action? supported-actions
        |          +-rw below
        |            +-rw below-highthresh-action? supported-actions
        |            +-rw below-lowthresh-action? supported-actions
      +-rw Cpu
        |  +-rw poll?      uint32
        |  +-rw retry?      uint32
        |  +-rw limit?      uint32
        |  +-rw actions?    enumeration
      +-rw Memory
        |  +-rw poll?      uint32
        |  +-rw retry?      uint32
        |  +-rw high-limit? uint32
        |  +-rw actions?    enumeration
      +-rw Buffer
        |  +-rw poll?      uint32
        |  +-rw retry?      uint32
        |  +-rw limit?      uint32
        |  +-rw actions?    enumeration
      +-rw bfd-session
        |  +-rw high-limit? uint32
        |  +-rw low-limit?   uint32
        |  +-rw actions?    enumeration
        |  +-rw count?      uint32
        |  +-rw interval?   uint32
      +-rw vxlan-tunnel
        |  +-rw high-limit? uint32
        |  +-rw low-limit?   uint32
        |  +-rw actions?    enumeration
        |  +-rw count?      uint32
        |  +-rw interval?   uint32
      +-rw lif
        |  +-rw high-limit? uint32
```

```
|   +-rw low-limit?    uint32
|   +-rw actions?     enumeration
|   +-rw count?       uint32
|   +-rw interval?    uint32
+---rw mac-table
  +-rw high-limit?   uint32
  +-rw low-limit?    uint32
  +-rw actions?     enumeration
  +-rw count?       uint32
  +-rw interval?    uint32
```

brocade-tm-stats

RPCs

```
rpcs:  
  +---x clear-tm-voq-stat-ing-all-egr-all  
  |  +---w input  
  |  +---w clear-tm-voq-ing-all-egress-port-all?  boolean  
  +---x clear-tm-voq-stat-ing-all-egr-ifname  
  |  +---w input  
  |  +---w clear-tm-voq-ing-all-egress-port-name?  string  
  +---x clear-tm-voq-stat-slot-id-egr-all  
  |  +---w input  
  |  +---w slot-id                               common-def:lc-number-type  
  |  +---w clear-tm-voq-slot-egress-port-all?  boolean  
  +---x clear-tm-voq-slot-id-egress-port-name  
    +---w input  
      +---w slot-id                           common-def:lc-number-type  
      +---w clear-tm-voq-slot-egress-port-name  string
```

brocade-topology-group

Top-level container

```
module: brocade-topology-group
  +-rw topology-group* [topology-group-id]
    +-rw topology-group-id          uint32
    +-rw master-vlan?              uint32
    +-rw member-vlan
      |  +-rw member-vlan-add?      ui32-member-vlan-range
      |  +-rw member-vlan-remove?   ui32-member-vlan-range
    +-rw member-bridge-domain
      +-rw member-bridge-domain-add?  bd:ui32-bridge-domain-range
      +-rw member-bridge-domain-remove?  bd:ui32-bridge-domain-range
```

brocade-tpvm

Top-level container

```
module: brocade-tpvm
  +-rw tpvm
    +---x install
      | +---w input
      | | +---w tpvmid?    string
      | | +---w blade?     bladeType
      | | +---w debug?    boolean
      | +---ro output
      | | +---ro tpvm-install-msg?   string
    +---x uninstall
      | +---w input
      | | +---w tpvmid?    string
      | | +---w force?     empty
      | | +---w blade?     bladeType
      | | +---w debug?    boolean
      | +---ro output
      | | +---ro tpvm-uninstall-msg?   string
    +---x download
      | +---w input
      | | +---w protocol      enumeration
      | | +---w user          string
      | | +---w password      string
      | | +---w host          inet:host
      | | +---w directory     string
      | | +---w filename      string
      | | +---w use-vrf?     common-def:use-vrf
      | | +---w sanity?      string
      | | +---w block?       empty
      | +---ro output
      | | +---ro tpvm-filename?   string
      | | +---ro tpvm-version?   string
      | | +---ro tpvm-length?    string
      | | +---ro tpvm-status?    string
    +---x fileinfo
      | +---ro output
      | | +---ro tpvm-filename?   string
      | | +---ro tpvm-version?   string
      | | +---ro tpvm-length?    string
      | | +---ro tpvm-status?    string
    +---x upgrade
      | +---w input
      | | +---w tpvmid?        string
      | | +---w (file-options)
      | | | +---:(local)
      | | | | +---w uselocalfile  empty
      | | | +---:(remote)
      | | | | +---w protocol      enumeration
      | | | | +---w user          string
      | | | | +---w password      string
      | | | | +---w host          inet:host
      | | | | +---w directory     string
      | | | | +---w filename      string
      | | | | +---w use-vrf?     common-def:use-vrf
      | | | +---w snapshot?     empty
      | | +---w incremental?   empty
      | +---ro output
      | | +---ro tpvm-upgrade-msg?   string
    +---x password
```

```

|   +---w input
|   |   +---w blade?    bladeType
|   |   +---w debug?    boolean
|   +---ro output
|   |   +---ro tpvm-update-password-msg?    string
+---x start
|   +---w input
|   |   +---w tpvmid?    string
|   |   +---w blade?    bladeType
|   |   +---w debug?    boolean
|   +---ro output
|   |   +---ro tpvm-start-msg?    string
+---x stop
|   +---w input
|   |   +---w tpvmid?    string
|   |   +---w blade?    bladeType
|   |   +---w debug?    boolean
|   +---ro output
|   |   +---ro tpvm-stop-msg?    string
+---rw auto-boot
|   +---x enable
|   |   +---w input
|   |   |   +---w blade?    bladeType
|   |   |   +---w debug?    boolean
|   |   +---ro output
|   |   |   +---ro tpvm-enable-on-boot-msg?    string
|   +---x disable
|   |   +---w input
|   |   |   +---w blade?    bladeType
|   |   |   +---w debug?    boolean
|   |   +---ro output
|   |   |   +---ro tpvm-disable-on-boot-msg?    string
+---rw service-port
|   +---x enable
|   |   +---w input
|   |   |   +---w blade?    bladeType
|   |   |   +---w debug?    boolean
|   |   +---ro output
|   |   |   +---ro tpvm-sp-enable-msg?    string
+---rw disk
|   +---x add
|   |   +---w input
|   |   |   +---w name      union
|   |   |   +---w size     diskSize
|   |   |   +---w blade?   bladeType
|   |   |   +---w debug?   boolean
|   |   +---ro output
|   |   |   +---ro tpvm-add-disk-msg?    string
|   +---x remove
|   |   +---w input
|   |   |   +---w name      union
|   |   |   +---w blade?   bladeType
|   |   |   +---w debug?   boolean
|   |   +---ro output
|   |   |   +---ro tpvm-remove-disk-msg?    string
+---rw deploy
|   +---x mgmt
|   |   +---w input
|   |   |   +---w (options)
|   |   |   |   +---:(dhcp)
|   |   |   |   |   +---w dhcp          empty
|   |   |   |   +---:(ipaddr)
|   |   |   |   |   +---w ipaddr        union
|   |   |   |   +---w gw?           tpvm-ipv4-address

```

```
| | | +---w allow-pwless?    empty
| | | +---w admin-pwd?      string
| | | +---w confirm-pwd?    string
| | +--ro output
| |   +---ro tpvm-mgmt-deploy-msg?  string
| +--rw insight-intf
|   +---x insight
|     +---w input
|       +---w ipaddr          union
|       +---w gw?            tpvm-ipv4-address
|       +---w allow-pwless?  empty
|       +---w admin-pwd?    string
|       +---w confirm-pwd?  string
+--rw config
| +--rw ldap
|   +---x add
|   | +---w input
|   |   +---w ldap-server
|   |     | +---w host?          inet:host
|   |     | +---w ldap-server-options
|   |     |   +---w port?        uint16
|   |     |   +---w secure?      empty
|   |     +---w basedn?        string
|   |     +---w rootdn?        string
|   |     +---w rootdnpw?      string
|   +---x remove
|   | +---w input
|   |   +---w ldap-server
|   |     | +---w host?          inet:host
|   |     | +---w ldap-server-options
|   |     |   +---w port?        empty
|   |     |   +---w secure?      empty
|   |     +---w basedn?        empty
|   |     +---w rootdn?        empty
|   |     +---w rootdnpw?      empty
|   +---rw ca-cert
|     +---x import
|     | +---w input
|     |   +---w protocol      enumeration
|     |   +---w user          string
|     |   +---w password?    string
|     |   +---w host          inet:host
|     |   +---w directory    string
|     |   +---w filename      string
|     +---x remove
| +--rw ntp
|   +---x add
|   | +---w input
|   |   +---w server        tpvm-ntp-server
|   +---x remove
|   | +---w input
|   |   +---w server        tpvm-ntp-server
|   +---x default
| +--rw dns
|   +---x add
|   | +---w input
|   |   +---w dns
|   |     +---w dns-server    inet:ipv4-address
|   |     +---w secondary-dns-server?  inet:ipv4-address
|   |     +---w domain
|   |       +---w domain-name?  string
|   +---x remove
| +--rw system-attributes
|   +---x hostname
```

```

| | | +---w input
| | | +---w name      string
| | +---x timezone
| | | +---w input
| | | +---w zone     common-def:timezone
| +---rw trusted-peer
| | +---x add
| | | +---w input
| | | +---w pwless
| | | | +---w peer-ip      inet:ipv4-address
| | | +---w credentials
| | | | +---w peer-password  string
| | | | +---w peer-sudoer?   string
| | +---x remove
| | | +---w input
| | | +---w pwless
| | | | +---w peer-ip      inet:ipv4-address
| | | +---w credentials
| | | | +---w peer-password  string
| | | | +---w peer-sudoer?   string
+---rw snapshot
| +---x create
| | +---w input
| | | +---w tpvmid?    string
| | | +---w withefa?   boolean
| | +---ro output
| | | +---ro tpvm-snapshot-action-result? tpvmActionResult
| | | +---ro tpvm-snapshot-msg?      string
| +---x delete
| | +---w input
| | | +---w tpvmid?    string
| | +---ro output
| | | +---ro tpvm-snapshot-action-result? tpvmActionResult
| | | +---ro tpvm-snapshot-msg?      string
| +---x revert
| | +---w input
| | | +---w tpvmid?    string
| | +---ro output
| | | +---ro tpvm-snapshot-action-result? tpvmActionResult
| | | +---ro tpvm-snapshot-msg?      string

```

RPCs

```

rpcs:
+---x get-tpvm-detail
+---w input
| +---w tpvm-instance-id?  string
+---ro output
+---ro tpvm
| +---ro tpvm-state?       tpvmStateType
| +---ro additional-status? string
| +---ro version?          string
| +---ro auto-boot-enabled? empty
| +---ro allow-pwless-enabled? empty
| +---ro password?         string
| +---ro hostname?         string
| +---ro timezone?         string
| +---ro ldap
| | +---ro host?           string
| | +---ro port?           uint16
| | +---ro secure?          empty
| | +---ro basedn?          string
| | +---ro rootdn?          string

```

```
|   +--ro rootdnpw?    string
+--ro dns
|   +--ro primary?     union
|   +--ro secondary?   union
|   +--ro domain?      string
+--ro ntp* [server]
|   +--ro server       string
+--ro trusted-peer
|   +--ro (options)
|   |   +--:(peer-ip)
|   |   |   +--ro peer-ip        inet:ipv4-address
|   |   +--:(peer-ipv6)
|   |   |   +--ro peer-ipv6      inet:ipv6-address
|   +--ro sudo-user?    string
|   +--ro peer-password? string
+--ro disk* [disk-name]
|   +--ro disk-name     string
|   +--ro disk-size?    string
+--ro interface* [interface-name]
|   +--ro interface-name string
|   +--ro ipv4-address? string
|   +--ro gateway?      inet:ipv4-address
|   +--ro ipv6-address? string
|   +--ro gateway-v6?   inet:ipv6-address
```

brocade-tunnels

Top-level container

```

module: brocade-tunnels
  +-rw nsx-controller* [name]
    | +-rw name                      nvp-controller-name-type
    | +-rw connection-addr
      | | +-rw address?    inet:ip-address
      | | +-rw port?       uint32
      | | +-rw method?     enumeration
      | +-rw reconnect-interval?   uint32
      | +-rw activate?      empty
  +-rw overlay-gateway* [name]
    | +-rw name                      overlay-gw-name-type
    | +-rw gw-type?                 overlay-gw-type
    | +-rw ip
      | | +-rw interface
        | | | +-rw ve
          | | | | +-rw ve-id?           intf:ve-type
          | | | | +-rw vrrp-extended-group?   vrrp:vrid-type
          | | | | +-rw fabric-virtual-gateway!
          | | | +-rw loopback
            | | | | +-rw loopback-id?   lo:intf-loopback-port-type
    | +-rw map
    | | +-rw vlan-and-bd
      | | | +-rw vni
        | | | | +-rw auto?   empty
    | | +-rw vlan-vni-mapping* [vid]
      | | | +-rw vid     vlan-type
      | | | +-rw vni?    vni-type
      | | +-rw bd-vni-mapping* [bdid]
        | | | +-rw bdid   bridge-domain-id-type
      | | +-rw vni?    vni-type
    | +-rw optimized-replication!
      | | +-rw underlay-mdt-default-group?   inet:ipv4-address
      | | +-rw underlay-mdt-group* [group-ip-address broadcast-domain-type]
        | | | +-rw group-ip-address      inet:ipv4-address
        | | | +-rw broadcast-domain-type   broadcast-domain-enum-type
        | | | +-rw add?                intf:ui32-vlan-20k-range
        | | | +-rw remove?              intf:ui32-vlan-20k-range
      | | +-rw qos-dscp-mode?         qos-mode-type
    | +-rw access-lists
      | | +-rw overlay-acl-in
        | | | +-rw in-name?   overlay-acl-name
      | | +-rw in-dir?      empty
    | +-rw site* [name]
      | | +-rw name          site-id-type
      | | +-rw description?  string
      | | +-rw tunnel-dst* [address]
        | | | +-rw address    inet:ip-address
      | | +-rw static* [mac-address vni-num]
        | | | +-rw mac-address mac-access-list:mac-address-type
        | | | +-rw vni-num     vni-num-type
      | | +-rw extend
        | | | +-rw vlan
          | | | | +-rw add?     vlan-range-type
          | | | | +-rw remove?   vlan-range-type
        | | | +-rw bridge-domain
          | | | | +-rw bd-add?   bridge-domain-id-range-type
          | | | | +-rw bd-remove? bridge-domain-id-range-type
        | | +-rw mac-learning
  
```

```
| | |   +-rw protocol?    mac-learning-proto-type
| | +-rw bfd-enable?      empty
| | +-rw bfd
| | |   +-rw params
| | |   +-rw interval
| | | |   +-rw min-tx?    bfd-tx-interval-type
| | | |   +-rw min-rx?    bfd-rx-interval-type
| | | |   +-rw multiplier?  bfd-multiplier-type
| | | |   +-rw bfd-shutdown? empty
| | +-rw shutdown?        empty
| +-rw activate?          empty
+-rw ovssdb-server* [name]
| +-rw name              ovssdb-server-name-type
| +-rw port?             ovssdb-server-port-type
| +-rw activate?          empty
+-rw tunnel-settings
  +-rw system
    +-rw tunnel
      +-rw suppress-debounce? empty
      +-rw replicator
        +-rw load-balance? empty
```

brocade-tunnels-ext

RPCs

```

rpcs:
  +---x get-tunnel-info
    | +---w input
    | | +---w page-cursor?    string
    | | +---w node-id*        uint32
    | | +---w (filter-type)?
    | |   +---:(filter-by-id)
    | |     | +---w id?          tnl:tunnel-id-type
    | |   +---:(filter-by-mode)
    | |     | +---w mode?        tnl:tunnel-mode-type
    | |   +---:(filter-by-gateway)
    | |     | +---w gw-name?      tnl:overlay-gw-name-type
    | |   +---:(filter-by-sip)
    | |     | +---w src-ip?      inet:ipv4-address
    | |   +---:(filter-by-dip)
    | |     | +---w dest-ip?      inet:ipv4-address
    | |   +---:(filter-by-cfg-src)
    | |     | +---w config-src?  config-src-type
    | |   +---:(filter-by-site)
    | |     | +---w site-name?    tnl:site-id-type
    | |   +---:(filter-by-adm-state)
    | |     | +---w admin-state?  proto-state-type
    | |   +---:(filter-by-opr-state)
    | |     | +---w oper-state?    proto-state-type
    | |   +---:(filter-by-bfd-state)
    | |     +---w bfd-state?      proto-state-type
    | | +---ro output
    | |   +---ro tunnel*
    | |     | +---ro id?          tnl:tunnel-id-type
    | |     | +---ro mode?        tnl:tunnel-mode-type
    | |     | +---ro src-ip?      inet:ip-address
    | |     | +---ro dest-ip?      inet:ip-address
    | |     | +---ro vrf?          comn:vrf-name
    | |     | +---ro config-src?  config-src-type
    | |     | +---ro admin-state?  proto-state-type
    | |     | +---ro oper-state?    proto-state-type
    | |     | +---ro bfd-state?    proto-state-type
    | |     | +---ro tunnel-type?  tunnel-type
    | |     | +---ro nodes
    | |       | +---ro node-id*    uint32
    | |     | +---ro has-conflicts? empty
    | |   +---ro next-page-cursor?  string
  +---x get-tunnel-statistics
    +---w input
    | +---w page-cursor?    string
    | +---w node-id*        uint32
    | +---w (filter-type)?
    |   +---:(filter-by-id)
    |     | +---w id?          tnl:tunnel-id-type
    |   +---:(filter-by-mode)
    |     | +---w mode?        tnl:tunnel-mode-type
    |   +---:(filter-by-gateway)
    |     | +---w gw-name?      tnl:overlay-gw-name-type
    +---ro output
      +---ro tunnel-stat*
        | +---ro id?          tnl:tunnel-id-type
        | +---ro tx-frames?    uint64
        | +---ro tx-bytes?     uint64

```

```
|  +-+ro rx-frames?  uint64
|  +-+ro rx-bytes?   uint64
+---ro next-page-cursor?  string
```

brocade-uda-access-list

Top-level container

```
+--rw uda
|   +-+rw access-list
|   |   +-+rw extended* [name]
|   |   +-+rw name          uda-acl-name
|   |   +-+rw uda-acl-ext
|   |   |   +-+rw seq* [seq-id]
|   |   |   |   +-+rw seq-id      uint64
|   |   |   |   +-+rw action       enumeration
|   |   |   |   +-+rw uda-value0    uda-value-type
|   |   |   |   +-+rw uda-value-mask0  uda-mask-type
|   |   |   |   +-+rw uda-value1    uda-value-type
|   |   |   |   +-+rw uda-value-mask1  uda-mask-type
|   |   |   |   +-+rw uda-value2    uda-value-type
|   |   |   |   +-+rw uda-value-mask2  uda-mask-type
|   |   |   |   +-+rw uda-value3    uda-value-type
|   |   |   |   +-+rw uda-value-mask3  uda-mask-type
|   |   |   |   +-+rw count?      empty
|   |   |   |   +-+rw log?        empty
|   |   |   |   +-+rw mirror?     empty
|   |   |   |   +-+rw sflow?      empty
+-+rw uda-key
  +-+rw profile* [name]
    +-+rw name          uda-profile-name
    +-+rw uda-profile-offsets
      +-+rw offset-base1?  uda-offset-base-type
      +-+rw negative1?    empty
      +-+rw uda-offset1?   uda-offset-value-type
      +-+rw offset-base2?  uda-offset-base-type
      +-+rw negative2?    empty
      +-+rw uda-offset2?   uda-offset-value-type
      +-+rw offset-base3?  uda-offset-base-type
      +-+rw negative3?    empty
      +-+rw uda-offset3?   uda-offset-value-type
      +-+rw offset-base4?  uda-offset-base-type
      +-+rw negative4?    empty
      +-+rw uda-offset4?   uda-offset-value-type
```

brocade-udld

External augmentations

```
module: brocade-interface
  +-rw protocol
  |  +-rw udld:udld?
  |  |  +-rw udld:hello?          uint32
  |  |  +-rw udld:multiplier?    uint32
  |  |  +-rw udld:shutdown?      empty

module: brocade-interface
  +-rw interface
  |  +-rw ethernet [name]
  |  |  +-rw udld:udld
  |  |  |  +-rw udld:udld-enable? empty /*alt-name:"enable"*/
```

brocade-vcs

VCS fabric refers to the ability of a group of physical Ethernet switches, interconnected in an arbitrary way using the regular front-end data ports, to appear as one unified and transparent Ethernet switching service to the external network. The network that connects these individual switches is referred to as the fabric. The group of physical Ethernet switches in the fabric is referred to as the cluster.

The cluster behaves like a logical switch to the external network.

Top-level container

```
module: brocade-vcs
  +-+ro vcs-mode
  |  +-+ro vcs-mode          boolean
  |  +-+ro vcs-cluster-mode  boolean
  +-+ro local-node
  |  +-+ro swbd-number      uint32
  +-+rw vcs
    +-+rw virtual
    |  +-+rw ip
    |  |  +-+rw address* [address]
    |  |  +-+rw address    common-def:ipv4-address-prefix-type
    |  |  +-+rw inband
    |  |  +-+rw interface
    |  |  +-+rw ve?        ve-type
    |  +-+rw ipv6
    |  |  +-+rw address* [ipv6address]
    |  |  +-+rw ipv6address  common-def:ipv6-address-prefix
    +-+rw virtual-fabric
      +-+rw vfab-enable?   empty
```

RPCs

```
rpcs:
  +--+x get-last-config-update-time
  |  +-+ro output
  |  |  +-+ro last-config-update-time?  uint64
  +--+x show-vcs
  |  +-+ro output
  |  |  +-+ro principal-switch-wwn?      string
  |  |  +-+ro co-ordinator-wwn?          string
  |  |  +-+ro vcs-cluster-type-info?     vcs-cluster-type
  |  |  +-+ro vcs-guid?                 string
  |  |  +-+ro virtual-ip-address?       string
  |  |  +-+ro virtual-ipv6-address?     string
  |  |  +-+ro total-nodes-in-cluster?   uint16
  |  |  +-+ro nodes-disconnected-from-cluster? uint16
  |  |  +-+ro cluster-generic-status?   string
  |  |  +-+ro cluster-specific-status?  string
  |  |  +-+ro vcs-nodes
  |  |  |  +-+ro vcs-node-info*
  |  |  |  |  +-+ro node-num?            uint16
  |  |  |  |  +-+ro node-serial-num?    string
  |  |  |  |  +-+ro node-condition?    string
  |  |  |  |  +-+ro node-status?       string
  |  |  |  |  +-+ro node-hw-sync-state? node-hw-sync-state-type
  |  |  |  |  +-+ro node-vcs-mode?     string
  |  |  |  |  +-+ro node-vcs-id?       uint16
```

```

|     +---ro node-rbridge-id?          uint16
|     +---ro node-is-principal?       boolean
|     +---ro co-ordinator?           boolean
|     +---ro node-switch-mac?        yang:mac-address
|     +---ro node-switch-wwn?        string
|     +---ro switch-fcf-mac?        yang:mac-address
|     +---ro node-internal-ip-address?   inet:ipv4-address
|     +---ro node-public-ip-addresses*    inet:ipv4-address
|     | +---ro node-public-ip-address?   inet:ipv4-address
|     +---ro node-public-ipv6-addresses*   inet:ipv6-address
|     | +---ro node-public-ipv6-address?   inet:ipv6-address
|     +---ro firmware-version?        string
|     +---ro node-swbd-number?        int32
|     +---ro node-switchname?         string
|     +---ro node-switchtype?         string
|     +---ro node-switch-subtype?      uint16
|     +---ro node-switch-description? string
|     +---ro manufacturer-name?      string
|     +---ro node-state?             node-state-type
|     +---ro node-fabric-state?      string
+---x get-vcs-details
| +---ro output
|     +---ro vcs-details
|     +---ro principal-switch-wwn?   string
|     +---ro co-ordinator-wwn?       string
|     +---ro local-switch-wwn?       string
|     +---ro node-vcs-mode?          boolean
|     +---ro node-vcs-type?          vcs-cluster-type
|     +---ro node-vcs-id?            uint32
+---x vcs-rbridge-config
| +---w input
|     +---w vcs-id?                uint16
|     +---w rbridge-id?              uint16
+---x vcs-rbridge-context
| +---w input
|     +---w rbridge-id?              uint16
+---x no-vcs-rbridge-context
+---x get-last-config-update-time-for-xpaths
    +---w input
    | +---w xpath-strings* [xpath-string]
    |     +---w xpath-string        string
    +---ro output
        +---ro last-config-update-time-for-xpaths* [xpath-string]
        +---ro xpath-string          string
        +---ro last-config-update-time? uint64

```

brocade-vlan

Top-level container

```
module: brocade-vlan
  +-rw vlan
    +-rw dot1q
      +-rw tag
        +-rw native?    empty
```

brocade-vrf

Top-level container

```

module: brocade-vrf
  +-rw vrf* [vrf-name]
    +-rw vrf-name
    +-rw route-distinguisher?      common-def:vrf-name
    +-rw vpn-statistics?          rd-type
    +-rw resilient-hash
      +-rw ecmp
        +-rw resilient-hash-ecmp-enable?  empty
      +-rw max-path?    uint32
    +-rw evpn
      +-rw irb
        +-rw ve?                interface:ve-type
        +-rw cluster-gateway?   empty
    +-rw route-target* [action target-community]
      +-rw action             enumeration
      +-rw target-community   four-byte-rt-type
    +-rw address-family
      +-rw ip
        +-rw unicast!
          +-rw max-route?          uint32
          +-rw route-target-container
            +-rw route-target-evpn* [action target-community]
              +-rw action         enumeration
              +-rw target-community four-byte-rt-type
              +-rw evpn?           empty
            +-rw route-target-container-ipv4
              +-rw route-target* [action target-community]
                +-rw action         enumeration
                +-rw target-community four-byte-rt-type
                +-rw evpn?           empty
            +-rw import-vpn
              +-rw import
                +-rw map-import-vpn?  route-map-type
            +-rw import
              +-rw map-import?      route-map-type
              +-rw evpn-import?     empty
            +-rw export-vpn
              +-rw export
                +-rw map-export-vpn?  route-map-type
            +-rw export
              +-rw map-export?      route-map-type
              +-rw evpn-export?     empty
            +-rw bgp
              +-rw next-hop
                +-rw loopback?      intf-loopback:intf-loopback-port-type
            +-rw arp:arp-entry* [arp-ip-address]
              +-rw arp:arp-ip-address  inet:ipv4-address
              +-rw arp:mac-address-value? mac-access-list:mac-address-type
              +-rw arp:interfacename?  enumeration
              +-rw (interfacetype)?
                +---:(Port-channel)
                  +-rw arp:Port-channel?   interface:portchannel-type
                +---:(Ethernet)
                  +-rw arp:Ethernet?     interface:interface-type
                +---:(Ve)
                  +-rw arp:Ve?           interface:ve-type
            +-rw rtm:ip
              +-rw rtm:route

```

```

| | | | +--rw rtm:static-route-nh* [static-route-dest static-route-next-hop]
| | | | | +--rw rtm:static-route-dest          inet:ipv4-prefix
| | | | | +--rw rtm:static-route-next-hop    inet:ipv4-address
| | | | | +--rw rtm:route-attributes
| | | | | | +--rw rtm:metric?           uint32
| | | | | | +--rw rtm:distance?         uint32
| | | | | | +--rw rtm:tag?            uint32
| | | | | | +--rw rtm:route_name?      ip-static-route-name
| | | | | +--rw rtm:static-route-nh-vrf* [static-route-next-vrf-dest next-hop-
vrf static-route-next-hop]
| | | | | | +--rw rtm:static-route-next-vrf-dest   inet:ipv4-prefix
| | | | | | +--rw rtm:next-hop-vrf             common-def:vrf-name
| | | | | | +--rw rtm:static-route-next-hop    inet:ipv4-address
| | | | | | +--rw rtm:static-route-oif-vrf* [static-route-next-vrf-dest next-hop-
vrf static-route-oif-type static-route-oif-name]
| | | | | | | +--rw rtm:static-route-next-vrf-dest   inet:ipv4-prefix
| | | | | | | +--rw rtm:next-hop-vrf             common-def:vrf-name
| | | | | | | +--rw rtm:static-route-oif-type     enumeration
| | | | | | | +--rw rtm:static-route-oif-name      string
| | | | | | +--rw rtm:static-route-oif* [static-route-dest static-route-oif-type
static-route-oif-name]
| | | | | | | +--rw rtm:static-route-dest        inet:ipv4-prefix
| | | | | | | +--rw rtm:static-route-oif-type     enumeration
| | | | | | | +--rw rtm:static-route-oif-name      string
| | | | | | +--rw rtm:route-attributes
| | | | | | | +--rw rtm:metric?           uint32
| | | | | | | +--rw rtm:distance?         uint32
| | | | | | | +--rw rtm:tag?            uint32
| | | | | | | +--rw rtm:route_name?      ip-static-route-name
| | | | | +--rw rtm:static
| | | | | | +--rw rtm:bfd
| | | | | | | +--rw rtm:bfd-static-route* [bfd-static-route-dest bfd-static-
route-src]
| | | | | | | | +--rw rtm:bfd-static-route-dest    inet:ipv4-address
| | | | | | | | +--rw rtm:bfd-static-route-src      inet:ipv4-address
| | | | | | | | +--rw rtm:bfd-interval-attributes
| | | | | | | | | +--rw rtm:interval?           uint16
| | | | | | | | | +--rw rtm:min-rx?            uint16
| | | | | | | | | +--rw rtm:multiplier?        uint8
| | | | | | | | +--rw rtm:holdover-interval?   uint8
| | | | | +--rw rtm:next-hop-recursion?      empty
| | | +--rw rtm:import
| | | | +--rw rtm:routes* [src-vrf route-map]
| | | | | +--rw rtm:src-vrf       common-def:vrf-name
| | | | | +--rw rtm:route-map      common-def:name-string63
| +-rw ipv6
| +--rw unicast!
| | +--rw max-route?           uint32
| +--rw route-target-container-ipv6
| | +--rw route-target-evpn* [action target-community]
| | | +--rw action              enumeration
| | | +--rw target-community    four-byte-rt-type
| | | +--rw evpn?              empty
| +--rw route-target-container-ipv6
| | +--rw route-target* [action target-community]
| | | +--rw action              enumeration
| | | +--rw target-community    four-byte-rt-type
| | | +--rw evpn?              empty
| +--rw import-vpn
| | +--rw import
| | | +--rw map-import-vpn?    route-map-type
| +--rw import
| | +--rw map-import?         route-map-type
| | +--rw evpn-import?        empty

```

```

|       +---rw export-vpn
|       |   +---rw export
|       |       +---rw map-export-vpn?    route-map-type
+---rw export
|       |   +---rw map-export?      route-map-type
|       |   +---rw evpn-export?    empty
+---rw bgp
|       +---rw next-hop
|           +---rw loopback?    intf-loopback:intf-loopback-port-type
+---rw ipv6-route:ipv6
|       +---rw ipv6-route:route
|           +---rw ipv6-route:static-route-nh* [static-route-dest static-route-
next-hop]
|               |   +---rw ipv6-route:static-route-dest      inet:ipv6-prefix
|               |   +---rw ipv6-route:static-route-next-hop    inet:ipv6-address
|               |   +---rw ipv6-route:route-attributes
|                   +---rw ipv6-route:metric?        uint32
|                   +---rw ipv6-route:distance?      uint32
|                   +---rw ipv6-route:tag?        uint32
|                   +---rw ipv6-route:route_name?    rtm:ip-static-route-name
|               +---rw ipv6-route:static-route-oif* [static-route-dest static-route-
oif-type static-route-oif-name]
|                   |   +---rw ipv6-route:static-route-dest      inet:ipv6-prefix
|                   |   +---rw ipv6-route:static-route-oif-type    enumeration
|                   |   +---rw ipv6-route:static-route-oif-name    string
|                   |   +---rw ipv6-route:route-attributes
|                       +---rw ipv6-route:metric?        uint32
|                       +---rw ipv6-route:distance?      uint32
|                       +---rw ipv6-route:tag?        uint32
|                       +---rw ipv6-route:route_name?    rtm:ip-static-route-name
|               +---rw ipv6-route:link-local-static-route-nh* [link-local-static-
route-dest link-local-nexthop link-local-route-oif-type link-local-route-oif-name]
|                   |   +---rw ipv6-route:link-local-static-route-dest      inet:ipv6-prefix
|                   |   +---rw ipv6-route:link-local-nexthop          inet:ipv6-address
|                   |   +---rw ipv6-route:link-local-route-oif-type    enumeration
|                   |   +---rw ipv6-route:link-local-route-oif-name    string
|                   |   +---rw ipv6-route:route-attributes
|                       +---rw ipv6-route:metric?        uint32
|                       +---rw ipv6-route:distance?      uint32
|                       +---rw ipv6-route:tag?        uint32
|                       +---rw ipv6-route:route_name?    rtm:ip-static-route-name
|               +---rw ipv6-route:static-route-nh-vrf* [static-route-next-vrf-dest
next-hop-vrf static-route-next-hop]
|                   |   +---rw ipv6-route:static-route-next-vrf-dest    inet:ipv6-prefix
|                   |   +---rw ipv6-route:next-hop-vrf                  common-def:vrf-name
|                   |   +---rw ipv6-route:static-route-next-hop        inet:ipv6-address
|                   |   +---rw ipv6-route:link-local-static-route-nh-vrf* [static-route-next-
vrf-dest next-hop-vrf link-local-next-hop link-local-route-oif-type link-local-route-oif-
name]
|                       |   +---rw ipv6-route:static-route-next-vrf-dest    inet:ipv6-prefix
|                       |   +---rw ipv6-route:next-hop-vrf                  common-def:vrf-name
|                       |   +---rw ipv6-route:link-local-next-hop        inet:ipv6-address
|                       |   +---rw ipv6-route:link-local-route-oif-type    enumeration
|                       |   +---rw ipv6-route:link-local-route-oif-name    string
|                       +---rw ipv6-route:ipv6-static-route-oif-vrf* [static-route-next-vrf-
dest next-hop-vrf static-route-oif-type static-route-oif-name]
|                           |   +---rw ipv6-route:static-route-next-vrf-dest    inet:ipv6-prefix
|                           |   +---rw ipv6-route:next-hop-vrf                  common-def:vrf-name
|                           |   +---rw ipv6-route:static-route-oif-type    enumeration
|                           |   +---rw ipv6-route:static-route-oif-name    string
|                           |   +---rw ipv6-route:static
|                           |   +---rw ipv6-route:bfd
|                           |       +---rw ipv6-route:bfd-ipv6-static-route* [bfd-ipv6-static-route-
dest bfd-ipv6-static-route-src]
```

```

    |           |   |   |   +-rw ipv6-route:bfd-ipv6-static-route-dest      inet:ipv6-
address
    |           |   |   |   +-rw ipv6-route:bfd-ipv6-static-route-src      inet:ipv6-
address
    |           |   |   |   +-rw ipv6-route:bfd-ipv6-interval-attributes
    |           |   |   |   |   +-rw ipv6-route:interval?          uint16
    |           |   |   |   |   +-rw ipv6-route:min-rx?          uint16
    |           |   |   |   |   +-rw ipv6-route:multiplier?        uint8
    |           |   |   |   +-rw ipv6-route:bfd-ipv6-link-local-static-route* [bfd-ipv6-
link-local-dest bfd-ipv6-link-local-src bfd-interface-type bfd-interface-name]
    |           |   |   |   |   +-rw ipv6-route:bfd-ipv6-link-local-dest      inet:ipv6-
address
    |           |   |   |   |   +-rw ipv6-route:bfd-ipv6-link-local-src      inet:ipv6-
address
    |           |   |   |   |   +-rw ipv6-route:bfd-interface-type      enumeration
    |           |   |   |   |   +-rw ipv6-route:bfd-interface-name      string
    |           |   |   |   |   +-rw ipv6-route:bfd-ipv6-interval-attributes
    |           |   |   |   |   |   +-rw ipv6-route:interval?          uint16
    |           |   |   |   |   |   +-rw ipv6-route:min-rx?          uint16
    |           |   |   |   |   |   +-rw ipv6-route:multiplier?        uint8
    |           |   |   |   |   +-rw ipv6-route:ipv6-holdover-interval?      uint8
    |           |   |   |   |   +-rw ipv6-route:next-hop-recursion?      empty
    +-rw ipv6-route:import
        +-rw ipv6-route:routes* [src-vrf route-map]
            +-rw ipv6-route:src-vrf      common-def:vrf-name
            +-rw ipv6-route:route-map     common-def:name-string63
+-rw ip
    +-rw vrf-router-id?      inet:ipv4-address

```

brocade-vrrp

Use this module to enable VRRP globally, and to configure and enable VRRP on specific interfaces to share workload and provide router redundancy.

Top-level Container

```
module: brocade-vrrp
  +-rw protocol-vrrp
    +-rw protocol
```

External augmentations

```
module: brocade-interface
  +-rw vrrp:vrrp [vrid version]
    | | | +-rw vrrp:vrid                      vrid-type
    | | | +-rw vrrp:version                   uint8
    | | | +-rw vrrp:use-v2-checksum?      empty
    | | | +-rw vrrp:virtual-ip [virtual-ipaddr]
    | | |   +-rw vrrp:virtual-ipaddr     inet:ipv4-address
    | | | +-rw vrrp:track
    | | |   +-rw vrrp:interface [interface-type interface-name]
    | | |     +-rw vrrp:interface-type   track-iftype
    | | |     +-rw vrrp:interface-name  track-ifname
    | | |     +-rw vrrp:track-priority?  uint8
    | | | +-rw vrrp:advertisement-interval?  uint32
    | | | +-rw vrrp:enable?              empty
    | | | +-rw vrrp:hold-time?          uint32
    | | | +-rw vrrp:preempt-mode?      empty
    | | | +-rw vrrp:arp
    | | |   +-rw vrrp:unicast-request
    | | |     +-rw vrrp:receive?      empty
    | | | +-rw vrrp:priority?          uint8
    | | | +-rw vrrp:description?      string
```

brocade-vrrpv3

Use this module to enable VRRPv3 globally, and to configure and enable VRRPv3 on specific interfaces to share workload and provide router redundancy.

Top-level container

```
module: brocade-vrrpv3
++-rw vrrp-global
    +-rw vrrp-acceptmode-disable?    empty
```

External augmentations

```
module: brocade-interface
++-rw vrrpv3:vrrpv3-group [vrid]
| | | | +--rw vrrpv3:vrid                      vrid-type
| | | | +--rw vrrpv3:use-v2-checksum?           empty
| | | | +--rw vrrpv3:virtual-ip [virtual-ipaddr]
| | | | | +-rw vrrpv3:virtual-ipaddr      inet:ipv6-address
| | | | +--rw vrrpv3:track
| | | | | +--rw vrrpv3:interface [interface-type interface-name]
| | | | | | +-rw vrrpv3:interface-type   track-iftype
| | | | | | +-rw vrrpv3:interface-name  track-ifname
| | | | | | +-rw vrrpv3:track-priority?  uint8
| | | | | +-rw vrrpv3:advertisement-interval?  uint32
| | | | | +-rw vrrpv3:enable?            empty
| | | | | +-rw vrrpv3:hold-time?        uint32
| | | | | +-rw vrrpv3:preempt-mode?    empty
| | | | | +-rw vrrpv3:priority?       uint8
| | | | | +-rw vrrpv3:description?    string
| | | | +-rw vrrpv3:vrrpv3e-group [vrid]
| | | | | +-rw vrrpv3:vrid          vrrpe-vrid-type
| | | | | +-rw vrrpv3:virtual-ip [virtual-ipaddr]
| | | | | | +-rw vrrpv3:virtual-ipaddr  inet:ipv6-address
| | | | | +--rw vrrpv3:track
| | | | | | +--rw vrrpv3:interface [interface-type interface-name]
| | | | | | | +-rw vrrpv3:interface-type   track-iftype
| | | | | | | +-rw vrrpv3:interface-name  track-ifname
| | | | | | | +-rw vrrpv3:track-priority?  uint8
| | | | | +-rw vrrpv3:enable?            empty
| | | | | +-rw vrrpv3:hold-time?        uint32
| | | | | +-rw vrrpv3:preempt-mode?    empty
| | | | | +-rw vrrpv3:priority?       uint8
| | | | | +-rw vrrpv3:description?    string
| | | | | +-rw vrrpv3:advertise-backup?  empty
| | | | | +-rw vrrpv3:nd-advertisement-timer?  uint32
| | | | | +-rw vrrpv3:advertisement-interval-scale?  uint32
| | | | | +-rw vrrpv3:backup-advertisement-interval?  uint32
| | | | | +-rw vrrpv3:vrrpe-advertisement-interval?  uint32
| | | | | +-rw vrrpv3:short-path-forwarding
| | | | | | +-rw vrrpv3:basic?          empty
| | | | | | +-rw vrrpv3:revert-priority?  uint8
```

brocade-vxlan-visibility

Top-level container

```

module: brocade-vxlan-visibility
  +-rw overlay
    |  +-rw access-list
    |    +-rw type
    |      +-rw vxlan
    |        +-rw standard* [user-acl-name]
    |          +-rw user-acl-name    user-acl-name-type
    |          +-rw seq* [seq-num]
    |            +-rw seq-num        uint32
    |            +-rw permit-deny?   enumeration
    |            +-rw (choice-dst-vtep-ip)?
    |              +-:(case-dst-vtep-ip)
    |                |  +-rw dst-vtep-ip?      inet:ipv4-address
    |                |  +-:(case-dst-vtep-ip-any)
    |                  +-rw dst-vtep-ip-any?  empty
    |            +-rw (choice-src-vtep-ip)?
    |              +-:(case-src-vtep-ip)
    |                |  +-rw src-vtep-ip?      inet:ipv4-address
    |                |  +-:(case-src-vtep-ip-any)
    |                  +-rw src-vtep-ip-any?  empty
    |            +-rw (choice-vni)?
    |              +-:(case-vni)
    |                |  +-rw vni?          uint32
    |                |  +-:(case-vni-any)
    |                  +-rw vni-any?    empty
    |            +-rw vni-mask?      string
    |            +-rw count?        empty
    |            +-rw redirect?     interface:interface-type
    |            +-rw sflow?         empty
    |            +-rw extended* [ext-user-acl-name]
    |              +-rw ext-user-acl-name  user-acl-name-type
    |              +-rw ext-seq* [ext-seq-num]
    |                +-rw ext-seq-num       uint32
    |                +-rw ext-permit-deny?  enumeration
    |                +-rw (choice-ext-dst-vtep-ip)?
    |                  +-:(case-ext-dst-vtep-ip)
    |                    |  +-rw ext-dst-vtep-ip?      inet:ipv4-address
    |                    |  +-:(case-ext-dst-vtep-ip-any)
    |                      +-rw ext-dst-vtep-ip-any?  empty
    |                +-rw (choice-ext-src-vtep-ip)?
    |                  +-:(case-ext-src-vtep-ip)
    |                    |  +-rw ext-src-vtep-ip?      inet:ipv4-address
    |                    |  +-:(case-ext-src-vtep-ip-any)
    |                      +-rw ext-src-vtep-ip-any?  empty
    |                +-rw (choice-ext-vni)?
    |                  +-:(case-ext-vni)
    |                    |  +-rw ext-vni?          uint32
    |                    |  +-:(case-ext-vni-any)
    |                      +-rw ext-vni-any?    empty
    |                +-rw ext-vni-mask?    string
    |                +-rw ext-count?      empty
    |                +-rw ext-mirror?     interface:interface-type
    |                +-rw ext-redirect?   interface:interface-type
    |                +-rw ext-sflow?      empty
    |                +-rw native?        empty
    |                +-rw tag?          enumeration
    |                +-rw (choice-dst-ip)?
    |                  +-:(case-dst-ip-host)

```

```
|           |   |   +-+rw dst-ip-host?          inet:ipv4-address
|           |   |   +-+: (case-dst-ip)
|           |   |   +-+rw dst-ip?          union
|           |   |   +-+: (case-dst-ip-any)
|           |   |   +-+rw dst-ip-any?      empty
|   +-+rw (choice-src-ip)?
|       |   +-+: (case-src-ip-host)
|       |   |   +-+rw src-ip-host?      inet:ipv4-address
|       |   |   +-+: (case-src-ip)
|       |   |   +-+rw src-ip?          union
|       |   |   +-+: (case-src-ip-any)
|       |   |   +-+rw src-ip-any?      empty
|   +-+rw (choice-dst-port)?
|       |   +-+: (case-dst-port)
|       |   |   +-+rw dst-port?          uint32
|       |   |   +-+: (case-dst-port-any)
|       |   |   +-+rw dst-port-any?      empty
|   +-+rw (choice-src-port)?
|       |   +-+: (case-src-port)
|       |   |   +-+rw src-port?          uint32
|       |   |   +-+: (case-src-port-any)
|       |   |   +-+rw src-port-any?      empty
+--+rw overlay-transit* [user-transit-name]
    +-+rw user-transit-name    user-transit-name-type
    +-+rw transit-overlay* [access-group in-out]
        +-+rw access-group      string
        +-+rw in-out            enumeration
```

brocade-xstp-ext

RPCs

```

rpcs:
  +--x get-stp-brief-info
  | +---w input
  | | +---w (request-type)?
  | | | +---:(getnext-request)
  | | | +---w last-rcvd-instance
  | | | | +---w instance-id?    uint32
  | +--ro output
  |   +---ro spanning-tree-info
  |   | +---ro stp-mode?      stp-type
  |   | +---ro (spanning-tree-mode)?
  |   | | +---:(stp)
  |   | | | +---ro stp
  |   | | | | +---ro root-bridge
  |   | | | | | +---ro priority?        uint32
  |   | | | | | +---ro bridge-id?      bridge-id-type
  |   | | | | | +---ro hello-time?     uint32
  |   | | | | | +---ro max-age?       uint32
  |   | | | | | +---ro forward-delay? uint32
  |   | | | +---ro bridge
  |   | | | | +---ro priority?        uint32
  |   | | | | +---ro bridge-id?      bridge-id-type
  |   | | | | +---ro hello-time?     uint32
  |   | | | | +---ro max-age?       uint32
  |   | | | | +---ro forward-delay? uint32
  |   | | +---ro port*
  |   | | | +---ro interface-type?      enumeration
  |   | | | +---ro interface-name?      union
  |   | | | +---ro spanningtree-enabled? boolean
  |   | | | +---ro if-index?           uint64
  |   | | | +---ro interface-id?      uint64
  |   | | | +---ro if-role?          stp-port-role
  |   | | | +---ro if-state?         stp-port-state
  |   | | | +---ro external-path-cost? uint32
  |   | | | +---ro internal-path-cost? uint32
  |   | | | +---ro configured-path-cost? uint32
  |   | | | +---ro designated-port-id? uint64
  |   | | | +---ro port-priority?     uint32
  |   | | | +---ro designated-bridge-id? bridge-id-type
  |   | | | +---ro port-hello-time?    uint32
  |   | | | +---ro forward-transitions-count? uint32
  |   | | | +---ro received-stp-type?   stp-type
  |   | | | +---ro transmitted-stp-type? stp-type
  |   | | | +---ro edge-port?         on-off-type
  |   | | | +---ro auto-edge?        yes-no-type
  |   | | | +---ro admin-edge?       yes-no-type
  |   | | | +---ro edge-delay?       uint32
  |   | | | +---ro configured-root-guard? on-off-type
  |   | | | +---ro oper-root-guard?   on-off-type
  |   | | | +---ro boundary-port?    yes-no-type
  |   | | | +---ro oper-bpdu-guard?   on-off-type
  |   | | | +---ro oper-bpdu-filter?  on-off-type
  |   | | | +---ro link-type?        stp-link-type
  |   | | | +---ro rx-bpdu-count?    uint64
  |   | | | +---ro tx-bpdu-count?    uint64
  |   | | +---:(rstp)
  |   | | | +---ro rstp
  |   | | | | +---ro root-bridge

```

```

|   |   |   |   +-+ro priority?          uint32
|   |   |   |   +-+ro bridge-id?        bridge-id-type
|   |   |   |   +-+ro hello-time?       uint32
|   |   |   |   +-+ro max-age?         uint32
|   |   |   |   +-+ro forward-delay?    uint32
|   |   |   +-+ro bridge
|   |   |   |   +-+ro priority?          uint32
|   |   |   |   +-+ro bridge-id?        bridge-id-type
|   |   |   |   +-+ro hello-time?       uint32
|   |   |   |   +-+ro max-age?         uint32
|   |   |   |   +-+ro forward-delay?    uint32
|   |   |   +-+ro transmit-hold-count?  uint32
|   |   |   +-+ro migrate-time?        uint32
|   |   |   +-+ro port*
|   |   |   |   +-+ro interface-type?    enumeration
|   |   |   |   +-+ro interface-name?    union
|   |   |   |   +-+ro spanningtree-enabled? boolean
|   |   |   |   +-+ro if-index?          uint64
|   |   |   |   +-+ro interface-id?      uint64
|   |   |   |   +-+ro if-role?           stp-port-role
|   |   |   |   +-+ro if-state?          stp-port-state
|   |   |   |   +-+ro external-path-cost?  uint32
|   |   |   |   +-+ro internal-path-cost? uint32
|   |   |   |   +-+ro configured-path-cost? uint32
|   |   |   |   +-+ro designated-port-id?  uint64
|   |   |   |   +-+ro port-priority?      uint32
|   |   |   |   +-+ro designated-bridge-id? bridge-id-type
|   |   |   |   +-+ro port-hello-time?     uint32
|   |   |   |   +-+ro forward-transitions-count? uint32
|   |   |   |   +-+ro received-stp-type?   stp-type
|   |   |   |   +-+ro transmitted-stp-type? stp-type
|   |   |   |   +-+ro edge-port?          on-off-type
|   |   |   |   +-+ro auto-edge?          yes-no-type
|   |   |   |   +-+ro admin-edge?         yes-no-type
|   |   |   |   +-+ro edge-delay?         uint32
|   |   |   |   +-+ro configured-root-guard? on-off-type
|   |   |   |   +-+ro oper-root-guard?     on-off-type
|   |   |   |   +-+ro boundary-port?       yes-no-type
|   |   |   |   +-+ro oper-bpdu-guard?     on-off-type
|   |   |   |   +-+ro oper-bpdu-filter?    on-off-type
|   |   |   |   +-+ro link-type?          stp-link-type
|   |   |   |   +-+ro rx-bpdu-count?      uint64
|   |   |   |   +-+ro tx-bpdu-count?      uint64
|   |   +-+:(mstp)
|   |   +-+ro mstp
|   |   |   +-+ro root-bridge
|   |   |   |   +-+ro priority?          uint32
|   |   |   |   +-+ro bridge-id?        bridge-id-type
|   |   |   |   +-+ro hello-time?       uint32
|   |   |   |   +-+ro max-age?         uint32
|   |   |   |   +-+ro forward-delay?    uint32
|   |   |   +-+ro bridge
|   |   |   |   +-+ro priority?          uint32
|   |   |   |   +-+ro bridge-id?        bridge-id-type
|   |   |   |   +-+ro hello-time?       uint32
|   |   |   |   +-+ro max-age?         uint32
|   |   |   |   +-+ro forward-delay?    uint32
|   |   |   +-+ro transmit-hold-count?  uint32
|   |   |   +-+ro migrate-time?        uint32
|   |   |   +-+ro port*
|   |   |   |   +-+ro interface-type?    enumeration
|   |   |   |   +-+ro interface-name?    union
|   |   |   |   +-+ro spanningtree-enabled? boolean
|   |   |   |   +-+ro if-index?          uint64

```

```

|   |   |
|   |   |   +-+ro interface-id?          uint64
|   |   |   +-+ro if-role?            stp-port-role
|   |   |   +-+ro if-state?           stp-port-state
|   |   |   +-+ro external-path-cost? uint32
|   |   |   +-+ro internal-path-cost? uint32
|   |   |   +-+ro configured-path-cost? uint32
|   |   |   +-+ro designated-port-id? uint64
|   |   |   +-+ro port-priority?      uint32
|   |   |   +-+ro designated-bridge-id? bridge-id-type
|   |   |   +-+ro port-hello-time?    uint32
|   |   |   +-+ro forward-transitions-count? uint32
|   |   |   +-+ro received-stp-type?  stp-type
|   |   |   +-+ro transmitted-stp-type? stp-type
|   |   |   +-+ro edge-port?          on-off-type
|   |   |   +-+ro auto-edge?         yes-no-type
|   |   |   +-+ro admin-edge?        yes-no-type
|   |   |   +-+ro edge-delay?        uint32
|   |   |   +-+ro configured-root-guard? on-off-type
|   |   |   +-+ro oper-root-guard?   on-off-type
|   |   |   +-+ro boundary-port?     yes-no-type
|   |   |   +-+ro oper-bpdu-guard?   on-off-type
|   |   |   +-+ro oper-bpdu-filter?  on-off-type
|   |   |   +-+ro link-type?         stp-link-type
|   |   |   +-+ro rx-bpdu-count?    uint64
|   |   |   +-+ro tx-bpdu-count?    uint64

+---:(pvstp)
|   |   +-+ro pvstp* [vlan-id]
|   |   |   +-+ro vlan-id             interface:vlan-type
|   |   |   +-+ro root-bridge
|   |   |   |   +-+ro priority?       uint32
|   |   |   |   +-+ro bridge-id?      bridge-id-type
|   |   |   |   +-+ro hello-time?    uint32
|   |   |   |   +-+ro max-age?       uint32
|   |   |   |   +-+ro forward-delay? uint32
|   |   |   +-+ro bridge
|   |   |   |   +-+ro priority?       uint32
|   |   |   |   +-+ro bridge-id?      bridge-id-type
|   |   |   |   +-+ro hello-time?    uint32
|   |   |   |   +-+ro max-age?       uint32
|   |   |   |   +-+ro forward-delay? uint32
|   |   |   +-+ro transmit-hold-count? uint32
|   |   |   +-+ro migrate-time?     uint32
|   |   +-+ro port*
|   |   |   +-+ro interface-type?   enumeration
|   |   |   +-+ro interface-name?   union
|   |   |   +-+ro spanningtree-enabled? boolean
|   |   |   +-+ro if-index?         uint64
|   |   |   +-+ro interface-id?    uint64
|   |   |   +-+ro if-role?          stp-port-role
|   |   |   +-+ro if-state?         stp-port-state
|   |   |   +-+ro external-path-cost? uint32
|   |   |   +-+ro internal-path-cost? uint32
|   |   |   +-+ro configured-path-cost? uint32
|   |   |   +-+ro designated-port-id? uint64
|   |   |   +-+ro port-priority?    uint32
|   |   |   +-+ro designated-bridge-id? bridge-id-type
|   |   |   +-+ro port-hello-time?   uint32
|   |   |   +-+ro forward-transitions-count? uint32
|   |   |   +-+ro received-stp-type?  stp-type
|   |   |   +-+ro transmitted-stp-type? stp-type
|   |   |   +-+ro edge-port?        on-off-type
|   |   |   +-+ro auto-edge?       yes-no-type
|   |   |   +-+ro admin-edge?      yes-no-type
|   |   |   +-+ro edge-delay?      uint32

```

```

|   |   |
|   |   |   +-ro configured-root-guard?      on-off-type
|   |   |   +-ro oper-root-guard?        on-off-type
|   |   |   +-ro boundary-port?       yes-no-type
|   |   |   +-ro oper-bpdu-guard?      on-off-type
|   |   |   +-ro oper-bpdu-filter?     on-off-type
|   |   |   +-ro link-type?          stp-link-type
|   |   |   +-ro rx-bpdu-count?      uint64
|   |   |   +-ro tx-bpdu-count?      uint64
|   |   +-:(rpvstp)
|   |   |   +-ro rpvstp* [vlan-id]           interface:vlan-type
|   |   |   +-ro vlan-id
|   |   |   +-ro root-bridge
|   |   |   |   +-ro priority?            uint32
|   |   |   |   +-ro bridge-id?          bridge-id-type
|   |   |   |   +-ro hello-time?         uint32
|   |   |   |   +-ro max-age?            uint32
|   |   |   |   +-ro forward-delay?      uint32
|   |   |   +-ro bridge
|   |   |   |   +-ro priority?            uint32
|   |   |   |   +-ro bridge-id?          bridge-id-type
|   |   |   |   +-ro hello-time?         uint32
|   |   |   |   +-ro max-age?            uint32
|   |   |   |   +-ro forward-delay?      uint32
|   |   |   +-ro transmit-hold-count?    uint32
|   |   |   +-ro migrate-time?         uint32
|   |   +-ro port*
|   |   |   +-ro interface-type?        enumeration
|   |   |   +-ro interface-name?        union
|   |   |   +-ro spanningtree-enabled?   boolean
|   |   |   +-ro if-index?             uint64
|   |   |   +-ro interface-id?         uint64
|   |   |   +-ro if-role?              stp-port-role
|   |   |   +-ro if-state?             stp-port-state
|   |   |   +-ro external-path-cost?   uint32
|   |   |   +-ro internal-path-cost?  uint32
|   |   |   +-ro configured-path-cost? uint32
|   |   |   +-ro designated-port-id?   uint64
|   |   |   +-ro port-priority?       uint32
|   |   |   +-ro designated-bridge-id? bridge-id-type
|   |   |   +-ro port-hello-time?     uint32
|   |   |   +-ro forward-transitions-count? uint32
|   |   |   +-ro received-stp-type?   stp-type
|   |   |   +-ro transmitted-stp-type? stp-type
|   |   |   +-ro edge-port?           on-off-type
|   |   |   +-ro auto-edge?          yes-no-type
|   |   |   +-ro admin-edge?         yes-no-type
|   |   |   +-ro edge-delay?         uint32
|   |   |   +-ro configured-root-guard? on-off-type
|   |   |   +-ro oper-root-guard?     on-off-type
|   |   |   +-ro boundary-port?       yes-no-type
|   |   |   +-ro oper-bpdu-guard?     on-off-type
|   |   |   +-ro oper-bpdu-filter?    on-off-type
|   |   |   +-ro link-type?          stp-link-type
|   |   |   +-ro rx-bpdu-count?      uint64
|   |   |   +-ro tx-bpdu-count?      uint64
|   |   +-ro has-more?             boolean
|   |   +-ro last-instance
|   |   |   +-ro instance-id?        uint32
+--x get-stp-mst-detail
    +-w input
    |   +-w (request-type)?
    |   |   +-:(getnext-request)
    |   |   +-w last-rcvd-instance
    |   |   +-w instance-id?        uint32

```

```

++ro output
++ro cist
| ++ro cist-root-id?          bridge-id-type
| ++ro cist-bridge-id?        bridge-id-type
| ++ro cist-reg-root-id?      bridge-id-type
| ++ro root-forward-delay?   uint32
| ++ro hello-time?           uint32
| ++ro max-age?              uint32
| ++ro max-hops?             uint32
| ++ro migrate-time?         uint32
| ++ro vlans
| | ++ro vlan-id*    interface:vlan-type
| ++ro port*
| | ++ro interface-type?      enumeration
| | ++ro interface-name?      union
| | ++ro spanningtree-enabled? boolean
| | ++ro if-index?            uint64
| | ++ro interface-id?        uint64
| | ++ro if-role?             stp-port-role
| | ++ro if-state?            stp-port-state
| | ++ro external-path-cost?  uint32
| | ++ro internal-path-cost?  uint32
| | ++ro configured-path-cost? uint32
| | ++ro designated-port-id?  uint64
| | ++ro port-priority?       uint32
| | ++ro designated-bridge-id? bridge-id-type
| | ++ro port-hello-time?     uint32
| | ++ro forward-transitions-count? uint32
| | ++ro received-stp-type?    stp-type
| | ++ro transmitted-stp-type? stp-type
| | ++ro edge-port?           on-off-type
| | ++ro auto-edge?           yes-no-type
| | ++ro admin-edge?          yes-no-type
| | ++ro edge-delay?          uint32
| | ++ro configured-root-guard? on-off-type
| | ++ro oper-root-guard?     on-off-type
| | ++ro boundary-port?       yes-no-type
| | ++ro oper-bpdu-guard?     on-off-type
| | ++ro oper-bpdu-filter?    on-off-type
| | ++ro link-type?           stp-link-type
| | ++ro rx-bpdu-count?       uint64
| | ++ro tx-bpdu-count?       uint64
++ro msti* [instance-id]
| ++ro instance-id             uint32
| ++ro msti-root-id?           bridge-id-type
| ++ro msti-bridge-id?         bridge-id-type
| ++ro msti-bridge-priority?   uint32
| ++ro vlans
| | ++ro vlan-id*    interface:vlan-type
| ++ro port*
| | ++ro interface-type?      enumeration
| | ++ro interface-name?      union
| | ++ro spanningtree-enabled? boolean
| | ++ro if-index?            uint64
| | ++ro interface-id?        uint64
| | ++ro if-role?             stp-port-role
| | ++ro if-state?            stp-port-state
| | ++ro external-path-cost?  uint32
| | ++ro internal-path-cost?  uint32
| | ++ro configured-path-cost? uint32
| | ++ro designated-port-id?  uint64
| | ++ro port-priority?       uint32
| | ++ro designated-bridge-id? bridge-id-type
| | ++ro port-hello-time?     uint32

```

```
|   +--ro forward-transitions-count?    uint32
|   +--ro received-stp-type?           stp-type
|   +--ro transmitted-stp-type?       stp-type
|   +--ro edge-port?                 on-off-type
|   +--ro auto-edge?                yes-no-type
|   +--ro admin-edge?               yes-no-type
|   +--ro edge-delay?                uint32
|   +--ro configured-root-guard?    on-off-type
|   +--ro oper-root-guard?          on-off-type
|   +--ro boundary-port?           yes-no-type
|   +--ro oper-bpdu-guard?          on-off-type
|   +--ro oper-bpdu-filter?         on-off-type
|   +--ro link-type?                stp-link-type
|   +--ro rx-bpdu-count?            uint64
|   +--ro tx-bpdu-count?            uint64
+--ro has-more?                  boolean
+--ro last-instance
    +--ro instance-id?      uint32
```

extreme-config-mgmt

Top-level container

```
+--rw config-drift-track
    +---x off
        +---ro output
            +---ro result?    actionResult
```

extreme-gNMI

Top-level container

```
+--rw gNMI
|  +-+rw server
|    +-+rw secure-port?  gnmi-secure-port
|    +-+rw activate?    empty
+--rw operational-state
  +-+rw syncup
    +-+rw enable
    +-+rw channel
      +-+rw all?        empty
      +-+rw interface?  empty
      +-+rw platform?   empty
      +-+rw bgp?        empty
```

extreme-remote-attestation

Top-level container

```
+--rw measured-boot
|  +---x enable
|  +---x disable
+--rw remote-attestation!
  +-rw registrar-server* [registrar-ip use-vrf]
  |  +-rw registrar-ip      inet:ip-address
  |  +-rw use-vrf          common-def:use-vrf
  |  +-rw registrar-port?  uint16
  +-rw agent-port?        uint16
  +-rw agent-enable?     empty
  +-rw agent-uuid?       uuid-type
```

extreme-ssl

Top-level container

```
+--rw pki
    +-rw ocsp
    |  +-rw use-vrf?          use-vrf-option
    |  +-rw disable?          empty
    |  +-rw source-interface
    |    +-rw source-intf-type?   source-interface-type
    |    +-rw ethernet
    |      |  +-rw source-intf-name?   ethernet-iftype
    |    +-rw loopback
    |      |  +-rw source-intf-name?   loopback-iftype
    |    +-rw ve
    |      |  +-rw source-intf-name?   ve-iftype
    |    +-rw management
    |      +-rw source-intf-name?   mm-iftype
    +-rw authorization
        +-rw username
            +-rw (username-options)?
                +---:(certificate-attribute-case)
                    +-rw attribute-options
                        +-rw attribute?   attribute-option
                        +-rw prefix?     string
                        +-rw match?     string
                        +-rw suffix?     string
```

extreme-tpvm-config

Top-level container

```

module: extreme-tpvm-config
++-rw tpvm-cfg
    +-rw tpvm* [tpvm-instance-id]
        +-rw tpvm-instance-id      string
        +-rw password?           string
        +-rw auto-boot?          empty
        +-rw ntp* [server]
            | +-rw server   union
        +-rw disk* [disk-name]
            | +-rw disk-name   union
            | +-rw disk-size   tpvm:diskSize
        +-rw ldap
            | +-rw ldap-server
                | | +-rw host?           inet:host
                | | +-rw ldap-server-options
                | | | +-rw port?         uint16
                | | | +-rw secure?       empty
                | | | +-rw basedn?       string
                | | | +-rw rootdn?       string
                | | | +-rw rootdnpw?     string
            | +-rw ca-cert
                | | +-rw import
                | | | +-rw protocol?     enumeration
                | | | +-rw user?         string
                | | | +-rw ldap-password? string
                | | | +-rw ldap-host?    inet:host
                | | | +-rw directory?   string
                | | | +-rw filename?    string
        +-rw dns
            | +-rw dns-params
                | | +-rw primary-server? union
                | | +-rw secondary-server? union
                | | +-rw domain?        string
        +-rw system-attributes
            | +-rw hostname?      string
            | +-rw timezone?       common-def:timezone
        +-rw trusted-peer
            | +-rw pwless
                | | +-rw (trusted-ip-config-choices)?
                | | | +-:(peer-ip)
                | | | | +-rw peer-ip?     inet:ipv4-address
                | | | | +-:(peer-ipv6)
                | | | | | +-rw peer-ipv6?   inet:ipv6-address
                | | | | +-rw peer-password? string
            | +-rw peer-sudoer?    string
        +-rw interface
            | +-rw management
                | | +-rw ip
                    | | | +-rw (ip-config-choices)?
                    | | | | +-:(ip-case)
                    | | | | | +-rw ip-params
                    | | | | | | +-rw ipaddr?   common-def:ipv4-prefix-mask
                    | | | | | | +-rw gw?       inet:ipv4-address
                    | | | | | | +-:(dhcp-case)
                    | | | | | | | +-rw dhcp?     empty
                | | | +-rw ipv6
                    | | | | +-rw (ipv6-config-choices)?
                    | | | | | +-:(ipv6-case)

```

```
| | | +--rw ipv6-params  
| | | +--rw ipv6addr? common-def:ipv6-address-prefix  
| | | +--rw gwv6? inet:ipv6-address  
| | +---(dhcpv6-case)  
| | +--rw dhcpv6? empty  
| +-rw insight  
|   +-rw ip  
|     +--rw (insight-ip-config-choices)?  
|       +---:(ip-case)  
|         | +--rw ip-params  
|           | +--rw insight-ipaddr? common-def:ipv4-prefix-mask  
|           | +--rw insight-gw? inet:ipv4-address  
|         +---:(dhcp-case)  
|           +--rw insight-dhcp? empty  
+--rw deploy? empty  
+--rw undeploy-force? empty
```

extreme-bmc

Top-level container

```
module: extreme-bmc
  +-rw bmc
    +---x user
      |  +---w input
      |    +---w id-value
      |      +---w id          uint32
      |      +---w password    string
    +-rw lan
      |  +---x ipaddr
      |    |  +---w input
      |    |    +---w ipaddress  inet:ipv4-address
      |  +---x netmask
      |    |  +---w input
      |    |    +---w ipaddress  inet:ipv4-address
      |  +---x gateway
      |    |  +---w input
      |    |    +---w ipaddress  inet:ipv4-address
      |  +-rw ipsrc
      |    +---x dhcp
      |    +---x static
  +-rw factory
    +---x reset
```